Phase 3: UI/UX Development & Customization

Milestone 1: Creating Permission Sets

Objective: To create a permission set named **Swift Ship** that gives the Agentforce agent user the access it needs to the SwiftShip custom objects (Parcel, Delivery, Sender and Receiver) and their key fields.

Step 1: Open Permission Sets and click New

- Go to **Setup** and type **Permission Sets** in the Quick Find box.
- Click **Permission Sets** under the **Users** section.
- On the Permission Sets page, click the **New** button.

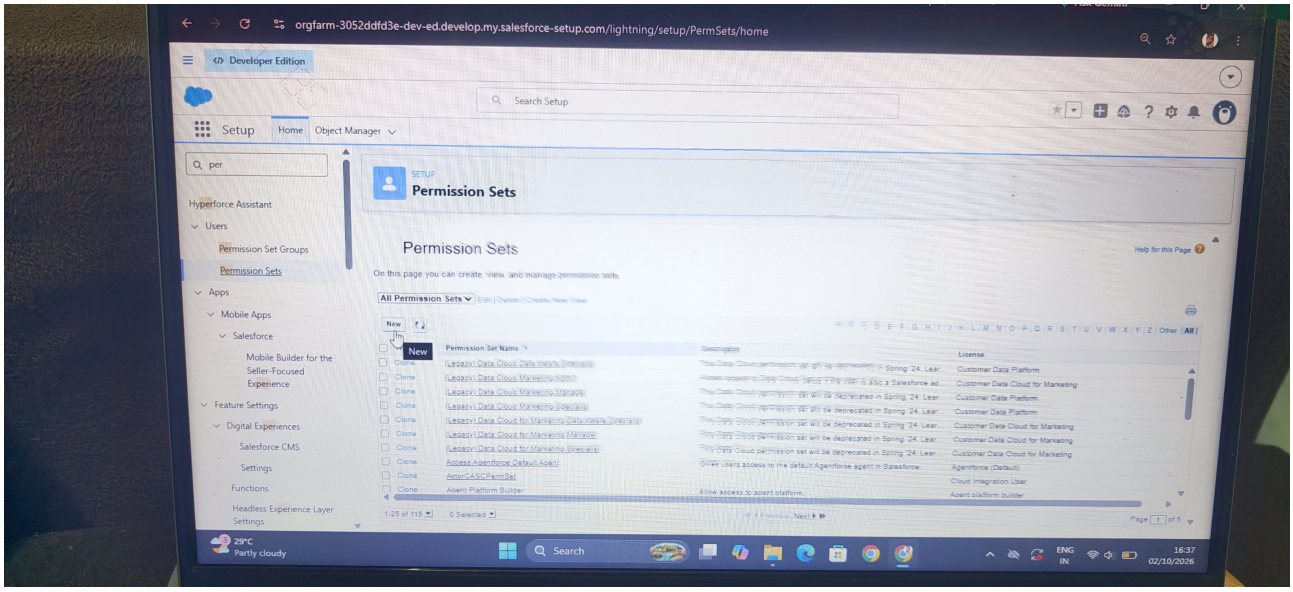


Fig 1: Permission Sets page with the New button

Step 2: Create the Swift Ship permission set

• Enter Label: **Swift Ship**. The API Name auto-fills as **Swift_Ship**.

• Select License: **Einstein Agent**.

• Click **Save**. The Permission Set Overview page opens.

• Under the **Apps** section, click **Object Settings** to set object access.

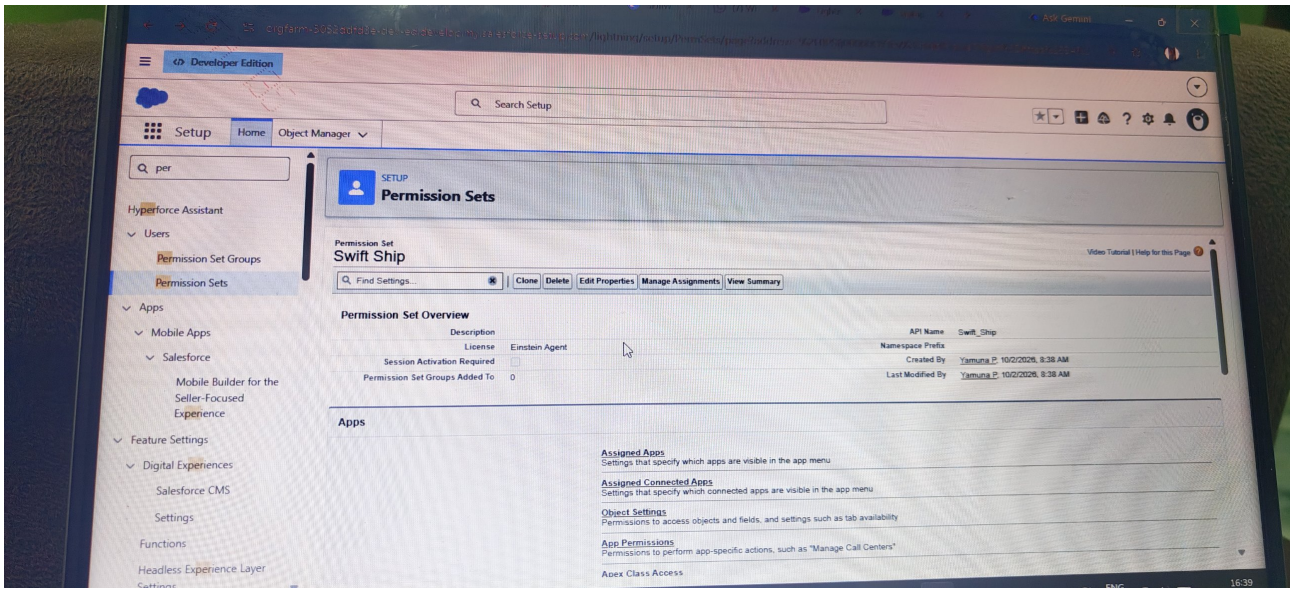


Fig 2: Swift Ship permission set overview (License: Einstein Agent)

Step 3: Configure the Parcel object

• In Object Settings, search for and click **Parcels**, then click **Edit**.

• Under Object Permissions, enable **Read, Create** and **Edit**. Delete is optional.

• Under Field Permissions, tick **Read Access** and **Edit Access** for the key fields: Parcel ID, Status, Weight, Estimated Delivery and Sender.

• Click **Save**.

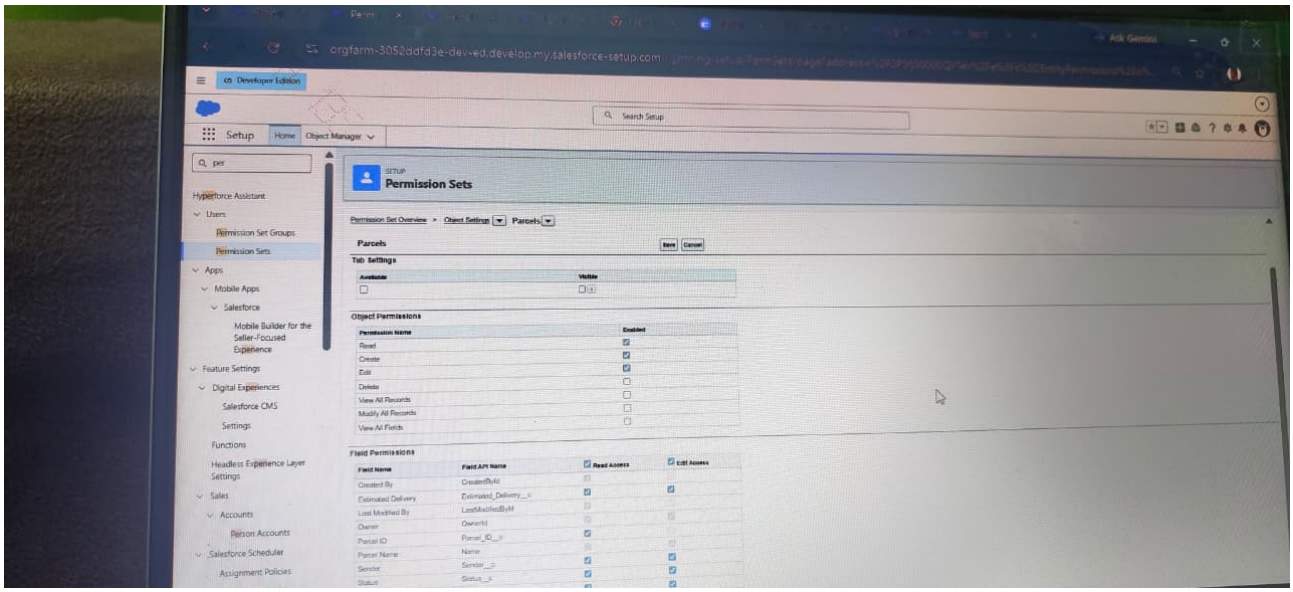


Fig 3: Object and field permissions for Parcel__c

Step 4: Configure the Delivery object

- Go back to Object Settings and click **Deliverys**, then click **Edit**.
- Enable **Read, Create** and **Edit** under Object Permissions.
- Give Read and Edit Access to Current Location, Estimated Delivery, Parcel and Sender.
- Click **Save**.

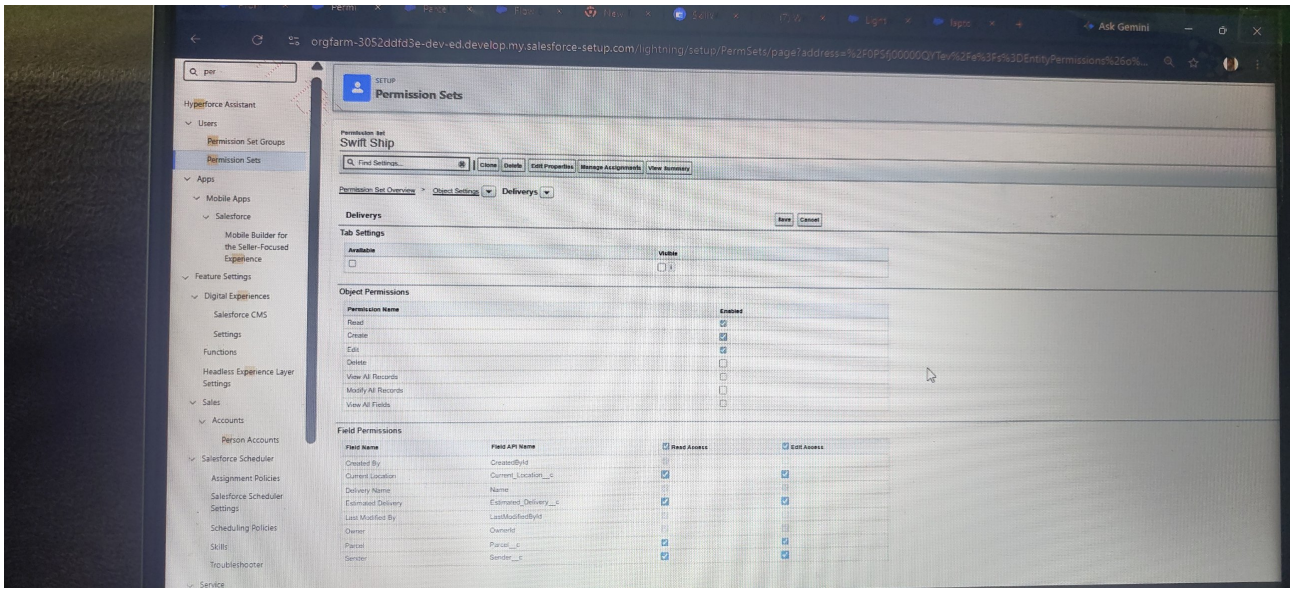


Fig 4: Object and field permissions for Delivery__c

Step 5: Configure the Sender object

- Go back to Object Settings and click **Senders**, then click **Edit**.
- Enable **Read, Create** and **Edit** under Object Permissions.
- Give Read and Edit Access to Sender Address, Sender Contact and Sender Email.
- Click **Save**.

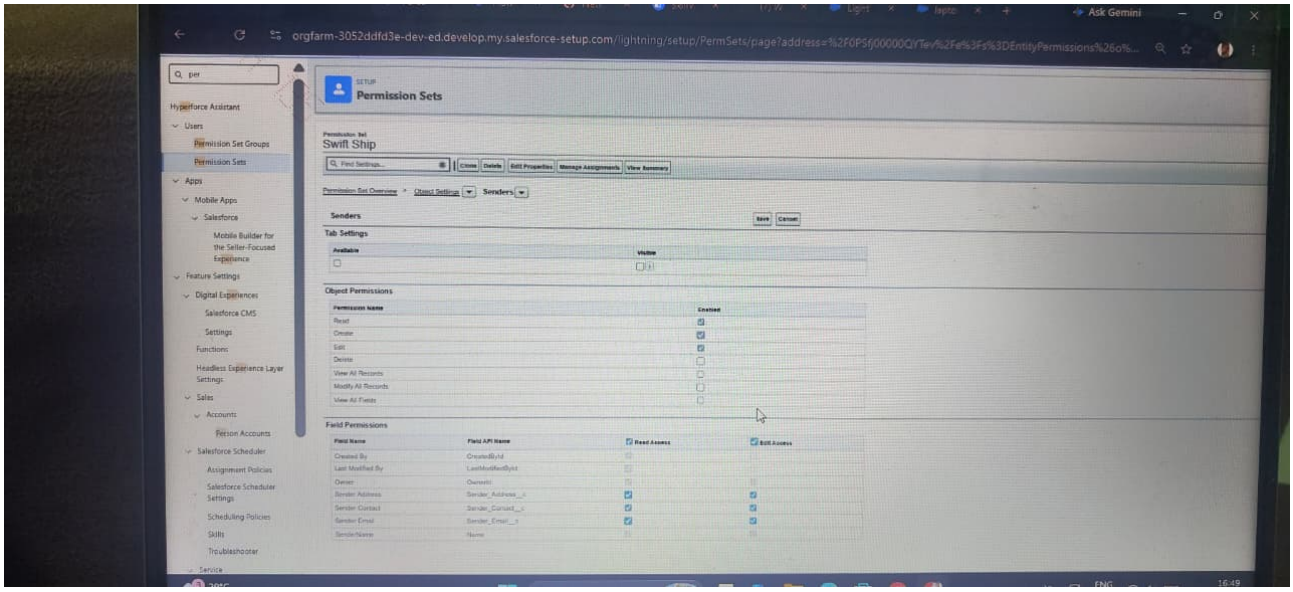


Fig 5: Object and field permissions for Sender__c

Step 6: Configure the Receiver object

• Go back to Object Settings and click **Receivers**, then click **Edit**.

• Enable **Read, Create** and **Edit** under Object Permissions.

• Give Read and Edit Access to Receiver's Address, Receiver Contact, Receiver Email, Parcel and Sender.

• Click **Save**.

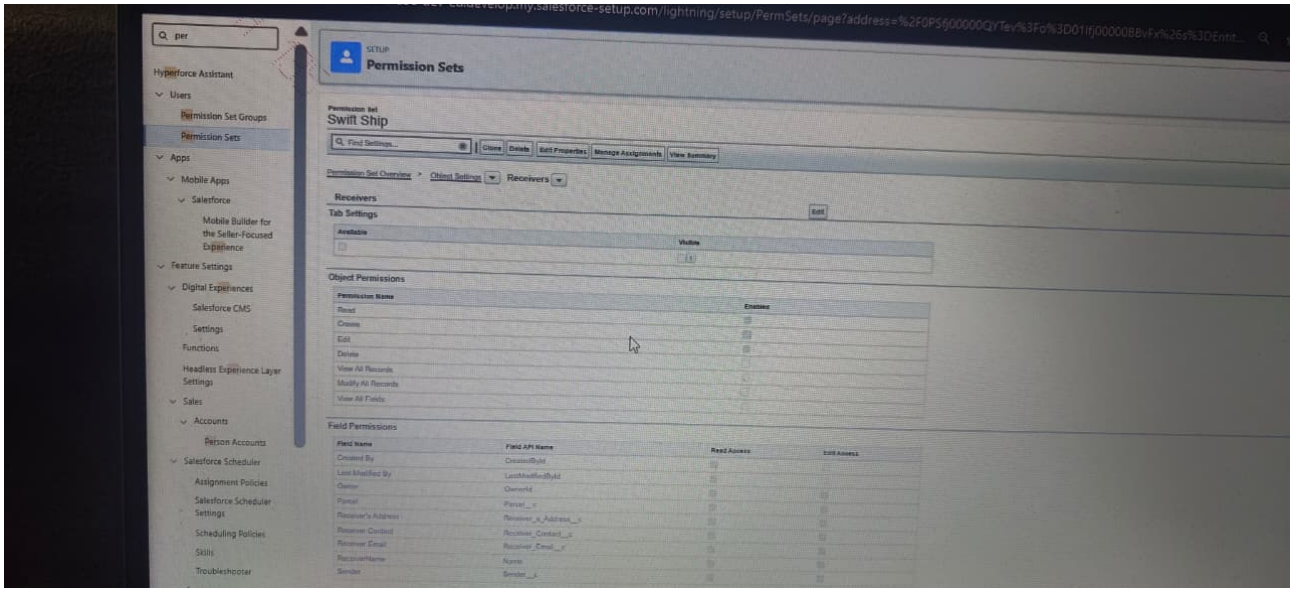


Fig 6: Object and field permissions for Receiver__c

Result

The **Swift Ship** permission set now grants Read, Create and Edit access on Parcel, Delivery, Sender and Receiver, with field-level access to their key fields. In Milestone 2 this permission set is assigned to the Agent user.

Phase 3: UI/UX Development & Customization

Milestone 2: Assigning Permissions to the Agent User

Objective: To assign the **Swift Ship** permission set to the Einstein Service Agent user, so the Agentforce agent can read and update Parcel, Delivery, Sender and Receiver records.

Step 1: Open the Agent user

• Go to **Setup**, type **Users** in Quick Find, and click **Users** under the Users section.

• In the All Users list, find **EinsteinServiceAgent User** (Alias: einstein, Profile: Einstein Agent User).

• Click the Full Name to open the user record.

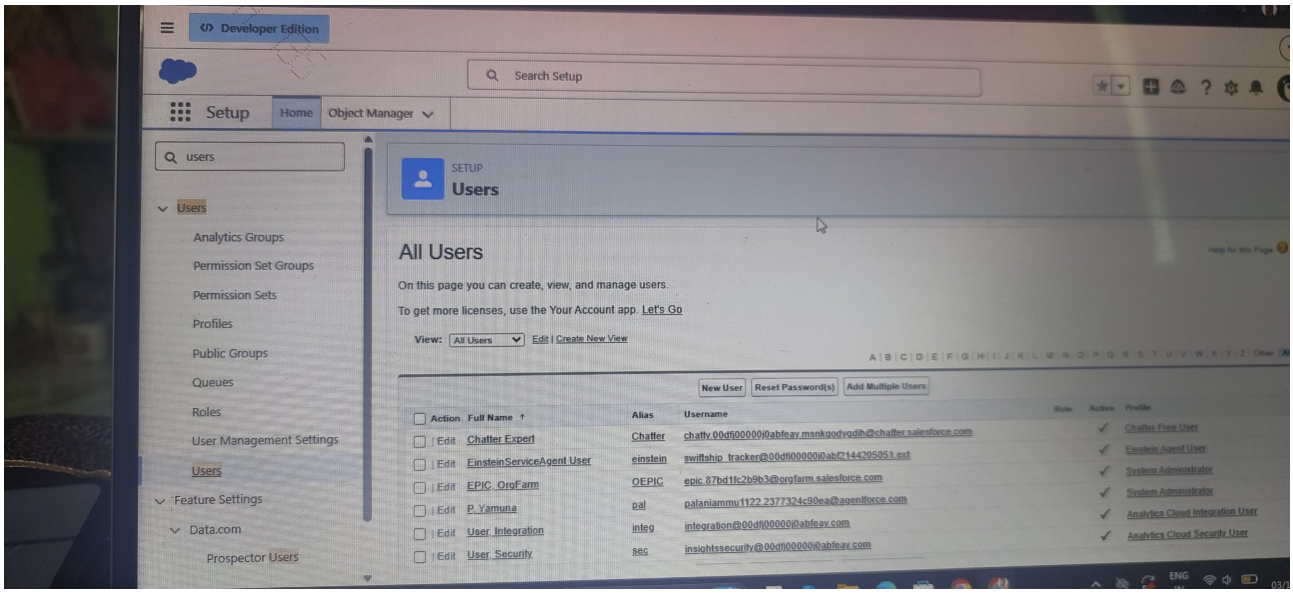


Fig 1: All Users list showing EinsteinServiceAgent User

Step 2: Add the Swift Ship permission set

• On the user record, scroll to **Permission Set Assignments** and click **Edit Assignments**.

• In **Available Permission Sets**, select **Swift Ship**.

• Click **Add** to move it to **Enabled Permission Sets**.

• Click **Save**.

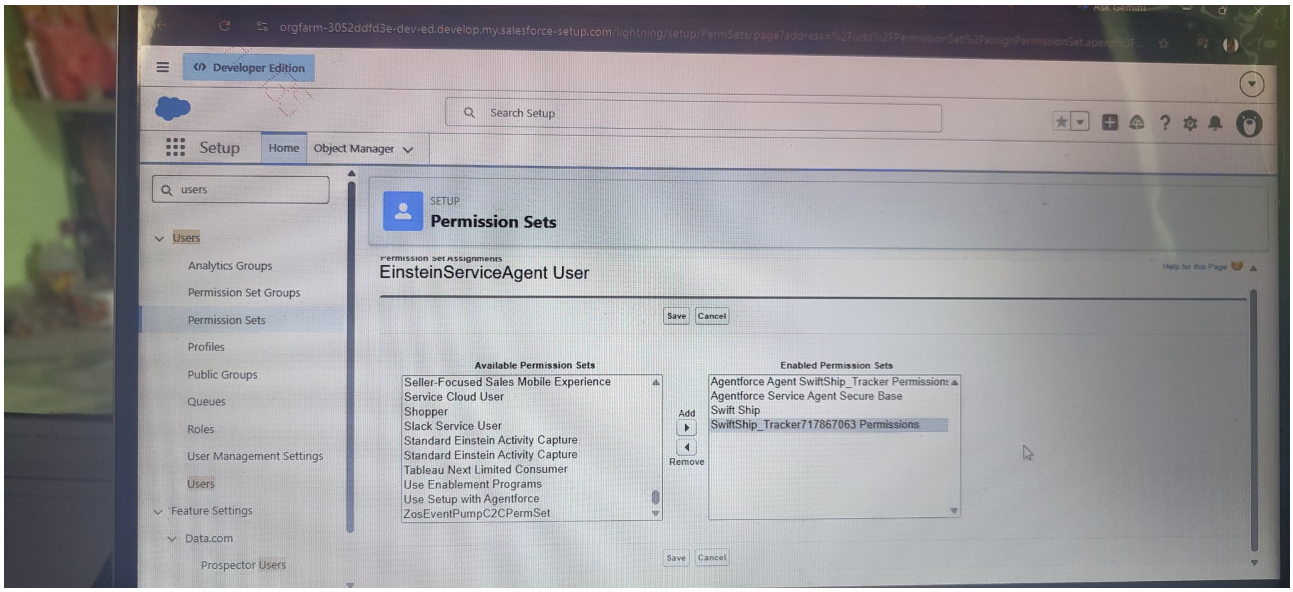


Fig 2: Edit Assignments page with Swift Ship in Enabled Permission Sets

Step 3: Verify the assignment

• Reopen the user record and scroll to **Permission Set Assignments**.

• Confirm that **Swift Ship** is listed along with **Agentforce Service Agent Secure Base**, **Agentforce Agent SwiftShip_Tracker Permissions** and **SwiftShip_Tracker717867063 Permissions**, all assigned on 10/2/2026.

• The **Agentforce Service Agent User** permission set group is also assigned.

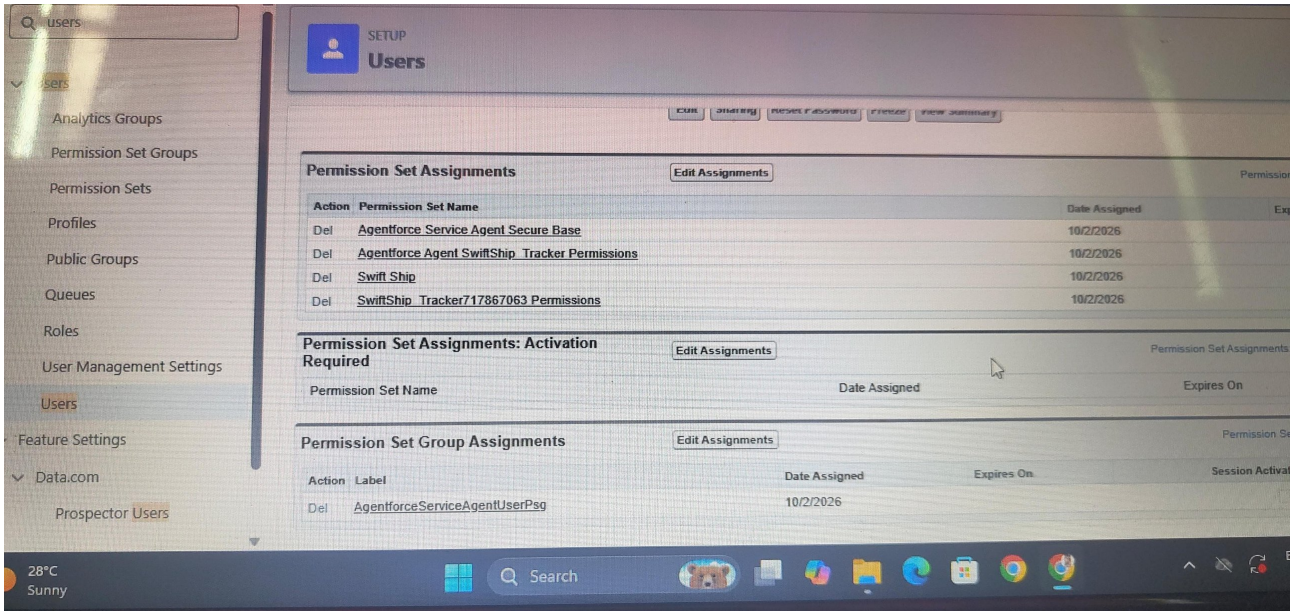


Fig 3: Permission Set Assignments for EinsteinServiceAgent User

Result

The **Swift Ship** permission set is now assigned to the EinsteinServiceAgent User. The agent has Read, Create and Edit access to the SwiftShip objects and their key fields, which is required before the agent is built in Milestone 4.

Phase 3: UI/UX Development & Customization

Milestone 3: Org Setup for Agentforce

Objective: To enable the Salesforce features required to build and run the Agentforce agent: the Default Agent, Einstein generative AI and Agentforce.

Step 1: Enable the Default Agent from Salesforce Go

- In Setup, type **Salesforce Go** in the Quick Find box and click it.
- Search for **Default Agent** and click **Get Started**.
- Turn the Default Agent **On**, then refresh the page.

Step 2: Enable Einstein

- In Setup, type **Einstein Setup** in the Quick Find box and click it. Click **Get Started** if prompted.
- Turn on **Turn on Einstein** to enable generative AI on your Salesforce data.
- Under **Prompt Builder Settings**, turn on **Global Languages** and **Deploy Prompt Templates**.
- Refresh the browser page.

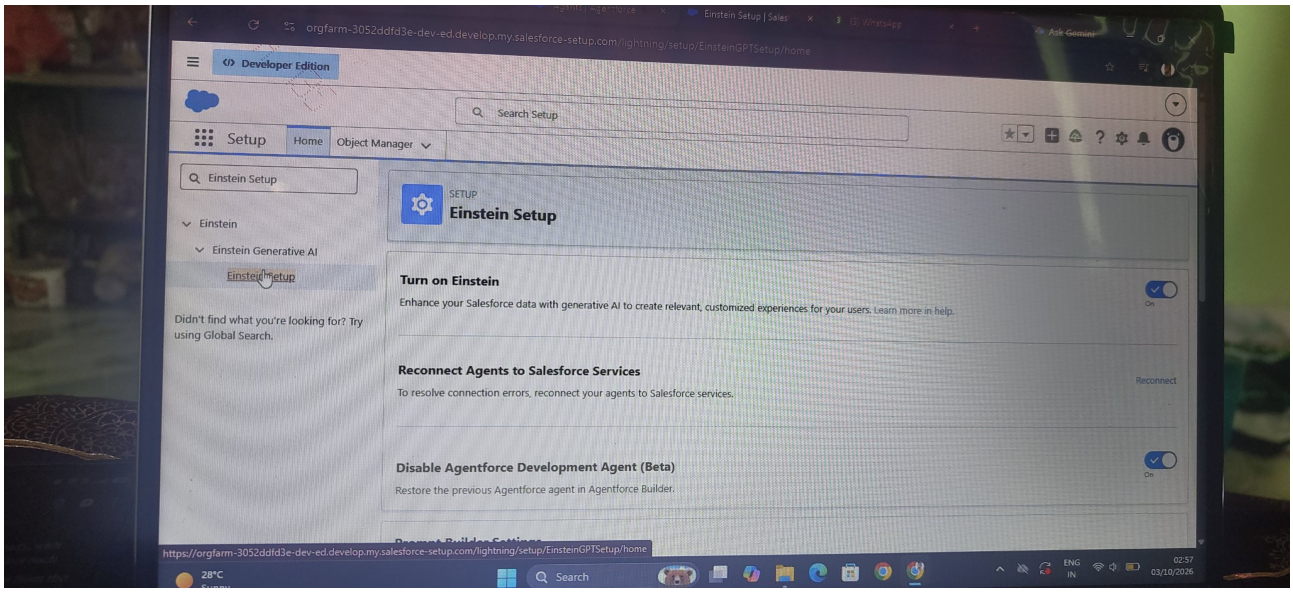


Fig 1: Einstein Setup with Turn on Einstein enabled

Step 3: Enable Agentforce

• In Setup, type **Agentforce Agents** in the Quick Find box and click it (Einstein > Einstein Generative AI > Agentforce Studio > Agentforce Agents).

• Turn the **Agentforce** toggle **On** at the top right.

• Confirm that **Agentforce (Default)** appears in the agents list (Type: Employee).

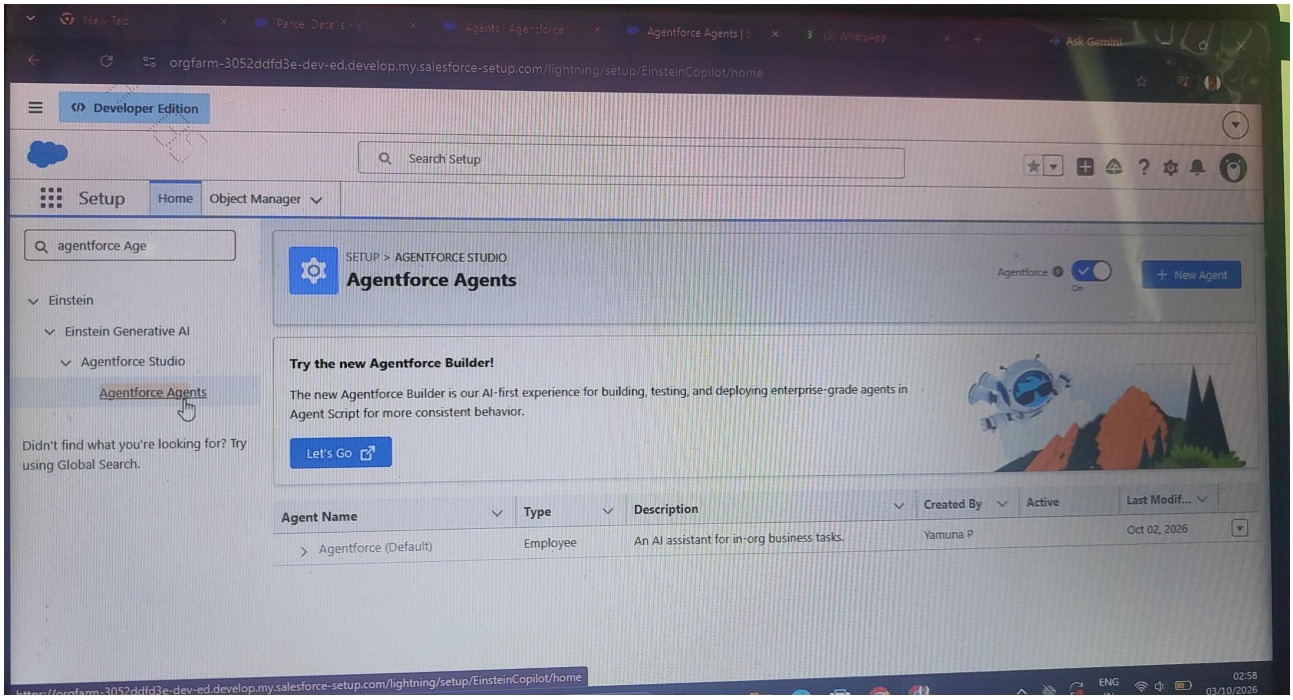


Fig 2: Agentforce Agents page with Agentforce turned On and the Default agent listed

Result

Einstein and Agentforce are now enabled in the org, and the Agentforce (Default) agent is available. It is opened in Agentforce Builder in Milestone 4 to create the SwiftShip Tracker agent.

Phase 3: UI/UX Development & Customization

Milestone 4: Building the Agent

Objective: To build the Agentforce agent that retrieves parcel details by Parcel ID, by creating a subagent and an agent action linked to the Parcel Details flow.

Step 1: Open the Default Agent in Agentforce Builder

• Go to **Setup > Agentforce Agents** and click **Agentforce (Default)**.

• On the Agent Details page (API Name: Copilot_for_Salesforce, Type: Employee), click **Open in Builder**.

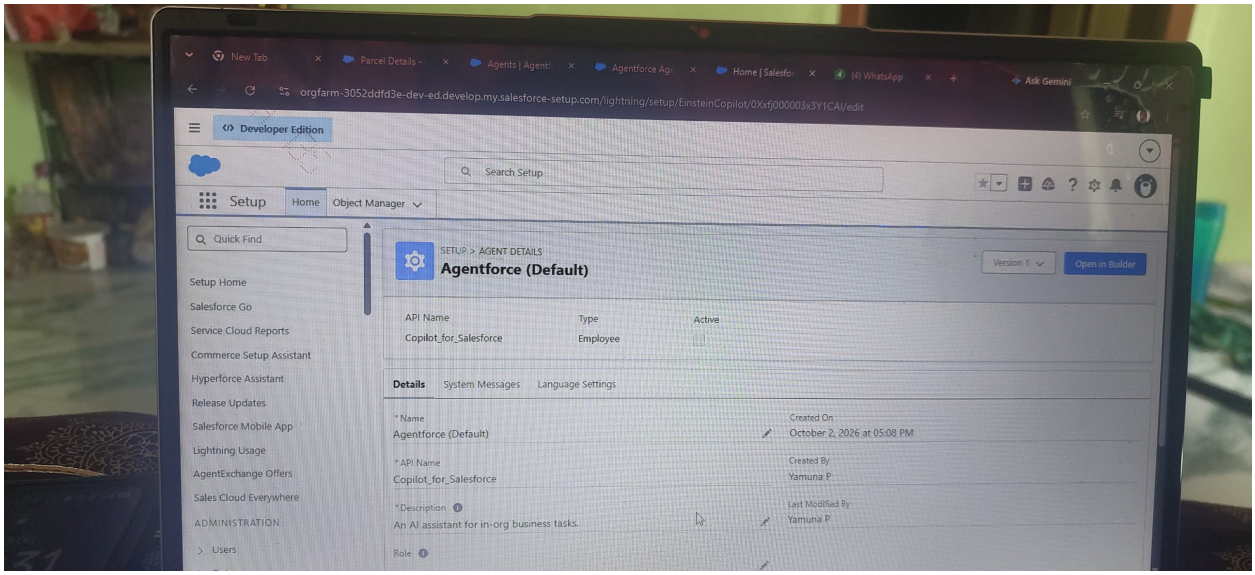


Fig 1: Agent Details page of Agentforce (Default) with Open in Builder

Step 2: Start a new subagent

• In Agentforce Builder, open the **Subagents** panel. It lists General CRM and Single Record Summary.

• Click **New** and select **New Subagent**.

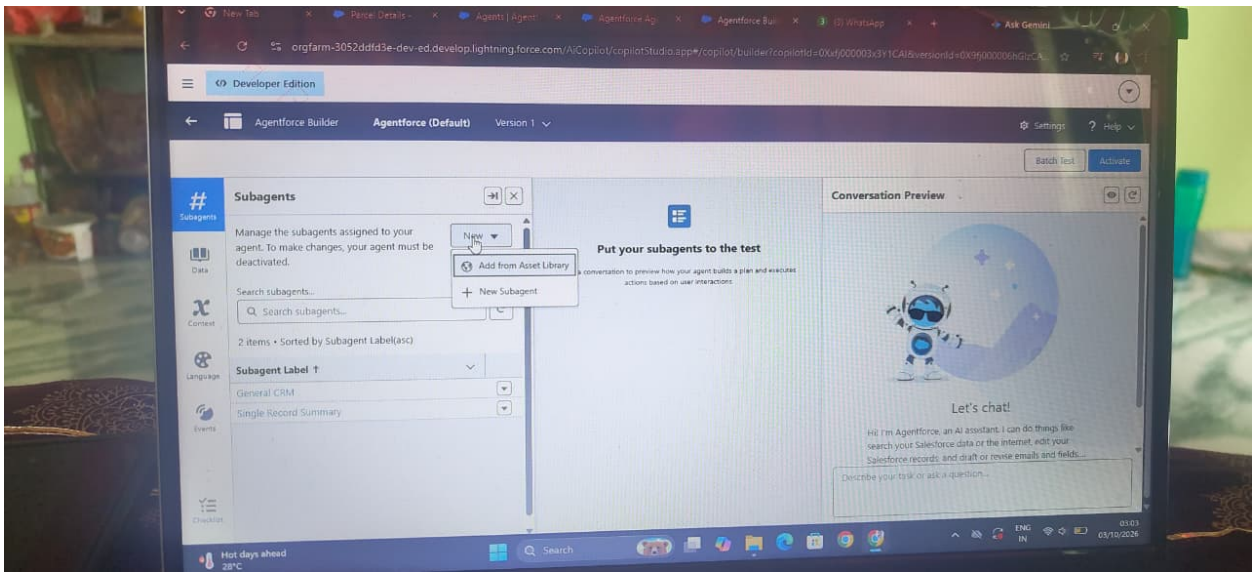


Fig 2: Subagents panel with the New > New Subagent option

Step 3: Describe the subagent

• In the **Create a Subagent** window, enter what the subagent should do: *This Agent should give the parcel details to the user, by asking for the parcel id.*

• Click **Next** and complete the wizard. The subagent is named **Parcel Details Inquiry**.

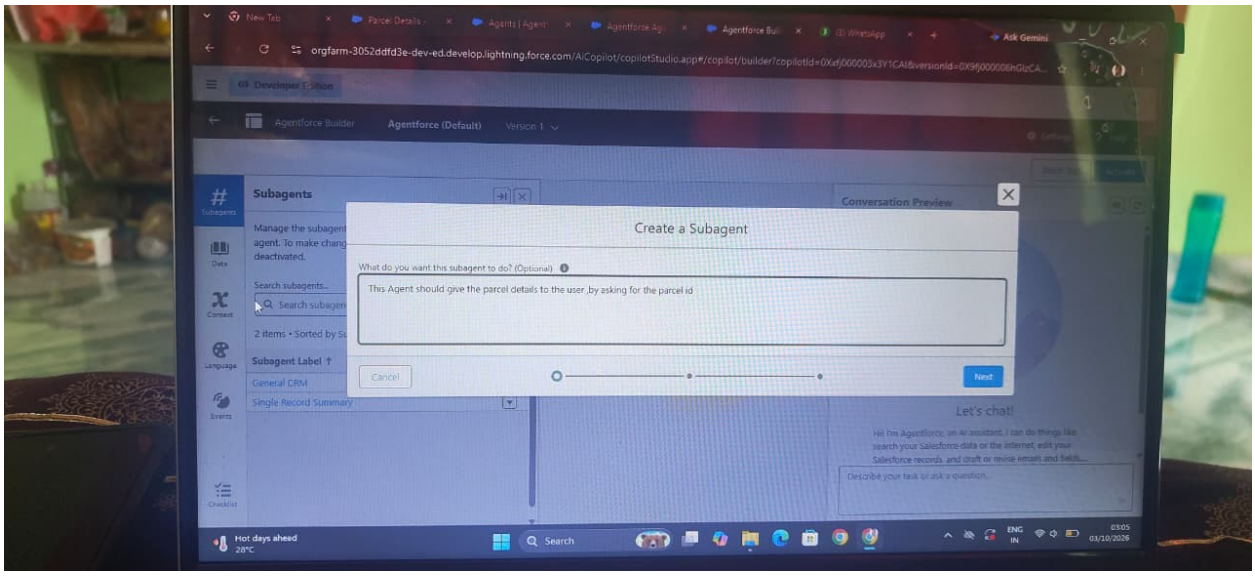


Fig 3: Create a Subagent dialog

Step 4: Open the Agentforce Asset Library

• Go to **Setup > Agentforce Asset Library** and open the **Actions** tab.

• Agent actions are listed here (134 items). The **New Agent Action** button is at the top right.

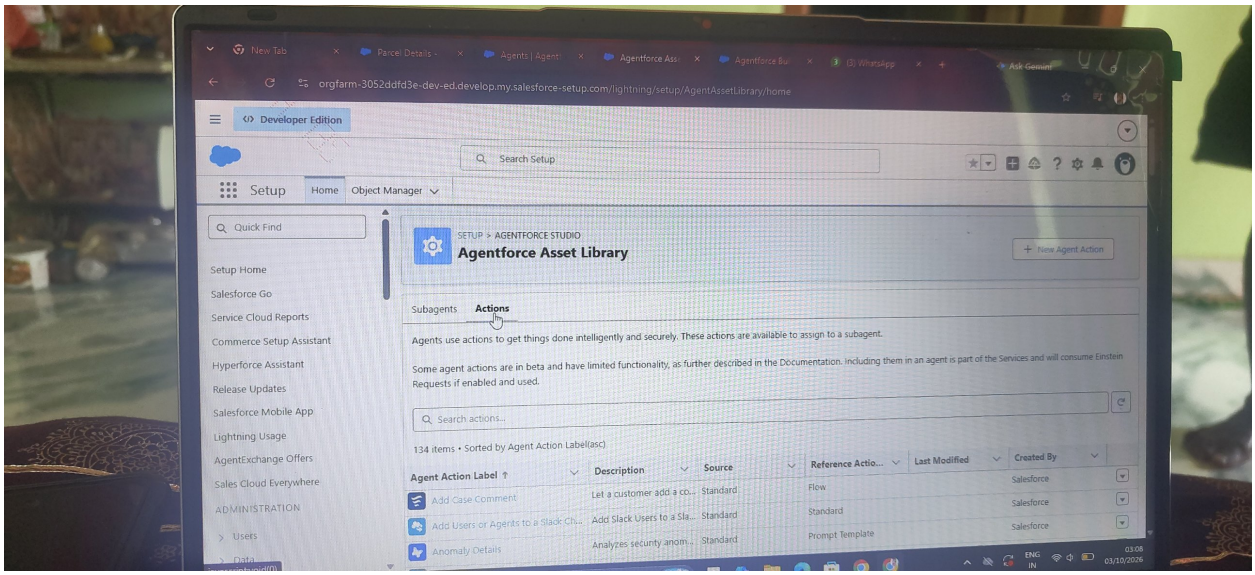


Fig 4: Agentforce Asset Library, Actions tab

Step 5: Configure the Parcel Details agent action

• Create a new agent action with Reference Action Type **Flow** and choose the **Parcel Details** flow.

• Agent Action Label: **Parcel Details**. Agent Action API Name: **Parcel_Details**.

• Agent Action Description: *Use this action to get or checked the parcel details and tracking status for a shipment.*

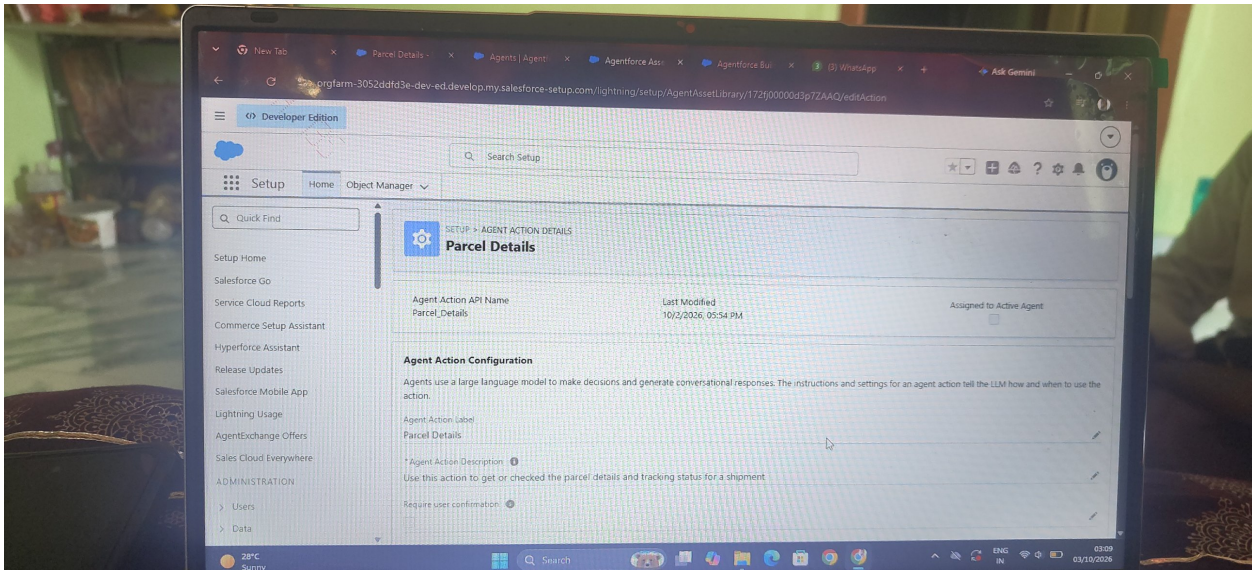


Fig 5: Parcel Details agent action configuration

Step 6: Verify the action in the Asset Library

• Return to the Actions list and scroll to **Parcel Details**.

• Its Source is **Custom**, which confirms the action was created from the flow.

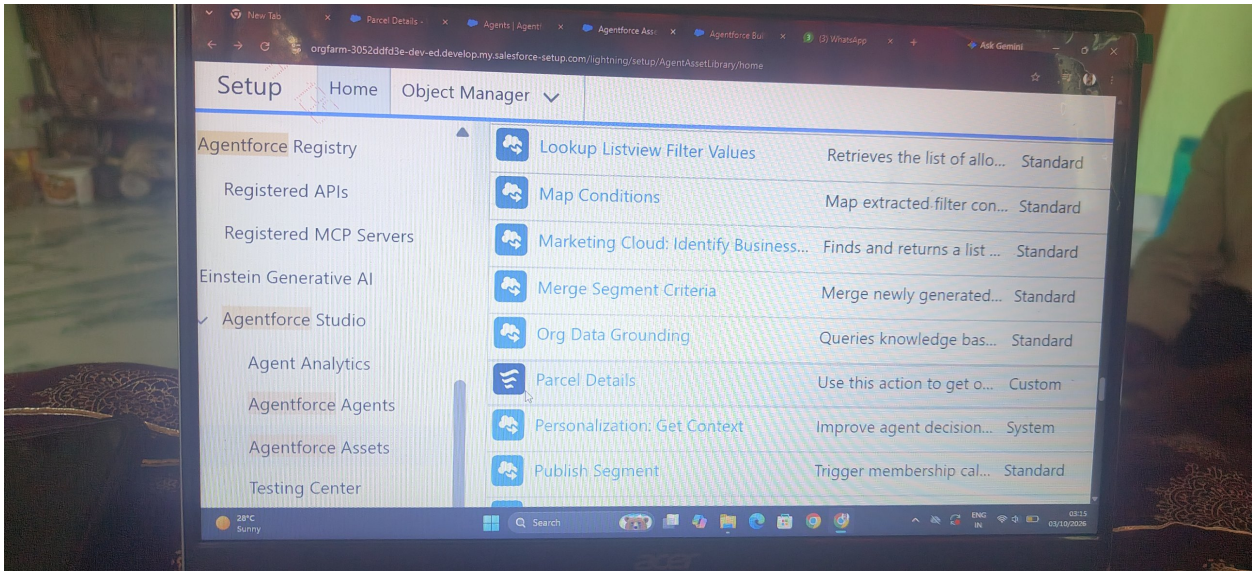


Fig 6: Parcel Details listed as a Custom action

Step 7: Confirm the subagent

• Back in Agentforce Builder, the Subagents list now shows **Parcel Details Inquiry** (3 items).

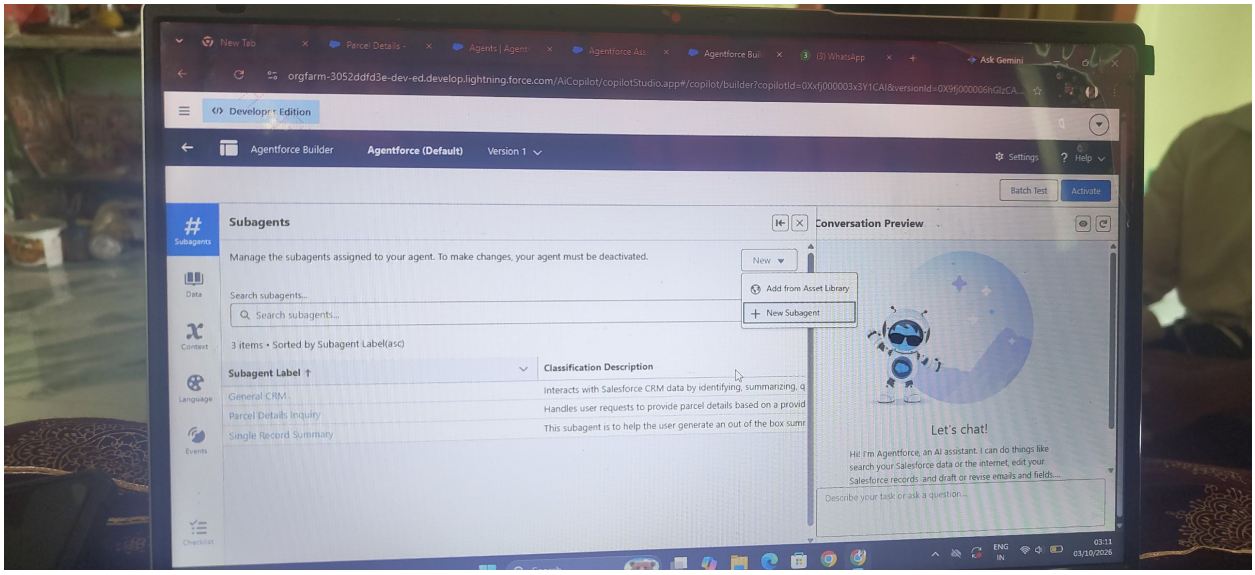


Fig 7: Subagents list with Parcel Details Inquiry

Step 8: Assign the action to the subagent

• In Agentforce Builder, under Subagents, click the **Parcel Details Inquiry** subagent.

• Click **This Subagent's Actions**, then click **New** and select **Add from Asset Library**.

• Select the flow action created earlier, **Parcel Details**, and click **Finish**.

• The action now appears under the subagent's actions.

Step 9: Rename the agent

• Click **Settings** at the top right of Agentforce Builder.

• In Edit Agent Details, change the Name to **SwiftShip Tracker**.

• Click **Save**.

Step 10: Activate the agent

• Click **Activate** at the top right.

• If a **Configuration Issues Detected** warning appears, click **Ignore & Activate**, then click **Activate**.

• Go to **Setup > Agentforce Agents** and confirm that **SwiftShip Tracker** is listed and Active.

Result

The Parcel Details Inquiry subagent and the Parcel Details agent action are created. The action is assigned to the subagent, and the agent is renamed **SwiftShip Tracker** and activated, so it can answer parcel tracking queries using the Parcel ID.