Phase 4: Data Migration, Testing & Security

Objective: To validate that the SwiftShip Tracker agent routes parcel queries to the correct subagent, runs the Flow, retrieves parcel data, and works without access or permission issues. The goal is to confirm that the AI-driven agent gives accurate responses to parcel tracking queries within Salesforce.

1. Verify the Agent

Go to Setup → Agentforce Agents and confirm that the SwiftShip Tracker agent (Type: Employee) appears in the list.

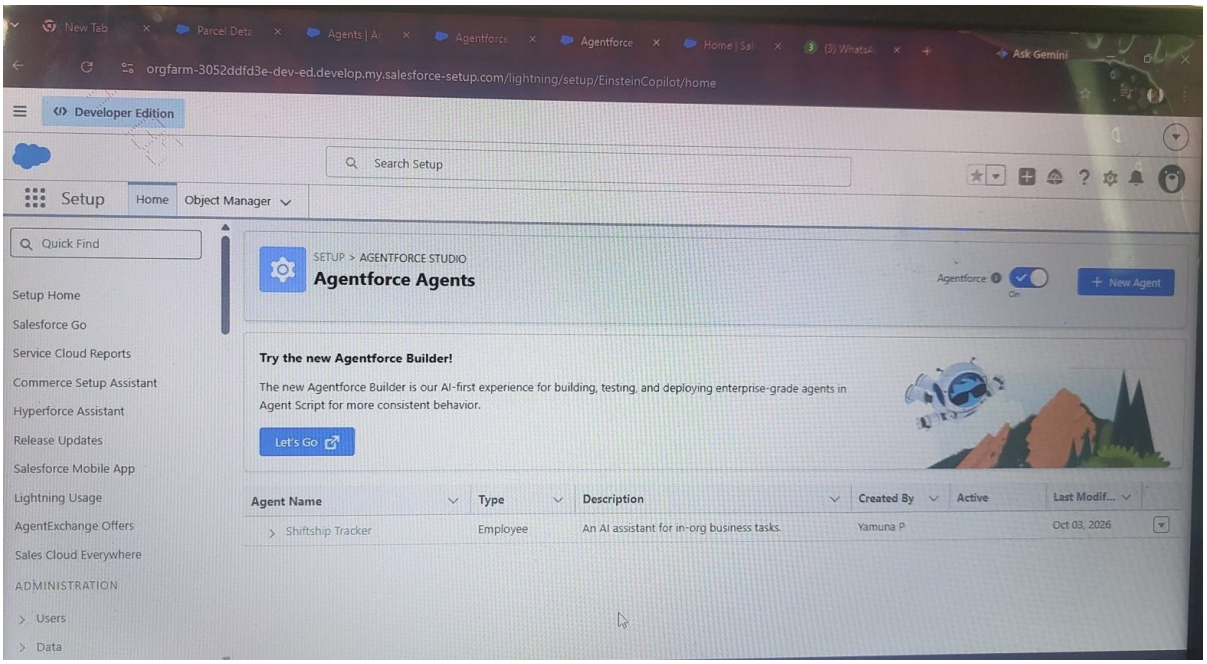


Figure 1: Agentforce Agents list showing the agent

2. Validate the Subagent

In Agentforce Builder (Version 1, Active), open the Parcel Details Inquiry subagent and confirm its configuration:

- **Classification Description:** Handles user requests to provide parcel details based on a provided parcel ID.
- **Scope:** Retrieve and provide parcel details to the user by asking for and using the parcel ID. Unrelated inquiries are not addressed.

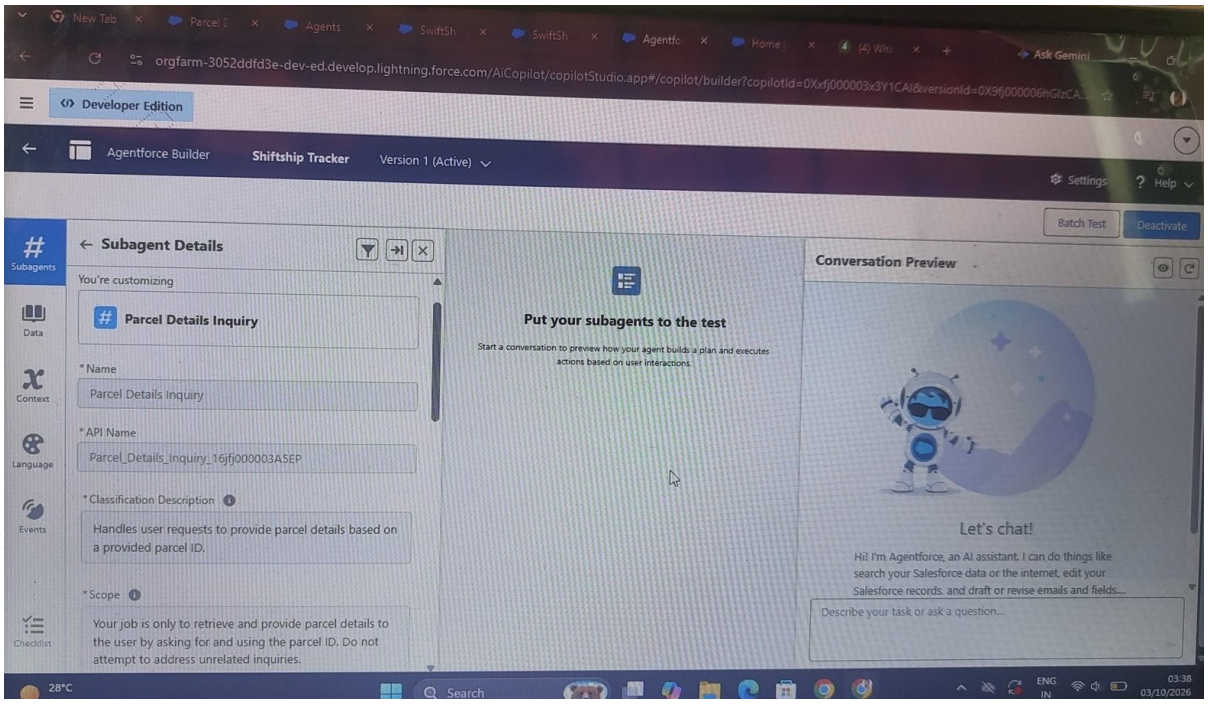


Figure 2: Subagent configuration

Under This Subagent's Actions, confirm that the Parcel Details action is linked.

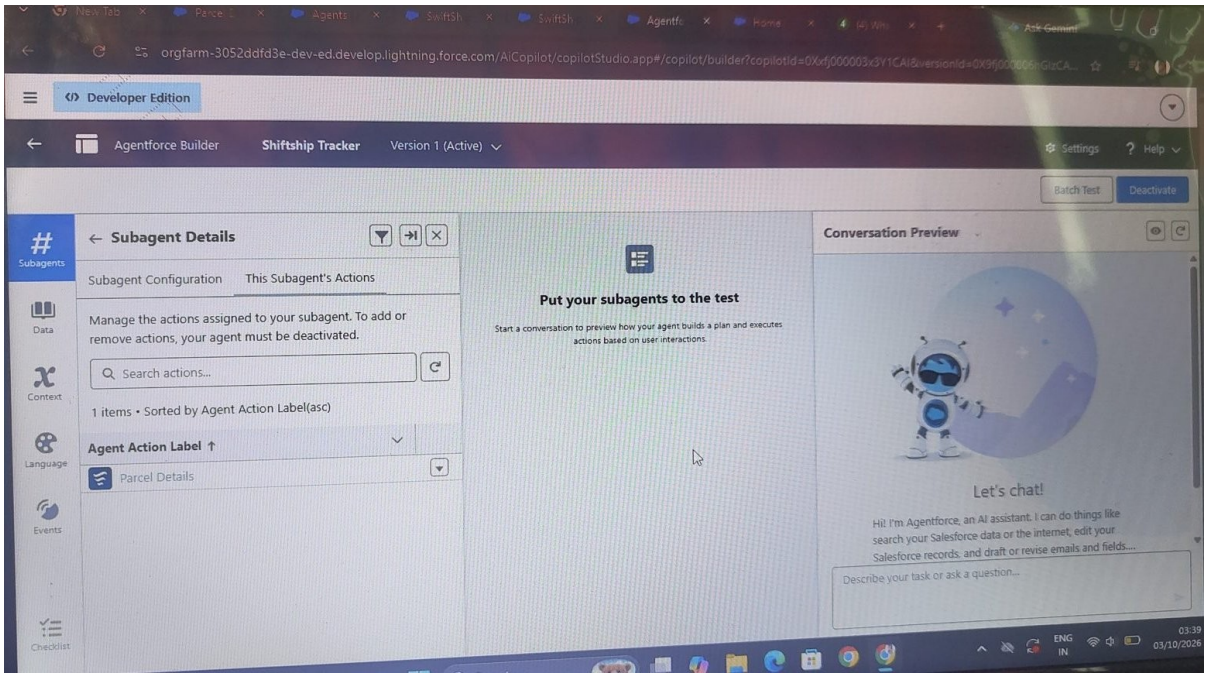


Figure 3: Parcel Details action linked to the subagent

3. Check the Flow

Go to Setup → Flows and open Parcel Details – V1. Confirm that the flow is Active and follows this sequence: Start → Get Parcel Records → Parcel Updates (prompt template action) → Assignment Outputs → End.

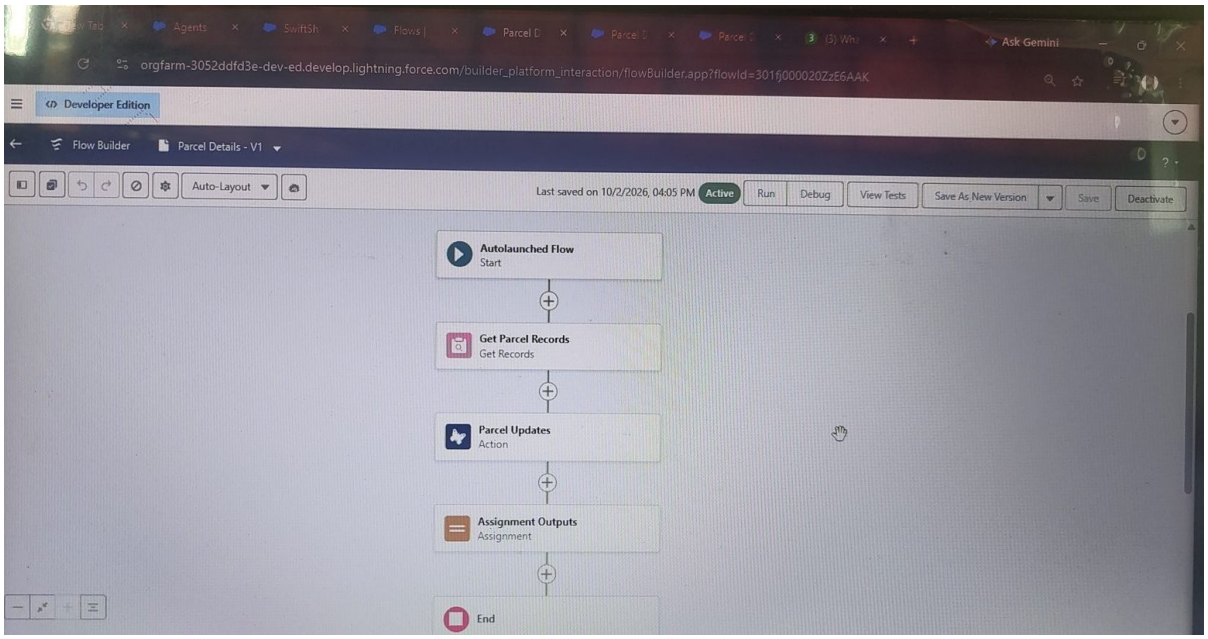


Figure 4: Parcel Details auto-launched flow (Active)

4. Security: Assign the Permission Set

Open the Swift Ship permission set and go to Manage Assignments. Click Add Assignment, select the EinsteinServiceAgent User, and click Next. The Assignment Summary shows the status as Success.

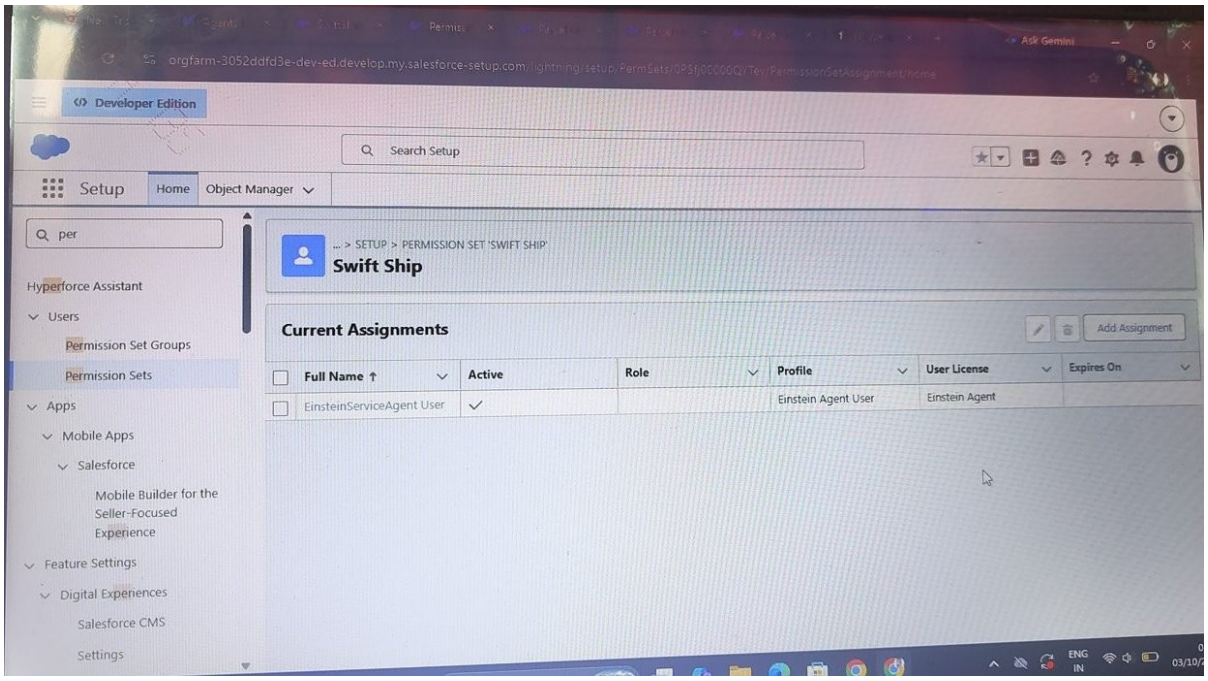


Figure 5: Swift Ship permission set – current assignments

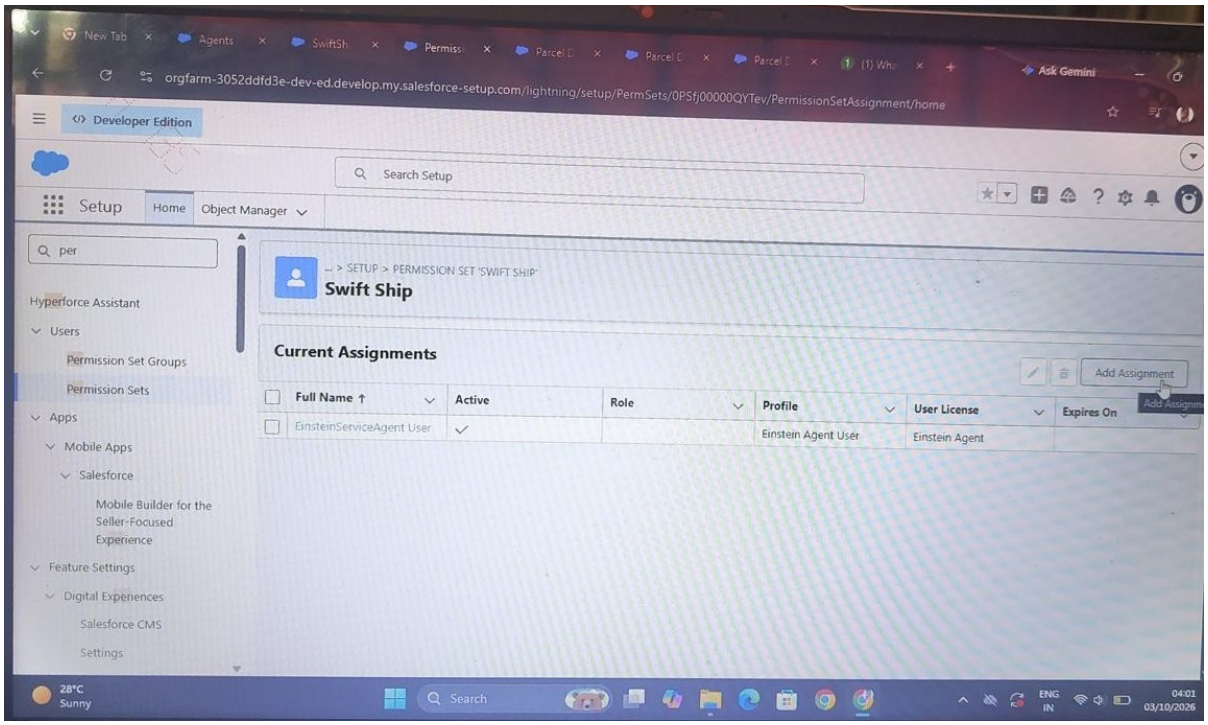


Figure 6: Add Assignment option

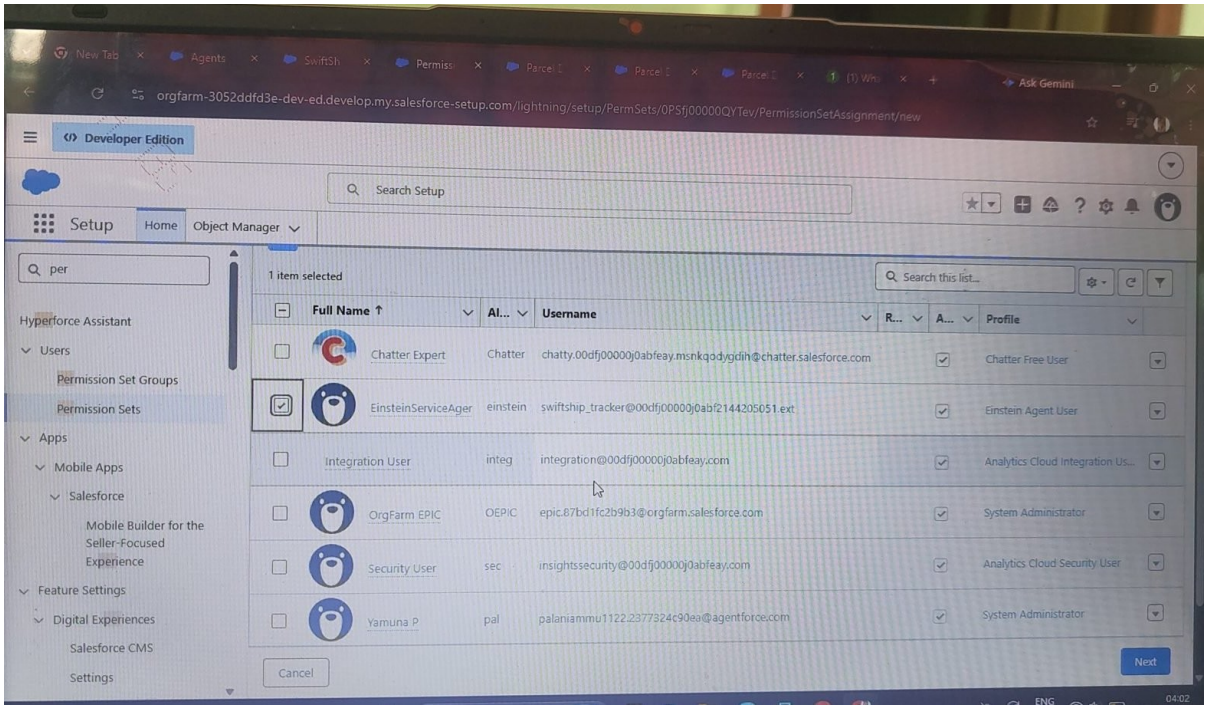


Figure 7: Selecting the EinsteinServiceAgent User

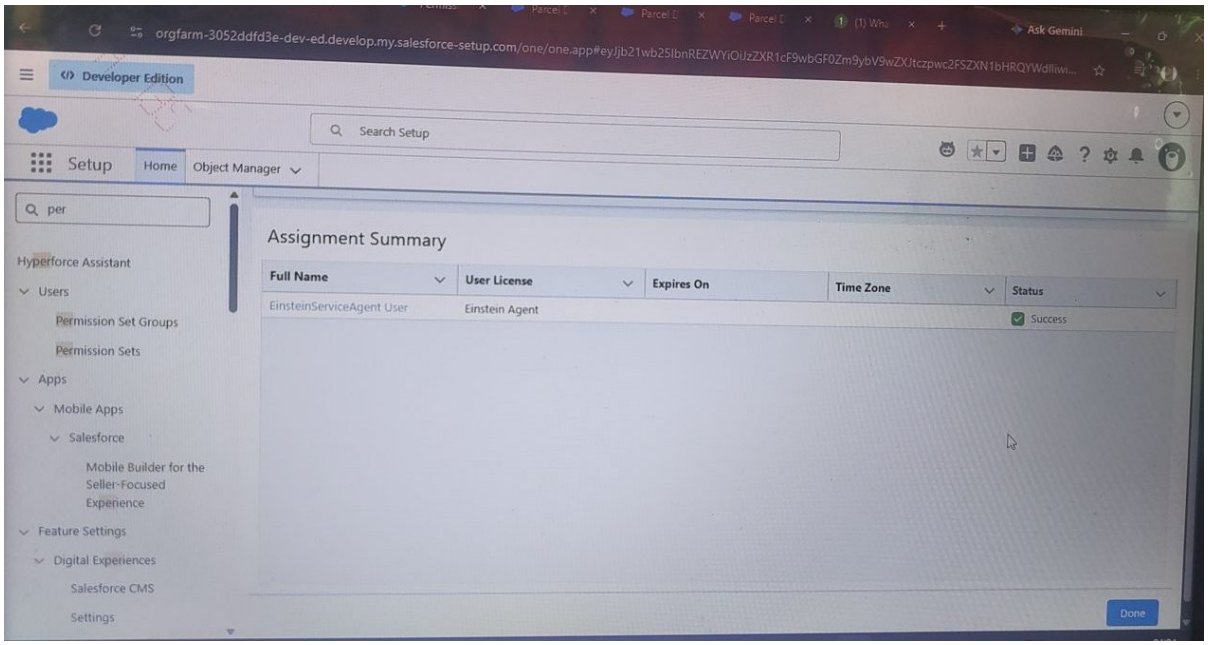


Figure 8: Assignment Summary – Success

5. Configure and Activate the Agent

In the Agentforce Builder, the Parcel Details action is configured as follows:

- **Input:** ids (String) – “Enter the tracking ID or Parcel ID”, with “Require Input to execute action” enabled.
- **Output:** Output (String) – returns the current status of the parcel.

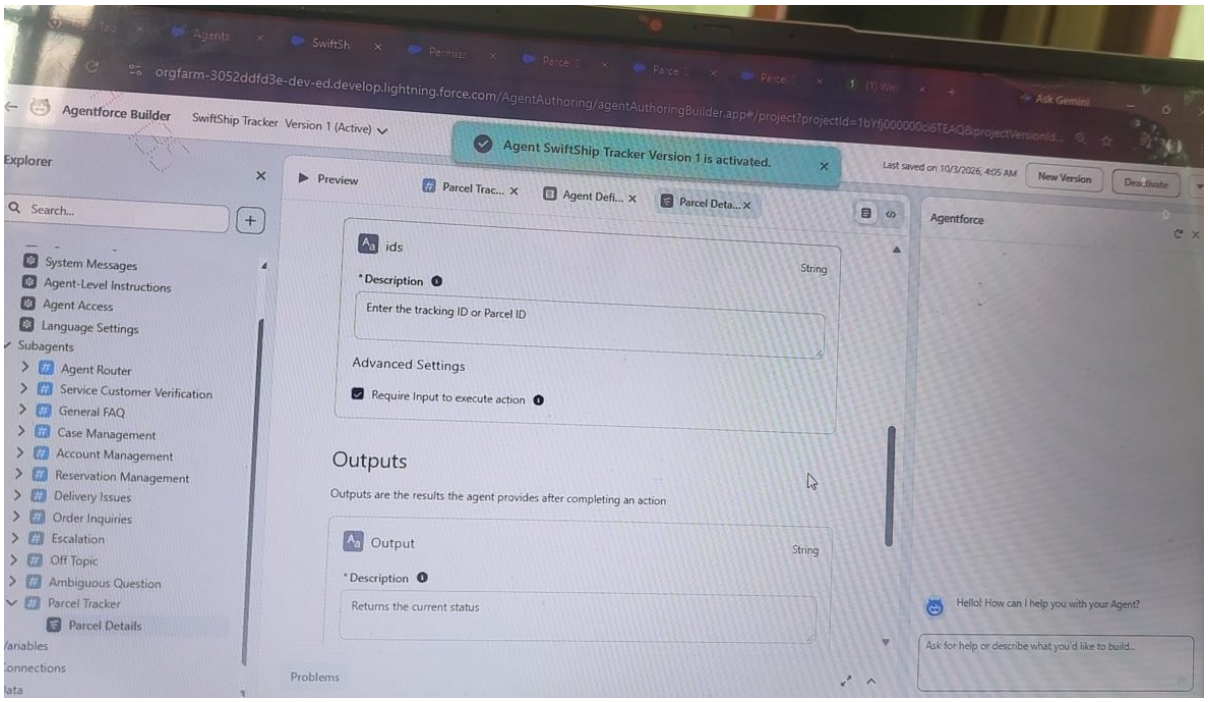


Figure 9: Parcel Details action – inputs and outputs

The version is then committed, and the agent is activated. A confirmation message shows that the agent SwiftShip Tracker Version 1 is activated.

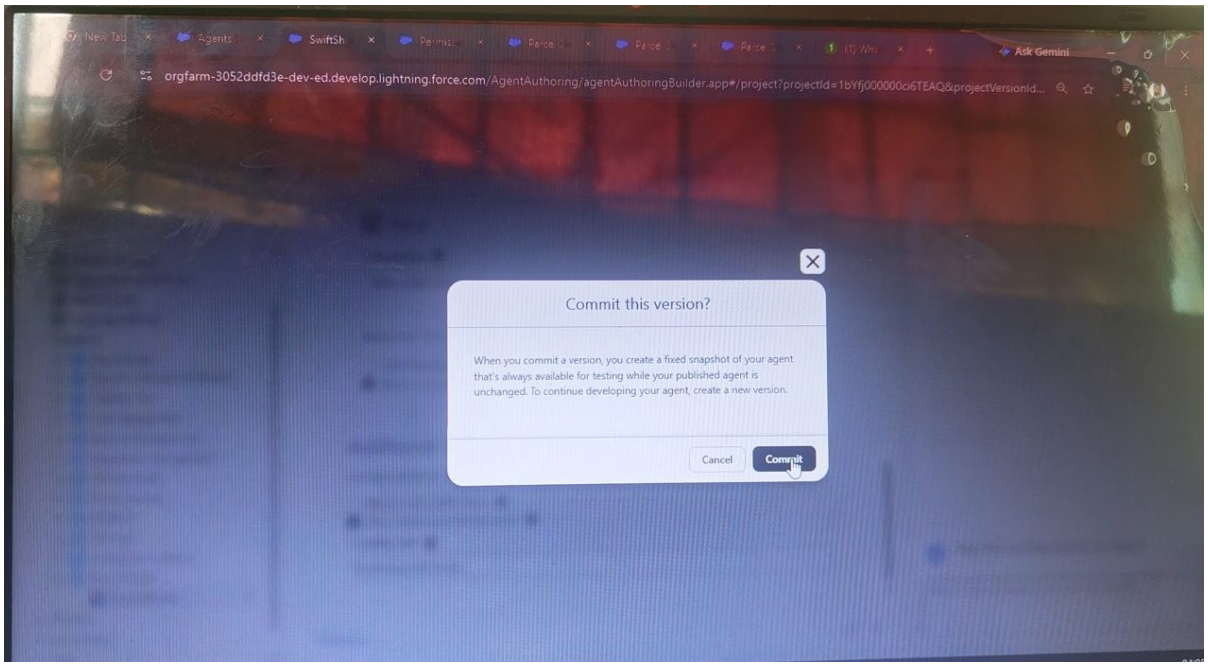


Figure 10: Commit this version

6. Test Data in Salesforce

A test Parcel record was created in the Developer Org with the following values:

Field	Value
Parcel Name	laptop
Parcel ID	P-001
Status	Booked
Weight	2
Estimated Delivery	10/29/2026

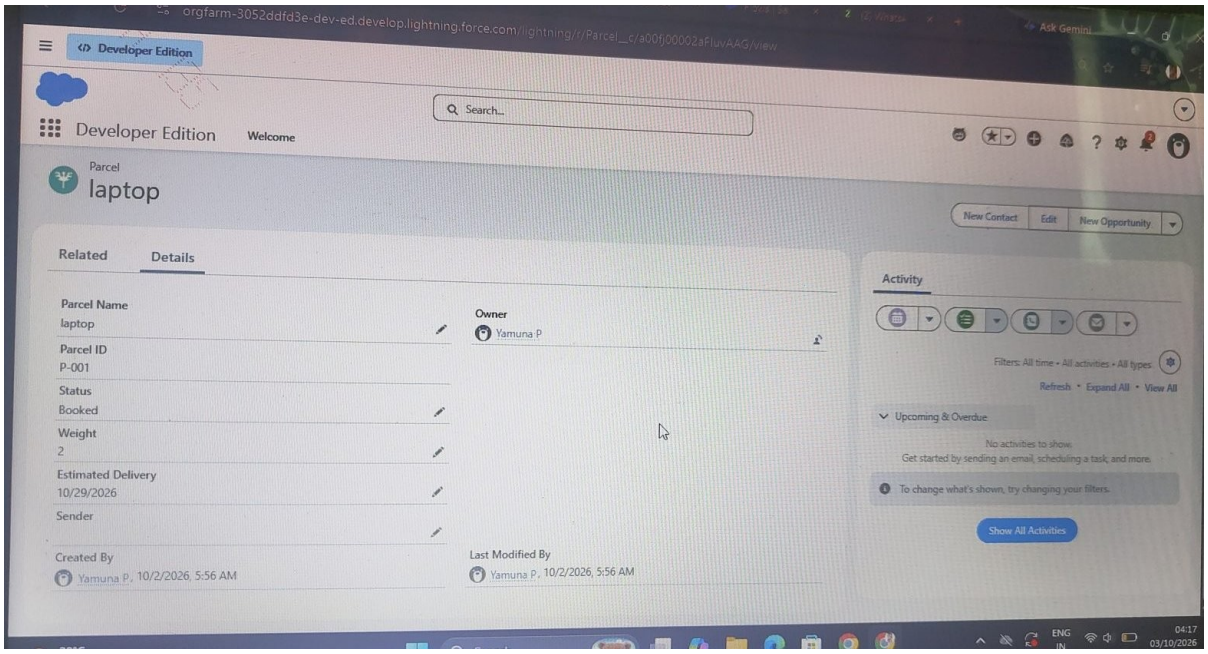


Figure 11: Test Parcel record (P-001)

7. Test the Agent (Live Test)

In the Preview panel (Live Test), the following prompt was entered:

"Please provide parcel information about parcel id=P-001"

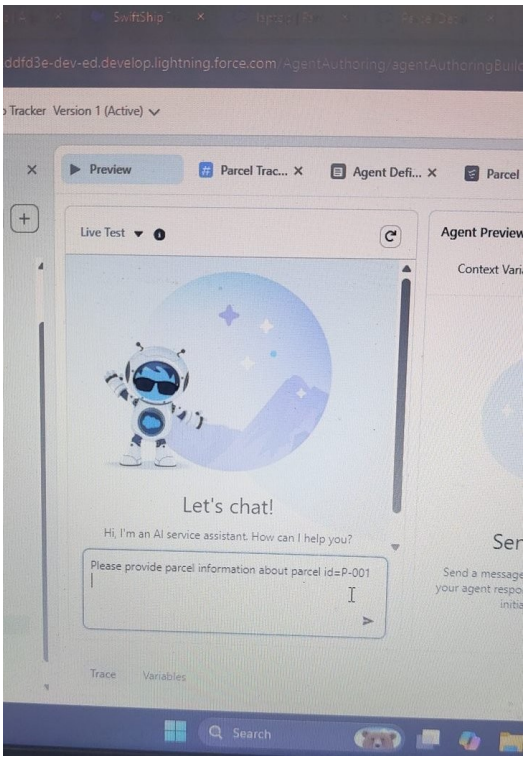


Figure 12: Prompt entered in the Live Test

The agent responded with the parcel details:

- **Parcel Name:** laptop
- **Status:** Booked
- **Weight:** 2 kg
- **Estimated Delivery Date:** 10/29/2026

The Agent Preview trace shows that the request was transitioned to the Parcel Tracker subagent, the Parcel Details action was invoked, and the output evaluation was GROUNDED.

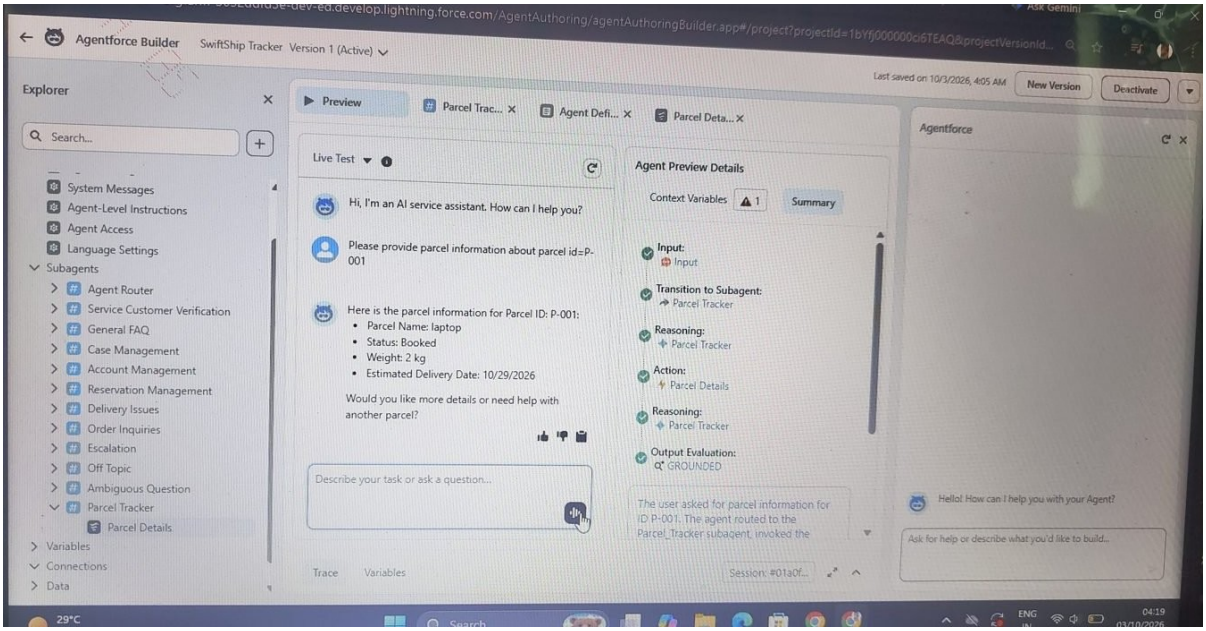


Figure 13: Agent response and reasoning trace

Result

The agent's response matches the Parcel record exactly. This confirms that topic routing, Flow execution, permissions, and data retrieval all work correctly.

Data Migration

Sample records were entered manually in the Developer Org, so no bulk data migration was required.