

PROJECT DEVELOPMENT

Implement Client Script and UI Policy (Incident)

	Name	NM.Id
Team Leader	Yamuna devi A	asaluau020224128037
Team Members	Kalaiselvi S	asaluau020224128018
	Keerthana M	asaluau020224128020
	Kavitha V	asaluau020224128019
	Mageshwari R	asaluau020224128021

1. Development Overview

The development phase focuses on implementing the planned Client Script and UI Policy configurations on the Service Now Incident form. The development is carried out based on the requirements and project design defined in the previous phases. The main purpose is to provide dynamic field behaviour, improve data validation, and make the Incident form easier and more controlled for users.

2. Client Script Development

A Client Script is developed to perform client-side actions on the Incident form based on specific user interactions and conditions. The appropriate Client Script type is selected according to the requirement:

- onLoad – used when an action is required when the Incident form loads.
- onChange – used when the behaviour depends on a field value changing.
- onSubmit – used to validate information before the Incident is submitted.

The Client Script evaluates the required field values and performs the defined action immediately on the form. Development Steps

1. Open the Client Scripts configuration.
2. Select the Incident table.
3. Enter the required Client Script name.
4. Select the appropriate script type.
5. Select the required field for an onChange script.
6. Define the required conditions.
7. Add the client-side script logic.
8. Save the Client Script.

3. UI Policy Development

A UI Policy is developed to control the behaviour and properties of Incident form fields without requiring complex scripting. The UI Policy is configured with a specific condition. When the condition is satisfied, the related UI Policy Actions are applied automatically. The UI Policy can control:


- Mandatory – makes a field required.
- Visible – displays or hides a field.
- Read-only – prevents modification of a field.

Development Steps

1. Open the UI Policies configuration.
2. Select the Incident table.
3. Enter the UI Policy name.
4. Define the required condition.
5. Create the required UI Policy Actions.
6. Configure the field properties.
7. Save the UI Policy.
8. Test the policy using different Incident conditions.

4. Client Script and UI Policy Integration

Client Script and UI Policy work together to provide dynamic behaviour on the Incident form. The basic development flow is:

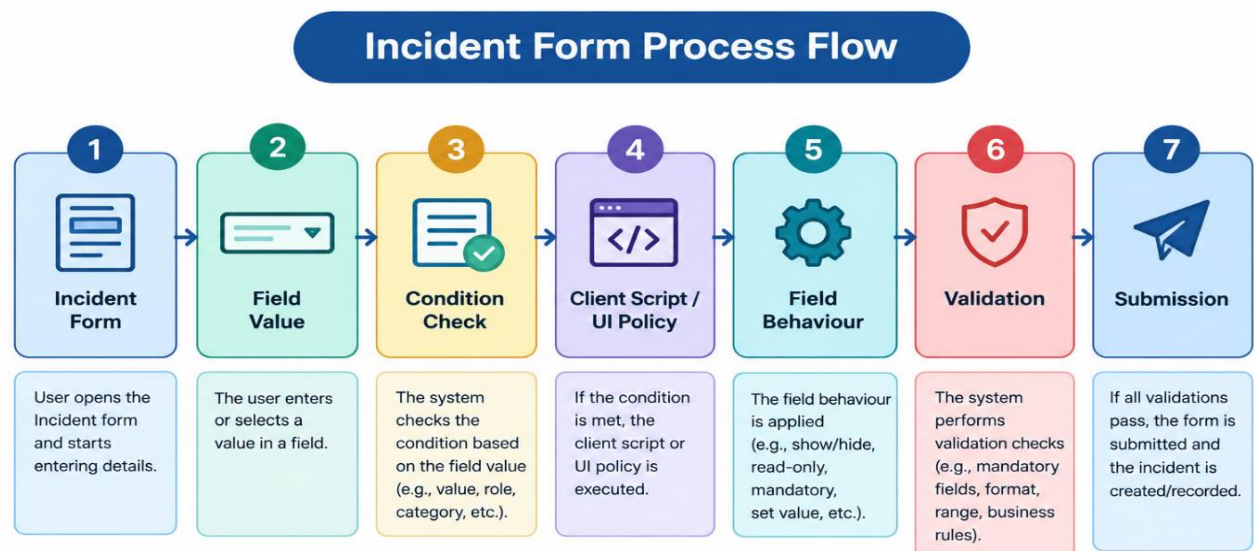

When the user changes a relevant field, the system evaluates the defined condition. Based on the result, the appropriate field behaviour is applied. For example, a field may become mandatory, visible, or read-only according to the configured condition.

5. Development Validation

After creating the Client Script and UI Policy, the configuration is tested on the Incident form. The following behaviours are verified:

- * Client Script executes at the correct event.
- * UI Policy condition is triggered correctly.
- * Mandatory fields work as expected.
- * Field visibility changes correctly.
- * Read-only behaviour is applied correctly.
- * Invalid or incomplete information is handled properly.
- * Valid Incident records can be submitted successfully.

Any configuration errors identified during testing are corrected before moving to the final validation phase.

6. Development Outcome

The development phase results in a functional Incident form with dynamic field behaviour. The implemented Client Script and UI Policy help to:

- * Improve data accuracy.
- * Reduce incomplete Incident records.
- * Control field behaviour dynamically.
- * Improve user interaction.
- * Maintain consistency in Incident data.

The completed development is then passed to the Testing and Validation phase for final verification.