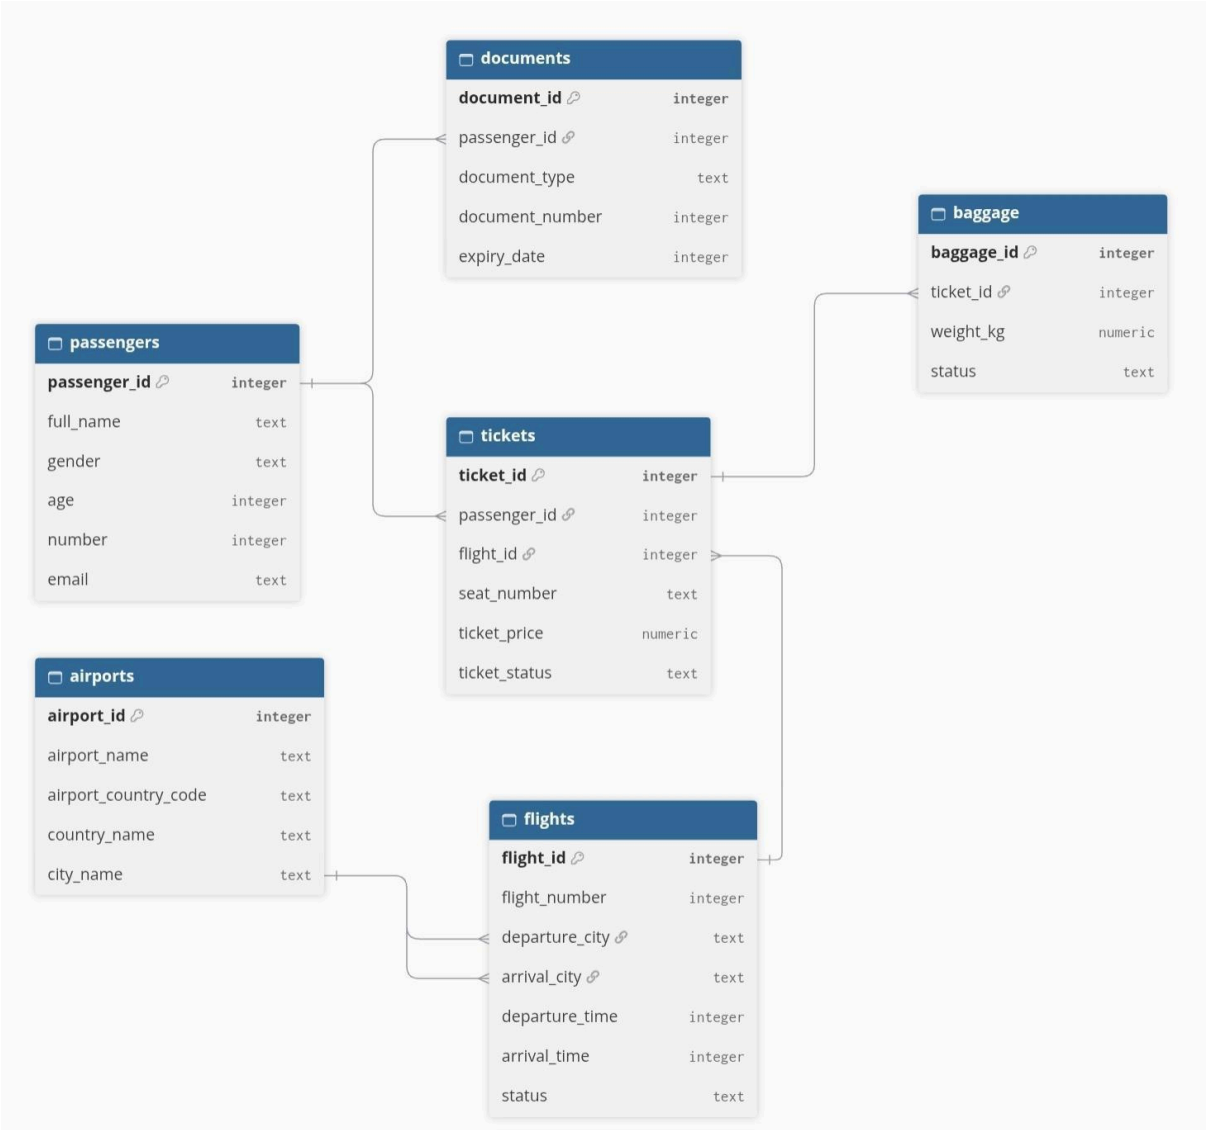



```
PRAGMA foreign_keys = ON;

CREATE TABLE passengers (
    passenger_id INTEGER PRIMARY KEY AUTOINCREMENT,
    full_name TEXT NOT NULL,
    gender TEXT CHECK (gender IN ('M', 'F', 'Other')),
    age INTEGER CHECK (age >= 0 AND age < 150),
    number TEXT,
    email TEXT
);

CREATE TABLE documents (
    document_id INTEGER PRIMARY KEY AUTOINCREMENT,
    passenger_id INTEGER NOT NULL,
    document_type TEXT NOT NULL,
    document_number TEXT NOT NULL,
    expiry_date TEXT NOT NULL,
    FOREIGN KEY (passenger_id) REFERENCES passengers(passenger_id)
```

```
);

CREATE TABLE airports (
    airport_id INTEGER PRIMARY KEY AUTOINCREMENT,
    airport_name TEXT NOT NULL,
    airport_country_code TEXT,
    country_name TEXT,
    city_name TEXT NOT NULL UNIQUE
);

CREATE TABLE flights (
    flight_id INTEGER PRIMARY KEY AUTOINCREMENT,
    flight_number TEXT NOT NULL,
    departure_city TEXT NOT NULL,
    arrival_city TEXT NOT NULL,
    departure_time TEXT NOT NULL,
    arrival_time TEXT NOT NULL,
    status TEXT DEFAULT 'scheduled',
    FOREIGN KEY (departure_city) REFERENCES airports(city_name),
    FOREIGN KEY (arrival_city) REFERENCES airports(city_name)
);

CREATE TABLE tickets (
    ticket_id INTEGER PRIMARY KEY AUTOINCREMENT,
    passenger_id INTEGER NOT NULL,
    flight_id INTEGER NOT NULL,
    seat_number TEXT,
    ticket_price NUMERIC CHECK (ticket_price >= 0),
    ticket_status TEXT DEFAULT 'booked',
    FOREIGN KEY (passenger_id) REFERENCES passengers(passenger_id),
    FOREIGN KEY (flight_id) REFERENCES flights(flight_id)
);

CREATE TABLE baggage (
    baggage_id INTEGER PRIMARY KEY AUTOINCREMENT,
    ticket_id INTEGER NOT NULL,
    weight_kg NUMERIC CHECK (weight_kg >= 0),
    status TEXT DEFAULT 'checked_in',
    FOREIGN KEY (ticket_id) REFERENCES tickets(ticket_id)
);
```

Код для dbdiagram.io

```
Table passengers {
passenger_id integer [primary key]
full_name text
gender text
age integer
```

```
number integer
email text
}

Table documents {
document_id integer [primary key]
passenger_id integer
document_type text
document_number integer
expiry_date integer
}

Table flights {
flight_id integer [primary key]
flight_number integer
departure_city text
arrival_city text
departure_time integer
arrival_time integer
status text
}

Table baggage {
baggage_id integer [primary key]
ticket_id integer
weight_kg numeric
status text
}

Table airports {
airport_id integer [primary key]
airport_name text
airport_country_code text
country_name text
city_name text
}

Table tickets {
ticket_id integer [primary key]
passenger_id integer
flight_id integer
seat_number text
ticket_price numeric
```

```
ticket_status text
}

Ref: documents.passenger_id > passengers.passenger_id

Ref: baggage.ticket_id > tickets.ticket_id

Ref: tickets.flight_id > flights.flight_id

Ref: airports.city_name < flights.arrival_city

Ref: airports.city_name < flights.departure_city

Ref: tickets.passenger_id > passengers.passenger_id
```