


SpringBoot++Mybatisplus+Thymeleaf模板

SpringBoot++Mybatisplus+Thymeleaf模板


一.创建SpringBoot项目

(1) idea直接选择Spring initializr可创建SpringBoot项目

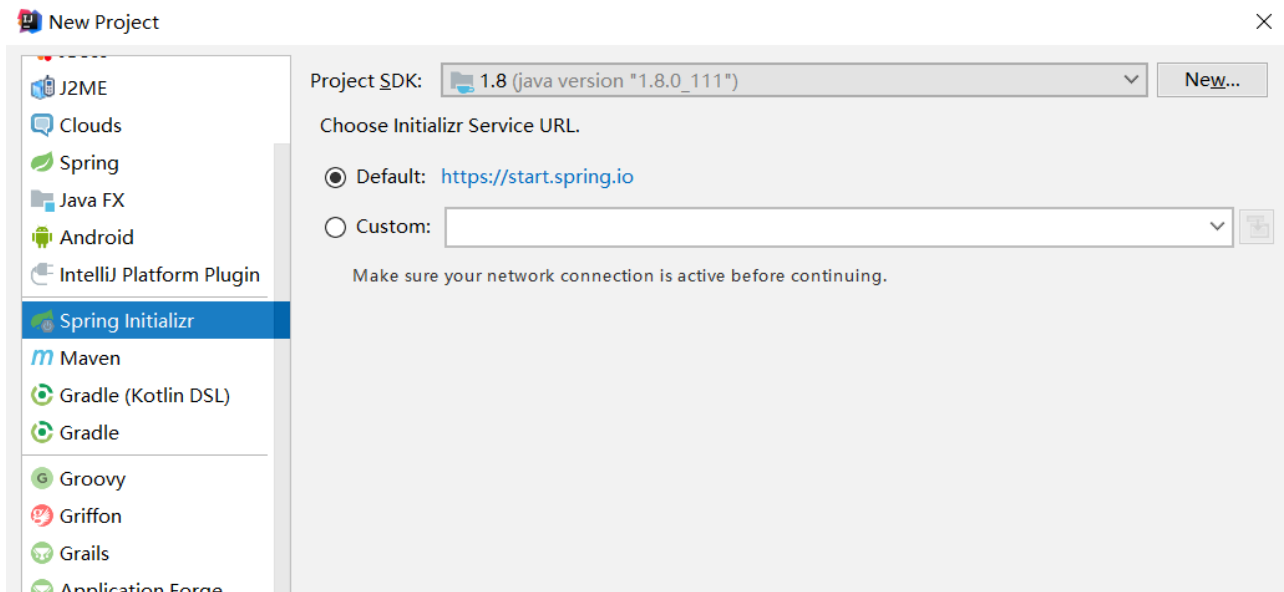

(2) 选择依赖


根据个人需求选择依赖，选择好后会直接在pom.xml中

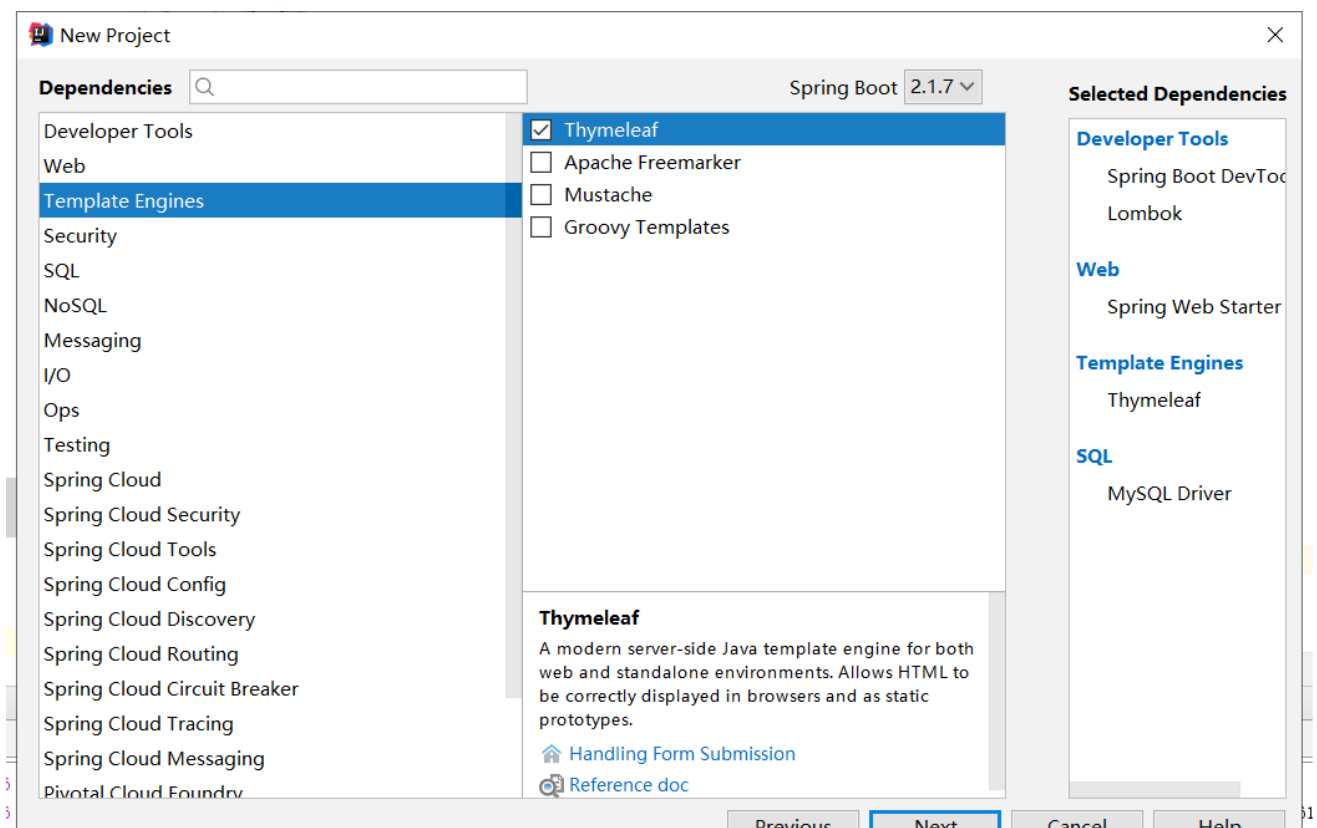

mybatisplus依赖

```
<!--mybatisplus-->
<dependency>
<groupId>com.baomidou</groupId>
<artifactId>mybatis-plus-boot-starter</artifactId>
<version>3.1.2</version>
</dependency>
```

项目架构

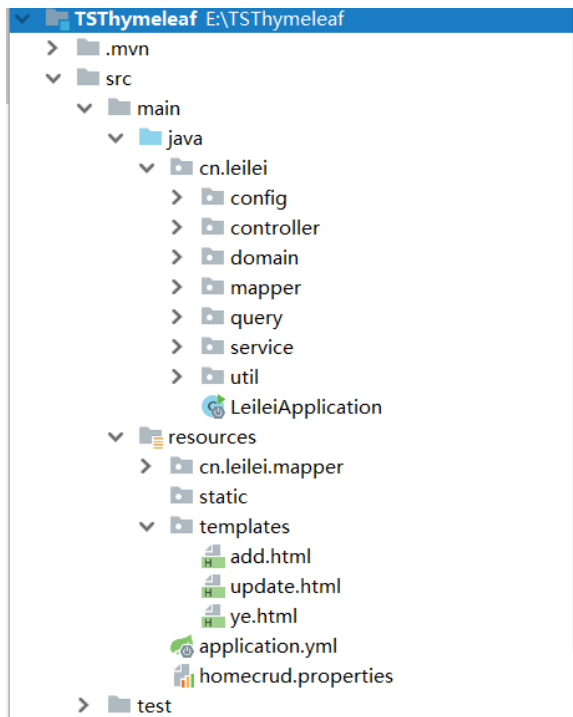

(3) 配置

application.yml

```
server:
  port: 5000
spring:
  datasource:
    #数据库连接池
    driver-class-name: com.mysql.jdbc.Driver
    username: root
    password: root
    url: jdbc:mysql:///homecrud?useUnicode=true&characterEncoding=UTF-8&useJDBCCompliantTimezoneShift=true&useLegacyDatetimeCode=false&serverTimezone=UTC

  devtools:
    #热部署
    restart:
      enabled: true
  thymeleaf:
    prefix: classpath:/templates/
    suffix: .html
    mode: LEGACYHTML5
```

二.代码编写

因为用了Mybatisplus代码生成器 根据数据库表反向生成pojo ,mapper,mapper.xml service,serviceimpl,controller,具体代码生成器使用见 mybatisplus篇

```

@Table("real_eseate")
public class RealEseate extends Model<RealEseate> {

    private static final long serialVersionUID=1L;

    @TableId(value = "id", type = IdType.AUTO)
    private Long id;
    @TableField("project_name")
    private String projectName;
    @TableField("address")
    private String address;
    @TableField("house_type")
    private String houseType;
    @TableField("area")
    private Integer area;
    @TableField("build_time")
    @JsonFormat(pattern = "yyyy-MM-dd HH:mm:ss",timezone = "GMT+8")
    private LocalDateTime buildTime;
    @TableField("user_id")
    private Long userId;
    //表示这个属性不会对应数据库中的列
    @TableField(exist = false)
    private User user;
}

```

mapper

```

public interface RealEseateMapper extends BaseMapper<RealEseate> {
    //高级分页查询
    IPage<RealEseate> queryPage(Page<RealEseate> page, @Param("query") Requery query);
}

```

因为涉及到分页，使用Mybatisplus必须配置一个分页bean

```

@EnableTransactionManagement
@Configuration
@MapperScan("cn.leilei.mapper")
public class MybatisPlusConfig {

    /**
     * 分页插件
     */
    @Bean
    public PaginationInterceptor paginationInterceptor() {
        PaginationInterceptor paginationInterceptor = new PaginationInterceptor();
        // paginationInterceptor.setLimit(你的最大单页限制数量，默认 500 条，小于 0 如 -1 不受限制);
        return paginationInterceptor;
    }
}

```

mapper.xml

```

<!-- 通用查询映射结果 -->
<resultMap id="BaseResultMap" type="cn.leilei.domain.RealEseate">
    <id column="id" property="id" />
    <result column="project_name" property="projectName" />
    <result column="address" property="address" />
    <result column="house_type" property="houseType" />
    <result column="area" property="area" />
    <result column="build_time" property="buildTime" />
    <result column="user_id" property="userId" />
    <!--关联对象属性-->
    <result column="uname" property="user.username"/>
    <result column="ucard" property="user.cardId"/>
</resultMap>
<!--查询条件-->
<sql id="whereSql">
    <where>
        <if test="query.keywordName!=null and query.keywordName!="">
            and
            ( u.username like concat('%',{query.keywordName},%')
            )
        </if>
        <if test="query.keywordCard!=null and query.keywordCard!="">
            and
            (
            u.card_id like concat('%',{query.keywordCard},%')
            )
        </if>
    </where>
</sql>
<!--根据时间倒叙排列，分页，高级查询-->
<select id="queryPage" resultMap="BaseResultMap">
    SELECT re.id,re.project_name,re.address,u.username uname,u.card_id ucard,re.house_type,re.area,re.build_time
    FROM real_eseate re LEFT JOIN user u ON re.user_id=u.id
    <include refid="whereSql"/> ORDER BY build_time DESC
</select>

```

为考虑到前端框架分页所需数据的特殊性 封装一个分页对象类 （前端需要 total ,rows)

```

public class PageResult<T> {
    private Long total = 0L; //每页条数

    private List<T> rows = new ArrayList<T>(); //每页数据

    public PageResult(Long total, List<T> rows) {
        this.total = total;
        this.rows = rows;
    }

    public PageResult() {

    }

    //get set方法
}

```

service

```

public interface IRealEseateService extends IService<RealEseate> {
    PageResult<RealEseate> queryBypage(Requery requery);
}

```

serviceimpl

@Service

```
public class RealEseateServiceImpl extends ServiceImpl<RealEseateMapper, RealEseate> implements IRealEseateService {
```

```
    //关联用户分页查询
```

```
    @Override
```

```
    @Transactional(readOnly = true,propagation = Propagation.SUPPORTS)
```

```
    public PageResult<RealEseate> queryBypage(Requery query) {
```

```
        Page<RealEseate> page = new Page<>(query.getPage(),query.getRows());
```

```
        IPage<RealEseate> ip = baseMapper.queryPage(page, query);
```

```
        return new PageResult<>(ip.getTotal(),ip.getRecords());
```

```
    }
```

```
}
```

controller

@Controller

```
public class RealEseateController {
```

```
    @Autowired
```

```
    private IRealEseateService realEseateService;
```

```
    @RequestMapping("/index")
```

```
    public String index(org.springframework.ui.Model model, Requery requery) {
```

```
        PageResult<RealEseate> realEseatePageResult = realEseateService.queryBypage(requery);
```

```
        model.addAttribute("reals", realEseatePageResult.getRows());
```

```
        return "ye";
```

```
    }
```

```
    //添加的跳转
```

```
    @RequestMapping("/addIndex")
```

```
    public String addIndex(){
```

```
        return "add";
```

```
    }
```

```
    //添加
```

```
    @RequestMapping("/add")
```

```
    public String add(RealEseate user){
```

```
        realEseateService.save(user);
```

```
        return "redirect:/index";
```

```
    }
```

```
    //跳到修改页面
```

```
    @RequestMapping("/toUpdate")
```

```
    public String toUpdate(Integer id, org.springframework.ui.Model model){
```

```
        RealEseate real = realEseateService.getByid(id);
```

```
        model.addAttribute("real",real);
```

```
        return "update";
```

```
    }
```

```
    //修改
```

```
    @RequestMapping("/update")
```

```
    public String update(RealEseate user){
```

```
        realEseateService.updateByid(user);
```

```
        return "redirect:/index";
```

```
    }
```

```
    //删除
```

```
    @RequestMapping("/delete")
```

```
    public String delete(Integer id){
```

```
        realEseateService.remove(new QueryWrapper<RealEseate>().eq("id", id));
```

```
        return "redirect:/index";
```

```
    }
```

```
}
```

前端页面（简单弄弄） html

ye.html

```
<body>

<table border="1" cellspacing="0">
  <tr>
    <td>id</td>
    <td>projectName</td>
    <td>address</td>
    <td>houseType</td>
    <a th:href="@{/addIndex}">新增</a>
  </tr>
  <tr th:each="real:${reals}">
    <td th:text="${real.id}"></td>
    <td th:text="${real.projectName}">projectName</td>
    <td th:text="${real.address}">address</td>
    <td th:text="${real.houseType}">houseType</td>
    <td>

      <a th:href="@{/toUpdate(id=${real.id})}">修改</a>
      <a th:href="@{/delete(id=${real.id})}">删除</a>

    </td>
  </tr>
</table>
</body>
```

add.html

```
<body>

<form th:action="@{/add}" method="post">
  <table>
    <tr>
      <td>productName</td>
      <td><input type="text" name="productName"></td>
    </tr>
    <tr>
      <td>address</td>
      <td><input type="text" name="address"></td>
    </tr>
    <tr>
      <td><input type="submit" value="add"></td>
    </tr>
  </table>
</form>

</body>
```

update.html

```
<body>
<form th:action="@{/udpate}" method="post">
  <table>
    <tr>
      <td><input type="hidden" name="id" th:value="${real.id}"></td>
    </tr>
    <tr>
      <td>projectName</td>
      <td><input type="text" name="projectName" th:value="${real.projectName}"></td>
    </tr>
    <tr>
      <td>address</td>
      <td><input type="text" name="address" th:value="${real.address}"></td>
    </tr>
    <tr>
      <td><input type="submit" value="udpate"></td>
    </tr>
  </table>
</form>
</body>
```

一个简单的页面以及crud功能就完成了

新增

id	projectName	address	houseType	
6	樊城3	德阳	五室一厅	修改 删除
3	龙湖3	成都	五室一厅	修改 删除
4	樊城1	德阳	三室	修改 删除
5	樊城2	德阳	四室一厅	修改 删除
2	龙湖2	成都	四室一厅	修改 删除