Connecting Sponsor APIs to Agent Harness of your choice

Models, providers and harnesses

Meta in OpenCode
QwenCloud through CC Switch

GCR Hackathon / 15-minute walkthrough

Model, provider and harness

MODEL

The AI

Generates responses and requests tool actions

Qwen3.8 Max
Muse Spark Contributor

PROVIDER

The API service

Supplies access and accounts for usage

QwenCloud
Meta Model API

HARNESS

The coding application

Manages files, tools and the development loop

OpenCode
Claude Code / Codex

Example: OpenCode sends a coding request through QwenCloud to Qwen3.8 Max.

The connection details

API key	Authenticates your team
Base URL	Specifies where requests go
Model ID	Selects the model to request
API format	Defines the request and response structure

Use the exact key, endpoint and model ID supplied together.

The configuration behind the connection

opencode.json · illustrative example

```
{
  "providers": {
    "gcr-qwen": {
      "name": "GCR QwenCloud",
      "package": "aisdk:@ai-sdk/anthropic",
      "settings": {
        "baseURL":
          "https://token-plan.maas.qwencloudapi.com/apps/anthropic/v1",
        "apiKey": "{file:./gcr-qwen.key}"
      },
      "models": {
        "qwen3.8-max": {
          "name": "Qwen3.8 Max"
        }
      }
    }
  }
}
```

CC Switch fills these connection settings through a form.

Provider

gcr-qwen identifies this connection.

Endpoint and key

settings supplies the address and credential.

Model

models lists the selectable model IDs.

The desktop applications

OpenCode

Work on your project and
select the model for a session.

Download OpenCode Desktop

opencode.ai/v2/docs/#desktop

CC Switch

Add API provider configurations
for the applications you use.

Download CC Switch

github.com/farion1231/cc-switch/releases

Choose the installer for your operating system and processor.


Meta in OpenCode

01 Find Meta

Search for Meta and select its entry.

02 Connect your account


Enter the sponsor API key when prompted.

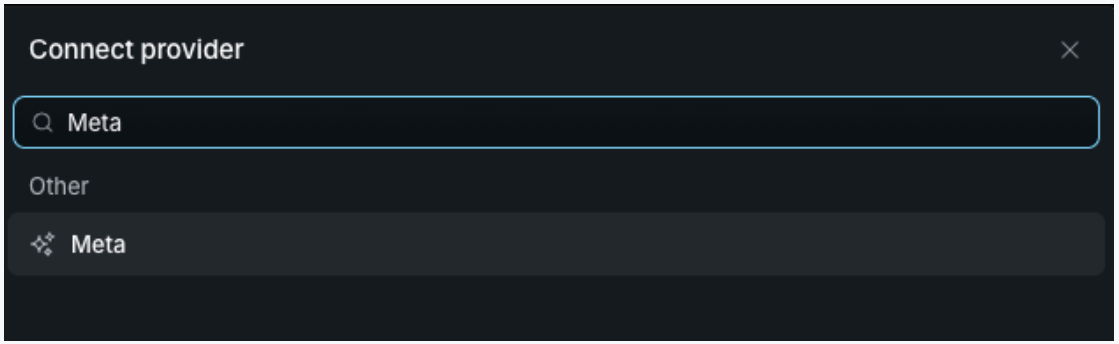

Then open the model selector

muse-spark-1.3-contributor

QwenCloud in this installation

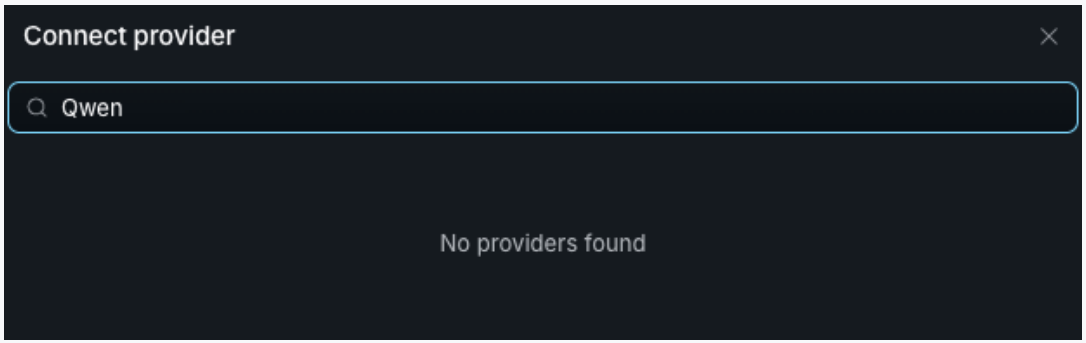

No matching provider entry

We will add the QwenCloud connection through CC Switch.

The provider catalogue and custom configuration are separate routes.

QwenCloud setup in CC Switch


OpenCode / Add Provider / QwenCloud

01 Match the plan

Token Plan or pay-as-you-go

02 Enter credentials

Provider Key: gcr-qwen
API Key: sponsor secret

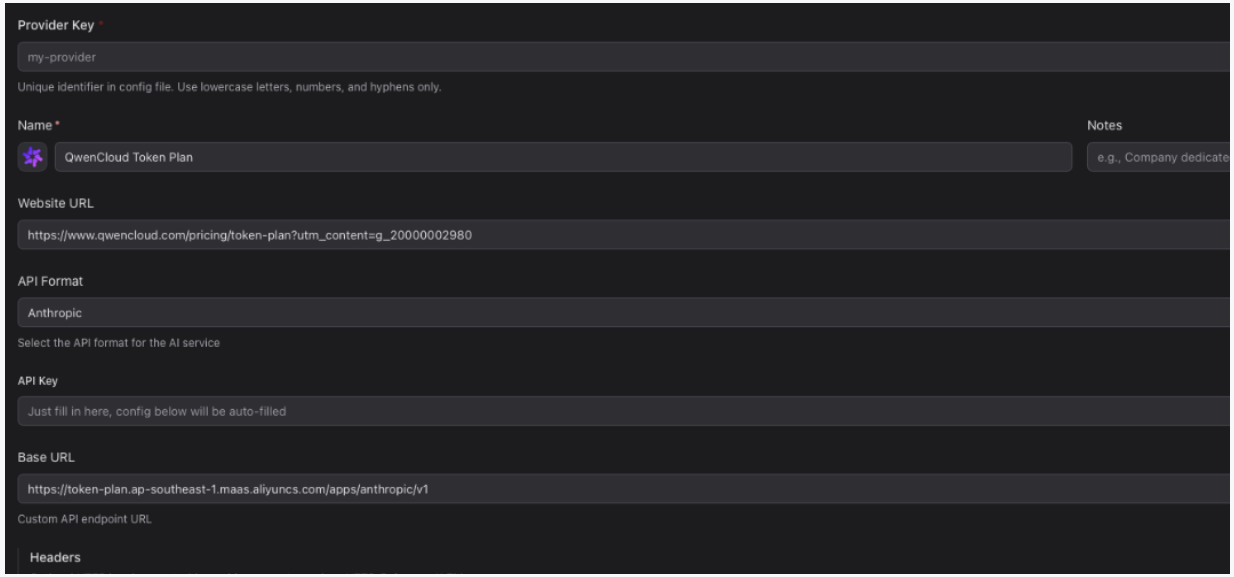

Check endpoint and permitted model, then click Add.

Model selection in OpenCode

01 Save in CC Switch

Confirm that the OpenCode provider configuration was added.

02 Reopen OpenCode

Open your project and its model selector.

03 Select the Qwen model

Choose your QwenCloud provider, then Qwen3.8 Max.

Several providers can coexist. The selected model determines the route.

A small coding demonstration

1. Meta selected

Create index.html with:

The heading “GCR Hackathon”
A button labelled “Test”
A “Working!” message on click

Use one HTML file.

2. Qwen selected

Read index.html.

Change the heading to
“Team 01 is ready”.

Preserve the button behaviour.

Review the change. Open the page. Test the button.

Connection checks and common errors

Authentication error	Check the key and matching endpoint.
Model unavailable	Check the exact ID and account access.
Model missing	Check saved configuration and selection.
Chat works	Also verify a file edit and the result.

Provider usage records confirm the account receiving requests.

THANK YOU