

# A lightweight resugaring approach based on reduction semantics\*

Subtitle†

ANONYMOUS AUTHOR(S)

With the rapid development of computer science, domain-specific language (DSL) is quite useful in our daily life, not only for programmers or computer scientists, but for people from all walks of life. Syntactic sugar is a good way to implement embedded DSLs, because it can make good use of existing general-purposed language's feature. However, the evaluation sequences became unrecognizable after the sugar expression desugared.

Resugaring is an method to solve the problem above. In this paper, we purposed a lightweight approach of resugaring based on reduction semantics—getting evaluation sequences without fully desugaring the whole syntactic sugar expression. We implement a tool based on our method using PLT Redex and test our approach on some applications. The results show that our lightweight approach can even deal with more syntactic sugar's feature.

Additional Key Words and Phrases: Domain-specific Language, Syntactic Sugar, Interpreter

## 1 INTRODUCTION

Domain-specific language[Fowler 2011] is becoming useful for people's daily tasks. For example, the IFTTT app and IOS's shortcuts designed DSLs describing some tasks to make our lives more convenient. So the users of DSL are no longer limited to programmers, but people from all walks of life.(to be completed)

Syntactic sugar[Landin 1964], as a simple way of implementing DSL, has an obvious problem. DSL based on syntactic sugars contains many components of its host language. Then its interpretation will be outside the DSL itself. The evaluation sequences of syntactic sugar expressions will contain many terms of the host language, which may confuse the users of DSL.

There is an existing work—resugaring[Pombrio and Krishnamurthi 2014][Pombrio and Krishnamurthi 2015], which aimed to solve the problem upon. It lifts the evaluation sequences of desugared expression to sugar's syntax. The evaluation sequences shown by resugaring will not contain components of host language. But we found the existing resugaring approach using match and substitution is kind of redundant. The biggest deficiency of existing resugaring method is that the syntactic sugars in an expression have to fully desugar before evaluation. This limits the processing ability of the method. Moreover, it limits the complexity of getting the resugaring sequences. If we need to resugar a very huge expression, the match and substitution processes will cost so much. Also, processing of hygienic macros is complex due to the extra data structure.

In this paper, We propose a lightweight approach to get resugaring sequences based on syntactic sugars. The key idea of our approach is—syntactic sugar expression only desugars at the point that it have to desugar. We guess that we don't have to desugar the whole expression at the initial time of evaluation under the premise of keeping the properties of expression.

Initially, our work focused on improving current resugaring method on complexity. After designing the algorithm, we found our lightweight resugaring approach could process some syntactic sugars' feature that current approach cannot do. Finally, we implement our algorithm using PLT

---

\*Title note

†Subtitle note

Redex[Felleisen et al. 2009] and test our approach on some applications. The result shows that our approach does handle more features of syntactic sugar.

### 1.1 Definition of resugaring

This subsection is partially similar to original definition in[Pombrio and Krishnamurthi 2014].

**DEFINITION 1.1 (RESUGARING).** *Given core language (named **CoreLang**) and its evaluation rules, together with surface language based on syntactic sugars of CoreLang (named **SurfLang**). For any expression of SurfLang, getting the evaluation sequences of the expression in terms of SurfLang.*

For correctness of the resugaring, the evaluation sequences should maintain the following three properties:

- (1) **Emulation** The evaluation sequences reflect the actual execution process.
- (2) **Abstraction** The resugaring sequences should only contain terms in SurfLang, and each term of SurfLang should originate from initial expression.
- (3) **Coverage** No sequence is skipped during the process.

Given an example below.

For syntactic sugar **and** and **or**, the sugar rules are:

$$\begin{aligned} \text{and}(e1, e2) &\rightarrow \text{if}(e1, e2, \#f) \\ \text{or}(e1, e2) &\rightarrow \text{if}(e1, \#t, e2) \end{aligned}$$

which forms a simple SurfLang.

The evaluation rules of **if** is:

$$\begin{aligned} \text{if}(\#t, e1, e2) &\rightarrow e1 \\ \text{if}(\#f, e1, e2) &\rightarrow e2 \end{aligned}$$

Then for SurfLang's expression  $\text{and}(\text{or}(\#f, \#t), \text{and}(\#t, \#f))$  should get resugaring sequences as fig1.




Fig. 1. resugaring example

The reason we should get the sequences above is because  $(\text{and}(\text{or}(\#f, \#t), \text{and}(\#t, \#f)))$  should desugar to  $(\text{if}(\text{if}(\#f, \#t, \#f), \text{if}(\#t, \#f, \#f), \#f))$ . Then in the CoreLang, the evaluation sequences will be as fig2.

The second item in the sequences can be desugared from  $(\text{and}(\#t, \text{and}(\#t, \#f)))$ , so resugars to it. So as the third item.

In the rest of this paper, we present the technical details of our approach together with the proof of correctness. In details, the rest of our paper is organized as follow: todo:update

- An overview of our approach with some background knowledge.[sec 2]
- The algorithm definition and proof of correctness.[sec 3]




Fig. 2. evaluation sequences

- The implementation of our lightweight resugaring algorithm using PLT Redex.[sec ??]
- sth else?[sec ??]
- Evaluation of our lightweight resugaring approach.[sec 3.5]

## 2 OVERVIEW

Use a simple but sharp example to give an overview of your approach.

The key idea of our lightweight resugaring approach, is that, we won't expand a syntactic sugar until we must desugar it. We design a core algorithm to choose the right reduction rule for any expression during the execution. Take the example  $\text{and}(\text{or}(\#f, \#t), \text{and}(\#t, \#f))$  again. We will get the sequence as ...



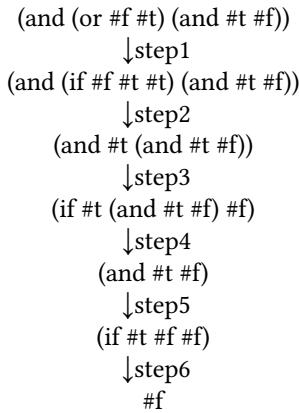


Fig. 3. core-algo example

At step 1, we found the outermost *and* sugar don't have to expand, because its first sub-expression will reduce earlier. At step 2, the same as step 1. At step 3, the outermost *and* sugar have to expand, because no sub-expression will reduce after the whole expression desugar. At step 4, the inner *and* sugar don't have to expand either. At step 5, the sugar have to desugar to CoreLang. Finally at step 6, we get the final result.

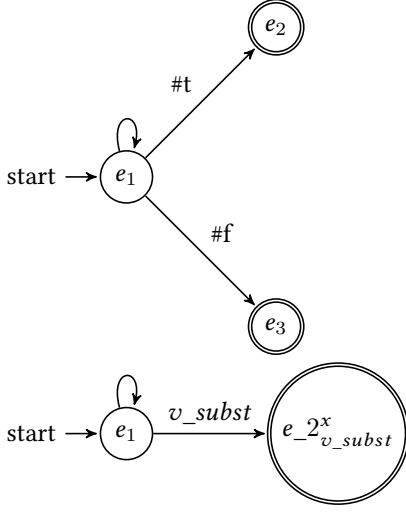

(Or  $e_1 e_2 \rightarrow (\text{let } x \text{ } e_1 \text{ (if } x \text{ } e_2))$ )

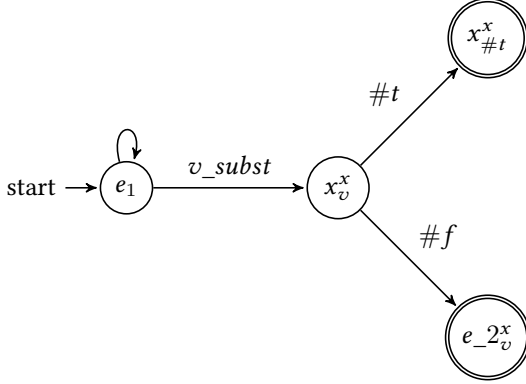

### 3 LIGHTWEIGHT RESUGARING APPROACH

#### 3.1 Language setting

**3.1.1 Grammatical restrictions.** Firstly, the whole language should be restricted to tree-structured disjoint expression.

**DEFINITION 3.1 (DISJOINT).** For every sub-expression in a expression, its reduction rule is decided by itself.

This restriction limits the scope of language. Every sub-expression must have no side effect. We will discuss more on side effect in ...

**DEFINITION 3.2 (TREE-STRUCTURED).** The grammar of the whole language is defined as follow.

$$\begin{array}{lcl} \text{Exp} & ::= & (\text{Headid Exp}^*) \\ & | & \text{Value} \\ & | & \text{Variable} \end{array}$$

The grammatical restrictions give our language a similiar property as church-rosser theorem for lambda calculus.

todo:church-rosser?

3.1.2 *Context restrictions.* For expressions in CoreLang, the context rules should restrict it to have only one reduction path. The context rules can limit the order of evaluation. This restriction is normal, because a program in general-purposed language should have only one execution path.

For expressions in SurfLang, context rules should allow every sub-expressions reduced. It's the same as full- $\beta$  reduction.

3.1.3 *Restriction of syntactic sugar.* The form of syntactic sugar is as follow.

$$(\text{Surfid } e_1 \ e_2 \ \dots) \rightarrow (\text{Headid } \dots)$$

An counter example of this restriction is (Surfid ... ( $e_1 \ e_2$ ) ...) in LHS. It's for simpler algorithm form, and the expression ability of syntactic sugar will not be changed.

DEFINITION 3.3 (UNAMBIGUOUS). *For every syntactic sugar expressions, it can only desugar to one expression in CoreLang.*

3.1.4 *Grammar Description.* In our language setting, we regard SurfLang and CoreLang as a whole language. The whole language is under restrictions above, and its grammar is defined as follow.

```

Exp ::= DisplayableExp
      | UndisplayableExp
DisplayableExp ::= Surfexp
                | Commonexp
UndisplayableExp ::= Coreexp
                  | OtherSurfexp
                  | OtherCommonexp
Coreexp ::= (CoreHead Exp*)
Surfexp ::= (SurfHead DisplayableExp*)
Commonexp ::= (CommonHead DisplayableExp*)
              | Value
              | Variable
OtherSurfexp ::= (SurfHead Exp * UndisplayableExp Exp*)
OtherCommonexp ::= (CommonHead Exp * UndisplayableExp Exp*)

```

The difference between CoreLang and SurfLang is identified by *Headid*. But there are some terms in CoreLang should be displayed during evaluation. Or we need some terms to help us getting better resugaring sequences. So we defined **Commonexp**, which origin from CoreLang, but can be displayed in resugaring sequences. The **Coreexp** terms are terms with undisplayable CoreLang's Headid. The **Surfexp** terms are terms with SurfLang's Headid and all sub-expressions are displayable. The **Commonexp** terms are terms with displayable CoreLang's Headid, together with displayable sub-expressions. There exists some other expression during our resugaring process. They have Headid which can be displayed, but one or more subexpressions can't. They are UndisplayableExp.

## 3.2 Algorithm defination

Our lightweight resugaring algorithm is based on a core algorithm  $f$ . For every expression during resugaring process, it may have one or more reduction rules. The core algorithm  $f$  chooses the

one that satisfies three properties of resugaring, then applies it on the given expression. The core algorithm  $f$  is defined as 1.

---

**Algorithm 1** Core-algorithm  $f$ 


---

**Input:**

Any expression  $Exp = (Headid\ Subexp_1 \dots Subexp_n)$  which satisfies Language setting

**Output:**

$Exp'$  reduced from  $Exp$ , s.t. the reduction satisfies three properties of resugaring

- 1: Let  $ListofExp' = \{Exp'_1, Exp'_2, \dots\}$
  - 2: **if**  $Exp$  is Coreexp or Commonexp or OtherCommonexp **then**
  - 3:   **if**  $Lengthof(ListofExp') = 0$  **then**
  - 4:     **return** null; Case1
  - 5:   **else if**  $Lengthof(ListofExp') = 1$  **then**
  - 6:     **return**  $first(ListofExp')$ ; Case2
  - 7:   **else**
  - 8:     **return**  $Exp'_i = (Headid\ Subexp_1 \dots Subexp'_i \dots)$ ; //where  $i$  is the index of subexp which have to be reduced. Case3
  - 9:   **end if**
  - 10: **else**
  - 11:   **if**  $Exp$  have to be desugared **then**
  - 12:     **return**  $desugarsurf(Exp)$ ; Case4
  - 13:   **else**
  - 14:     Let  $DesugarExp = desugarsurf(Exp)$
  - 15:     **if**  $Subexp_i$  is reduced to  $Subexp'_i$  during  $f(DesugarExp)$  **then**
  - 16:       **return**  $Exp'_i = (Headid\ Subexp_1 \dots Subexp'_i \dots)$ ; Case5
  - 17:     **else**
  - 18:       **return**  $DesugarExp$ ; Case6
  - 19:     **end if**
  - 20:   **end if**
  - 21: **end if**
- 

We briefly describe the core algorithm  $f$  in words.

For  $Exp$  in language defined as last section, try all reduction rules in the language, get a list of possible expressions  $ListofExp' = \{Exp'_1, Exp'_2, \dots\}$ .

Line 2-9 deal with the case when  $Exp$  has a CoreLang's Headid. When  $Exp$  is value or variable (line 3-4),  $ListofExp'$  won't have any element (not reducible). When  $Exp$  is of Coreexp or Commonexp (line 5-6, due to the context restriction of CoreLang, only one reduction rule can be applied). When  $Exp$  is OtherCommonexp (line 7-8), due to the context restriction of CoreLang, only one sub-expression can be reduced, then just apply core algorithm recursively on the sub-expression.

Line 10-21 deal with the case then  $Exp$  has a SurfLang's Headid. When  $Exp$  only has one reduction rule (line 11-12), the syntactic sugar has to desugar. If not, we should expand outermost sugar and find the sub-expression which should be reduced (line 14-16), or the sugar has to desugar (line 17-18).

Then, our lightweight-resugaring algorithm is defined as 2.

The whole process of the lightweight resugaring executes core algorithm  $f$ , and output sequences which is of Surfexp or Commonexp.

**Algorithm 2** Lightweight-resugaring**Input:**Surfexp  $Exp$ **Output:** $Exp$ 's evaluation sequences within DSL

```

1: while  $tmpExp = f(Exp)$  do
2:   if  $tmpExp$  is empty then
3:     return
4:   else if  $tmpExp$  is Surfexp or Commonexp then
5:     print  $tmpExp$ ;
6:     Lightweight-resugaring( $tmpExp$ );
7:   else
8:     Lightweight-resugaring( $tmpExp$ );
9:   end if
10: end while

```

**3.3 Proof of correctness**

First of all, because the difference between our lightweight resugaring algorithm and the existing one is that we only desugar the syntactic sugar when needed, and in the existing approach, all syntactic sugar desugars firstly and then executes on CoreLang.

Second, to prove convenience, define some terms.

$Exp = (Headid\ Subexp_1\ Subexp_2\ \dots)$  is any reducible expression in our language.

If we use the reduction rule that desugar  $Exp$ 's outermost syntactic sugar, then the reduction process is called **Outer Reduction**.

If the reduction rule we use reduce  $Subexp_i$ , where  $Subexp_i$  is  $(Headid_i\ Subexp_{i1}\ Subexp_{i2}\ \dots)$

- If the reduction process is Outer Reduction of  $Subexp_i = (Headid_i\ Subexp_{i1}\ Subexp_{i2}\ \dots)$ , then it is called **Surface Reduction**.
- If the reduction process reduces  $Subexp_{ij}$ , then it is called **Inner Reduction**.

**Example:**

$(if\ \#t\ Exp_1\ Exp_2) \rightarrow Exp1$	Outer Reduction
$(if\ (And\ \#t\ \#f)\ Exp_1\ Exp_2) \rightarrow (if\ (if\ \#t\ \#f\ \#f)\ Exp_1\ Exp_2)$	Surface Reduction
$(if\ (And\ (And\ \#t\ \#t)\ \#t)\ \#f)\ Exp_1\ Exp_2 \rightarrow (if\ (And\ \#t\ \#t)\ Exp_1\ Exp_2)$	Inner Reduction

DEFINITION 3.4 (UPPER AND LOWER EXPRESSION). For  $Exp = (Headid\ Subexp_1\ Subexp_2\ \dots)$ ,  $Exp$  is called **upper expression**,  $Subexp_i$  is called **lower expression**.

We only need to prove that all the 6 cases of core algorithm  $f$  won't effect its properties. Case 1 and case 3 won't effect any properties, because it does what CoreLang should do.

PROOF OF EMULATION.

For case 4 and 6, desugaring won't change Emulation property, because desugaring and resugaring are interconvertible.

For case 2 and 5, our core algorithm reduces the sub-expression which should be reduced. So if applying core algorithm  $f$  on the subexpression satisfies emulation property, then this two cases satisfy. A recursive proof it is. todo:case5  $\square$

PROOF OF ABSTRACTION.

It's true, because we only display the sequence which satisfies abstraction property.  $\square$

LEMMA 3.1. *If no syntactic sugar desugared before it has to, then coverage property is satisfied.*

PROOF OF LEMMA. Assume that no syntactic sugar not necessarily expanded desugars too early, existing an expression in CoreLang

$Exp = (Headid\ Subexp_1\ Subexp_2\ \dots)$  which can be resugared to

$ResugarExp' = (Surfid\ Subexp'_1\ Subexp'_2\ \dots)$ , and  $ResugarExp'$  is not displayed during lightweight-resugaring. Then

- Or existing

$ResugarExp = (Surfid\ Subexp'_1\ \dots\ Subexp'_i\ Subexp'_i\ \dots)$  in resugaring sequences, such that the expression after  $ResugarExp$  desugaring reduces to  $Exp$ , and the reduction reduces  $ResugarExp$ 's sub-expression  $Subexp'_i$ . If so, outermost syntactic sugar of  $ResugarExp$  is not expanded. So if  $ResugarExp'$  is not displayed, then the sugar not necessarily expanded desugars too early, which is contrary to assumption.

- Or existing

$ResugarExp = (Surfid'\ \dots\ ResugarExp'\ \dots)$  in resugaring sequences, such that the expression after  $ResugarExp$  desugaring reduces to  $Exp$ , and  $Exp$  is desugared from  $ResugarExp'$ 's sub-expression. If  $ResugarExp'$  is not displayed, then the outermost syntactic sugar is expanded early, which is contrary to assumption.  $\square$

PROOF OF COVERAGE.

For case 4 and 6, the syntactic sugar has to desugar.

For case 2 and 5, the reduction occurs in sub-expression of  $Exp$ . So if applying core algorithm  $f$  on the subexpression doesn't desugar syntactic sugars not necessarily expanded, then this two cases don't. A recursive proof it is.  $\square$

### 3.4 Implementation

Our lightweight approach of resugaring is implemented using PLT Redex [Felleisen et al. 2009], which is an semantic engineering tool based one reduction semantics. The whole framework is as Fig4.

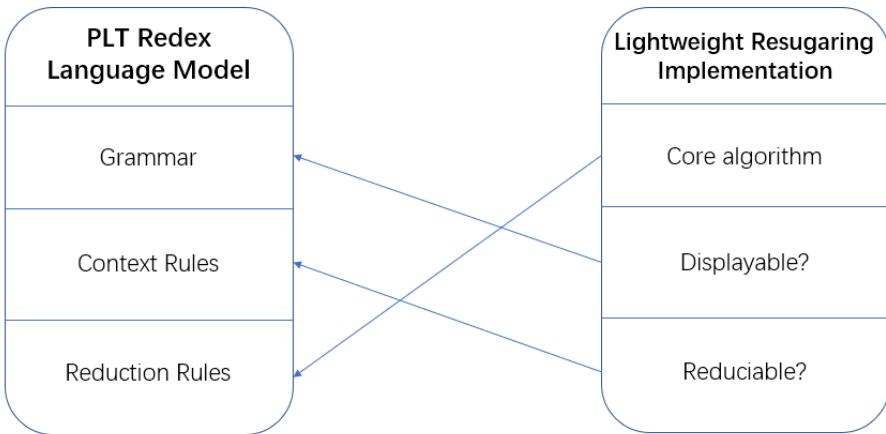


Fig. 4. framework of implementation



The grammar of the whole language contains Coreexp, Surfexp and Commonexp as the language setting in sec3. OtherSurfexp is of Surfexp and OtherCommonexp is of Commonexp. The identifier of any kind of expression is Headid of expression. If we need to add a syntactic sugar to the whole language, only three steps is needed.

- (1) Add grammar of the syntactic sugar.
- (2) Add context rules of the sugar, such that any sub-expressions can be reduced.
- (3) Add desugar rules of the sugar to reduction rules of the whole language.

Then inputting an expression of the syntactic sugar to lightweight-resugaring will get the resugaring sequences.

### 3.5 Evaluation

We test some applications on the tool implemented using PLT Redex. Note that we set CBV's lambda calculus as terms in commonexp, because we need to output some intermediate sequences including lambda expressions in some examples. It's easy if we want to skip them.

**3.5.1 simple sugar.** We construct some simple syntactic sugar and try it on our tool. Some sugar is inspired by the first work of resugaring[Pombrio and Krishnamurthi 2014]. The result shows that our approach can process all sugar features of their first work.

We take a SKI combinator syntactic sugar as an example. We will show why our approach is lightweight.

$$\begin{aligned} S &\rightarrow (\lambda_N (x_1 x_2 x_3) (x_1 x_2 (x_1 x_3))) \\ K &\rightarrow (\lambda_N (x_1 x_2) x_1) \\ I &\rightarrow (\lambda_N (x) x) \end{aligned}$$

Although SKI combinator calculus is a reduced version of lambda calculus, we can construct combinators' sugar based on call-by-need lambda calculus in our CoreLang. For expression

$(S (K (S I)) K xx yy)$ , we get the following resugaring sequences as Fig 5.




Fig. 5. SKI's resugaring sequences

For existing approach, the sugar expression should firstly desugar to

$$((\lambda_N (x_1 x_2 x_3) (x_1 x_3 (x_2 x_3))) ((\lambda_N (x_1 x_2) x_1) ((\lambda_N (x_1 x_2 x_3) (x_1 x_3 (x_2 x_3))) (\lambda_N (x) x))) (\lambda_N (x_1 x_2) x_1) xx yy)$$

Then in our CoreLang, the execution of expanded expression will contain 33 steps. For each step, there will be many attempts to match and substitute the syntactic sugars. We will omit more steps for a larger expression. So the unidirectional resugaring algorithm makes our approach lightweight.

3.5.2 *hygienic macro*. The second work[Pombrio and Krishnamurthi 2015] mainly processes hygienic macro compared to first work. We try a *Let* sugar, which is a common hygienic sugar example, on our tool. Our algorithm can easily process hygienic macro without special data structure. The *Let* sugar is define as follow

$(Let\ x\ v\ exp) \rightarrow (Apply\ (\lambda\ (x)\ exp)\ v)$

Take  $(Let\ x\ 1\ (+\ x\ (Let\ x\ 2\ (+\ x\ 1))))$  for an example. First, a temp expression

$(Apply\ (\lambda\ (x)\ (+\ x\ (Let\ x\ 2\ (+\ x\ 1))))\ 1)$

is needed. (case 5 or 6)Then one-step try on the temp expression, we will get

$(+ 1\ (Let\ 1\ 2\ (+ 1)))$  which is out of the whole language's grammar. In this case, it is not a good

choice to desugar the outermost *Let* sugar. Then we just apply the core-algo f on the sub-expression where the error occurs  $(+ x\ (Let\ x\ 2\ (+ x\ 1)))$  in this example). So the right intermediate sequence  $(Let\ x\ 1\ (+ x\ 3))$  will be get.

In practical application, we think resugaring for a unhygienic rewriting system is not interesting at all, because hygienic macro can be easily processed by rewriting system. So in the finally implementation of our tool, we just use PLT Redex's binding forms to deal with hygienic macros. But we did try it on the version without hygienic rewriting system.

3.5.3 *recursive sugar*. Recursive sugar is a kind of syntactic sugars where call itself or each other during the expanding. For example,

$(Odd\ e) \rightarrow (if\ (>\ e\ 0)\ (Even\ (-\ e\ 1)\ \#f))$

$(Even\ e) \rightarrow (if\ (>\ e\ 0)\ (Odd\ (-\ e\ 1)\ \#t))$

are typical recursive sugars. The previous works can process this kind of syntactic sugar easily, because boundary conditions are in the sugar itself.

Take  $(Odd\ 2)$  as an example. The previous work will firstly desugar the expression using the rewriting system. Then the rewriting system will never start resugaring as Fig6 shows.

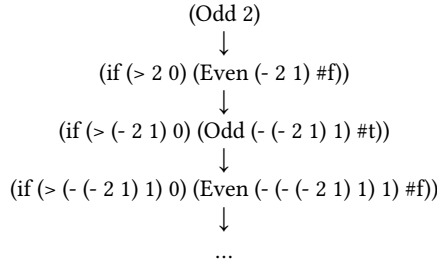


Fig. 6. Odd2's desugaring process

Then the advantage of our approach is embodied. Our lightweight approach doesn't require a whole expanding of sugar expression, which gives the framework chances to judge boundary conditions in sugars themselves, and showing more intermediate sequences. We get the resugaring sequences as Fig 7 of the former example using our tool.

We also construct some higher-order syntactic sugars and test them. The higher-order feature is important for constructing practical syntactic sugar. And for syntactic sugar's feature, it is of recursive sugar. Giving the following two higher-order syntactic sugar as examples.

$(map\ e\ (list\ v_1\ \dots)) \rightarrow$

$(if\ (empty\ (list\ v_1\ \dots))\ (list)\ (cons\ (e\ (first\ (list\ v_1\ \dots)))\ (map\ e\ (rest\ (list\ v_1\ \dots)))))$

$(filter\ e\ (list\ v_1\ v_2\ \dots)) \rightarrow$

$(if\ (e\ v_1)\ (cons\ v_1\ (filter\ e\ (list\ v_2\ \dots)))\ (filter\ e\ (list\ v_2\ \dots)))$




Fig. 7. Odd2's resugaring sequences

$(\text{filter } e \text{ (list)}) \rightarrow (\text{list})$

These two syntactic sugars use different sugar forms to implement. For *Map* sugar, we use *if* expression in CoreLang to constrain the boundary conditions. For *Filter* sugar, we use two different parameters' form, which is another easy way for constructing syntactic sugar. The testing results show as Fig8 9.

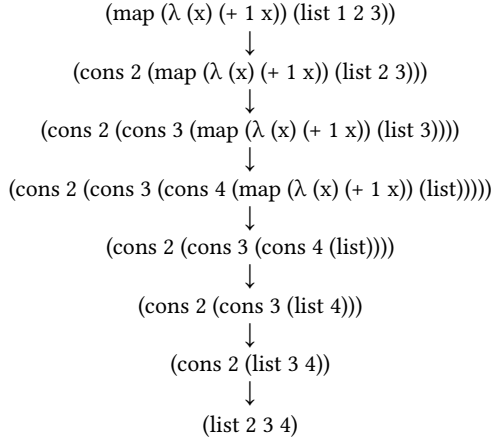


Fig. 8. Map's resugaring sequences

### 3.6 Compare to previous work

As mentioned many times before, the biggest difference between previous resugaring approach and our approach, is that our approach doesn't need to desugar the sugar expression totally. Thus, our approach has the following advantages compared to previous work.

- **Lightweight** As the example at sec3.5.1, the match and substitution process searches all intermediate sequences many times. It will cause huge cost for a large program. So our approach—only expanding a syntactic sugar when necessarily, is a lightweight approach.
- **Friendly to hygienic macro** Previous hygienic resugaring approach use a new data structure—abstract syntax DAG, to process resugaring of hygienic macros. Our approach simply finds hygienic error after expansion, and gets the correct reduction instead.

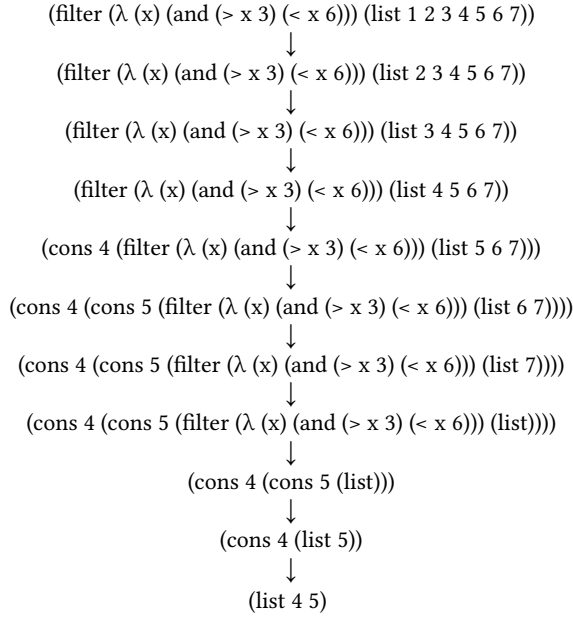


Fig. 9. Filter's resugaring sequences

- **More syntactic sugar features** The ability of processing recursive sugar is a superiority compared to previous work. The key point is that recursive syntactic sugar must handle boundary conditions. Our approach handle them easily by not necessarily desugaring all syntactic sugars. Higher-order functions, as an important feature of functional programming, was supported by many daily programming languages. So the ability on higher-order sugar is important.
- **Rewriting rules based on reduction semantics** Any syntactic sugar that can expressed by reduction semantics can be used in our approach. It will give more possible forms for constructing syntactic sugars. todo:example?

## 4 ZC

## 5 RELATED WORK

The most related work is the series of resugaring[Pombrio and Krishnamurthi 2014, 2015, 2018; Pombrio et al. 2017]. The first two work is about resugaring evaluation sequences, the third one is about resugaring scope rules, and the last one is about resugaring type rules. The whole series is for better syntactic sugar. Our approach considered to implement a method for better DSLs, then regarded core language and surf language as a whole language.

Macrofiction[Schuster et al. 2016] is for generating macros for programs automatically to refactor the codes. Our work may try resugaring some macros generated automatically to test the practicality of resugaring method. Since the setup of our tools is simple, it will be easy to intergrate the two tools.

Galois slicing for Imperative Functional Programs[Ricciotti et al. 2017] is a work for analyzing functional programs during execution. Our approach used a similiar idea on slicing programs and processing on sub-programs.

## 5.1 Comments on resugaring

*5.1.1 Side effects in resugaring.* The previous resugaring approach used to tried a *Letrec* sugar and found no useful sequences shown. We explain the reason from the angle of side effects. We also used to try some syntactic sugars which contain side effect. We would say a syntactic sugar including side-effect is bad for resugaring, because after a side effect takes effect, the desugared expression should never resugar to the sugar expression. Thus, we don't think resugaring is useful for syntactic sugars including side effects, though it can be done by marking any expressions which have a side effect.

*5.1.2 hygienic resugaring.* As mention in Sec3.5.2, our approach can deal with hygienic resugaring without much afford (just another case in core algorithm). Compare to existing hygienic resugaring[Pombrio and Krishnamurthi 2015], our approach is a more general approach. As we learned from the existing approach, it will also work if the rewriting system itself is hygienic, so is our approach. During implementing our tools, we found using *#refers* – to keyword of PLT Redex would get more concise intermediate process, so we just use it.

## 6 CONCLUSION

Summarize the paper, explaining what you have shown, what results you have achieved, and what future work is.

## REFERENCES

- Matthias Felleisen, Robert Bruce Findler, and Matthew Flatt. 2009. *Semantics Engineering with PLT Redex* (1st ed.). The MIT Press.
- Martin Fowler. 2011. *Domain-Specific Languages*. Addison-Wesley. [http://vig.pearsoned.com/store/product/1,1207,store-12521\\_isbn-0321712943,00.html](http://vig.pearsoned.com/store/product/1,1207,store-12521_isbn-0321712943,00.html)
- P. J. Landin. 1964. The Mechanical Evaluation of Expressions. *Comput. J.* 6, 4 (01 1964), 308–320. <https://doi.org/10.1093/comjnl/6.4.308> arXiv:<https://academic.oup.com/comjnl/article-pdf/6/4/308/1067901/6-4-308.pdf>
- Justin Pombrio and Shriram Krishnamurthi. 2014. Resugaring: Lifting Evaluation Sequences through Syntactic Sugar. *SIGPLAN Not.* 49, 6 (June 2014), 361–371. <https://doi.org/10.1145/2666356.2594319>
- Justin Pombrio and Shriram Krishnamurthi. 2015. Hygienic Resugaring of Compositional Desugaring. *SIGPLAN Not.* 50, 9 (Aug. 2015), 75–87. <https://doi.org/10.1145/2858949.2784755>
- Justin Pombrio and Shriram Krishnamurthi. 2018. Inferring Type Rules for Syntactic Sugar. *SIGPLAN Not.* 53, 4 (June 2018), 812–825. <https://doi.org/10.1145/3296979.3192398>
- Justin Pombrio, Shriram Krishnamurthi, and Mitchell Wand. 2017. Inferring Scope through Syntactic Sugar. *Proc. ACM Program. Lang.* 1, ICFP, Article 44 (Aug. 2017), 28 pages. <https://doi.org/10.1145/3110288>
- Wilmer Ricciotti, Jan Stolarek, Roly Perera, and James Cheney. 2017. Imperative Functional Programs That Explain Their Work. *Proc. ACM Program. Lang.* 1, ICFP, Article 14 (Aug. 2017), 28 pages. <https://doi.org/10.1145/3110258>
- Christopher Schuster, Tim Disney, and Cormac Flanagan. 2016. Macrofication: Refactoring by Reverse Macro Expansion. In *Proceedings of the 25th European Symposium on Programming Languages and Systems - Volume 9632*. Springer-Verlag, Berlin, Heidelberg, 644–671.

## A APPENDIX

Text of appendix ...