

# Mosaic Memory: Fuzzy Duplication in Copyright Traps for Large Language Models

Igor Shilov\*  
Imperial College London

Matthieu Meeus\*  
Imperial College London

Yves-Alexandre de Montjoye†  
Imperial College London

## Abstract

The immense datasets used to develop Large Language Models (LLMs) often include copyright-protected content, typically without the content creator’s consent. Copyright traps have been proposed to be injected into the original content, improving content detectability in newly released LLMs. Traps, however, rely on the exact duplication of a unique text sequence, leaving them vulnerable to commonly deployed data deduplication techniques. We here propose the generation of *fuzzy* copyright traps, featuring slight modifications across duplication. When injected in the fine-tuning data of a 1.3B LLM, we show *fuzzy trap sequences* to be memorized nearly as well as exact duplicates. Specifically, the Membership Inference Attack (MIA) ROC AUC only drops from 0.90 to 0.87 when  $R = 4$  tokens are replaced across the fuzzy duplicates. We also find that selecting replacement positions to minimize the exact overlap between fuzzy duplicates leads to similar memorization, while making fuzzy duplicates highly unlikely to be removed by any deduplication process. Lastly, we argue that the fact that LLMs memorize across fuzzy duplicates challenges the study of LLM memorization relying on naturally occurring duplicates. Indeed, we find that the commonly used training dataset, The Pile, contains significant amounts of fuzzy duplicates. This introduces a previously unexplored confounding factor in post-hoc studies of LLM memorization, and questions the effectiveness of (exact) data deduplication as a privacy protection technique.

\*Equal contribution

†Corresponding author: deMontjoye@imperial.ac.uk.

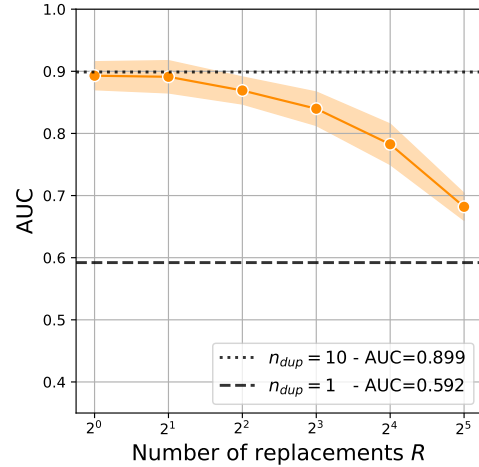


Figure 1: **Memorization of fuzzy trap sequences.** The *Ratio* MIA performance (AUC) (mean and standard deviation) versus number of replacements  $R$ . For smaller values of  $R$ , fuzzy duplicates are memorized almost equally well than exact duplicates while for larger values of  $R$ , memorization remains significantly higher than for a single repetition.

## 1 Introduction

Large Language Models (LLMs) acquire their capabilities from the extremely large textual datasets they are trained on. These datasets mostly contain human-generated text, often also including copyright-protected content [61, 37]. This raises growing concerns amongst content creators, leading some to file lawsuits against LLM developers, claiming copyright

infringement for utilizing books [78, 43], songs [23] or news articles [53] for training. While the legal status of model training on copyright-protected content remains an open question in some major jurisdictions [65], new LLMs are continuously developed, often not disclosing any details on the training dataset [12, 54, 77, 33]. Beyond concerns on copyright, as training data fundamentally shapes the model’s behaviour, data provenance becomes increasingly important to understand potential propagation of harmful content [72, 7] or misinformation [86, 6], and to fairly evaluate models on held-out benchmarks [45, 64, 66].

Recent works proposed methods to modify the original text to help content creators protect their content from being used for LLM training without consent. They propose synthetically generated *copyright traps* [49] or *data watermarks* [80, 79] to be injected into the original content, potentially hidden on the web page invisible to users yet picked up by data scrapers. This enables content owners to track whether their data has been used to train newly released LLMs. They show that this injection of purposely crafted sequences enables detectability in LLMs where state-of-the-art document-level membership inference methods [48, 68] fail.

However, including these traps relies on injecting long unique sequences a large number of times across the content - up to 1,000 times [49]. This makes copyright traps vulnerable to accidental removal by common data preprocessing methods. Deduplication of training data has indeed been found to improve model utility and training efficiency [40, 28, 4, 76, 29, 83], which has led model developers to perform document-, and even sequence-level deduplication at scale [38, 55].

**Contribution.** We propose the injection of *fuzzy* copyright traps. We here measure how slight modifications across trap sequence repetitions, instead of exact duplication, impact the trap detectability, while making it increasingly hard to be removed by deduplication techniques.

First, we introduce a framework to generate fuzzy trap sequences, each differing from a reference trap by  $R$  replaced tokens. We then fine-tune the 1.3B parameter CroissantLLM [22] on documents containing fuzzy trap sequences, and measure the trap memo-

rization by computing the AUC of a sequence-level membership inference attack (MIA) [19, 35].

We find that fuzzy duplicates are memorized almost as strongly as the exact duplicates even when a significant number of tokens are replaced (see Fig. 1). For instance, the mean MIA AUC only drops from 0.90 to 0.87 when  $R = 4$  tokens are replaced in each of the 10 repetitions of a 100-token-long sequence. Compared to the baseline assumption that fuzzy duplicates do not contribute to each other’s memorization (mean AUC=0.59), this demonstrates that LLMs possess a *mosaic memory*, where the memorization of a sequence is strongly impacted by other sequences with partially overlapping fragments.

We then show how non-uniform selection of tokens to be replaced makes the method more robust to deduplication by minimizing the overlap across fuzzy trap sequences (Sec. 5.1). Many deduplication methods currently implemented in practice remove exact duplicates of 50 tokens or more [40, 38, 55]. We find that, in our setup, adopting non-uniform selection reduces the number of replacements necessary to avoid removal by deduplication from  $R = 8$  to  $R = 4$ , significantly increasing the memorization AUC. This shows fuzzy trap sequences to be both effective and feasible in practice.

Next, we study how different aspects of the experimental setup affect fuzzy memorization. We adapt the MIA to also leverage the fuzzy duplicates, instead of the reference trap sequence alone (Sec. 5.2) and study the robustness of our results to token replacement strategy and model training (Sec. 5.3). We find that replacing tokens with the top predictions from a Masked Language Model boosts the MIA AUC, suggesting that semantic coherence across fuzzy duplicates improves memorization.

Second, we find that commonly used training datasets contain a significant amount of fuzzy duplicates and hence argue that our findings have implications for post-hoc studies of LLM memorization and privacy. Using the technique proposed by Lee et al. [40], we collect all naturally occurring duplicates from The Pile [24], as previously used to quantify LLM memorization [17, 31]. We indeed find that almost 30% of duplicated sequences have at least one fuzzy duplicate with no more than  $R = 4$  token replace-

ments. Moreover, 10% of sequences have as many fuzzy duplicates as exact duplicates, effectively doubling the number of occurrences in the dataset. With our results demonstrating the mosaic memory effect in LLMs, we show a major confounding factor in the study of post-hoc LLM memorization relying on naturally occurring duplicates. Further, in the context of LLM privacy, our findings question the effectiveness of (exact) data deduplication as a privacy protection measure.

## 2 Related work

### 2.1 Memorization in LLMs

It has been previously established that LLMs are capable of memorizing training examples [74, 84]. Further works provided qualitative evidence by injecting artificial sequences into the training set [18, 27, 75], or matching the model’s output with the known training dataset [19].

Membership inference attacks (MIAs) have been used to measure memorization. First proposed for data aggregates [30], MIAs became a widely used tool to infer whether a given data point was used to train a machine learning (ML) model [70, 63, 52]. In the context of LLMs, MIAs have been utilized to study the memorization of naturally occurring duplicates [35], injected synthetic sequences [49], or with a neighbourhood sampling method [47]. Reference model loss has also been used to control for "hardness" of the example [35, 20].

Separately, data extraction has been studied both as a privacy risk, and as a metric for memorization. Prior work provided scalable techniques [51] and quantitative analysis [17] of training data extraction, demonstrating the risk to be highly prominent [44, 50, 87, 13]. Model scale, level of duplication, and context size have been shown [35, 17] to be the major factors affecting memorization. Finally, Biderman et al. [9] has shown that memorization of large models can be extrapolated from lower-compute runs.

In this work, we study LLM training in the presence of fuzzy duplicates, and their impact on memorization. Importantly for our work, previous research [31, 56]

has considered a related question from the model output perspective, i.e. how often do models generate near-duplicates of its training data. Authors argue that studying verbatim regurgitation is too restrictive and does not address the risks associated with the generation of near-exact training samples. Ippolito et al. [31] adopts a permissive definition of a "duplicate" (based on BLEU score and Levenshtein distance), demonstrating that LLMs often produce near-duplicates of sequences from the training set. Peng et al. [56] proposes an efficient algorithm for finding near-duplicates in large datasets, and demonstrated that a notable proportion of sequences *generated* by GPT-2 and GPT-Neo models have near-duplicates in their respective training datasets.

### 2.2 Copyright and data provenance

With the ongoing copyright lawsuits against model developers [53, 43, 23] and high-quality training data increasingly considered as a competitive advantage [55], it becomes less common for companies to disclose the full information on the training dataset [12]. As such, research has emerged to verify whether a certain data point has been used for training.

Relevant for this work, copyright traps [49] and data watermarks [80, 79] have been proposed to improve membership inference. These methods propose injecting purposely designed synthetic sequences into the original text. Randomness in the injected sequences creates a basis for a hypothesis test, while controlled number of repetitions allows for statistically significant results even in models that do not exhibit extractable memorization. Both methods, however, are vulnerable to sequence-level deduplication of a training dataset.

Further methods for training data detection in language models often rely on either data extraction or MIAs. First, prompt crafting techniques have been suggested to elicit verbatim training data regurgitation from the model [21, 36]. Second, document- and sequence-level MIAs [48, 68, 47] have been proposed to infer the presence of a document in the training set. Later work [20], however, argues that much of a success of prior research on MIAs against LLMs could be attributed to a data distribution shift, and not

model memorization, raising questions of their utility in practice.

In the image domain, methods have been proposed to add imperceptible perturbations to make the content traceable throughout the model training process, often referred to as *radioactive data* [5, 62]. Further work introduced backdoor watermarking [41], clean-label poisoning [67], and data isotopes [81], relaxing assumptions on access to the model, full dataset, and labelling process.

## 2.3 Training data deduplication

LLMs are typically trained on large text datasets scraped from the internet, and often contain a significant amount of duplicated pieces of text [15, 69]. Prior work has found that training data deduplication benefits LLM training by reducing computational cost to reach similar or even better performance [40, 28, 4, 76, 29, 83]. Multiple strategies for large-scale deduplication of text have been proposed and put into practice for the creation of high-quality LLM training datasets.

First, *exact* deduplication has been performed at the document-, and then the substring-level. Lee et al. [40] use a suffix array [46] constructed on the full training dataset to remove exact duplicated substrings of at least 50 tokens. This strategy has, for instance, been used to create the RefinedWeb Dataset [55] and MADLAD-400 [38]. In the creation of Dolma [73], exact deduplication is performed on the document- and paragraph-level using Bloom filters [11].

Second, *approximate* deduplication has been performed at the document level. For this, locality sensitive hashing schemes such as MinHash [14] have been used to efficiently identify near-duplicate documents in large datasets. Lee et al. [40] uses MinHash to approximate the Jaccard distance [32] between all documents. Similar approaches to remove near-duplicates have been employed to create RefinedWeb Dataset [55], MADLAD-400 [38] and SlimPajama [71], but also for the creation of the training dataset for a Chinese LLM [85], for Gopher [59], Pythia [10], and for GPT-3 [16]. Alternatively, semantic deduplication has also been proposed, removing documents whose embeddings computed using pre-trained LLMs are

closer than a certain threshold [1, 34].

## 3 Fuzzy trap sequences

### 3.1 Threat model

We consider an attacker who is in possession of a collection of texts  $\mathcal{T}$ , which they can modify before publishing. In the context of copyright, this represents a content owner, who does not wish their content to be used for training without their explicit consent. Following Meeus et al. [49], we assume the attacker to inject synthetic text sequences, and refer to such sequences as *trap sequences*.

We assume the attacker to synthetically generate a *reference* trap sequence  $X_{\text{ref}}$  using a reference language model  $LM_{\text{ref}}$  with tokenizer  $T_{\text{ref}}$ . The length of the  $X_{\text{ref}}$  is defined by the number of tokens using reference tokenizer  $T_{\text{ref}}$ , or  $L_{\text{ref}}(X_{\text{ref}}) = |T_{\text{ref}}(X_{\text{ref}})|$ . We then consider the attacker to inject  $n_{\text{dup}}$  sequences of text into  $\mathcal{T}$  to create trap-injected texts  $\mathcal{T}'$ . Instead of injecting  $n_{\text{dup}}$  exact duplications of  $X_{\text{ref}}$  as originally proposed [49], we now consider the attacker to generate *fuzzy* trap sequences  $\{X_i \mid i = 1 \dots n_{\text{dup}}\}$  to be injected. Note that we always inject the reference trap sequence, or  $X_1 = X_{\text{ref}}$ , and that all fuzzy trap sequences  $X_i$  are generated from  $X_{\text{ref}}$  (See Sec. 3.2).

We then assume the modified collection of texts  $\mathcal{T}'$  to be made publicly available, and potentially picked up by LLM developers. The target model for the attacker is the language model  $LM$  that has been pretrained on dataset  $\mathcal{D}$ . We also assume the attacker to have query access to  $LM$ , which outputs predicted probabilities. The attacker’s goal is now to infer whether  $X_{\text{ref}}$  has been seen by  $LM$ , or if  $X_{\text{ref}} \in \mathcal{D}$  or not. In the context of copyright, the attacker can use a sequence-level MIA on the trap sequence  $X_{\text{ref}}$  to infer whether their collection  $\mathcal{T}'$  has been used for training, as  $X_{\text{ref}}$  is synthetically generated to be unique to  $\mathcal{T}$ .

### 3.2 Generating fuzzy trap sequences

Given the reference trap sequence  $X_{\text{ref}}$ , we here propose the generation of fuzzy trap sequences  $\{X_i \mid i =$

$2 \dots n_{\text{dup}}\}$  (we always include the reference sequence, so  $X_1 = X_{\text{ref}}$ ). For this, we first use the tokenizer  $T_{\text{MLM}}$  of a masked language model  $MLM$  to encode the reference trap sequence (a sequence of textual characters) to  $T_{\text{MLM}}(X_{\text{ref}}) = \{t_1, \dots, t_N\}$ . Note that here, due to the different tokenization of  $T_{\text{ref}}$  and  $T_{\text{MLM}}$ ,  $N$  slightly differs from  $L_{\text{ref}}$ .

We then generate  $n_{\text{dup}}$  fuzzy duplicates for  $X_{\text{ref}}$  by replacing  $R$  tokens in  $T_{\text{MLM}}(X_{\text{ref}})$ . Unless stated otherwise, we uniformly sample without replacement  $R$  indices of tokens to be replaced. To replace a token, we randomly sample another, yet distinct token from the top  $k$  tokens following the probability distribution predicted by the  $MLM$ . Note that, when  $k$  equals the size of the entire vocabulary  $\mathcal{V}_{\text{MLM}}$  of tokenizer  $T_{\text{MLM}}$ , or  $k = |\mathcal{V}_{\text{MLM}}|$ , we replace the token with a randomly sampled token from  $\mathcal{V}_{\text{MLM}}$ . We provide further analysis of the impact of token replacements in Appendix A.

## 4 Experimental Setup

**Models.** As target model  $LM$  we use the pretrained 1.3B CroissantLLM [22], which we fine-tune on documents containing fuzzy trap sequences. As reference model  $LM_{\text{ref}}$ , we use the pretrained LLaMA-2 7B [77] to generate the synthetic reference trap sequences. Finally, as masked language model  $MLM$ , we use RoBERTa [42] to generate the fuzzy duplicates.

**Fuzzy trap sequences.** We generate 100 reference trap sequences using  $LM_{\text{ref}}$ . We specifically control for the sequence length ( $L_{\text{ref}}(X_{\text{ref}}) = 100$ ), and perplexity (between 90 and 100) to minimize variance in memorization, as previous works have shown length and perplexity to correlate with memorization [49, 17]. Unless stated otherwise, we use  $k = 50$  when selecting top  $k$  tokens predicted by masked language model  $MLM$ . For number of replacements we consider  $R = \{1, 2, 4, 8, 16, 32\}$ .

**Data.** We inject fuzzy trap sequences in a collection of books available in the public domain. We use the open-source library [57] to collect 100 books made available under a permissive license on Project Gutenberg [26] but have not been included in the training dataset of CroissantLLM [22]. The books we

selected contain 8.7M tokens in total (tokenized with CroissantLLM tokenizer). For each of the 100 reference trap sequences, we inject the  $n_{\text{dup}} = 10$  fuzzy trap sequences at random into one book and use this collection of modified books as dataset for fine-tuning.

**Fine-tuning.** In all of our experiments we fine-tune CroissantLLM [22] on the 100 modified books for 1 epoch. We use its maximum sequence length of 2048 tokens, a batch size of 6 and optimizer Adam with constant learning rate  $3 \times 10^{-6}$  and weight decay of 0.01. Unsurprisingly, we find that the extent to which the target model  $LM$  memorizes the trap sequences at the fixed number of training steps, heavily depends on the learning rate. We elaborate on this in Sec 5.3 and throughout the rest of the experiments consider the learning rate fixed to  $3 \times 10^{-6}$ . We argue, however, that the *absolute* extent of memorization does not impact our findings, as we here study how fuzzy trap sequences are memorized *relative* to exact duplication of trap sequences, which have been shown by Meeus et al. [49] to be memorized in a real-world scenario. Fine-tuning one model on 100 trap-injected books took roughly 2 GPU-hours on A100 NVIDIA GPUs.

**Membership Inference Attack (MIA).** To measure the memorization of the fuzzy trap sequences, we instantiate a sequence-level MIA to infer whether  $X_{\text{ref}}$  has been seen by the target model  $LM$ . For this, we generate 100 new reference trap sequences, which we do not include in the training dataset and thus consider as *non-members*. We consider the 100 reference trap sequences that are included in the training dataset as *members*. As MIA methodology, we use the *Ratio* attack [19]. For each  $X_{\text{ref}}$ , either *member* or *non-member*, we compute the target model loss divided by the loss computed using the reference model, which we call *membership score*  $\alpha(X_{\text{ref}}) = \mathcal{L}_{LM}(X_{\text{ref}})/\mathcal{L}_{LM_{\text{ref}}}(X_{\text{ref}})$ . We then use  $\alpha(X_{\text{ref}})$  to compute the ROC AUC for the binary membership prediction task and use the AUC to measure to what extent the fully trained target model  $LM$  memorizes the trap sequences. We compute the AUC on 25 bootstrapped subsets of members and non-members and report both the mean and standard deviation across all results [8].

**Baselines.** The primary goal of this paper is to quantify how fuzzy trap sequences are memorized

compared to exact duplication. For 10 fuzzy trap sequences  $\{X_{\text{ref}}, X_2, X_3, \dots, X_{n_{\text{dup}}}\}$ , where each  $X_i$  has  $R$  tokens replaced compared to  $X_{\text{ref}}$ , we consider the following baselines. As an upper bound, we consider the exact repetition of the reference trap sequence  $X_{\text{ref}}$  for  $n_{\text{dup}} = 10$  times. As a lower bound we consider a single injection of the reference trap sequence, i.e.  $n_{\text{dup}} = 1$ .

**Reproducibility.** We will share the code to reproduce our results in the camera-ready version.

## 5 LLMs have mosaic memory

Fig. 1 shows how the AUC varies for increasing number of replacements  $R$  made to the fuzzy trap sequences. We find that the AUC only drops slightly for smaller values of replacements  $R$ . For  $R = 4$ , when  $n_{\text{dup}} = 10$  fuzzy trap sequences are injected, the mean AUC only drops from 0.90 to 0.87. Even at  $R = 32$ , when we replace roughly one third of all tokens in the sequence, the mean AUC is 0.68 and remains significantly higher than a single repetition  $n_{\text{dup}} = 1$  with a mean AUC of 0.59. This demonstrates the mosaic memory in the target LLM, i.e. the overlapping fragments of multiple, slightly different sequences contribute to the memorization of the reference trap sequence.

### 5.1 Replacement position distribution.

We now aim to further reduce the chances of fuzzy trap sequences being removed by deduplication, and ensure that token replacements are evenly spread across the sequence. Above, we have uniformly at random sampled tokens to be replaced across fuzzy duplicates. Here, we instantiate the exact same setup, but we split the tokenized reference trap sequence using the MLM tokenizer:  $T_{\text{MLM}}(X_{\text{ref}}) = \{t_1, \dots, t_N\}$  in  $R$  equally-sized chunks of size  $\lceil \frac{N}{R} \rceil$ . We then replace exactly one (selected uniformly at random) token for every chunk. Below we refer to this strategy as *Even*, and to the previously used strategy as *Random*.

We also compute the length of subsequences repeated exactly within clusters of fuzzy duplicates, simulating a sequence-level deduplication algorithm.

We define  $C_{\text{max}}$  as the maximum length (in tokens) of a substring shared by at least two fuzzy duplicate sequences within a cluster. We report the mean  $C_{\text{max}}$  across 100 clusters used in our experiments.

Table 1 shows that for smaller values of  $R$  (up to  $R = 8$ ) the AUC for *randomly* and *evenly* distributed token replacements remains highly similar. For larger values of  $R$  ( $R \geq 16$ ), the impact of uniform spreading becomes more apparent, leading to a slightly lower AUC. At the same time,  $C_{\text{max}}$  is significantly lower for the evenly distributed token replacements, with the impact more pronounced at higher values of  $R$ . This demonstrates how a reasonable number of token replacements ( $R = 4$  or  $R = 8$ ) would evade even the sequence-level deduplication with the most aggressive threshold (e.g. 50 tokens), while retaining significant memorization.

### 5.2 MIAs adapted to fuzzy trap sequences.

So far we have used the unmodified *Ratio* attack [19] to infer whether the reference trap sequence has been seen by the target model. Specifically, we compute a single  $\alpha(X_{\text{ref}}) = \alpha(X_1)$  for each trap sequence, and do not utilize our knowledge of the fuzzy counterparts  $\{X_i \mid i = 2 \dots n_{\text{dup}}\}$ . To evaluate whether this could further improve detectability, we now compute the membership score for each of the fuzzy trap sequences, i.e.  $\{\alpha(X_i) \mid i = 1 \dots n_{\text{dup}}\}$ , and aggregate the membership scores with aggregation function  $\mathcal{A}(\cdot)$ , i.e.  $\alpha_{\mathcal{A}}(X_{\text{ref}}) = \mathcal{A}(\{\alpha(X_i) \mid i = 1 \dots n_{\text{dup}}\})$ . We then compute  $\alpha_{\mathcal{A}}(X_{\text{ref}})$  for each reference trap sequence. We compute AUC on a balanced set of *members* and *non-members*, and so generate fuzzy trap sequences for all non-member sequences too. As aggregation function  $\mathcal{A}$  we consider the mean, median, minimum and maximum. We report the MIA AUC for all aggregation functions, and for  $R = \{2, 8, 32\}$  for models trained in the main experiment (Fig. 1). As a baseline, we also provide the previously used MIA based on the reference trap sequence  $\alpha(X_{\text{ref}})$  alone.

Table 5.2 shows that aggregating the membership score on all fuzzy trap sequences  $\alpha_{\mathcal{A}}(X_{\text{ref}})$  does not provide substantial benefits compared to the baseline. We attribute this to the fact that all fuzzy trap se-

| $R$ | AUC               |                   | $C_{\max}$       |                  |
|-----|-------------------|-------------------|------------------|------------------|
|     | Random            | Even              | Random           | Even             |
| 1   | $0.893 \pm 0.022$ | $0.903 \pm 0.022$ | $91.43 \pm 1.60$ | $91.01 \pm 1.80$ |
| 2   | $0.891 \pm 0.026$ | $0.890 \pm 0.025$ | $79.97 \pm 1.35$ | $73.46 \pm 1.86$ |
| 4   | $0.869 \pm 0.022$ | $0.861 \pm 0.024$ | $61.40 \pm 1.77$ | $41.26 \pm 0.82$ |
| 8   | $0.840 \pm 0.027$ | $0.834 \pm 0.029$ | $42.39 \pm 1.47$ | $21.51 \pm 0.51$ |
| 16  | $0.783 \pm 0.032$ | $0.754 \pm 0.032$ | $25.90 \pm 0.70$ | $10.90 \pm 0.23$ |
| 32  | $0.682 \pm 0.022$ | $0.646 \pm 0.041$ | $13.54 \pm 0.42$ | $5.89 \pm 0.13$  |

Table 1: AUC and  $C_{\max}$  (mean and standard deviation) for *Random* and *Even* replacement position distribution.

quences  $X_i$  only differ from  $X_{\text{ref}}$  by  $R$  replacements, and therefore the target model loss computed on the reference trap sequence likely captures an aggregation across its fuzzy trap sequences already.

### 5.3 Ablation studies.

**Token replacement hyperparameters.** We here explore whether the semantic coherence of fuzzy trap sequences  $X_i$  affect memorization. For this, we vary the value  $k$  when sampling replacements from the top- $k$  tokens predicted by the MLM when a fixed number  $R = 8$  of replacements are made (see Sec. 3.2). Recall that thus far we only considered  $k = 50$  and that for  $k = |\mathcal{V}_{\text{MLM}}|$  -which is 50,000 for RoBERTa [42]-, we effectively randomly sample a token from the entire MLM vocabulary  $\mathcal{V}_{\text{MLM}}$ . In addition to sampling uniformly from the top  $k$  tokens, we also consider sampling directly from the full probability distribution predicted by the MLM (*Sample directly*).

Fig. 2(a) shows that the AUC decreases as  $k$  increases. We find  $k$  and AUC to be strongly correlated with a Spearman coefficient of  $-0.47$  and a p-value of  $4 \times 10^{-11}$ , suggesting that semantic coherence is important for mosaic memorization. Further, Fig. 2(b) compares the AUC for  $k = 50$  and  $k = |\mathcal{V}_{\text{MLM}}|$  for increasing values of  $R$ . For a smaller amount of replacements  $R$ , the AUC for  $k = 50$  and random token replacement remains very similar. For larger values of  $R$  the mean estimations start to diverge, yet with no statistically significant difference.

**Impact of learning rate.** We here show, that the key outcome of our experiments - the *relative* memorization of fuzzy duplicates compared to exact duplicates holds regardless of the *absolute* level of memorization. At a fixed number of training steps we can control the baseline memorization with varying learning rate. So far in previous experiments, we have considered a fixed learning rate of  $3 \times 10^{-6}$ . Fig. 2 (b) shows how for increasing learning rate the AUC for fuzzy trap sequences remains consistently slightly lower than the upper bound ( $n_{\text{dup}} = 10$ ), while remaining significantly higher than the lower bound ( $n_{\text{dup}} = 1$ ). This suggests that fuzzy trap sequences are also memorized in lower and higher memorization regimes.

## 6 Implications for measuring post-hoc LLM memorization.

Prior work on memorization in LLMs often relies on the natural presence of the duplicated sequences in large text datasets [19, 17, 35, 31]. For instance, seminal work by Carlini et al. [17] identifies sequences repeated multiple times in The Pile [24], and uses this to study the relationship between the number of repetitions and memorization. Kandpal et al. [35] adopts a similar approach with C4 [60] and OpenWebText [25].

We argue that relying on naturally occurring duplicates might overestimate the impact of exact duplica-

| Aggregation $\mathcal{A}$                 | $R = 2$           | AUC               |                   |
|-------------------------------------------|-------------------|-------------------|-------------------|
|                                           |                   | $R = 8$           | $R = 32$          |
| $\alpha(X_{\text{ref}})$ - no aggregation | $0.891 \pm 0.026$ | $0.840 \pm 0.027$ | $0.682 \pm 0.022$ |
| Mean                                      | $0.870 \pm 0.021$ | $0.828 \pm 0.029$ | $0.683 \pm 0.026$ |
| Median                                    | $0.869 \pm 0.028$ | $0.824 \pm 0.030$ | $0.692 \pm 0.039$ |
| Minimum                                   | $0.881 \pm 0.021$ | $0.823 \pm 0.030$ | $0.624 \pm 0.040$ |
| Maximum                                   | $0.879 \pm 0.030$ | $0.821 \pm 0.034$ | $0.679 \pm 0.041$ |

Table 2: AUC (mean and standard deviation) for MIA methodologies adapted to fuzzy trap sequences.

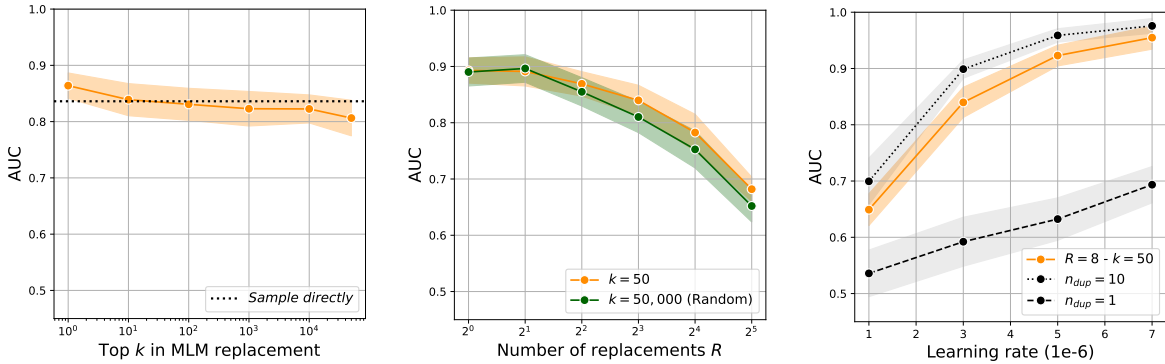


Figure 2: **Ablation.** MIA AUC (mean and standard deviation) for fuzzy trap sequences for (a) varying  $k$  for  $R = 8$ , (b)  $k = 50$  and  $k = 50,000$  across  $R$  and (c) varying learning rate used in fine-tuning.

tion on memorization. Instead, some memorization could be attributed to fuzzy duplicates. Any memorization study using the set of exact duplicates found in a large text dataset is susceptible to the confounding factor from the presence of fuzzy duplicates. As we show below, the number of fuzzy duplicates tend to be distributed in a highly non-uniform fashion, likely introducing bias when studying memorization.

To verify this, we here re-create the set of sequences duplicated in The Pile considered by prior work. We use the code provided by Lee et al. [40]<sup>1</sup> to build a suffix array and identify sequences occurring at least twice in the dataset. We consider sequences of 100 BPE (GPT-2) tokens [58]. As the original The Pile has been taken down due to copyright violations in

some of its subsets, we study the non-copyrighted version of The Pile [2], which covers roughly 80% of the original data<sup>2</sup>. While this affects the absolute counts of exact and fuzzy duplicates, we effectively report the lower bound on both counts, which allows us to study their relative prevalence in large datasets. Data processing took us  $\sim 96$  hours on a machine with 96 CPUs, 500GB of RAM and 5TB of available disk space.

Following the approach proposed by Carlini et al. [17], we group duplicate sequences into buckets by the number of exact repetitions, where the  $n$ -th bucket contains sequences repeated between  $2^{n/4} \leq n_{\text{dup}} < 2^{(n+1)/4}$  times in the dataset. We con-

<sup>1</sup>Distributed under Apache License 2.0.

<sup>2</sup>The rest of The Pile is distributed under a range of permissive licences.

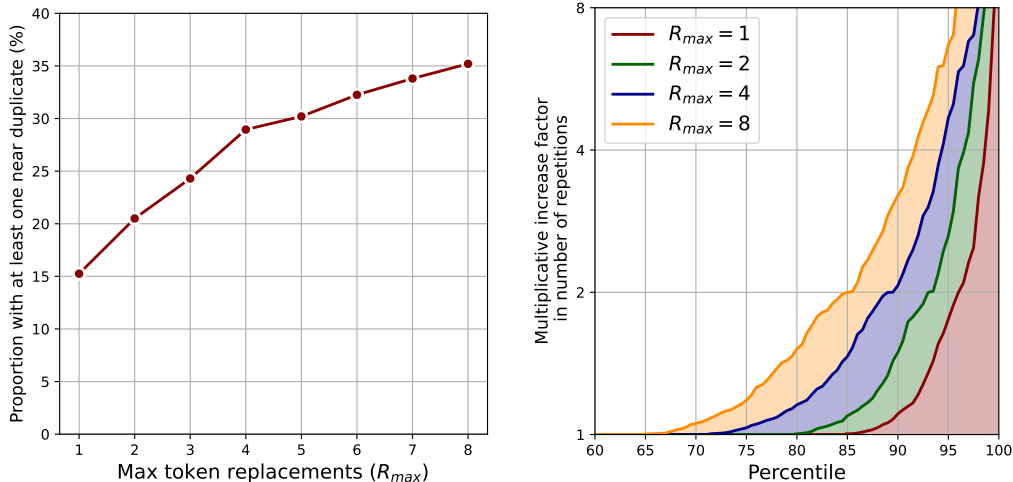


Figure 3: **Fuzzy duplicate sequences in The Pile.** (a) Proportion of sequences with at least one fuzzy duplicate given the maximum threshold  $R_{\max}$  (b) An increase in total number of repetitions if accounting for fuzzy duplicates given the maximum threshold  $R_{\max}$ .

sider  $n \in [20, 40)$ , thus covering sequences repeated between 32 and 1024 times. We then sample 100 random sequences from each bucket (2000 sequences overall) and search for their fuzzy duplicates. As in the experiments above, we define a fuzzy duplicate as a sequence of the same length with up to a certain number of tokens ( $R_{\max}$ ) replaced between the two sequences (we consider  $R_{\max} \leq 8$ ). Note that the notion of the number of tokens replaced between two sequences of the same length is equivalent to the Hamming distance - we here adopt the former for consistency. For computational reasons, we only look for fuzzy duplicates among sequences identified as duplicates themselves, i.e. repeated in the original dataset at least twice. Our fuzzy duplicate counts, therefore, only provide a lower bound estimation of the total number of fuzzy duplicates for a given sequence.

Our results show that a significant proportion of sequences duplicated in The Pile have additional fuzzy duplicates in the dataset. Fig. 3(a) shows that almost 15% and 30% of sequences have at least one fuzzy duplicate with only a  $R_{\max} = 1$  and  $R_{\max} = 4$  token replacements respectively (out of a 100 tokens in the sequence). Strikingly, Fig. 3(b) shows that for

10% of all duplicate sequences, the number of fuzzy duplicates ( $R_{\max} = 4$ ) is larger than the number of exact repetitions. For instance, 10% of all sequences repeated 32 times in The Pile have more than 32 additional fuzzy duplicates. This data suggests that using naturally occurring duplicates to study memorization is prone to unforeseen confounding factors, such as the presence of fuzzy duplicates illustrated above.

## 7 Discussion and Future Work

**Feasibility of copyright traps.** We here focus on addressing one core limitation of implementing copyright traps in practice: the potential accidental removal during training data deduplication [40, 38, 55]. We now consider other potential limitations. First, traps might be affected by quality filters. For instance, prior work has implemented filtering based on language [55, 73], certain heuristics (e.g. removing sequences with a high ratio of special characters) [38, 59, 39] and perplexity [82]. We here argue that trap sequences are designed to resemble human-generated text, and preprocessing techniques suffi-

ciently aggressive to remove traps are also likely to hurt model utility. While we do not believe any of the current filtering techniques to affect fuzzy copyright traps, we leave for future work to explore if the wide variety of filtering mechanisms [3] could remove trap sequences. Second, (fuzzy) trap sequences likely impact the readability of the original content. However, as also argued when introduced [49, 80], traps injected in web-based publications can be made invisible to a human reader yet picked up by a scraper. Lastly, we acknowledge that traps can potentially be removed by an informed and motivated adversary with techniques targeted specifically at trap sequences.

**Privacy and confidentiality.** Our findings highlight new challenges in addressing privacy issues associated with LLMs. Sec. 6 elaborates on challenges for post-hoc studies on LLM memorization. Further, we argue that deduplication does not necessarily eliminate privacy risks in LLMs [35], as some duplicate sequences also tend to have many fuzzy duplicates in the same dataset. Thus, even the more aggressive sequence-level deduplication techniques would not be able to remove fuzzy duplicates and leave the data prone to memorization.

**Potential for misuse.** With the injection of carefully designed fuzzy sequences and their memorization in a target LLM becoming feasible, we also acknowledge the potential misuse of this technology. For instance, malicious actors could leverage similar techniques to inject targeted misinformation into public content, which could potentially be propagated through LLMs deployed in practice. Future work could study whether our findings on memorization apply to the spread of misinformation and investigate potential mitigation strategies.

## 8 Conclusion

Copyright traps are unique synthetic sequences injected into original content, enabling its detectability in LLM training. However, traps rely on exact duplication across the content -up to 1,000 times-, making them vulnerable to accidental removal as part of commonly deployed deduplication strategies. We here propose *fuzzy* copyright traps. By replacing a small

amount of tokens across duplication, traps become increasingly unlikely to be removed - while we find their detectability to only decrease slightly. In our setup, fuzzy trap sequences with 4 token replacements in a sequence of 100 tokens, the mean MIA AUC only drops from 0.90 to 0.87 - while now being highly unlikely to be removed by deduplication techniques.

The fact that fuzzy duplicates are memorized to a similar extent as exact duplicates has implications for LLM memorization and confidentiality. First, we find that in a dataset widely used to train LLMs and study post-hoc memorization, The Pile, many duplicated sequences also have a significant amount of fuzzy duplicates - almost 30% have at least one, but potentially many more, fuzzy duplicates with as little as 4 mismatched tokens. We expect this to be a common feature of large text datasets, and to present a major confounding factor in studying memorization using duplicate sequences from such datasets. Further, our findings highlight additional challenges in training LLMs on private or confidential data. We show that techniques like data deduplication might not be sufficient to eliminate risks of information leakage.

## References

- [1] Amro Abbas, Kushal Tirumala, Dániel Simig, Surya Ganguli, and Ari S Morcos. Semdedup: Data-efficient learning at web-scale through semantic deduplication. *arXiv preprint arXiv:2303.09540*, 2023.
- [2] Devin Gulliver (alt account). Monology/pile-uncopyrighted · datasets at hugging face.
- [3] Alon Albalak, Yanai Elazar, Sang Michael Xie, Shayne Longpre, Nathan Lambert, Xinyi Wang, Niklas Muennighoff, Bairu Hou, Liangming Pan, Haewon Jeong, et al. A survey on data selection for language models. *arXiv preprint arXiv:2402.16827*, 2024.
- [4] Miltiadis Allamanis. The adverse effects of code duplication in machine learning models of code. In *Proceedings of the 2019 ACM SIGPLAN International Symposium on New Ideas*,

*New Paradigms, and Reflections on Programming and Software*, pages 143–153, 2019.

- [5] Buse Gul Atli Tekgul and N Asokan. On the effectiveness of dataset watermarking. In *Proceedings of the 2022 ACM on International Workshop on Security and Privacy Analytics*, pages 93–99, 2022.
- [6] Francois Barnard, Marlize Van Sittert, and Sirisha Rambhatla. Self-diagnosis and large language models: A new front for medical misinformation. *arXiv preprint arXiv:2307.04910*, 2023.
- [7] Emily M Bender, Timnit Gebru, Angelina McMillan-Major, and Shmargaret Shmitchell. On the dangers of stochastic parrots: Can language models be too big? In *Proceedings of the 2021 ACM conference on fairness, accountability, and transparency*, pages 610–623, 2021.
- [8] Patrice Bertail, Stéphan Cléménçon, and Nicolas Vayatis. On bootstrapping the roc curve. *Advances in Neural Information Processing Systems*, 21, 2008.
- [9] Stella Biderman, USVSN PRASHANTH, Lintang Sutawika, Hailey Schoelkopf, Quentin Anthony, Shivanshu Purohit, and Edward Raff. Emergent and predictable memorization in large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [10] Stella Biderman, Hailey Schoelkopf, Quentin Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar van der Wal. Pythia: A suite for analyzing large language models across training and scaling, 2023.
- [11] Burton H Bloom. Space/time trade-offs in hash coding with allowable errors. *Communications of the ACM*, 13(7):422–426, 1970.
- [12] Rishi Bommasani, Kevin Klyman, Shayne Longpre, Sayash Kapoor, Nestor Maslej, Betty Xiong, Daniel Zhang, and Percy Liang. The foundation model transparency index. *arXiv preprint arXiv:2310.12941*, 2023.
- [13] Sebastian Bordt, Harsha Nori, Vanessa Rodrigues, Besmira Nushi, and Rich Caruana. Elephants never forget: Memorization and learning of tabular data in large language models. *arXiv preprint arXiv:2404.06209*, 2024.
- [14] Andrei Z Broder. On the resemblance and containment of documents. In *Proceedings. Compression and Complexity of SEQUENCES 1997 (Cat. No. 97TB100171)*, pages 21–29. IEEE, 1997.
- [15] Andrei Z Broder, Steven C Glassman, Mark S Manasse, and Geoffrey Zweig. Syntactic clustering of the web. *Computer networks and ISDN systems*, 29(8-13):1157–1166, 1997.
- [16] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [17] Nicholas Carlini, Daphne Ippolito, Matthew Jagielski, Katherine Lee, Florian Tramer, and Chiyuan Zhang. Quantifying memorization across neural language models. In *The Eleventh International Conference on Learning Representations*, 2022.
- [18] Nicholas Carlini, Chang Liu, Úlfar Erlingsson, Jernej Kos, and Dawn Song. The secret sharer: Evaluating and testing unintended memorization in neural networks. In *28th USENIX Security Symposium (USENIX Security 19)*, pages 267–284, 2019.
- [19] Nicholas Carlini, Florian Tramer, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Úlfar Erlingsson, et al. Extracting training data from large language models. In *30th USENIX Security Symposium (USENIX Security 21)*, pages 2633–2650, 2021.

- [20] Michael Duan, Anshuman Suri, Niloofar Mireshghallah, Sewon Min, Weijia Shi, Luke Zettlemoyer, Yulia Tsvetkov, Yejin Choi, David Evans, and Hannaneh Hajishirzi. Do membership inference attacks work on large language models? *arXiv preprint arXiv:2402.07841*, 2024.
- [21] André V Duarte, Xuandong Zhao, Arlindo L Oliveira, and Lei Li. De-cop: Detecting copy-righted content in language models training data. *arXiv preprint arXiv:2402.09910*, 2024.
- [22] Manuel Faysse, Patrick Fernandes, Nuno Guerreiro, António Loison, Duarte Alves, Caio Corro, Nicolas Boizard, João Alves, Ricardo Rei, Pedro Martins, et al. Croissantlm: A truly bilingual french-english language model. *arXiv preprint arXiv:2402.00786*, 2024.
- [23] FinancialTimes. <https://www.ft.com/content/0965d962-5c54-4fdc-aef8-18e4ef3b9df5>, Oct 2023.
- [24] Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The Pile: An 800gb dataset of diverse text for language modeling. *arXiv preprint arXiv:2101.00027*, 2020.
- [25] Aaron Gokaslan and Vanya Cohen. Openweb-text corpus. <http://Skylion007.github.io/OpenWebTextCorpus>, 2019.
- [26] Michael Hart. Project gutenberg.
- [27] Peter Henderson, Koustuv Sinha, Nicolas Angelard-Gontier, Nan Rosemary Ke, Genevieve Fried, Ryan Lowe, and Joelle Pineau. Ethical challenges in data-driven dialogue systems. In *Proceedings of the 2018 AAAI/ACM Conference on AI, Ethics, and Society*, pages 123–129, 2018.
- [28] Danny Hernandez, Tom Brown, Tom Conerly, Nova DasSarma, Dawn Drain, Sheer El-Showk, Nelson Elhage, Zac Hatfield-Dodds, Tom Henighan, Tristan Hume, et al. Scaling laws and interpretability of learning from repeated data. *arXiv preprint arXiv:2205.10487*, 2022.
- [29] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. Training compute-optimal large language models, 2022.
- [30] Nils Homer, Szabolcs Szelinger, Margot Redman, David Duggan, Waibhav Tembe, Jill Muehling, John V Pearson, Dietrich A Stephan, Stanley F Nelson, and David W Craig. Resolving individuals contributing trace amounts of dna to highly complex mixtures using high-density snp genotyping microarrays. *PLoS genetics*, 4(8):e1000167, 2008.
- [31] Daphne Ippolito, Florian Tramèr, Milad Nasr, Chiyuan Zhang, Matthew Jagielski, Katherine Lee, Christopher A Choquette-Choo, and Nicholas Carlini. Preventing verbatim memorization in language models gives a false sense of privacy. *arXiv preprint arXiv:2210.17546*, 2022.
- [32] Paul Jaccard. The distribution of the flora in the alpine zone. 1. *New phytologist*, 11(2):37–50, 1912.
- [33] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [34] Jean Kaddour. The minipile challenge for data-efficient language models. *arXiv preprint arXiv:2304.08442*, 2023.
- [35] Nikhil Kandpal, Eric Wallace, and Colin Raffel. Deduplicating training data mitigates privacy risks in language models. In *International Conference on Machine Learning*, pages 10697–10707. PMLR, 2022.

- [36] Antonia Karamolegkou, Jiaang Li, Li Zhou, and Anders Søgaard. Copyright violations and large language models. In *The 2023 Conference on Empirical Methods in Natural Language Processing*, 2023.
- [37] Kate Knibbs. The battle over books3 could change ai forever. wired-battle-over-books3, 2023.
- [38] Sneha Kudugunta, Isaac Caswell, Biao Zhang, Xavier Garcia, Derrick Xin, Aditya Kusupati, Romi Stella, Ankur Bapna, and Orhan Firat. Madlad-400: A multilingual and document-level large audited dataset. *Advances in Neural Information Processing Systems*, 36, 2024.
- [39] Hugo Laurençon, Lucile Saulnier, Thomas Wang, Christopher Akiki, Albert Villanova del Moral, Teven Le Scao, Leandro Von Werra, Chenghao Mou, Eduardo González Ponferrada, Huu Nguyen, et al. The bigscience roots corpus: A 1.6 tb composite multilingual dataset. *Advances in Neural Information Processing Systems*, 35:31809–31826, 2022.
- [40] Katherine Lee, Daphne Ippolito, Andrew Nystrom, Chiyuan Zhang, Douglas Eck, Chris Callison-Burch, and Nicholas Carlini. Deduplicating training data makes language models better. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8424–8445, 2022.
- [41] Yiming Li, Ziqi Zhang, Jiawang Bai, Baoyuan Wu, Yong Jiang, and Shu-Tao Xia. Open-sourced dataset protection via backdoor watermarking. *arXiv preprint arXiv:2010.05821*, 2020.
- [42] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [43] LLMLitigation. Kadrey, silverman, golden v meta platforms, inc. <https://llmlitigation.com/pdf/03417/kadrey-meta-complaint.pdf>, 2023.
- [44] Nils Lukas, Ahmed Salem, Robert Sim, Shruti Tople, Lukas Wutschitz, and Santiago Zanella-Béguelin. Analyzing leakage of personally identifiable information in language models. In *2023 IEEE Symposium on Security and Privacy (SP)*, pages 346–363. IEEE, 2023.
- [45] Inbal Magar and Roy Schwartz. Data contamination: From memorization to exploitation. *arXiv preprint arXiv:2203.08242*, 2022.
- [46] Udi Manber and Gene Myers. Suffix arrays: a new method for on-line string searches. *siam Journal on Computing*, 22(5):935–948, 1993.
- [47] Justus Mattern, Fatemehsadat Miresghallah, Zhijing Jin, Bernhard Schölkopf, Mrinmaya Sachan, and Taylor Berg-Kirkpatrick. Membership inference attacks against language models via neighbourhood comparison. *arXiv preprint arXiv:2305.18462*, 2023.
- [48] Matthieu Meeus, Shubham Jain, Marek Rei, and Yves-Alexandre de Montjoye. Did the neurons read your book? document-level membership inference for large language models. *arXiv preprint arXiv:2310.15007*, 2023.
- [49] Matthieu Meeus, Igor Shilov, Manuel Faysse, and Yves-Alexandre de Montjoye. Copyright traps for large language models. *arXiv preprint arXiv:2402.09363*, 2024.
- [50] Niloofar Miresghallah, Hyunwoo Kim, Xuhui Zhou, Yulia Tsvetkov, Maarten Sap, Reza Shokri, and Yejin Choi. Can llms keep a secret? testing privacy implications of language models via contextual integrity theory. In *The Twelfth International Conference on Learning Representations*, 2023.
- [51] Milad Nasr, Nicholas Carlini, Jonathan Hayase, Matthew Jagielski, A Feder Cooper, Daphne Ippolito, Christopher A Choquette-Choo, Eric Wallace, Florian Tramèr, and Katherine Lee. Scalable extraction of training data from (production) language models. *arXiv preprint arXiv:2311.17035*, 2023.

- [52] Milad Nasr, Reza Shokri, and Amir Houmansadr. Comprehensive privacy analysis of deep learning. In *Proceedings of the 2019 IEEE Symposium on Security and Privacy (SP)*, pages 1–15, 2018.
- [53] NewYorkTimes. The times sues openai and microsoft over a.i. use of copyrighted work. <https://www.nytimes.com/2023/12/27/business/media/new-york-times-open-ai-microsoft-lawsuit.html>, Dec 2023.
- [54] OpenAI. Gpt-4 technical report. <https://cdn.openai.com/papers/gpt-4.pdf>, 2023.
- [55] Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Capelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. The refinedweb dataset for falcon llm: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*, 2023.
- [56] Zhencan Peng, Zhizhi Wang, and Dong Deng. Near-duplicate sequence search at scale for large language model memorization evaluation. *Proceedings of the ACM on Management of Data*, 1(2):1–18, 2023.
- [57] Katherine Pully. Gutenberg scraper. [https://github.com/kpully/gutenberg\\_scraper](https://github.com/kpully/gutenberg_scraper), 2020.
- [58] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [59] Jack W Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, et al. Scaling language models: Methods, analysis & insights from training gopher. *arXiv preprint arXiv:2112.11446*, 2021.
- [60] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *arXiv e-prints*, 2019.
- [61] Alex Reisner. These 183,000 books are fueling the biggest fight in publishing and tech. the-atlantic-books3-copyright, 2023.
- [62] Alexandre Sablayrolles, Matthijs Douze, Cordelia Schmid, and Hervé Jégou. Radioactive data: tracing through training. In *International Conference on Machine Learning*, pages 8326–8335. PMLR, 2020.
- [63] Alexandre Sablayrolles, Matthijs Douze, Cordelia Schmid, Yann Ollivier, and Hervé Jégou. White-box vs black-box: Bayes optimal strategies for membership inference. In *International Conference on Machine Learning*, pages 5558–5567. PMLR, 2019.
- [64] Oscar Sainz, Jon Ander Campos, Iker García-Ferrero, Julen Etxaniz, and Eneko Agirre. Did chatgpt cheat on your test, 2023.
- [65] Pamela Samuelson. Generative ai meets copyright. *Science*, 381(6654):158–161, 2023.
- [66] Rylan Schaeffer. Pretraining on the test set is all you need. *arXiv preprint arXiv:2309.08632*, 2023.
- [67] Ali Shafahi, W Ronny Huang, Mahyar Najibi, Octavian Suci, Christoph Studer, Tudor Dumitras, and Tom Goldstein. Poison frogs! targeted clean-label poisoning attacks on neural networks. *Advances in neural information processing systems*, 31, 2018.
- [68] Weijia Shi, Anirudh Ajith, Mengzhou Xia, Yangsibo Huang, Daogao Liu, Terra Blevins, Danqi Chen, and Luke Zettlemoyer. Detecting pretraining data from large language models. *arXiv preprint arXiv:2310.16789*, 2023.
- [69] Narayanan Shivakumar and Hector Garcia-Molina. Finding near-replicas of documents on the web. In *International Workshop on the World Wide Web and Databases*, pages 204–212. Springer, 1998.

- [70] Reza Shokri, Marco Stronati, Congzheng Song, and Vitaly Shmatikov. Membership inference attacks against machine learning models. In *2017 IEEE symposium on security and privacy (SP)*, pages 3–18. IEEE, 2017.
- [71] Daria Soboleva, Faisal Al-Khateeb, Robert Myers, Jacob R Steeves, Joel Hestness, and Nolan Dey. SlimPajama: A 627B token cleaned and deduplicated version of RedPajama, June 2023.
- [72] Irene Solaiman and Christy Dennison. Process for adapting language models to society (palms) with values-targeted datasets. *Advances in Neural Information Processing Systems*, 34:5861–5873, 2021.
- [73] Luca Soldaini, Rodney Kinney, Akshita Bhagia, Dustin Schwenk, David Atkinson, Russell Authur, Ben Bogin, Khyathi Chandu, Jennifer Dumas, Yanai Elazar, et al. Dolma: An open corpus of three trillion tokens for language model pretraining research. *arXiv preprint arXiv:2402.00159*, 2024.
- [74] Congzheng Song, Thomas Ristenpart, and Vitaly Shmatikov. Machine learning models that remember too much. In *Proceedings of the 2017 ACM SIGSAC Conference on computer and communications security*, pages 587–601, 2017.
- [75] Om Thakkar, Swaroop Ramaswamy, Rajiv Mathews, and Franoise Beaufays. Understanding unintended memorization in federated learning. *arXiv preprint arXiv:2006.07490*, 2020.
- [76] Kushal Tirumala, Daniel Simig, Armen Aghajanyan, and Ari Morcos. D4: Improving llm pretraining via document de-duplication and diversification. *Advances in Neural Information Processing Systems*, 36, 2024.
- [77] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models, 2023. *URL <https://arxiv.org/abs/2307.09288>*, 2023.
- [78] USAAuthorsGuild. More than 15,000 authors sign authors guild letter calling on ai industry leaders to protect writers. authors-guild-open-letter, 2023.
- [79] Jingtian Wang, Xinyang Lu, Zitong Zhao, Zhongxiang Dai, Chuan-Sheng Foo, See-Kiong Ng, and Bryan Kian Hsiang Low. Wasa: Watermark-based source attribution for large language model-generated data. *arXiv preprint arXiv:2310.00646*, 2023.
- [80] Johnny Tian-Zheng Wei, Ryan Yixiang Wang, and Robin Jia. Proving membership in llm pretraining data via data watermarks. *arXiv preprint arXiv:2402.10892*, 2024.
- [81] Emily Wenger, Xiuyu Li, Ben Y Zhao, and Vitaly Shmatikov. Data isotopes for data provenance in dnns. *Proceedings on Privacy Enhancing Technologies*, 2024.
- [82] Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán, Armand Joulin, and Edouard Grave. Ccnet: Extracting high quality monolingual datasets from web crawl data. *arXiv preprint arXiv:1911.00359*, 2019.
- [83] Fuzhao Xue, Yao Fu, Wangchunshu Zhou, Zangwei Zheng, and Yang You. To repeat or not to repeat: Insights from scaling llm under token-crisis. *Advances in Neural Information Processing Systems*, 36, 2024.
- [84] Samuel Yeom, Irene Giacomelli, Matt Fredrikson, and Somesh Jha. Privacy risk in machine learning: Analyzing the connection to overfitting. In *2018 IEEE 31st computer security foundations symposium (CSF)*, pages 268–282. IEEE, 2018.
- [85] Wei Zeng, Xiaozhe Ren, Teng Su, Hui Wang, Yi Liao, Zhiwei Wang, Xin Jiang, ZhenZhang Yang, Kaisheng Wang, Xiaoda Zhang, et al. Pangu-a: Large-scale autoregressive pretrained chinese language models with auto-parallel computation. *arXiv preprint arXiv:2104.12369*, 2021.

- [86] Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, et al. Siren’s song in the ai ocean: A survey on hallucination in large language models. *arXiv preprint arXiv:2309.01219*, 2023.
- [87] Zhuo Zhang, Guangyu Shen, Guanhong Tao, Siyuan Cheng, and Xiangyu Zhang. Make them spill the beans! coercive knowledge extraction from (production) llms. *arXiv preprint arXiv:2312.04782*, 2023.

## A Characterizing fuzzy trap sequences

In Sec. 3.2, we describe the generation of fuzzy trap sequences from a reference trap sequence ( $X_{\text{ref}}$ ). First, we tokenize the reference trap sequence using the tokenizer of a masked language model MLM, resulting in  $T_{\text{MLM}}(X_{\text{ref}}) = \{t_1, \dots, t_N\}$ . Due to the different tokenization of  $T_{\text{ref}}$  and  $T_{\text{MLM}}$ ,  $N$  differs from  $L_{\text{ref}}$ . Fig 4 (a) shows how the  $N = |T_{\text{MLM}}(X_{\text{ref}})|$  is distributed for 100 reference trap sequences - which all have  $L_{\text{ref}} = 100$ .

Next, to generate fuzzy trap sequences, we replace  $R$  tokens by sampling from the top  $k$  tokens predicted by the MLM. For smaller values of  $k$ , we expect more meaningful token replacements to be made than for larger values of  $k$ . Indeed, when  $k$  equals the size of the vocabulary of the MLM, or  $k = |\mathcal{V}_{\text{MLM}}|$ , we would effectively replace the token with a random other token regardless of its context in the reference trap sequence. This will likely impact the difference across fuzzy duplicates. We quantify this difference with the commonly used notion of *perplexity*. For the sequence of textual characters  $X$ , tokenized as  $T(X) = \{t_1, \dots, t_L\}$ , we denote the loss of language model  $LM$  with tokenizer  $T$  as:

$$\mathcal{L}_{LM}(X) = -\frac{1}{L} \sum_{i=1}^L \log(LM_{\theta}(t_i | t_1 \dots, t_{i-1})) \quad (1)$$

Perplexity is then computed as the exponent of the loss, i.e.  $\mathcal{P}_{LM}(X) = \exp(\mathcal{L}_{LM}(X))$ . The higher the value of perplexity, the more 'surprised' language model  $LM$  is to observe sequence  $X$ .

We now compute how the perplexity of the fuzzy trap sequences differs from the perplexity of the reference trap sequence. We generate synthetic reference trap sequences of length  $L_{\text{ref}}(X_{\text{ref}}) = 100$  and perplexity  $90 \leq \mathcal{P}_{LM_{\text{ref}}}(X_{\text{ref}}) < 100$ . Making  $R$  replacements in such a sequence will have undoubtedly altered this perplexity. Fig 4 (b) shows how the perplexity of fuzzy trap sequences computed using  $LM_{\text{ref}}$  varies for increasing number of replacements  $R$ . We find that, when more tokens are replaced, the perplexity indeed increases compared to the perplexity of the reference trap sequence  $X_{\text{ref}}$ , and more rapidly so when token replacements are made with higher values of  $k$ .

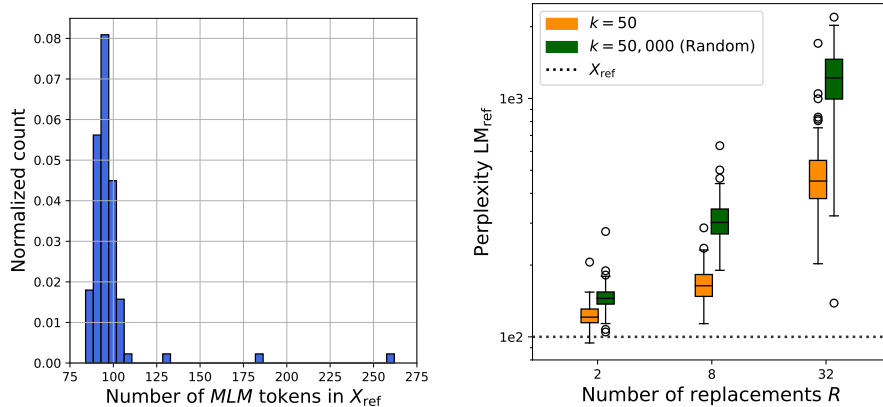


Figure 4: **Characterizing fuzzy trap sequences.** (a) The distribution of number of tokens  $|T_{\text{MLM}}(X_{\text{ref}})|$  of 100 reference trap sequences. (b) The perplexity computed using  $LM_{\text{ref}}$  each for 100 fuzzy trap sequences for token replacement strategies for different values of  $k$  across values for  $R$ .