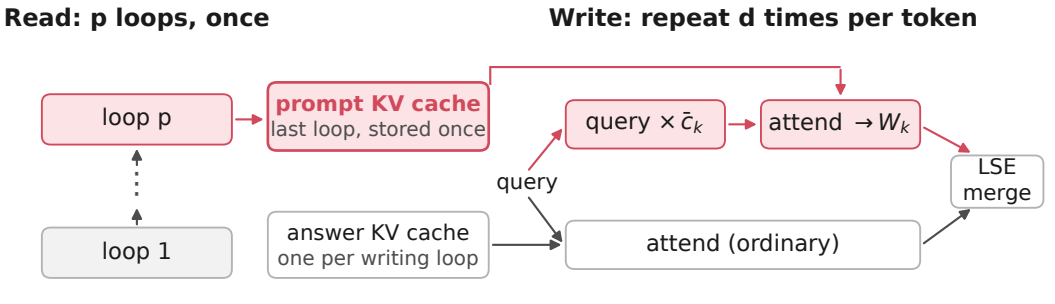
Read: p loops, once
Write: repeat d times per token
loop p
prompt KV cache
last loop, stored once
query × $\bar{c}_k$
attend $\rightarrow W_k$
LSE merge
query
loop 1
answer KV cache
one per writing loop
attend (ordinary)