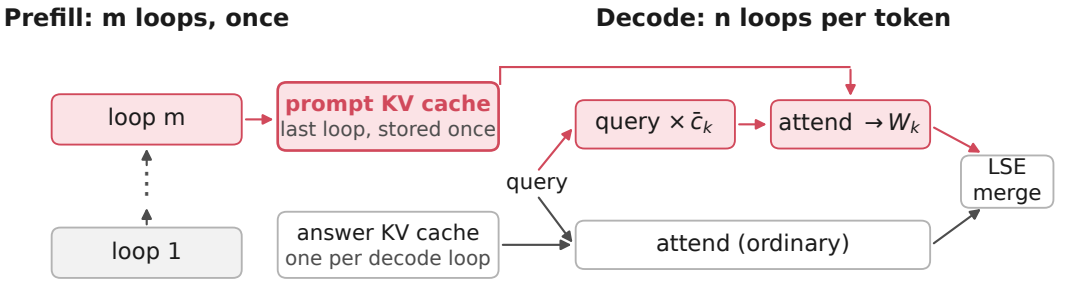
Prefill: m loops, once
Decode: n loops per token
loop m
prompt KV cache
last loop, stored once
loop 1
answer KV cache
one per decode loop
query
query × $\bar{c}_k$
attend → W_k
LSE
merge
attend (ordinary)