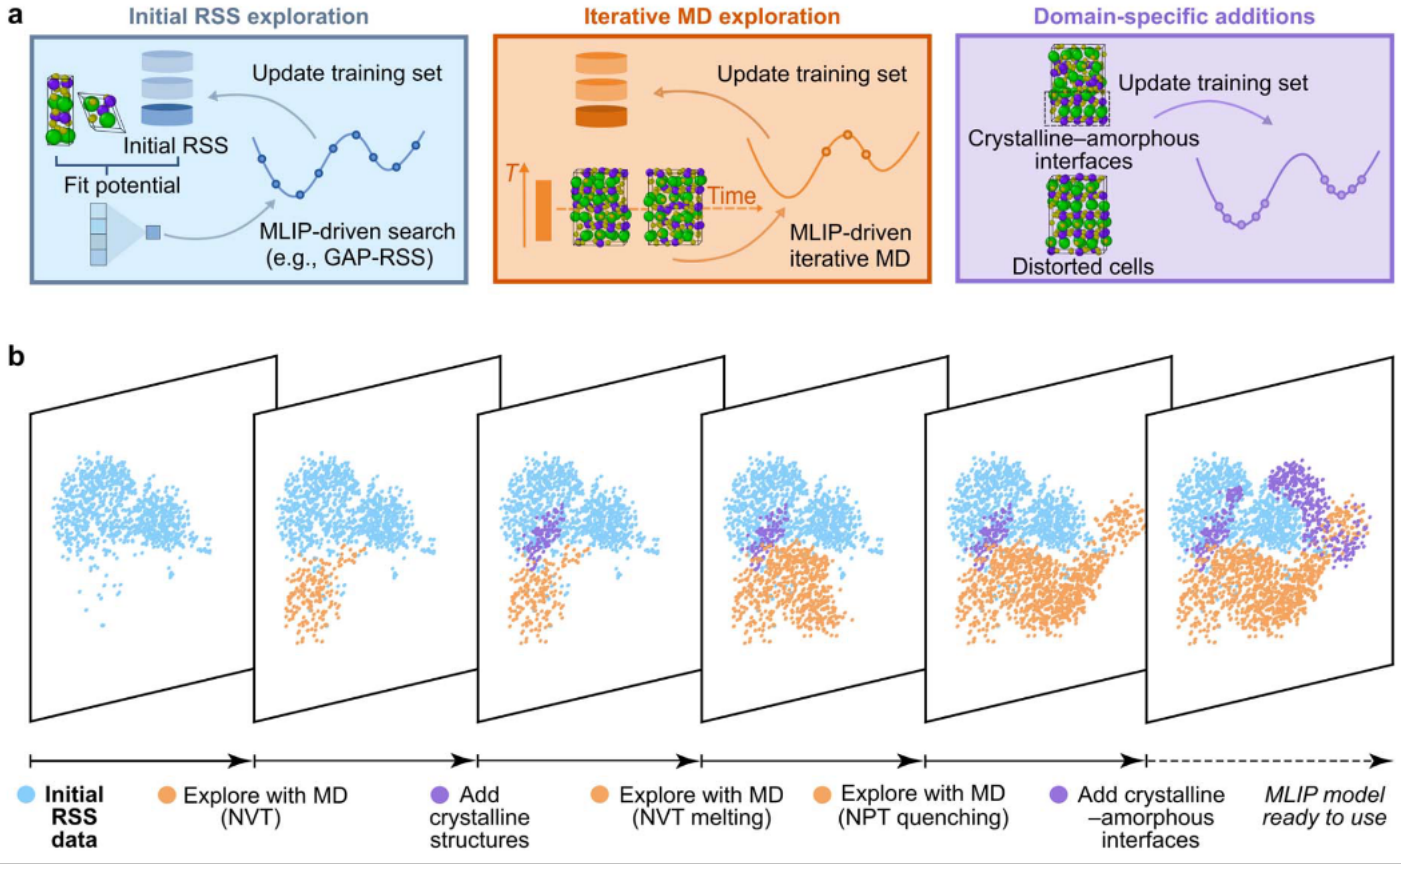

a
Initial RSS exploration
Update training set
Initial RSS
Fit potential
MLIP-driven search
(e.g., GAP-RSS)
Iterative MD exploration
Update training set
T
Time
MLIP-driven
iterative MD
Domain-specific additions
Update training set
Crystalline–amorphous
interfaces
Distorted cells
b
Initial
RSS
data
Explore with MD
(NVT)
Add
crystalline
structures
Explore with MD
(NVT melting)
Explore with MD
(NPT quenching)
Add crystalline
–amorphous
interfaces
MLIP model
ready to use