

# Project Report - Digit Classification

Ce Zhang, Student No. 55542639

Yang Ji, Student No. 56064832

## 1 Introduction

Modified National Institute of Standards and Technology (MNIST) is the standard dataset in the computation vision field. Since its release in 1999, this classical dataset, consisting of a collection of handwritten digit images, has been used extensively in machine learning and optical character recognition research. In real world, digit recognition system can significantly reduce the human effort and precisely recognize the digits from different resources like bank cheque, mails and drafts and in many demanding scenarios for numeric entries in tax forms, processing bank cheque amounts, recognizing number plates of vehicles and so on.

In this project, we have a hands on experience of MNIST handwritten digital classification task, which is a branch of supervised learning. Given 4,000 images of handwriting digits, the task is to learn images' corresponding digits from 2,000 training images and evaluate machine learning methods with the left 2,000 test images. The number of training set is much smaller than the traditional MNIST benchmark's, where the training set contains 60,000 images. This makes our problem more challenging.

## 2 Methodology

Combining the learning algorithms studied in this course, we would like to pick suitable techniques in different parts of the entire machine learning task, ranging from feature selection to result evaluation.

**Step 1: Feature Selection** Since the raw data has been pre-processed to feature vectors, it removes the need of reading grey value of images, normalization and mean-subtraction by pixels and digits. Therefore, we take the first step to study Principal Component Analysis (PCA) and kernel Principal Component Analysis (kPCA) to speed up the following machine learning algorithms. PCA/kPCA is essentially a method that reduces the dimension of the feature space in such a way that new variables are orthogonal to each other. By generating these uncorrelated variables, we could make our trained classes more distinct when applying supervised classification methods. As for disadvantages, although PCA helps cover maximum variance among the features in a dataset, it might incur the loss of some information compared to the original features. In the implementation part, we leverage the PCA function in the Python library *scikit-learn*.

**Step 2: Supervised Classification** In this part, we consider to evaluate: (1) logistic regression, (2) k-nearest-neighbor (kNN), (3) perceptron (4) SVM. Since some classifiers are binary classifiers, there are mainly two strategies that we can use: one versus all and one versus one. For one versus all method, the  $i^{th}$  classifier is to separate the  $i^{th}$  class with other  $k - 1$  classes, when we have  $k$  classes. One versus one method is based on training  $\frac{k(k-1)}{2}$  classifiers, where each classifier distinguishes two classes only. The class with more votes is selected as the output. We analyze the pros and cons of these four algorithms as follows.

- (i) **Logistic Regression** Logistic regression is a widely-used technique due to its efficiency and simplicity. It doesn't require too many computing resources. It also removes the need of any tuning and scaling input data. What's more, it works better when removing unrelated or redundant attributes. However, it can't help solve non-linear problems due to its linear decision surface and can be easily outperformed by more complex ones.
- (ii) **kNN** The main advantage of kNN is no training period when performing predictions. It means that new data can be added seamlessly which would not impact the final accuracy. But it doesn't work very well when dealing with large datasets or high-dimension datasets. What's more, kNN also requires to perform feature scaling (standardization and normalization) on the dataset. And kNN is also sensitive to noise in the dataset. The naive method to tackle this problem is to remove outliers manually.
- (iii) **Perceptron** Like logistic regression, perceptron is also a widely-used technique due to its efficiency and simplicity. The difference between logistic regression and perceptron is the loss function. Perceptron just normally reflects the penalty is zero when correctly classified and would introduce large loss for large errors. Logistic Regression will introduce some small loss when correctly classified to push classification boundary away from points.
- (iv) **SVM** SVM works relatively well when there is clear margin of separation between classes. It is more effective in the high dimensional spaces. However, it might perform very well on large dataset or noisy dataset.

### 3 Experimental Setup

All of the experiments of the classical machine learning methods (kNN, SVM, Logistic Regression, Perceptron) are implemented using Python and the *scikit learn* library. To make things easier, these methods are evaluated in a single file *test.py*. Observing the datasets in *digits4000.txt* directory, there are total 4,000 images with corresponding labels. The training set and test set both include 2,000 images. All of the training tasks will be done with the 2,000 training images. For the accuracy computation, we leverage the *score* method, provided by the *scikit learn* library.

For each of the classical methods, we first evaluate the method using the raw training set. Then, different dimension reduction techniques like PCA, kPCA will be applied to the training set. Since the reduced dimension is a hyperparameter, we test different dimensions and try to find the optimal one. For SVM method, we also test the performance of different kernel functions since they can influence the classification performance.

## 4 Experimental Results

### 4.1 kNN

The accuracy of kNN algorithm with no data pre-processing is **0.9135**. To get better performance, we first apply PCA on the training set and we set the reduced dimension from 10 to 100. Fig. 1 shows that  $dim = 40$  is the optimal reduced dimension. The best performance with PCA that we can get is **0.93**, which is better than the kNN without PCA. This means that by excluding the irrelevant features, we can get better performance for kNN algorithm. However, for kernel PCA (Fig. 2, 3), both of the *sigmoid* kernel and *rbf* kernel make the kNN performance even worse.

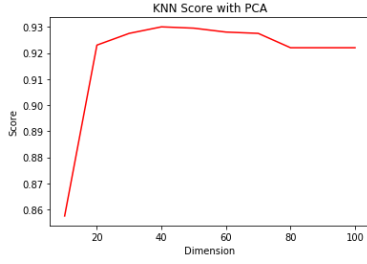


Figure 1: KNN-PCA

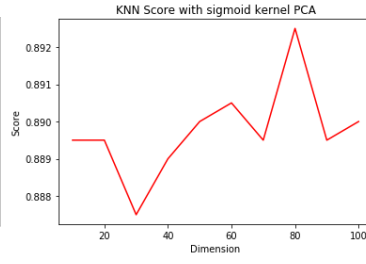


Figure 2: KNN-SIG-KPCA

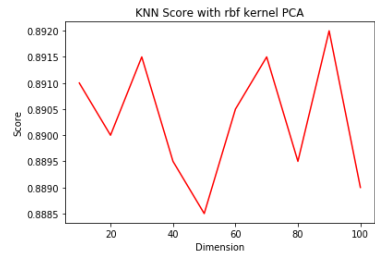


Figure 3: KNN-RBF-KPCA

## Performance Analysis

- (i) By removing unrelated data, PCA can help evaluate kNN algorithm on the dataset with relatively low dimensions.
- (ii) kPCA actually includes regular PCA as a special case. They're equivalent if the linear kernel is used. Despite capturing nonlinear structure in the dataset, kPCA which uses a nonlinear kernel might incur worse performance due to overfitting.

## 4.2 SVM

In this section, we test the SVM performance. For SVM with polynomial kernel, the accuracy is **0.9155**, which is only slightly better than the kNN without PCA. However, if we change the kernel to RBF kernel, the accuracy is then **0.941**. This is even better than the kNN with PCA. This means that for SVM algorithm, the choice of kernel is quite important. We also test the SVM with *decision\_function\_shape = ovo* and finally we get the same accuracy than the default *ovr* setting.

To improve the performance of SVM, we apply the PCA to see whether it can help improve the accuracy. Observing Fig. 4, we can see that PCA can definitely improve the SVM's accuracy. When the dimension is 40, we get the optimum accuracy, that is **0.952**. However, for kernel PCA, both of the methods with different kernels hurt the accuracy and also the accuracy shows a decreasing trend when the dimension increases.

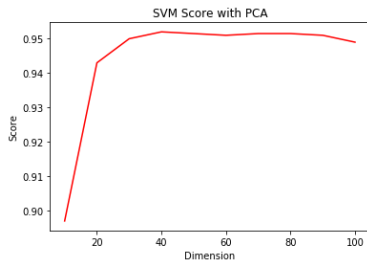


Figure 4: SVM-PCA

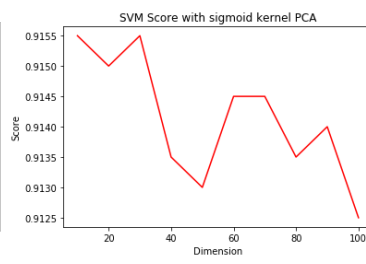


Figure 5: SVM-SIG-KPCA

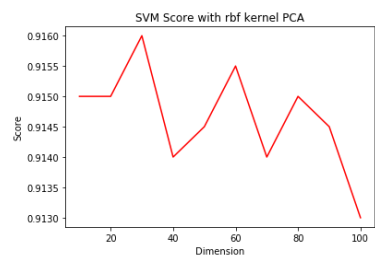


Figure 6: SVM-RBF-KPCA

## Performance Analysis

- (i) Overall, SVM outperforms compared to the kNN since it tends to work well on a high-dimensional dataset.
- (ii) By removing unrelated data, PCA can help evaluate SVM algorithm on the dataset with relatively low dimensions.
- (iii) Same as kNN-kPCA, the bad choice of kernel PCA might incur overfitting problems and decrease the generality of the trained model.

### 4.3 Logistic Regression

In this section, we evaluate the performance of Logistic Regression. The accuracy of Logistic regression with raw data is **0.8705**, which is worse than both the kNN and also the SVM. Then, we use PCA to see whether we can improve the accuracy.

From Fig. 7, we can see that the accuracy of Logistic Regression will first increase and then decrease with the increasing dimension. The highest accuracy of Logistic Regression with PCA is **0.878** when the dimension is 30. This accuracy is slightly higher than the one without PCA but is far more lower than both of the kNN and the SVM.



Figure 7: LR-PCA

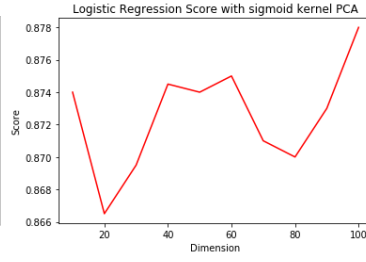


Figure 8: LR-SIG-KPCA

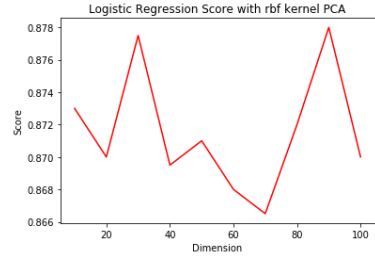


Figure 9: LR-RBF-KPCA

- (i) Overall, logistic regression under performs than kNN and SVM since it only works well on a linear dataset and can't tackle non-linear problems.
- (ii) The evaluation results also show that logistic regression can have a better performance when removing unrelated or redundant attributes. It is also why PCA/kPCA can help it improve the performance.

### 4.4 Perceptron

For Perceptron method, the accuracy with raw data is **0.8585**, which is the lowest one among all of the above method. We also use PCA to see whether it can help improve the accuracy. However, according to Fig. 10 to Fig. 12, we can see that none of the cases improve the accuracy. PCA hurts the accuracy of Perceptron in our experiment.

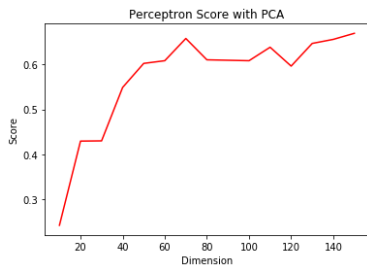


Figure 10: Perceptron-PCA

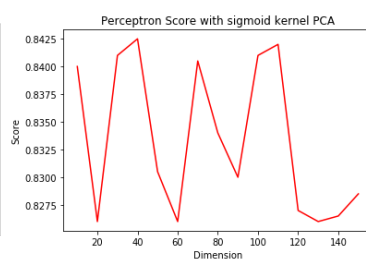


Figure 11: Perceptron-SIG-KPCA

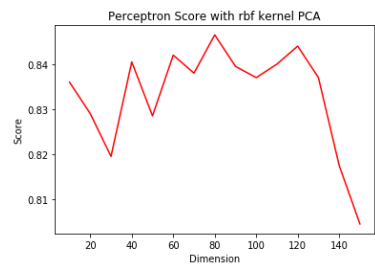


Figure 12: Perceptron-RBF-KPCA

- (i) Like logistic regression, perceptron has a relatively worse performance than SVM and kNN algorithm due to its linearity assumption.
- (ii) Although PCA/kPCA can help reduce the redundant information, they also incur the loss of some information which leads to the worse performance compared to perceptron without PCA/kPCA.

## 5 Appendix

Summary of Used Algorithms

Method	kNN	SVM	LR	PCT
Acc	0.9135	0.941	0.8705	0.8585
Best PCA Acc	0.93	0.952	0.878	0.6695
Best sig-kPCA Acc	0.8925	0.9155	0.878	0.8425
Best rbf-kPCA Acc	0.892	0.915	0.8775	0.8465