


R1.1 Representative learning-method comparison on case33bw_ds
Lin-style learns one static polygon per sampled operating condition

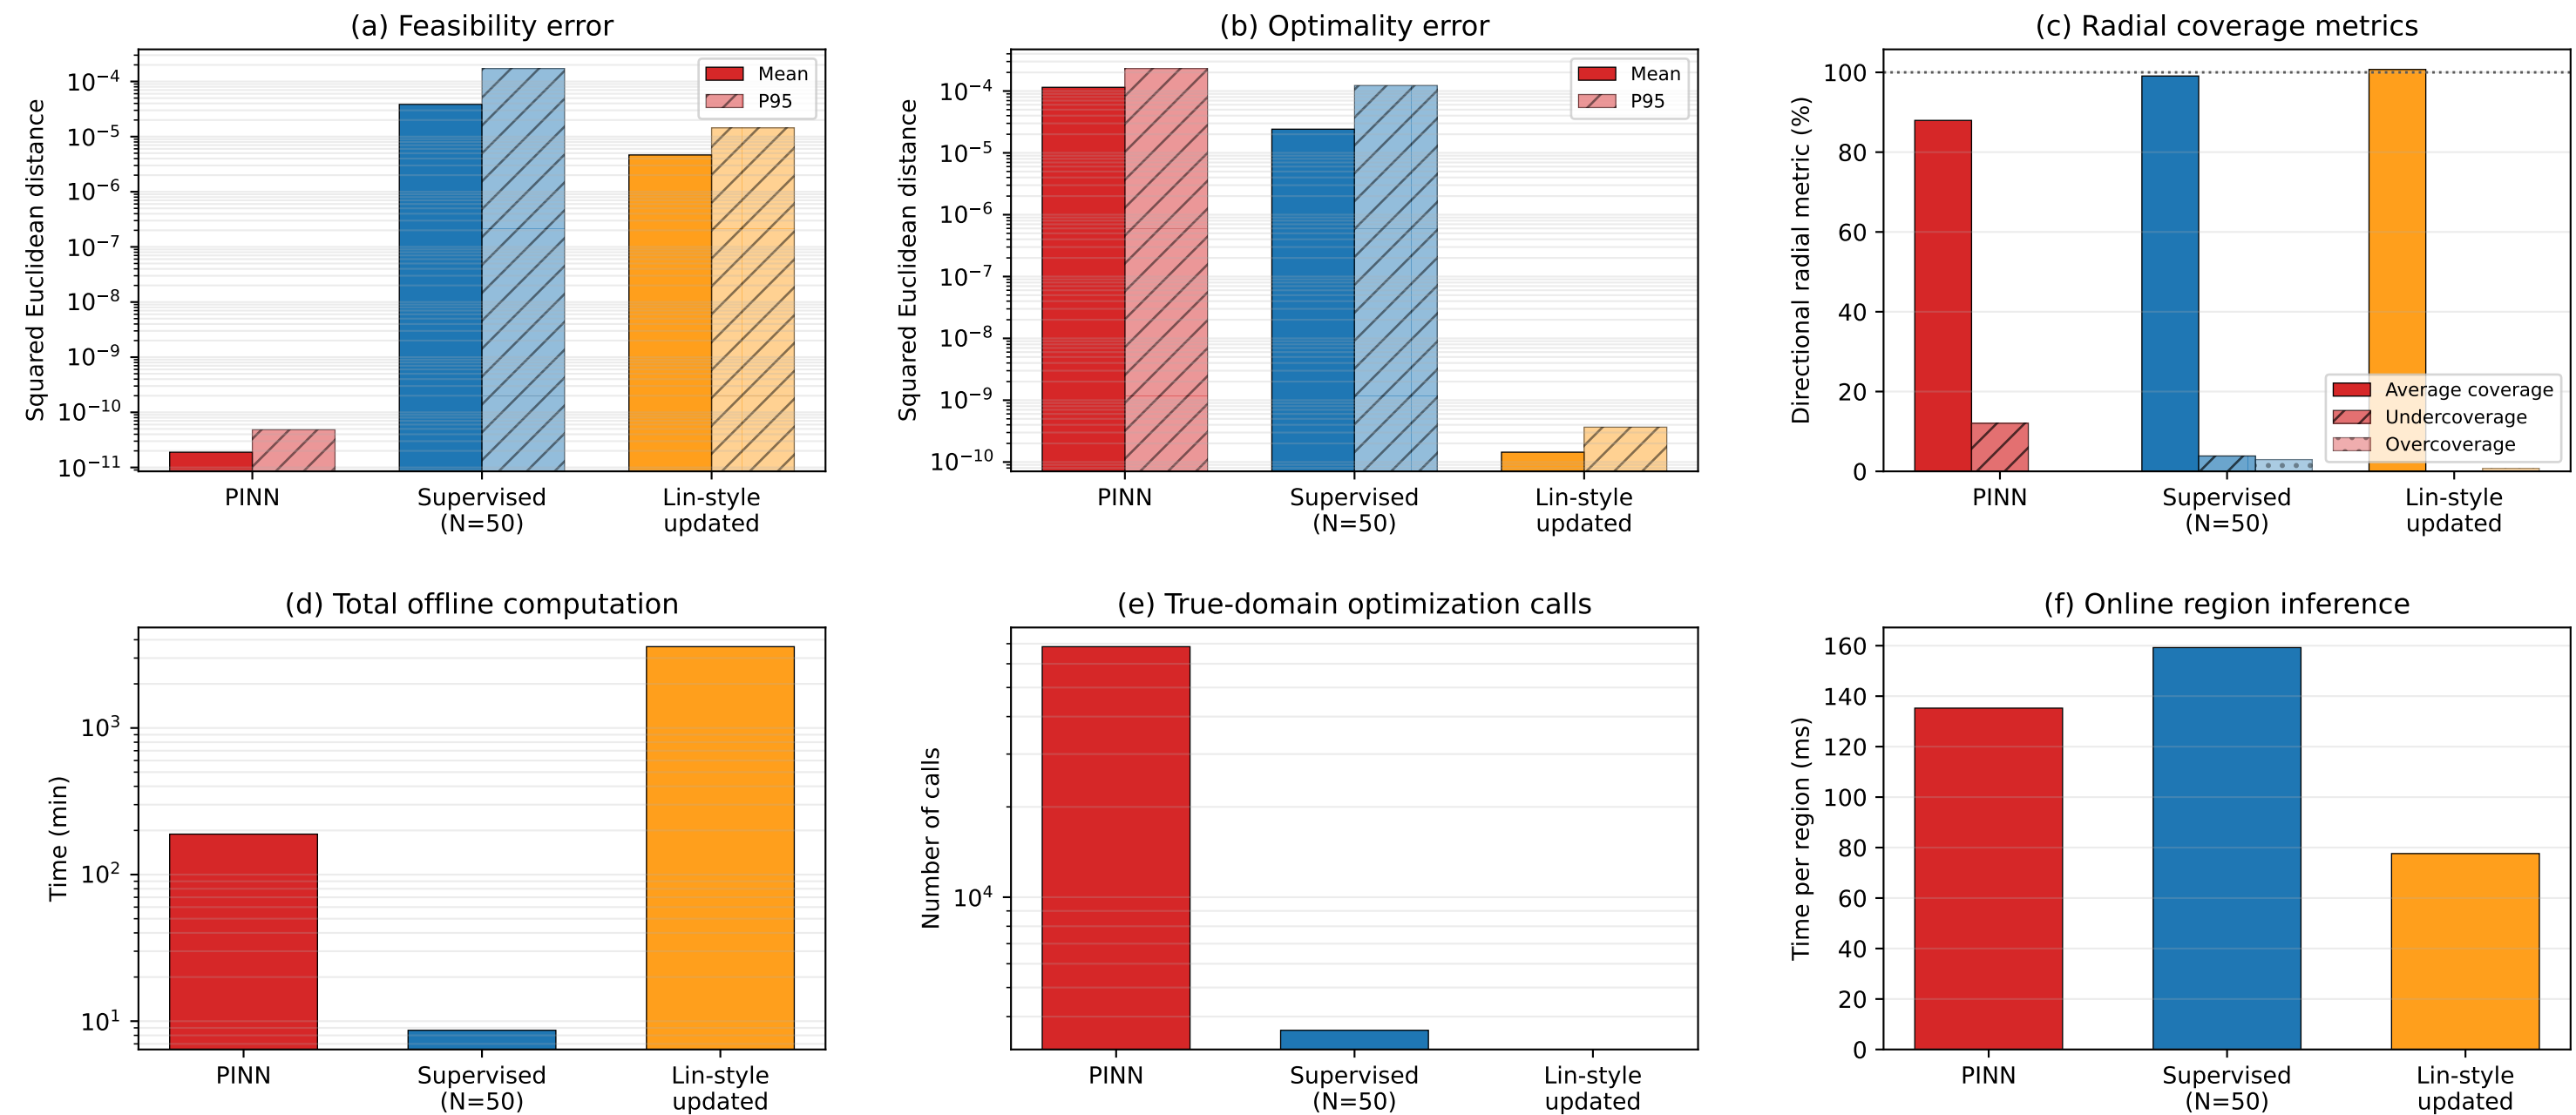

Training information is method-specific; true-domain optimization calls and total offline time are reported. The Lin-style independent-condition method uses pointwise labels, the supervised model uses complete 36-direction support-point labels, and PINN uses directional physics optimization during training. Online time follows the original manuscript's single end-to-end forward-pass protocol (model loading excluded).