

Pandas

The *pandas* package is the one of the most important tool at the disposal of Data Scientists today. The powerful machine learning and beautiful visualization tools may get all the praise, but *pandas* is the base of most data projects.

[*pandas*] is derived from the term "**panel data**", an econometrics term for data sets that include observations over multiple time periods for the same individuals. — [Wikipedia](https://en.wikipedia.org/wiki/Pandas_%28software%29)
(https://en.wikipedia.org/wiki/Pandas_%28software%29)

This notebook is modified from the Jupyter notebook located at <https://github.com/LearnDataSci/article-resources/tree/master/Python%20Pandas%20Tutorial%20A%20Complete%20Introduction%20for> (<https://github.com/LearnDataSci/article-resources/tree/master/Python%20Pandas%20Tutorial%20A%20Complete%20Introduction%20for>)

What's Pandas for?

This tool is essentially your data's home. Through *pandas*, you get acquainted with your data by cleaning, transforming, and analyzing it.

For example, say you want to explore a dataset stored in a CSV on your computer. *Pandas* will extract the data from that CSV into a *DataFrame* — a table, basically — then let you do things like:

- Calculate statistics and answer questions about the data, like
 - What's the average, median, max, or min of each column?
 - Does column A correlate with column B?
 - What does the distribution of data in column C look like?
- Clean the data by doing things like removing missing values and filtering rows or columns by some criteria
- Visualize the data with help from Matplotlib. Plot bars, lines, histograms, bubbles, and more.
- Store the cleaned, transformed data back into a CSV, other file or database

Before you jump into the modeling or the complex visualizations you need to have a good understanding of the nature of your dataset and *pandas* is the best avenue through which to do that.

How does *pandas* fit into the data science toolkit?

Not only is the *pandas* library a central component of the data science toolkit but it is used in conjunction with other libraries in that collection.

Pandas is built on top of the **NumPy** package, meaning a lot of the structure of NumPy is used or replicated in Pandas. Data in pandas is often used to feed statistical analysis in **SciPy**, plotting functions from **Matplotlib**, and machine learning algorithms in **Scikit-learn**.

Jupyter Notebooks offer a good environment for using pandas to do data exploration and modeling, but pandas can also be used in text editors just as easily.

Jupyter Notebooks give us the ability to execute code in a particular cell as opposed to running the entire file. This saves a lot of time when working with large datasets and complex transformations. Notebooks also provide an easy way to visualize pandas' DataFrames and plots. As a matter of fact, this article was created entirely in a Jupyter Notebook.

When should you start using pandas?

If you do not have any experience coding in Python, then you should stay away from learning pandas until you do. You don't have to be at the level of the software engineer, but you should be adept at the basics, such as lists, tuples, dictionaries, functions, and iterations. Also, I'd also recommend familiarizing yourself with **NumPy** due to the similarities mentioned above.

Pandas First Steps

Install and import

Pandas is an easy package to install. Open up your terminal program (for Mac users) or command line (for PC users) and install it using either of the following commands:

```
conda install pandas
```

OR

```
pip install pandas
```

Alternatively, if you're currently viewing this article in a Jupyter notebook you can run this cell:, uncomment it to proceed.

```
In [0]: #!pip install pandas or conda install -c anaconda pandas in the terminal
```

The `!` at the beginning runs cells as if they were in a terminal.

To import pandas we usually import it with a shorter name since it's used so much:

```
In [3]: import pandas as pd
```

Now to the basic components of pandas.

Core components of pandas: Series and DataFrames

The primary two components of pandas are the `Series` and `DataFrame`.

A `Series` is essentially a column, and a `DataFrame` is a multi-dimensional table made up of a collection of `Series`.



`DataFrames` and `Series` are quite similar in that many operations that you can do with one you can do with the other, such as filling in null values and calculating the mean.

You'll see how these components work when we start working with data below.



Creating DataFrames from scratch

Creating `DataFrames` right in Python is good to know and quite useful when testing new methods and functions you find in the pandas docs.

There are *many* ways to create a `DataFrame` from scratch, but a great option is to just use a simple `dict`.

Let's say we have a fruit stand that sells apples and oranges. We want to have a column for each fruit and a row for each customer purchase. To organize this as a dictionary for pandas we could do something like:

```
In [1]: data = {
        'apples': [3, 2, 0, 1],
        'oranges': [0, 3, 7, 2]
    }
```

And then pass it to the pandas `DataFrame` constructor:

```
In [4]: purchases = pd.DataFrame(data)

purchases
```

```
Out[4]:
```

	apples	oranges
0	3	0
1	2	3
2	0	7
3	1	2

How did that work?

Each (*key*, *value*) item in `data` corresponds to a *column* in the resulting `DataFrame`.

The **index** of this DataFrame was given to us on creation as the numbers 0-3, but we could also create our own when we initialize the DataFrame.

Let's have customer names as our index:

```
In [5]: purchases = pd.DataFrame(data, index=['June', 'Robert', 'Lily', 'David'])
purchases
```

```
Out[5]:
```

	apples	oranges
June	3	0
Robert	2	3
Lily	0	7
David	1	2

So now we could **locate** a customer's order by using their name:

```
In [6]: purchases.loc['June']
```

```
Out[6]: apples      3
oranges      0
Name: June, dtype: int64
```

There's more on locating and extracting data from the DataFrame later, but now you should be able to create a DataFrame with any random data to learn on.

Let's move on to some quick methods for creating DataFrames from various other sources.

How to read in data

It's quite simple to load data from various file formats into a DataFrame. In the following examples we'll keep using our apples and oranges data, but this time it's coming from various files.

Reading data from CSVs

With CSV files all you need is a single line to load in the data:

```
In [11]: df = pd.read_csv('./Data files/purchases.csv')
```

```
df
```

```
Out[11]:
```

	Unnamed: 0	apples	oranges
0	June	3	0
1	Robert	2	3
2	Lily	0	7
3	David	1	2

CSVs don't have indexes like our DataFrames, so all we need to do is just designate the `index_col` when reading:

```
In [13]: df = pd.read_csv('./Data files/purchases.csv', index_col=0)
```

```
df
```

```
Out[13]:
```

	apples	oranges
June	3	0
Robert	2	3
Lily	0	7
David	1	2

Here we're setting the index to be column zero.

You'll find that most CSVs won't ever have an index column and so usually you don't have to worry about this step.

Reading data from JSON

If you have a JSON file — which is essentially a stored Python `dict` — pandas can read this just as easily:

```
In [14]: df = pd.read_json('./Data files/purchases.json')
```

```
df
```

```
Out[14]:
```

	apples	oranges
June	3	0
Robert	2	3
Lily	0	7
David	1	2

Notice this time our index came with us correctly since using JSON allowed indexes to work through nesting. Feel free to open `data_file.json` in a notepad so you can see how it works.

Pandas will try to figure out how to create a DataFrame by analyzing structure of your JSON, and sometimes it doesn't get it right. Often you'll need to set the `orient` keyword argument depending on the structure, so check out [read_json docs \(https://pandas.pydata.org/pandas-docs/stable/generated/pandas.read_json.html\)](https://pandas.pydata.org/pandas-docs/stable/generated/pandas.read_json.html) about that argument to see which orientation you're using.

Reading data from a SQL database

If you're working with data from a SQL database you need to first establish a connection using an appropriate Python library, then pass a query to pandas. Here we'll use SQLite to demonstrate.

First, we need `pysqlite3` installed, so run this command in your terminal:

```
pip install pysqlite3
```

Or run this cell if you're in a notebook:

```
In [0]: #!/pip install pysqlite3 or conda install -c blaze sqlite3 in the terminal
```

`sqlite3` is used to create a connection to a database which we can then use to generate a DataFrame through a `SELECT` query.

So first we'll make a connection to a SQLite database file:

```
In [18]: import sqlite3  
con = sqlite3.connect("./Data files/database.db")
```

Note: If you have data in PostgreSQL, MySQL, or some other SQL server, you'll need to obtain the right Python library to make a connection. For example, `psycopg2` ([link \(http://initd.org/psycopg/download/\)](http://initd.org/psycopg/download/)) is a commonly used library for making connections to PostgreSQL. Furthermore, you would make a connection to a database URI instead of a file like we did here with SQLite.

In this SQLite database we have a table called *purchases*, and our index is in a column called "index".

By passing a `SELECT` query and our `con`, we can read from the *purchases* table:

```
In [19]: df = pd.read_sql_query("SELECT * FROM purchases", con)
```

```
df
```

```
Out[19]:
```

	index	apples	oranges
0	June	3	0
1	Robert	2	3
2	Lily	0	7
3	David	1	2

Just like with CSVs, we could pass `index_col='index'` , but we can also set an index after-the-fact:

```
In [20]: df = df.set_index('index')
```

```
df
```

```
Out[20]:
```

	apples	oranges
index		
June	3	0
Robert	2	3
Lily	0	7
David	1	2

In fact, we could use `set_index()` on *any* DataFrame using *any* column at *any* time. Indexing Series and DataFrames is a very common task, and the different ways of doing it is worth remembering.

Converting back to a CSV, JSON, or SQL

So after extensive work on cleaning your data, you're now ready to save it as a file of your choice. Similar to the ways we read in data, pandas provides intuitive commands to save it:

```
In [22]: df.to_csv('new_purchases.csv')
```

```
df.to_json('new_purchases.json')
```

```
df.to_sql('new_purchases1', con)
```

```
Out[22]: 4
```

When we save JSON and CSV files, all we have to input into those functions is our desired filename with the appropriate file extension. With SQL, we're not creating a new file but instead inserting a new table into the database using our `con` variable from before.

Let's move on to importing some real-world data and detailing a few of the operations you'll be using a lot.

Most important DataFrame operations

DataFrames possess hundreds of methods and other operations that are crucial to any analysis. As a beginner, you should know the operations that perform simple transformations of your data and those that provide fundamental statistical analysis.

```
In [24]: movies_df = pd.read_csv("../Data files/IMDB-Movie-Data.csv", index_col="Title")
```

We're loading this dataset from a CSV and designating the movie titles to be our index.

Viewing your data

The first thing to do when opening a new dataset is print out a few rows to keep as a visual reference. We accomplish this with `.head()` :

```
In [25]: movies_df.head()
```

Out[25]:

	Rank	Genre	Description	Director	Actors	Year	F
Title							(M)
Guardians of the Galaxy	1	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	James Gunn	Chris Pratt, Vin Diesel, Bradley Cooper, Zoe S...	2014	
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	
Split	3	Horror,Thriller	Three girls are kidnapped by a man with a diag...	M. Night Shyamalan	James McAvoy, Anya Taylor-Joy, Haley Lu Richar...	2016	
Sing	4	Animation,Comedy,Family	In a city of humanoid animals, a hustling thea...	Christophe Lourdelet	Matthew McConaughey,Reese Witherspoon, Seth Ma...	2016	
Suicide Squad	5	Action,Adventure,Fantasy	A secret government agency recruits some of th...	David Ayer	Will Smith, Jared Leto, Margot Robbie, Viola D...	2016	

`.head()` outputs the **first** five rows of your DataFrame by default, but we could also pass a number as well: `movies_df.head(10)` would output the top ten rows, for example.

To see the **last** five rows use `.tail()`. `tail()` also accepts a number, and in this case we printing the bottom two rows.:

In [0]: `movies_df.tail(2)`

Out[39]:

	Rank	Genre	Description	Director	Actors	Year	Runtime (Minutes)	F
Title								
Search Party	999	Adventure,Comedy	A pair of friends embark on a mission to reuni...	Scot Armstrong	Adam Pally, T.J. Miller, Thomas Middleditch,Sh...	2014	93	
Nine Lives	1000	Comedy,Family,Fantasy	A stuffy businessman finds himself trapped ins...	Barry Sonnenfeld	Kevin Spacey, Jennifer Garner, Robbie Amell,Ch...	2016	87	

Typically when we load in a dataset, we like to view the first five or so rows to see what's under the hood. Here we can see the names of each column, the index, and examples of values in each row.

You'll notice that the index in our DataFrame is the *Title* column, which you can tell by how the word *Title* is slightly lower than the rest of the columns.

Getting info about your data

`.info()` should be one of the very first commands you run after loading your data:

```
In [26]: movies_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Index: 1000 entries, Guardians of the Galaxy to Nine Lives
Data columns (total 11 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Rank                  1000 non-null   int64
1   Genre                 1000 non-null   object
2   Description           1000 non-null   object
3   Director              1000 non-null   object
4   Actors                1000 non-null   object
5   Year                  1000 non-null   int64
6   Runtime (Minutes)     1000 non-null   int64
7   Rating                1000 non-null   float64
8   Votes                 1000 non-null   int64
9   Revenue (Millions)    872 non-null    float64
10  Metascore             936 non-null    float64
dtypes: float64(3), int64(4), object(4)
memory usage: 93.8+ KB
```

`.info()` provides the essential details about your dataset, such as the number of rows and columns, the number of non-null values, what type of data is in each column, and how much memory your DataFrame is using.

Notice in our movies dataset we have some obvious missing values in the `Revenue` and `Metascore` columns. We'll look at how to handle those in a bit.

Seeing the datatype quickly is actually quite useful. Imagine you just imported some JSON and the integers were recorded as strings. You go to do some arithmetic and find an "unsupported operand" Exception because you can't do math with strings. Calling `.info()` will quickly point out that your column you thought was all integers are actually string objects.

Another fast and useful attribute is `.shape`, which outputs just a tuple of (rows, columns):

```
In [27]: movies_df.shape
```

```
Out[27]: (1000, 11)
```

Note that `.shape` has no parentheses and is a simple tuple of format (rows, columns). So we have **1000 rows** and **11 columns** in our movies DataFrame.

You'll be going to `.shape` a lot when cleaning and transforming data. For example, you might filter some rows based on some criteria and then want to know quickly how many rows were removed.

Handling duplicates

This dataset does not have duplicate rows, but it is always important to verify you aren't aggregating duplicate rows.

To demonstrate, let's simply just double up our movies DataFrame by appending it to itself:

```
In [32]: temp_df = movies_df.append(movies_df)

temp_df.shape
```

```
C:\Users\Asus\AppData\Local\Temp\ipykernel_12236\3236548275.py:1: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.
  temp_df = movies_df.append(movies_df)
```

```
Out[32]: (2000, 11)
```

Using `append()` will return a copy without affecting the original DataFrame. We are capturing this copy in `temp` so we aren't working with the real data.

Notice call `.shape` quickly proves our DataFrame rows have doubled.

Now we can try dropping duplicates:

```
In [38]: # temp_df = temp_df.drop_duplicates()

# temp_df.shape

temp_df = pd.concat([movies_df,movies_df])
temp_df.shape
```

```
Out[38]: (2000, 11)
```

Just like `append()`, the `drop_duplicates()` method will also return a copy of your DataFrame, but this time with duplicates removed. Calling `.shape` confirms we're back to the 1000 rows of our original dataset.

It's a little verbose to keep assigning DataFrames to the same variable like in this example. For this reason, pandas has the `inplace` keyword argument on many of its methods. Using `inplace=True` will modify the DataFrame object in place:

```
In [39]: temp_df.drop_duplicates(inplace=True)
```

Now our `temp_df` will have the transformed data automatically.

Another important argument for `drop_duplicates()` is `keep`, which has three possible options:

- `first` : (default) Drop duplicates except for the first occurrence.
- `last` : Drop duplicates except for the last occurrence.
- `False` : Drop all duplicates.

Since we didn't define the `keep` argument in the previous example it was defaulted to `first`. This means that if two rows are the same pandas will drop the second row and keep the first row. Using `last` has the opposite effect: the first row is dropped.

keep , on the other hand, will drop all duplicates. If two rows are the same then both will be dropped. Watch what happens to temp_df .

```
In [41]: temp_df = pd.concat([movies_df,movies_df]) # make a new copy

temp_df.drop_duplicates(inplace=True, keep=False)

temp_df.shape
```

Out[41]: (0, 11)

Since all rows were duplicates, keep=False dropped them all resulting in zero rows being left over. If you're wondering why you would want to do this, one reason is that it allows you to locate all duplicates in your dataset. When conditional selections are shown below you'll see how to do that.

Column cleanup

Many times datasets will have verbose column names with symbols, upper and lowercase words, spaces, and typos. To make selecting data by column name easier we can spend a little time cleaning up their names.

Here's how to print the column names of our dataset:

```
In [42]: movies_df.columns
```

Out[42]: Index(['Rank', 'Genre', 'Description', 'Director', 'Actors', 'Year', 'Runtime (Minutes)', 'Rating', 'Votes', 'Revenue (Millions)', 'Metascore'], dtype='object')

Not only does .columns come in handy if you want to rename columns by allowing for simple copy and paste, it's also useful if you need to understand why you are receiving a Key Error when selecting data by column.

We can use the .rename() method to rename certain or all columns via a dict . We don't want parentheses, so let's rename those:

```
In [0]: movies_df.rename(columns={
    'Runtime (Minutes)': 'Runtime',
    'Revenue (Millions)': 'Revenue_millions'
}, inplace=True)

movies_df.columns
```

Out[47]: Index(['Rank', 'Genre', 'Description', 'Director', 'Actors', 'Year', 'Runtime', 'Rating', 'Votes', 'Revenue_millions', 'Metascore'], dtype='object')

Excellent. But what if we want to lowercase all names? Instead of using `.rename()` we could also set a list of names to the columns like so:

```
In [44]: movies_df.columns = ['rank', 'genre', 'description', 'director', 'actors', 'year',  
                             'rating', 'votes', 'revenue_millions', 'metascore']  
  
movies_df.columns
```

```
Out[44]: Index(['rank', 'genre', 'description', 'director', 'actors', 'year', 'runtime',  
               'rating', 'votes', 'revenue_millions', 'metascore'],  
              dtype='object')
```

But that's too much work. Instead of just renaming each column manually we can do a list comprehension:

```
In [43]: movies_df.columns = [col.lower() for col in movies_df]  
  
movies_df.columns
```

```
Out[43]: Index(['rank', 'genre', 'description', 'director', 'actors', 'year',  
               'runtime (minutes)', 'rating', 'votes', 'revenue (millions)',  
               'metascore'],  
              dtype='object')
```

list (and dict) comprehensions come in handy a lot when working with pandas and data in general.

It's a good idea to lowercase, remove special characters, and replace spaces with underscores if you'll be working with a dataset for some time.

How to work with missing values

When exploring data, you'll most likely encounter missing or null values, which are essentially placeholders for non-existent values. Most commonly you'll see Python's `None` or NumPy's `np.nan`, each of which are handled differently in some situations.

There are two options in dealing with nulls:

1. Get rid of rows or columns with nulls
2. Replace nulls with non-null values, a technique known as **imputation**

Let's calculate the total number of nulls in each column of our dataset. The first step is to check which cells in our DataFrame are null:

```
In [45]: movies_df.isnull()
```

```
Out[45]:
```

	rank	genre	description	director	actors	year	runtime	rating	votes	revenue_m
Title										
Guardians of the Galaxy	False	False	False	False	False	False	False	False	False	False
Prometheus	False	False	False	False	False	False	False	False	False	False
Split	False	False	False	False	False	False	False	False	False	False
Sing	False	False	False	False	False	False	False	False	False	False
Suicide Squad	False	False	False	False	False	False	False	False	False	False
...
Secret in Their Eyes	False	False	False	False	False	False	False	False	False	False
Hostel: Part II	False	False	False	False	False	False	False	False	False	False
Step Up 2: The Streets	False	False	False	False	False	False	False	False	False	False
Search Party	False	False	False	False	False	False	False	False	False	False
Nine Lives	False	False	False	False	False	False	False	False	False	False

1000 rows × 11 columns

Notice `isnull()` returns a DataFrame where each cell is either True or False depending on that cell's null status.

To count the number of nulls in each column we use an aggregate function for summing:

```
In [46]: movies_df.isnull().sum()
```

```
Out[46]: rank          0
genre              0
description        0
director           0
actors             0
year              0
runtime           0
rating            0
votes             0
revenue_millions  128
metascore         64
dtype: int64
```

`.isnull()` just by itself isn't very useful, and is usually used in conjunction with other methods, like `sum()`.

We can see now that our data has **128** missing values for `revenue_millions` and **64** missing values for `metascore` .

Removing null values

Data Scientists and Analysts regularly face the dilemma of dropping or imputing null values, and is a decision that requires intimate knowledge of your data and its context. Overall, removing null data is only suggested if you have a small amount of missing data.

Remove nulls is pretty simple:

In [48]: `movies_df.dropna()`

Out[48]:

	rank	genre	description	director	actors	year	r
Title							
Guardians of the Galaxy	1	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	James Gunn	Chris Pratt, Vin Diesel, Bradley Cooper, Zoe S...	2014	
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	
Split	3	Horror,Thriller	Three girls are kidnapped by a man with a diag...	M. Night Shyamalan	James McAvoy, Anya Taylor-Joy, Haley Lu Richar...	2016	
Sing	4	Animation,Comedy,Family	In a city of humanoid animals, a hustling thea...	Christophe Lourdelet	Matthew McConaughey,Reese Witherspoon, Seth Ma...	2016	
Suicide Squad	5	Action,Adventure,Fantasy	A secret government agency recruits some of th...	David Ayer	Will Smith, Jared Leto, Margot Robbie, Viola D...	2016	
...
Resident Evil: Afterlife	994	Action,Adventure,Horror	While still out to destroy the evil Umbrella C...	Paul W.S. Anderson	Milla Jovovich, Ali Larter, Wentworth Miller,K...	2010	
Project X	995	Comedy	3 high school seniors throw a birthday party t...	Nima Nourizadeh	Thomas Mann, Oliver Cooper, Jonathan Daniel Br...	2012	
Hostel: Part II	997	Horror	Three American college students studying abroa...	Eli Roth	Lauren German, Heather Matarazzo, Bijou Philli...	2007	
Step Up 2: The Streets	998	Drama,Music,Romance	Romantic sparks occur between two dance studen...	Jon M. Chu	Robert Hoffman, Briana Evigan, Cassie Ventura,...	2008	
Nine Lives	1000	Comedy,Family,Fantasy	A stuffy businessman finds himself trapped ins...	Barry Sonnenfeld	Kevin Spacey, Jennifer Garner, Robbie Amell,Ch...	2016	

838 rows × 11 columns



This operation will delete any **row** with at least a single null value, but it will return a new DataFrame without altering the original one. You could specify `inplace=True` in this method as well.

So in the case of our dataset, this operation would remove 128 rows where `revenue_millions` is null and 64 rows where `metascore` is null. This obviously seems like a waste since there's perfectly good data in the other columns of those dropped rows. That's why we'll look at imputation next.

Other than just dropping rows, you can also drop columns with null values by setting `axis=1` :

```
In [49]: movies_df.dropna(axis=1)
```

Out[49]:

	rank	genre	description	director	actors	year	ri
Title							
Guardians of the Galaxy	1	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	James Gunn	Chris Pratt, Vin Diesel, Bradley Cooper, Zoe S...	2014	
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	
Split	3	Horror,Thriller	Three girls are kidnapped by a man with a diag...	M. Night Shyamalan	James McAvoy, Anya Taylor-Joy, Haley Lu Richar...	2016	
Sing	4	Animation,Comedy,Family	In a city of humanoid animals, a hustling thea...	Christophe Lourdelet	Matthew McConaughey,Reese Witherspoon, Seth Ma...	2016	
Suicide Squad	5	Action,Adventure,Fantasy	A secret government agency recruits some of th...	David Ayer	Will Smith, Jared Leto, Margot Robbie, Viola D...	2016	
...
Secret in Their Eyes	996	Crime,Drama,Mystery	A tight-knit team of rising investigators, alo...	Billy Ray	Chiwetel Ejiofor, Nicole Kidman, Julia Roberts...	2015	
Hostel: Part II	997	Horror	Three American college students studying abroa...	Eli Roth	Lauren German, Heather Matarazzo, Bijou Philli...	2007	
Step Up 2: The Streets	998	Drama,Music,Romance	Romantic sparks occur between two dance studen...	Jon M. Chu	Robert Hoffman, Briana Evigan, Cassie Ventura,...	2008	
Search Party	999	Adventure,Comedy	A pair of friends embark on a mission to reuni...	Scot Armstrong	Adam Pally, T.J. Miller, Thomas Middleditch,Sh...	2014	
Nine Lives	1000	Comedy,Family,Fantasy	A stuffy businessman finds himself trapped ins...	Barry Sonnenfeld	Kevin Spacey, Jennifer Garner, Robbie Amell,Ch...	2016	

1000 rows × 9 columns



In our dataset, this operation would drop the `revenue_millions` and `metascore` columns.

Intuition side note: What's with this `axis=1` parameter?

It's not immediately obvious where `axis` comes from and why you need it to be 1 for it to affect columns. To see why, just look at the `.shape` output:

```
In [50]: movies_df.shape
```

```
Out[50]: (1000, 11)
```

As we learned above, this is a tuple that represents the shape of the DataFrame, i.e. 1000 rows and 11 columns. Note that the *rows* are at index zero of this tuple and *columns* are at **index one** of this tuple. This is why `axis=1` affects columns. This comes from NumPy, and is a great example of why learning NumPy is worth your time.

Imputation

Imputation is a conventional feature engineering technique used to keep valuable data that have null values.

There may be instances where dropping every row with a null value removes too big a chunk from your dataset, so instead we can impute that null with another value, usually the **mean** or the **median** of that column.

Let's look at imputing the missing values in the `revenue_millions` column. First we'll extract that column into its own variable:

```
In [52]: revenue = movies_df['revenue_millions']
```

Using square brackets is the general way we select columns in a DataFrame.

If you remember back to when we created DataFrames from scratch, the keys of the `dict` ended up as column names. Now when we select columns of a DataFrame, we use brackets just like if we were accessing a Python dictionary.

`revenue` now contains a Series:

```
In [53]: revenue.head()
```

```
Out[53]: Title
Guardians of the Galaxy    333.13
Prometheus                 126.46
Split                     138.12
Sing                       270.32
Suicide Squad              325.02
Name: revenue_millions, dtype: float64
```

Slightly different formatting than a DataFrame, but we still have our `Title` index.

We'll impute the missing values of revenue using the mean. Here's the mean value:

```
In [55]: revenue_mean = revenue.mean()

revenue_mean
```

```
Out[55]: 82.95637614678898
```

With the mean, let's fill the nulls using `fillna()` :

```
In [56]: revenue.fillna(revenue_mean, inplace=True)
```

We have now replaced all nulls in `revenue` with the mean of the column. Notice that by using `inplace=True` we have actually affected the original `movies_df` :

```
In [57]: movies_df.isnull().sum()
```

```
Out[57]: rank                0
genre                0
description          0
director            0
actors              0
year                0
runtime             0
rating              0
votes               0
revenue_millions    0
metascore           64
dtype: int64
```

Imputing an entire column with the same value like this is a basic example. It would be a better idea to try a more granular imputation by Genre or Director.

For example, you would find the mean of the revenue generated in each genre individually and impute the nulls in each genre with that genre's mean.

Let's now look at more ways to examine and understand the dataset.

Understanding your variables

Using `describe()` on an entire DataFrame we can get a summary of the distribution of continuous variables:

In [59]: `movies_df.describe()`

Out[59]:

	rank	year	runtime	rating	votes	revenue_millions	met
count	1000.000000	1000.000000	1000.000000	1000.000000	1.000000e+03	1000.000000	936.0
mean	500.500000	2012.783000	113.172000	6.723200	1.698083e+05	82.956376	58.9
std	288.819436	3.205962	18.810908	0.945429	1.887626e+05	96.412043	17.1
min	1.000000	2006.000000	66.000000	1.900000	6.100000e+01	0.000000	11.0
25%	250.750000	2010.000000	100.000000	6.200000	3.630900e+04	17.442500	47.0
50%	500.500000	2014.000000	111.000000	6.800000	1.107990e+05	60.375000	59.5
75%	750.250000	2016.000000	123.000000	7.400000	2.399098e+05	99.177500	72.0
max	1000.000000	2016.000000	191.000000	9.000000	1.791916e+06	936.630000	100.0

Understanding which numbers are continuous also comes in handy when thinking about the type of plot to use to represent your data visually.

`.describe()` can also be used on a categorical variable to get the count of rows, unique count of categories, top category, and freq of top category:

In [63]: `movies_df.describe(include='object')`

Out[63]:

	genre	description	director	actors
count	1000	1000	1000	1000
unique	207	1000	644	996
top	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	Ridley Scott	Jennifer Lawrence, Josh Hutcherson, Liam Hemsw...
freq	50	1	8	2

In [64]: `movies_df['genre'].describe()`

Out[64]:

```
count          1000
unique          207
top    Action,Adventure,Sci-Fi
freq           50
Name: genre, dtype: object
```

This tells us that the genre column has 207 unique values, the top value is Action/Adventure/Sci-Fi, which shows up 50 times (freq).

`.value_counts()` can tell us the frequency of all values in a column:

```
In [66]: movies_df['genre'].value_counts().head(10)
```

```
Out[66]: Action,Adventure,Sci-Fi      50
Drama                                48
Comedy,Drama,Romance                 35
Comedy                               32
Drama,Romance                        31
Animation,Adventure,Comedy           27
Action,Adventure,Fantasy              27
Comedy,Drama                         27
Comedy,Romance                       26
Crime,Drama,Thriller                 24
Name: genre, dtype: int64
```

Relationships between continuous variables

By using the correlation method `.corr()` we can generate the relationship between each continuous variable:

```
In [62]: movies_df.corr()
```

C:\Users\Asus\AppData\Local\Temp\ipykernel_12236\4127630518.py:1: FutureWarning: The default value of numeric_only in DataFrame.corr is deprecated. In a future version, it will default to False. Select only valid columns or specify the value of numeric_only to silence this warning.

```
movies_df.corr()
```

```
Out[62]:
```

	rank	year	runtime	rating	votes	revenue_millions	metascore
rank	1.000000	-0.261605	-0.221739	-0.219555	-0.283876	-0.252996	-0.191869
year	-0.261605	1.000000	-0.164900	-0.211219	-0.411904	-0.117562	-0.079305
runtime	-0.221739	-0.164900	1.000000	0.392214	0.407062	0.247834	0.211978
rating	-0.219555	-0.211219	0.392214	1.000000	0.511537	0.189527	0.631897
votes	-0.283876	-0.411904	0.407062	0.511537	1.000000	0.607941	0.325684
revenue_millions	-0.252996	-0.117562	0.247834	0.189527	0.607941	1.000000	0.133328
metascore	-0.191869	-0.079305	0.211978	0.631897	0.325684	0.133328	1.000000

Correlation tables are a numerical representation of the bivariate relationships in the dataset.

Positive numbers indicate a positive correlation — one goes up the other goes up — and negative numbers represent an inverse correlation — one goes up the other goes down. 1.0 indicates a perfect correlation.

So looking in the first row, first column we see `rank` has a perfect correlation with itself, which is obvious. On the other hand, the correlation between `votes` and `revenue_millions` is 0.6. A little more interesting.

Examining bivariate relationships comes in handy when you have an outcome or dependent variable in mind and would like to see the features most correlated to the increase or decrease of the outcome. You can visually represent bivariate relationships with scatterplots (seen below in the plotting section).

For a deeper look into data summarizations check out [Essential Statistics for Data Science](https://www.learndatasci.com/tutorials/data-science-statistics-using-python/) (<https://www.learndatasci.com/tutorials/data-science-statistics-using-python/>).

DataFrame slicing, selecting, extracting

Up until now we've focused on some basic summaries of our data. We've learned about simple column extraction using single brackets, and we imputed null values in a column using `fillna()`. Below are the other methods of slicing, selecting, and extracting you'll need to use constantly.

It's important to note that, although many methods are the same, DataFrames and Series have different attributes, so you'll need be sure to know which type you are working with or else you will receive attribute errors.

Let's look at working with columns first.

By column

You already saw how to extract a column using square brackets like this:

```
In [68]: genre_col = movies_df['genre']  
  
         type(genre_col)
```

```
Out[68]: pandas.core.series.Series
```

This will return a *Series*. To extract a column as a *DataFrame*, you need to pass a list of column names. In our case that's just a single column:

```
In [0]: genre_col = movies_df[['genre']]  
  
         type(genre_col)
```

```
Out[65]: pandas.core.frame.DataFrame
```

Since it's just a list, adding another column name is easy:


```
In [69]: subset = movies_df[['genre', 'rating']]
subset.head()
```

```
Out[69]:
```

	genre	rating
Guardians of the Galaxy	Action,Adventure,Sci-Fi	8.1
Prometheus	Adventure,Mystery,Sci-Fi	7.0
Split	Horror,Thriller	7.3
Sing	Animation,Comedy,Family	7.2
Suicide Squad	Action,Adventure,Fantasy	6.2

Now we'll look at getting data by rows.

By rows

For rows, we have two options:

- `.loc` - **loc**ates by name
- `.iloc` - **loc**ates by numerical index

Remember that we are still indexed by movie Title, so to use `.loc` we give it the Title of a movie:

```
In [71]: prom = movies_df.loc["Prometheus"]
prom
```

```
Out[71]: rank                2
genre                Adventure,Mystery,Sci-Fi
description    Following clues to the origin of mankind, a te...
director                Ridley Scott
actors    Noomi Rapace, Logan Marshall-Green, Michael Fa...
year                2012
runtime                124
rating                7.0
votes                485820
revenue_millions    126.46
metascore                65.0
Name: Prometheus, dtype: object
```

On the other hand, with `iloc` we give it the numerical index of Prometheus:

```
In [75]: prom = movies_df.iloc[1]
```

```
prom
```

```
Out[75]: rank                2
genre                Adventure,Mystery,Sci-Fi
description    Following clues to the origin of mankind, a te...
director                Ridley Scott
actors                Noomi Rapace, Logan Marshall-Green, Michael Fa...
year                2012
runtime                124
rating                7.0
votes                485820
revenue_millions    126.46
metascore                65.0
Name: Prometheus, dtype: object
```

`loc` and `iloc` can be thought of as similar to Python `list` slicing. To show this even further, let's select multiple rows.

How would you do it with a list? In Python, just slice with brackets like `example_list[1:4]`. It's works the same way in pandas:

```
In [77]: movie_subset = movies_df.loc['Prometheus':'Sing']
```

```
# movie_subset = movies_df.iloc[1:4]
```

```
movie_subset
```

```
Out[77]:
```

	rank	genre	description	director	actors	year	ru
Title							
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	
Split	3	Horror,Thriller	Three girls are kidnapped by a man with a diag...	M. Night Shyamalan	James McAvoy, Anya Taylor-Joy, Haley Lu Richar...	2016	
Sing	4	Animation,Comedy,Family	In a city of humanoid animals, a hustling thea...	Christophe Lourdelet	Matthew McConaughey,Reese Witherspoon, Seth Ma...	2016	

One important distinction between using `.loc` and `.iloc` to select multiple rows is that `.loc` includes the movie *Sing* in the result, but when using `.iloc` we're getting rows 1:4 but the movie at index 4 (*Suicide Squad*) is not included.

Slicing with `.iloc` follows the same rules as slicing with lists, the object at the index at the end is not included.

Conditional selections

We've gone over how to select columns and rows, but what if we want to make a conditional selection?

For example, what if we want to filter our movies DataFrame to show only films directed by Ridley Scott or films with a rating greater than or equal to 8.0?

To do that, we take a column from the DataFrame and apply a Boolean condition to it. Here's an

```
In [78]: condition = (movies_df['director'] == "Ridley Scott")  
condition.head()
```

```
Out[78]: Title  
Guardians of the Galaxy    False  
Prometheus                 True  
Split                     False  
Sing                      False  
Suicide Squad              False  
Name: director, dtype: bool
```

Similar to `isnull()`, this returns a Series of True and False values: True for films directed by Ridley Scott and False for ones not directed by him.

We want to filter out all movies not directed by Ridley Scott, in other words, we don't want the False films. To return the rows where that condition is True we have to pass this operation into the DataFrame:

```
In [80]: movies_df[movies_df['director'] == "Ridley Scott"].head()
```

Out[80]:

	rank	genre	description	director	actors	year	runtime	rating
Title								
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	124	7
The Martian	103	Adventure,Drama,Sci-Fi	An astronaut becomes stranded on Mars after hi...	Ridley Scott	Matt Damon, Jessica Chastain, Kristen Wiig, Ka...	2015	144	8
Robin Hood	388	Action,Adventure,Drama	In 12th century England, Robin and his band of...	Ridley Scott	Russell Crowe, Cate Blanchett, Matthew Macfady...	2010	140	6
American Gangster	471	Biography,Crime,Drama	In 1970s America, a detective works to bring d...	Ridley Scott	Denzel Washington, Russell Crowe, Chiwetel Eji...	2007	157	7
Exodus: Gods and Kings	517	Action,Adventure,Drama	The defiant leader Moses rises up against the ...	Ridley Scott	Christian Bale, Joel Edgerton, Ben Kingsley, S...	2014	150	6
The Counselor	522	Crime,Drama,Thriller	A lawyer finds himself in over his head when h...	Ridley Scott	Michael Fassbender, Penélope Cruz, Cameron Dia...	2013	117	5
A Good Year	531	Comedy,Drama,Romance	A British investment broker inherits his uncle...	Ridley Scott	Russell Crowe, Abbie Cornish, Albert Finney, M...	2006	117	6

You can get used to looking at these conditionals by reading it like:

Select movies_df where movies_df director equals Ridley Scott

Let's look at conditional selections using numerical values by filtering the DataFrame by ratings:

```
In [81]: movies_df[movies_df['rating'] >= 8.6].head(3)
```

Out[81]:

	rank	genre	description	director	actors	year	runtime	rating
Title								
Interstellar	37	Adventure,Drama,Sci-Fi	A team of explorers travel through a wormhole in space in an attempt to ensure humanity's survival.	Christopher Nolan	Matthew McConaughey, Anne Hathaway, Jessica Chastain, ...	2014	169	8.6
The Dark Knight	55	Action,Crime,Drama	When the menace known as the Joker wreaks havoc and chaos on the people of Gotham, Batman must accept one of the greatest psychological and physical tests of his ability to fight injustice.	Christopher Nolan	Christian Bale, Heath Ledger, Aaron Eckhart, Michael Caine, ...	2008	152	9.0
Inception	81	Action,Adventure,Sci-Fi	A thief, who steals corporate secrets through the use of dream-sharing technology, is given the inverse task of planting an idea into the mind of a CEO.	Christopher Nolan	Leonardo DiCaprio, Joseph Gordon-Levitt, Ellen Page, ...	2010	148	8.8

We can make some richer conditionals by using logical operators `|` for "or" and `&` for "and".

Let's filter the the DataFrame to show only movies by Christopher Nolan OR Ridley Scott:

```
In [0]: movies_df[(movies_df['director'] == 'Christopher Nolan') | (movies_df['director'
```

Out[73]:

	rank	genre	description	director	actors	year	runtime	ra
Title								
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	124	
Interstellar	37	Adventure,Drama,Sci-Fi	A team of explorers travel through a wormhole ...	Christopher Nolan	Matthew McConaughey, Anne Hathaway, Jessica Ch...	2014	169	
The Dark Knight	55	Action,Crime,Drama	When the menace known as the Joker wreaks havo...	Christopher Nolan	Christian Bale, Heath Ledger, Aaron Eckhart,Mi...	2008	152	
The Prestige	65	Drama,Mystery,Sci-Fi	Two stage magicians engage in competitive one-...	Christopher Nolan	Christian Bale, Hugh Jackman, Scarlett Johanss...	2006	130	
Inception	81	Action,Adventure,Sci-Fi	A thief, who steals corporate secrets through ...	Christopher Nolan	Leonardo DiCaprio, Joseph Gordon-Levitt, Ellen...	2010	148	

We need to make sure to group evaluations with parentheses so Python knows how to evaluate the conditional.

Using the `isin()` method we could make this more concise though:

```
In [0]: movies_df[movies_df['director'].isin(['Christopher Nolan', 'Ridley Scott'])].head(5)
```

Out[74]:

	rank	genre	description	director	actors	year	runtime	ra
Title								
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	124	
Interstellar	37	Adventure,Drama,Sci-Fi	A team of explorers travel through a wormhole ...	Christopher Nolan	Matthew McConaughey, Anne Hathaway, Jessica Ch...	2014	169	
The Dark Knight	55	Action,Crime,Drama	When the menace known as the Joker wreaks havo...	Christopher Nolan	Christian Bale, Heath Ledger, Aaron Eckhart,Mi...	2008	152	
The Prestige	65	Drama,Mystery,Sci-Fi	Two stage magicians engage in competitive one-...	Christopher Nolan	Christian Bale, Hugh Jackman, Scarlett Johanss...	2006	130	
Inception	81	Action,Adventure,Sci-Fi	A thief, who steals corporate secrets through ...	Christopher Nolan	Leonardo DiCaprio, Joseph Gordon-Levitt, Ellen...	2010	148	

Let's say we want all movies that were released between 2005 and 2010, have a rating above 8.0, but made below the 25th percentile in revenue.

Here's how we could do all of that:

```
In [0]: movies_df[
    ((movies_df['year'] >= 2005) & (movies_df['year'] <= 2010))
    & (movies_df['rating'] > 8.0)
    & (movies_df['revenue_millions'] < movies_df['revenue_millions'].quantile(0.25))
]
```

Out[75]:

	rank	genre	description	director	actors	year	runtime
Title							
3 Idiots	431	Comedy,Drama	Two friends are searching for their long lost ...	Rajkumar Hirani	Aamir Khan, Madhavan, Mona Singh, Sharman Joshi	2009	170
The Lives of Others	477	Drama,Thriller	In 1984 East Berlin, an agent of the secret po...	Florian Henckel von Donnersmarck	Ulrich Mûhe, Martina Gedeck,Sebastian Koch, Ul...	2006	137
Incendies	714	Drama,Mystery,War	Twins journey to the Middle East to discover t...	Denis Villeneuve	Lubna Azabal, Mélissa Désormeaux-Poulin, Maxim...	2010	131
Taare Zameen Par	992	Drama,Family,Music	An eight-year-old boy is thought to be a lazy ...	Aamir Khan	Darsheel Safary, Aamir Khan, Tanay Chheda, Sac...	2007	165

If you recall up when we used `.describe()` the 25th percentile for revenue was about 17.4, and we can access this value directly by using the `quantile()` method with a float of 0.25.

So here we have only four movies that match that criteria.

Applying functions

It is possible to iterate over a DataFrame or Series as you would with a list, but doing so — especially on large datasets — is very slow.

An efficient alternative is to `apply()` a function to the dataset. For example, we could use a function to convert movies with an 8.0 or greater to a string value of "good" and the rest to "bad" and use this transformed values to create a new column.

First we would create a function that, when given a rating, determines if it's good or bad:


```
In [82]: def rating_function(x):
         if x >= 8.0:
             return "good"
         else:
             return "bad"
```

Now we want to send the entire rating column through this function, which is what `apply()` does:

```
In [83]: movies_df["rating_category"] = movies_df["rating"].apply(rating_function)
         movies_df.head(2)
```

```
Out[83]:
```

	rank	genre	description	director	actors	year	runtime	rating		
	Title									
	Guardians of the Galaxy	1	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	James Gunn	Chris Pratt, Vin Diesel, Bradley Cooper, Zoe S...	2014	121	8.1	75
	Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	124	7.0	48

The `.apply()` method passes every value in the `rating` column through the `rating_function` and then returns a new Series. This Series is then assigned to a new column called `rating_category`.

You can also use anonymous functions as well. This lambda function achieves the same result as `rating_function`:

```
In [84]: movies_df["rating_category"] = movies_df["rating"].apply(lambda x: 'good' if x
movies_df.head(2)
```

```
Out[84]:
```

	rank	genre	description	director	actors	year	runtime	rating	
Title									
Guardians of the Galaxy	1	Action,Adventure,Sci-Fi	A group of intergalactic criminals are forced ...	James Gunn	Chris Pratt, Vin Diesel, Bradley Cooper, Zoe S...	2014	121	8.1	75
Prometheus	2	Adventure,Mystery,Sci-Fi	Following clues to the origin of mankind, a te...	Ridley Scott	Noomi Rapace, Logan Marshall-Green, Michael Fa...	2012	124	7.0	48

Overall, using `apply()` will be much faster than iterating manually over rows because pandas is utilizing vectorization.

Vectorization: a style of computer programming where operations are applied to whole arrays instead of individual elements — [Wikipedia \(https://en.wikipedia.org/wiki/Vectorization\)](https://en.wikipedia.org/wiki/Vectorization)

A good example of high usage of `apply()` is during natural language processing (NLP) work. You'll need to apply all sorts of text cleaning functions to strings to prepare for machine learning.

Brief Plotting

Another great thing about pandas is that it integrates with Matplotlib, so you get the ability to plot directly off DataFrames and Series. To get started we need to import Matplotlib (`pip install matplotlib`):


```
In [85]: import matplotlib.pyplot as plt
plt.rcParams.update({'font.size': 20, 'figure.figsize': (10, 8)}) # set font ar
```

Now we can begin. There won't be a lot of coverage on plotting, but it should be enough to explore you're data easily.

Side note: For categorical variables utilize Bar Charts* and Boxplots. For continuous variables utilize Histograms, Scatterplots, Line graphs, and Boxplots.

Let's plot the relationship between ratings and revenue. All we need to do is call `.plot()` on `movies_df` with some info about how to construct the plot:


```
In [0]: movies_df.plot(kind='scatter', x='rating', y='revenue_millions', title='Revenue
```

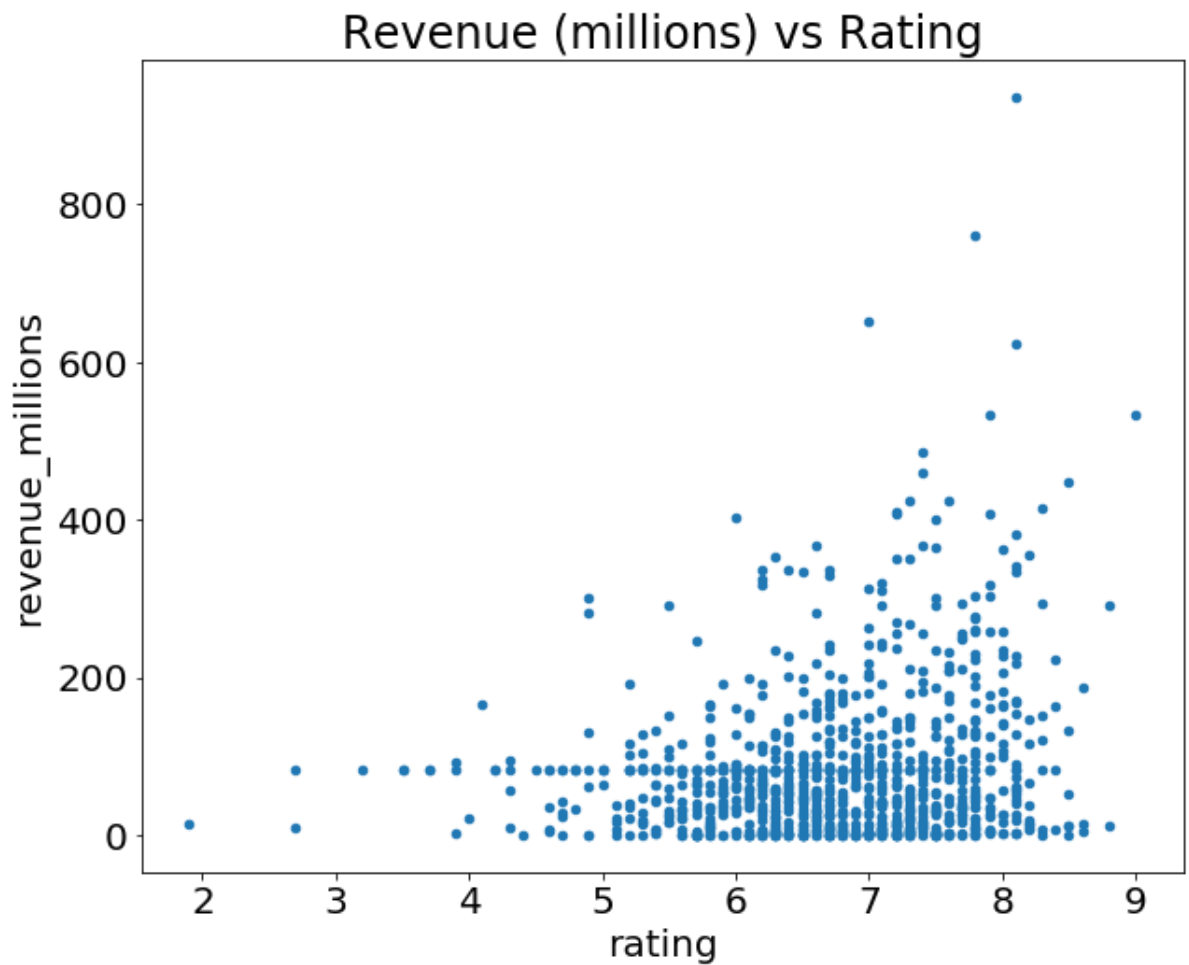

What's with the semicolon? It's not a syntax error, just a way to hide the `<matplotlib.axes._subplots.AxesSubplot at 0x26613b5cc18>` output when plotting in Jupyter notebooks.

If we want to plot a simple Histogram based on a single column, we can call plot on a column:

```
In [0]: movies_df['rating'].plot(kind='hist', title='Rating');
```

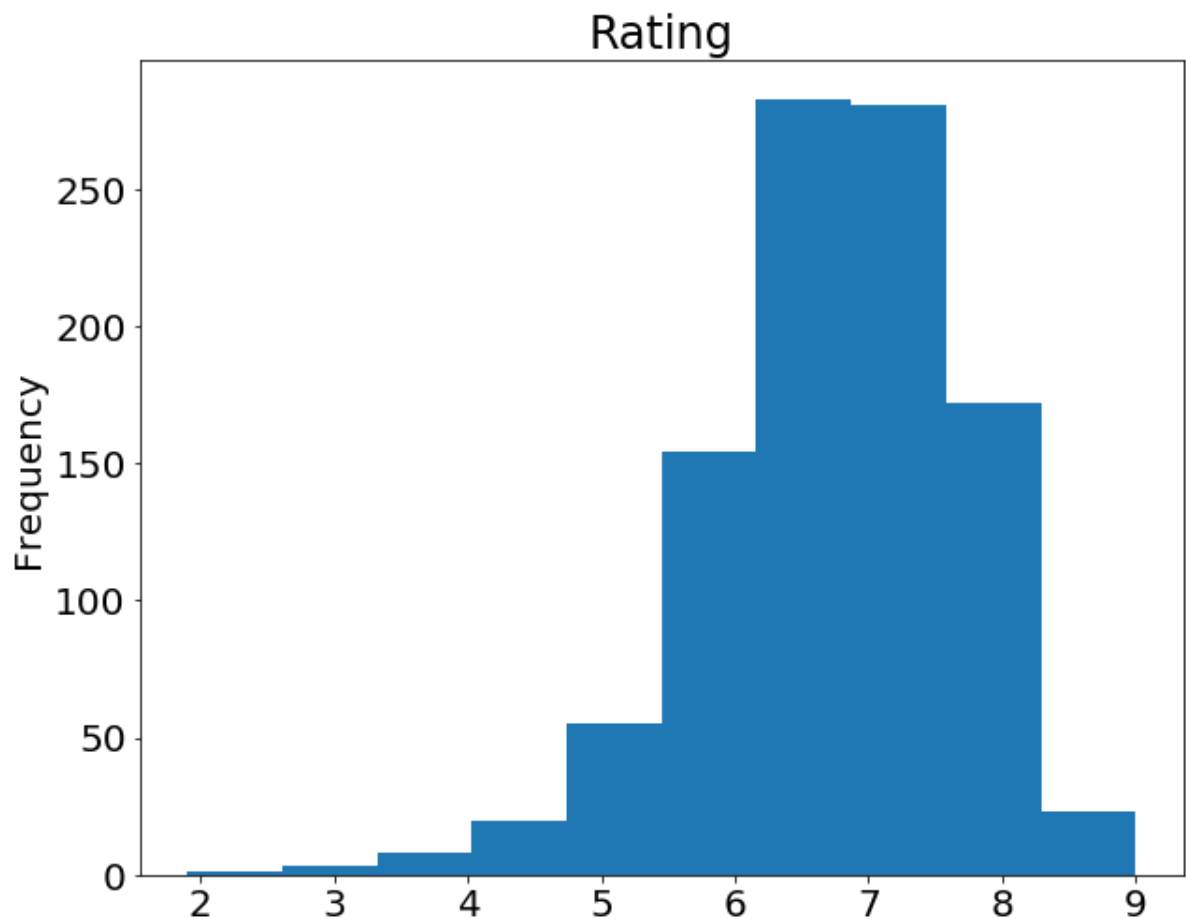


Do you remember the `.describe()` example at the beginning of this tutorial? Well, there's a graphical representation of the interquartile range, called the Boxplot. Let's recall what `describe()` gives us on the ratings column:


```
In [0]: movies_df['rating'].describe()
```

```
Out[82]: count    1000.000000
         mean      6.723200
         std       0.945429
         min       1.900000
         25%       6.200000
         50%       6.800000
         75%       7.400000
         max       9.000000
         Name: rating, dtype: float64
```

Using a Boxplot we can visualize this data:

```
In [0]: movies_df['rating'].plot(kind="box");
```

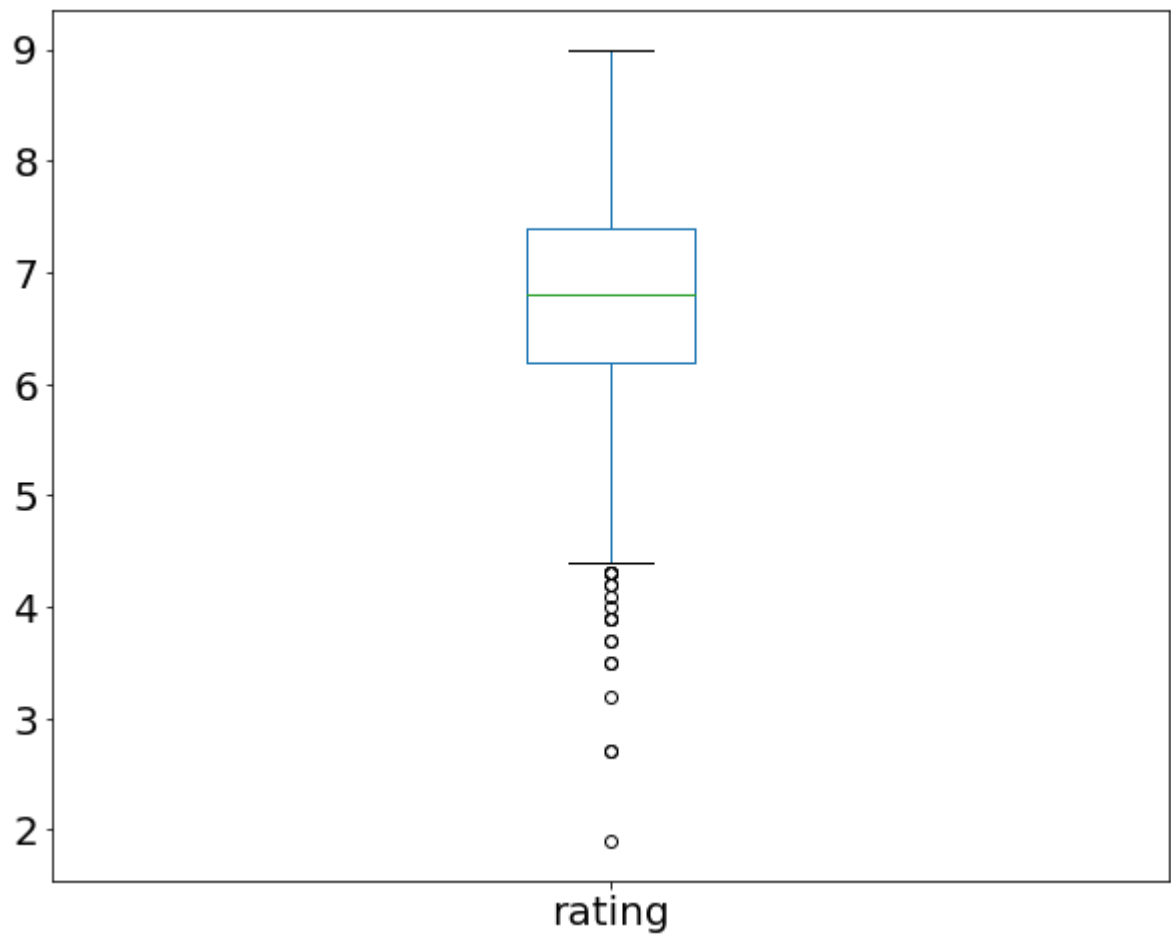


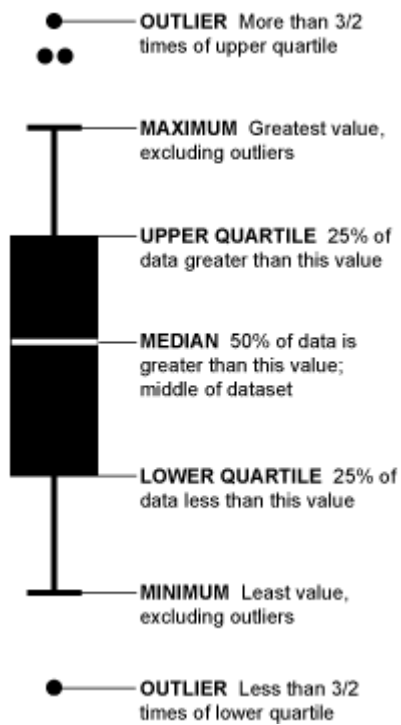

Source: *Flowing Data*

By combining categorical and continuous data, we can create a Boxplot of revenue that is grouped by the Rating Category we created above:

```
In [0]: movies_df.boxplot(column='revenue_millions', by='rating_category');
```

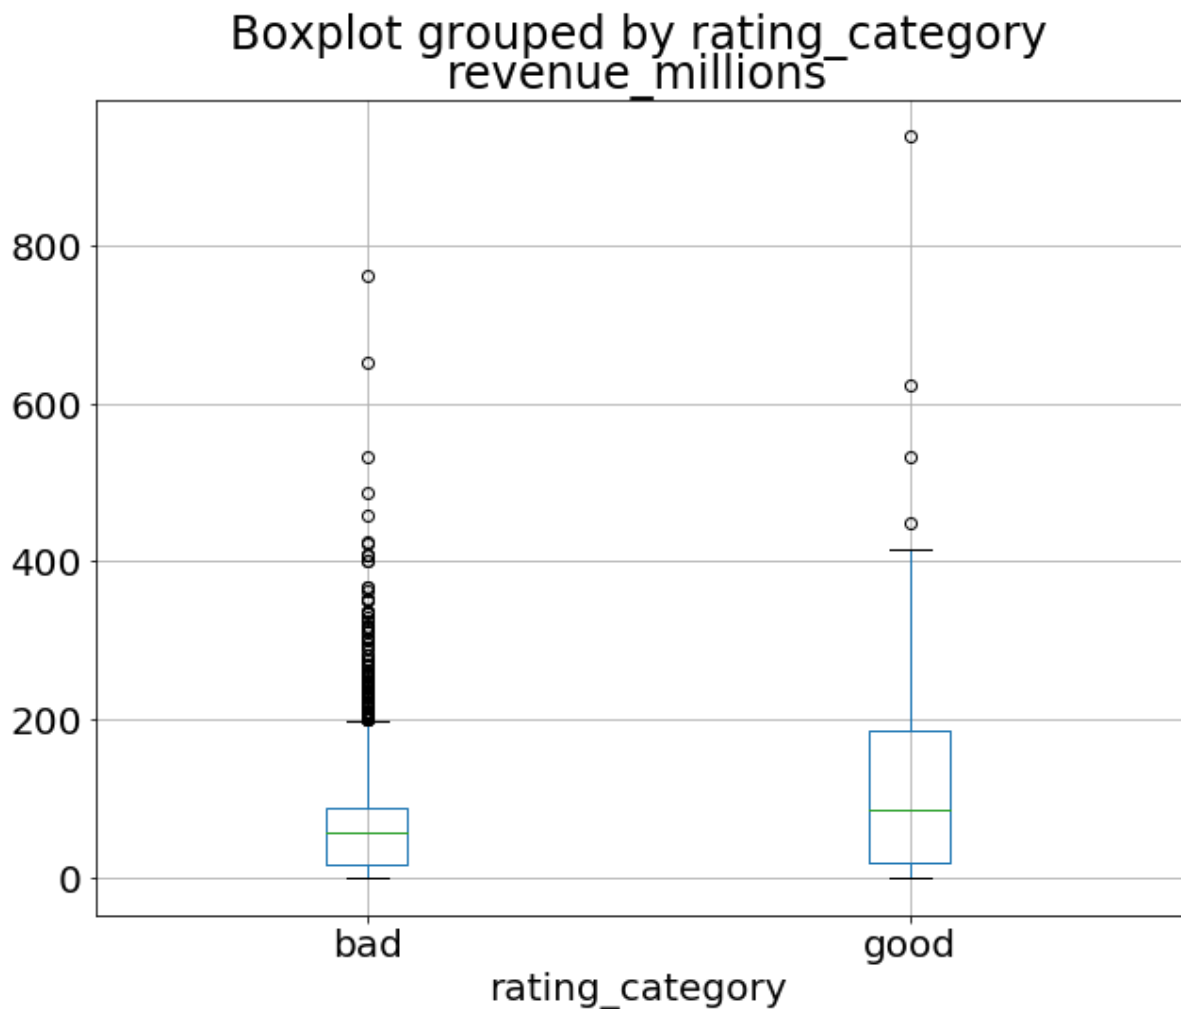

That's the general idea of plotting with pandas. There's too many plots to mention, so definitely take a look at the `plot()` [docs here \(https://pandas.pydata.org/pandas-docs/stable/generated/pandas.DataFrame.plot.html\)](https://pandas.pydata.org/pandas-docs/stable/generated/pandas.DataFrame.plot.html) for more information on what it can do.

Wrapping up

Exploring, cleaning, transforming, and visualization data with pandas in Python is an essential skill in data science. Just cleaning wrangling data is 80% of your job as a Data Scientist. After a few projects and some practice, you should be very comfortable with most of the basics.

To keep improving, view the [extensive tutorials \(https://pandas.pydata.org/pandas-docs/stable/tutorials.html\)](https://pandas.pydata.org/pandas-docs/stable/tutorials.html) offered by the official pandas docs, follow along with a few [Kaggle kernels \(https://www.kaggle.com/kernels\)](https://www.kaggle.com/kernels), and keep working on your own projects!

