

MATLAB with Python

Yann Debray



Table of Contents

1.	Introduction	4
1.1.	A brief history of scientific computing.....	4
1.2.	About the author	7
1.3.	Open-source vs Commercial	8
1.4.	Who is this book for?	9
2.	End-to-end project with MATLAB & Python	10
2.1.	Call Python from MATLAB.....	12
2.2.	Call MATLAB from Python.....	17
2.3.	Generate a Python package from a set of MATLAB functions.....	19
3.	Set-up MATLAB and Python.....	21
3.1.	Install Python	21
3.2.	Install Anaconda or other Python distribution	23
3.3.	Manage your PATH	25
3.4.	Install additional Python packages	27
3.5.	Set up a Python virtual environment.....	28
3.6.	Set up a Python Development Environment	28
3.7.	Connect MATLAB to Python.....	34
3.8.	Install the MATLAB Engine for Python.....	35
4.	Call Python from MATLAB.....	37
4.1.	Execute Python statements and files in MATLAB	37
4.2.	Execute Python code in a MATLAB Live Task.....	38
4.3.	Basic syntax of calling Python functions from MATLAB.....	40
4.4.	Call Python User Defined Functions from MATLAB	43
4.5.	Call Python community packages from MATLAB.....	52
4.6.	Debug Python code called by MATLAB	57
4.7.	Mapping data between Python and MATLAB.....	62

5.	Call Python AI libraries from MATLAB	71
5.1.	Call Scikit-learn from MATLAB.....	71
5.2.	Call TensorFlow from MATLAB	80
5.3.	Import TensorFlow model into MATLAB	84
6.	Call MATLAB from Python	98
6.1.	Getting started with the MATLAB Engine API for Python	98
6.2.	Facilitate AI development by using MATLAB Apps.....	100
6.3.	Leverage the work from the MATLAB community	114
7.	Simulink with Python.....	123
7.1.	Bring Python code into Simulink as a library for co-execution ...	123
7.2.	Integrate TensorFlow and PyTorch models for both simulation and code generation.....	130
7.3.	Simulate a Simulink model directly from Python.....	135
7.4.	Export a Simulink model as a Python package for deployment..	140
8.	Resources	144
8.1.	Getting Python packages on MATLAB Online	144
8.2.	Generate this book with Quarto and Pandoc.....	145

1. Introduction

Engineers and scientists that I meet every day think about MATLAB & Python as MATLAB **vs** Python. The goal of this book is to prove to them that it is possible to think about it as MATLAB **with** Python.

Python recently became the most used programming language¹. It is general purpose by nature, and it is particularly used for scripting, web development and Artificial Intelligence (Machine Learning & Deep Learning).

MATLAB is mostly seen as a programming language for technical computing, and a development environment for engineers and scientists. But MATLAB also provides flexible two-way integration with many programming languages including Python.

MATLAB works with common python distributions. For this book I will be using Python 3.10 (downloaded on [Python.org](https://www.python.org)) and MATLAB 2023a.

1.1. A brief history of scientific computing

1.1.1. The roots of numerical analysis

In the 1970s, Cleve Moler took actively part in the development of Fortran libraries called EISPACK² (to compute eigenvalues) and LINPACK³ (for linear algebra). As he was professor of Mathematics at the University of New Mexico, he wanted to make those libraries accessible to student while sparing them the need to write Fortran wrapper code, compile it, debug it, compile again, run, ...


So he created an interactive interpreter in Fortran for matrix computation, called MATLAB (short for MATrix LABoratory, nothing to do with the Matrix movie, that came out 30 years later). This first version was based on a few routines from EISPACK and LINPACK and only contained 80 functions.

This photo of a MATLAB manual at the time, shows the scope of the software in its early days.

¹ Python ranking #1 in the TIOBE index in 2021: <https://www.tiobe.com/tiobe-index/>

² EISPACK – computes the eigenvalues and eigenvectors of matrices:
<https://en.wikipedia.org/wiki/EISPACK>

³ LINPACK – Linear algebra package in Fortran:
<https://en.wikipedia.org/wiki/LINPACK>

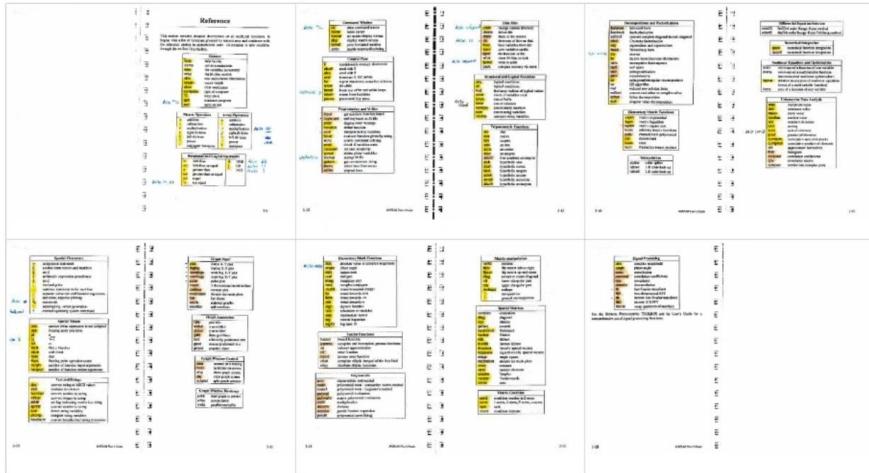

At that time MATLAB was not yet a programming language. It had no file extension (m-scripts), no toolboxes. The only available datatype was matrices. The graphic capabilities were asterisks drawn on the screen (not Astérix The Gaul).



In order to add a function, you had to modify the Fortran source code and recompile everything. So the source code was open, because it needed to be (open-source only appeared in the 80s, with Richard Stallman and the Free Software movement).

After a course on numerical analysis that Cleve Moler gave at Stanford University in California, an MIT trained engineer came to him: "I introduced myself to Cleve". This is the way Jack Little tells the story about their first encounter. Jack Little had anticipated the possible use of MATLAB on PC, and rewritten it in C. He knew, like Steve Jobs and Bill Gates that Personal Computing would win over the mainframe server business of IBM. He also added the ability to write program files to extend the capabilities of the software, and toolboxes that would become a well architected, modular and scalable business model. In 1984, he created the company (The) MathWorks to commercialize MATLAB.

Read more about the origins of MATLAB:

- A history of MATLAB – published in June 20202 -
<https://dl.acm.org/doi/10.1145/3386331>
- The Origins of MATLAB
<https://www.mathworks.com/company/newsletters/articles/the-origins-of-matlab.html>
- Cleve's Corner – History of MATLAB Published by the ACM
<https://blogs.mathworks.com/cleve/2020/06/13/history-of-matlab-published-by-the-acm/>

1.1.2. In a parallel universe

In the 1980s, Guido van Rossum was working at the [Centrum Wiskunde & Informatica](#) (abbr. **CWI**; English: "National Research Institute for Mathematics and Computer Science") on a language called ABC.

"ABC was intended to be a programming language that could be taught to intelligent computer users who were not computer programmers or software developers in any sense. During the late 1970s, ABC's main designers taught traditional programming languages to such an audience. Their students included various scientists—from physicists to social scientists to linguists—who needed help using their very large computers. Although intelligent people in their own right, these students were surprised at certain limitations, restrictions, and arbitrary rules that programming languages had traditionally set out. Based on this user feedback, ABC's designers tried to develop a different language."

In 1986 Guido van Rossum moved to a different project at CWI, the Amoeba project. Amoeba was a distributed operating system. By the late 1980s, they realized that they needed a scripting language. With the freedom he was given inside this project, Guido van Rossum started his own "mini project".

In December 1989, Van Rossum had been looking for a "'hobby' programming project that would keep [him] occupied during the week around Christmas" as his office was closed when he decided to write an interpreter for a "new scripting language [he] had been thinking about lately: a descendant of ABC that would appeal to Unix/C hackers". He attributes choosing the name

"Python" to "being in a slightly irreverent mood (and a big fan of Monty Python's Flying Circus)".⁴

He wrote a simple virtual machine, a simple parser and a simple runtime. He created a basic syntax, using indentation for statement grouping. And he developed a small number of datatypes: dictionaries, lists, strings and numbers. Python was born. In Guido's opinion, his most innovative contribution to Python's success was making it easy to extend.

Main milestones of the Python language:

- 1991: Python 0.9.0 published to alt.sources by Guido Van Rossum
- 1994: Python 1.0. include functional programming (lambda's map, filter, reduce)
- 2000: Python 2.0 introduces list comprehension and garbage collection
- 2008: Python 3 fixes fundamental design flaws and is not backward compatible
- 2022: Python 2 is end of life, last version 2.7.18 released

Read more about Python:

- The Making of Python - A Conversation with Guido van Rossum, Part I <https://www.artima.com/articles/the-making-of-python>
- Microsoft Q&A with Guido van Rossum, Inventor of Python <https://www.youtube.com/watch?v=aYbNh3NS7jA>
- The Story of Python, by Its Creator, Guido van Rossum <https://www.youtube.com/watch?v=J0Aq44Pze-w>
- Python history timeline infographics <https://python.land/python-tutorial/python-history>

1.2. About the author

My name is Yann Debray, and I work for MathWorks, as a MATLAB Product Manager. You will probably think that I am biased, in that I am trying to sell you MATLAB. That's not wrong. But to better understand my motivations, you need to look a little deeper into my background.

⁴ Foreword for "Programming Python" Guido van Rossum (1996): <https://www.python.org/doc/essays/foreword/>

I joined MathWorks in June 2020 (in the middle of the COVID-19 pandemic). Prior to that, I spent 6 years working on a project called Scilab⁵. Scilab is an open-source alternative to MATLAB. This experience translates my appetite for open-source and scientific computing.

My first professional encounter with numerical computing after college was in December 2013, when I met Claude Gomez⁶. He was the CEO of Scilab Enterprises back then, and the one who had turned Scilab from a research project to a company. The business model was inspired from Red Hat selling services around Linux.

I know very well the challenge of making open-source a sustainable model in scientific computing, and that is the reason why I believe in an equilibrium in the force, between open-source and proprietary software. Not every software can be free. Based on the expertise required in fields like simulation – requiring decades of investments – we will still observe entire markets of engineering software driven by intellectual property for the years to come.

1.3. Open-source vs Commercial

One of the early questions around this book was: *Do I commercialize it, or do I make it open-source?*

I had an idealized view of what it would mean to write a book. The fame and the glamour. But pragmatically, I know it is not going to sell a lot, as it is quite niche. My best estimate for a target audience is around 30% of the 5 million users of MATLAB, that may also be interested in Python.

Beyond my idealism on open-source, I felt like I needed concrete motivation to see this project through. Hence my initial idea to sell a hard copy of this book. But my dear colleague and good friend Mike Croucher advised me against what he calls “dead wood”. Hinting to the fact that the printed content would quickly become obsolete with every new version of MATLAB (twice a year).

⁵ Scilab: <https://scilab.org/>

⁶ Interview with Claude Gomez, former CEO of Scilab Enterprises: <https://www.d-booker.fr/content/81-interview-with-claude-gomez-ceo-of-scilab-enterprises-about-scilab-and-its-development>

Finally, I've decided that open-sourcing the content does not conflict with releasing a paid version of the book. In fact, when I buy technical books, I often decide for those who apply an open-source license.

1.4. Who is this book for?

If you recognize yourself in the following scenario, this book is for you:

You are an engineer or a researcher using MATLAB, and you are increasingly hearing about Python. This comes up particularly in subjects related to data science & artificial intelligence. When searching for code online, you might stumble on interesting scripts or packages written in Python. Or when working with colleagues that are using Python, you may be looking for ways to integrate their work:



I would like to **integrate Python code from the community or from my colleagues** in my MATLAB analysis

You are (or want to become) a Data Scientist, and you are working on scientific / engineering data (wireless, audio, video, radar/lidar, autonomous driving,...). You will probably be using Python for some of your daily operations related to data processing, but you may want to consider MATLAB for the engineering part of your AI workflow (especially if this intelligence will be integrated on embedded systems). If this part is covered by engineer colleagues, you might simply want to be able to run the models and scripts that they share with you:



Can I use MATLAB capabilities in my Python **Data Science & Artificial Intelligence** applications?


2. End-to-end project with MATLAB & Python

When I joined MathWorks, I met Heather. She had developed a really good demo to illustrate the use of MATLAB with Python. In this chapter, I'll show the **Weather Forecasting app** she developed. You can find the code on her GitHub repo: <https://github.com/hgorr/weather-matlab-python>

Start by retrieving the code by downloading a zip or cloning the repository:

```
!git clone https://github.com/hgorr/weather-matlab-python  
cd weather-matlab-python\
```

The resulting application will look like this:

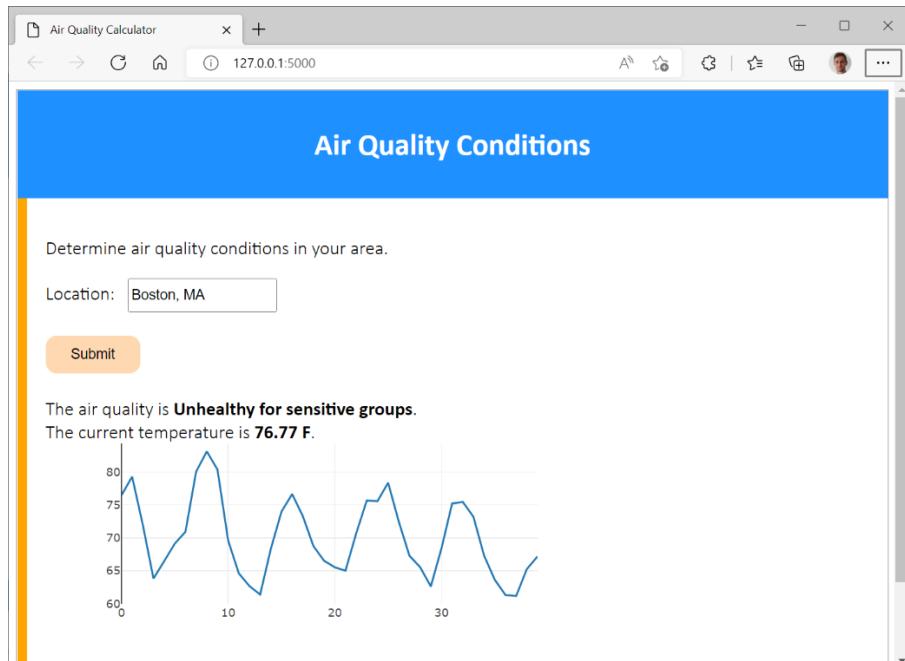

We will work in steps to:

1. Call Heather's python code to retrieve the weather data
2. Integrate a MATLAB model predicting the air quality
3. Deploy the resulting application made out of MATLAB + Python

In this example we will be using data from a web service at openweathermap.org

OpenWeather global services

Weather forecasts, nowcasts and history in fast and elegant way


2 Billion Forecasts Per Day
2,500 new subscribers a day

2,600,000 customers
20+ weather APIs



In order to access live data, you will need to register⁷ to the free tier offering. You will then have the option to generate an API key:

https://home.openweathermap.org/api_keys

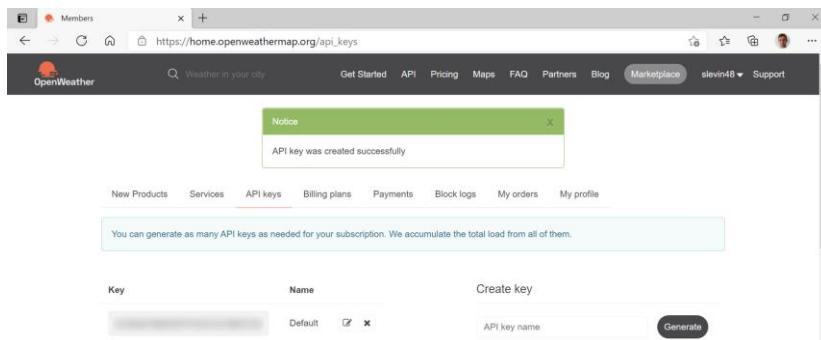

The screenshot shows a browser window for the OpenWeather website. The URL in the address bar is https://home.openweathermap.org/api_keys. The page has a navigation bar with links like 'Get Started', 'API', 'Pricing', 'Maps', 'FAQ', 'Partners', 'Blog', 'Marketplace', and user profile information ('slevin48'). A green notice box at the top says 'API key was created successfully'. Below it, a message states: 'You can generate as many API keys as needed for your subscription. We accumulate the total load from all of them.' There is a table with columns 'Key', 'Name', and 'Create key'. One row is visible with a 'Default' checkbox checked and a 'Generate' button.

This key will be necessary for each call of the web service. For instance, requesting the current weather⁸ will be performed by calling the following address:

`api.openweathermap.org/data/2.5/weather?q={city name}&appid={API key}`

Save your API key in a text file called accessKey.txt.

```
% apikey = fileread("accessKey.txt");
```

Alternatively you can use the sample API key (as demonstrated in this script)

```
appid = 'b1b15e88fa797225412429c1c50c122a1';
```

⁷ Register to OpenWeatherMap.org:

https://home.openweathermap.org/users/sign_up

⁸ OpenWeatherMap current weather API: <https://openweathermap.org/current>

2.1. Call Python from MATLAB

Heather has created a module called [weather.py](#) that reads from the web service and parses the JSON data it returns. Of course, we can do this in MATLAB, but let's use this module as an example of accessing data from Python.

2.1.1. Check the Python installation

First connect to the Python environment using the `pyenv`⁹ command. For more details on how to set-up MATLAB and Python, look at the [next chapter](#). MATLAB can call python functions and create python objects from base Python, from packages you have installed and from your own Python code.

```
pyenv % Use pyversion for MATLAB versions before R2019b
```

```
ans =  
PythonEnvironment with properties:  
  
    Version: "3.10"  
    Executable: "C:\Users\...\python-3.10.4.amd64\python.exe"  
    Library: "C:\Users\...\python-3.10.4.amd64\python310.dll"  
    Home: "C:\Users\...\python-3.10.4.amd64"  
    Status: NotLoaded  
ExecutionMode: OutOfProcess
```

2.1.2. Call Python user-defined functions from MATLAB

Now let's see how to use my colleague's weather module. We will start by getting the data for today. The [get_current_weather](#) function in the weather module gets the current weather conditions in Json format. The [parse_current_json](#) function then returns that data as a python dictionary.

```
jsonData =  
py.weather.get_current_weather("London", "UK", appid, api='samples')
```

```
jsonData =  
Python dict with no properties.
```

⁹ Change default environment of Python interpreter

<https://www.mathworks.com/help/matlab/ref/pyenv.html>

```
{'coord': {'lon': -0.13, 'lat': 51.51}, 'weather': [{"id": 300, 'main': 'Drizzle', 'description': 'light intensity drizzle', 'icon': '09d"}], 'base': 'stations', 'main': {'temp': 280.32, 'pressure': 1012, 'humidity': 81, 'temp_min': 279.15, 'temp_max': 281.15}, 'visibility': 10000, 'wind': {'speed': 4.1, 'deg': 80}, 'clouds': {'all': 90}, 'dt': 1485789600, 'sys': {'type': 1, 'id': 5091, 'message': 0.0103, 'country': 'GB', 'sunrise': 1485762037, 'sunset': 1485794875}, 'id': 2643743, 'name': 'London', 'cod': 200}
```

```
weatherData = py.weather.parse_current_json(jsonData)
```

```
weatherData =  
Python dict with no properties.
```

```
{'temp': 280.32, 'pressure': 1012, 'humidity': 81, 'temp_min': 279.15, 'temp_max': 281.15, 'speed': 4.1, 'deg': 80, 'lon': -0.13, 'lat': 51.51, 'city': 'London', 'current_time': '2023-03-15 16:04:38.427888'}
```

2.1.3. Convert Python data to MATLAB data

Let's convert the Python dictionary¹⁰ into a MATLAB structure¹¹:

```
data = struct(weatherData)
```

```
data = struct with fields:  
    temp: 280.3200  
    pressure: [1x1 py.int]  
    humidity: [1x1 py.int]  
    temp_min: 279.1500  
    temp_max: 281.1500  
    speed: 4.1000  
    deg: [1x1 py.int]  
    lon: -0.1300  
    lat: 51.5100  
    city: [1x6 py.str]  
    current_time: [1x26 py.str]
```

¹⁰ Python Dictionary:

<https://docs.python.org/3/tutorial/datastructures.html#dictionaries>

¹¹ MATLAB Structure: <https://www.mathworks.com/help/matlab/ref/struct.html>

Most of the data gets automatically converted. Only some fields did not find an obvious equivalent:

- pressure & humidity remain as a `py.int` object in MATLAB.
- city and current_time remain as a `py.str` object in MATLAB.

We can convert them explicitly using standard MATLAB functions like double¹², string¹³ and datetime¹⁴:

```
data.pressure = double(data.pressure);
data.humidity = double(data.humidity);
data.deg = double(data.deg);
data.city = string(data.city);
data.current_time = datetime(string(data.current_time))
```

```
data = struct with fields:
    temp: 280.3200
    pressure: 1012
    humidity: 81
    temp_min: 279.1500
    temp_max: 281.1500
    speed: 4.1000
    deg: 80
    lon: -0.1300
    lat: 51.5100
    city: "London"
current_time: 15-Mar-2023 16:04:38
```

2.1.4. Convert Python lists to MATLAB matrices

Now let's call the `get_forecast` function which returns a series of predicted weather conditions over the next few days. We can see that the fields of the structure are returned as Python list¹⁵:

¹² Double-precision arrays:

<https://www.mathworks.com/help/matlab/ref/double.html>

¹³ Characters and Strings: <https://www.mathworks.com/help/matlab/characters-and-strings.html>

¹⁴ Dates and Time: <https://www.mathworks.com/help/matlab/date-and-time-operations.html>

¹⁵ Python List: <https://docs.python.org/3/tutorial/datastructures.html#more-on-lists>

```
jsonData =
py.weather.get_forecast('Muenchen', 'DE', appid, api='samples');
forecastData = py.weather.parse_forecast_json(jsonData);
forecast = struct(forecastData)
```

```
forecast = struct with fields:
    current_time: [1x36 py.list]
        temp: [1x36 py.list]
        deg: [1x36 py.list]
        speed: [1x36 py.list]
    humidity: [1x36 py.list]
    pressure: [1x36 py.list]
```

Lists containing only numeric data can be converted into doubles (since MATLAB R2022a):

```
forecast.temp = double(forecast.temp) - 273.15; % from Kelvin to Celsius
forecast.temp
```

```
ans = 1x36
    13.5200    12.5100     3.9000    -0.3700      0.1910
    2.4180    3.3280 ...
```

Lists containing text can be transformed to strings, and further processed into specific data types like datetime:

```
forecast.current_time = string(forecast.current_time);
forecast.current_time = datetime(forecast.current_time);
forecast.current_time
```


```
ans = 1x36 datetime
16-Feb-2017 12:00:00 16-Feb-2017 15:00:00 16-Feb-2017
18:00:00 16-Feb-2017 21:00: ...
```

Read more about mapping data between Python and MATLAB ([section 4.7](#))

2.1.5. Explore graphically the Python data imported in MATLAB

```
plot(forecast.current_time, forecast.temp)
xtickangle(45)
```

```
xlabel('Date')  
ylabel('Temperature')
```

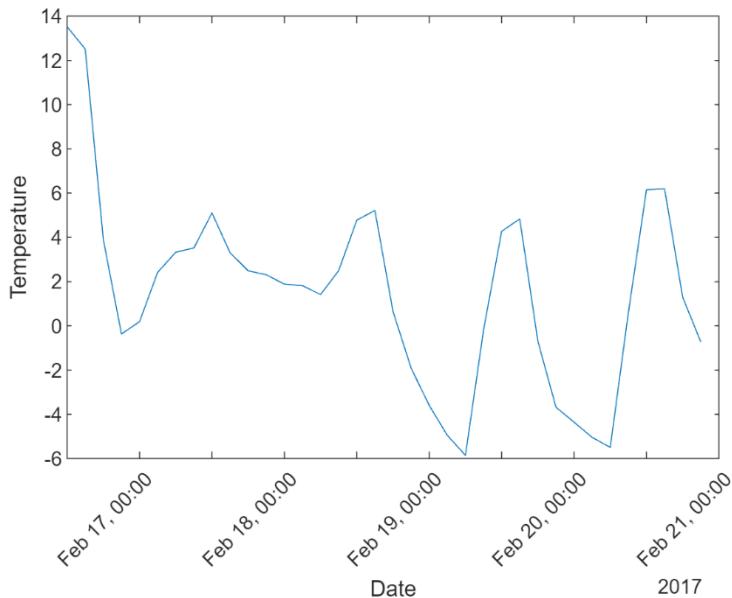

2.1.6. Call a Machine Learning model in MATLAB

Now let's suppose we have used some historical data to create a machine learning model that takes a set of weather conditions and returns a prediction of the air quality. My Python colleague wants to make use of my model in her Python code.

First, let's see how the air quality prediction works. There are three steps:

- Load the model from a .mat file
- Convert the current weather data from openweathermap.org to the format expected by the model
- Call the predict method of the model to get the expected air quality for that day

```
load airQualModel.mat model  
testData = prepData(data);  
airQuality = predict(model,testData)
```

```
airQuality = categorical  
Good
```

To give this to my colleague, I'm going to pack up these steps into a single function called [`predictAirQuality`](#):

```
function airQual = predictAirQual(data)
% PREDICTAIRQUAL Predict air quality, based on machine
learning model
%
%#function CompactClassificationEnsemble

% Convert data types
currentData = prepData(data);

% Load model
mdl = load("airQualModel.mat");
model = mdl.model;

% Determine air quality
airQual = predict(model,currentData);

% Convert data type for use in Python
airQual = char(airQual);

end
```

This function does the same three steps as above – loads the model, converts the data, and calls the model's predict method.

However, it has to do one other thing. The model returns a MATLAB categorical value which doesn't have a direct equivalent in Python, so we convert it to a character array.

Now that we have our MATLAB function that uses the air quality prediction model, let's see how to use it in Python.

2.2. Call MATLAB from Python

Here we will demonstrate calling MATLAB from Python inside of a simple Python shell (`>>>`).

The first step is to use the engine API to start a MATLAB running in the background for Python to communicate with (we will assume here that you have installed it already – else check [section 3.8](#)).

```
>>> import matlab.engine  
>>> m = matlab.engine.start_matlab()
```

Once the MATLAB is running, we can call any MATLAB function on the path.

```
>>> m.sqrt(42.0)  
6.48074069840786
```

We need to access the key from the txt file:

```
>>> with open("accessKey.txt") as f:  
...     apikey = f.read()
```

Now we can use the `get_current_weather` and the `parse_current_json` functions from the `weather` module just like we did in MATLAB to get the current weather conditions.

```
>>> import weather  
>>> json_data =  
weather.get_current_weather("Boston", "US", apikey)  
>>> data = weather.parse_current_json(json_data)  
>>> data  
  
{'temp': 62.64, 'feels_like': 61.9, 'temp_min': 58.57,  
'temp_max': 65.08, 'pressure': 1018, 'humidity': 70,  
'speed': 15.01, 'deg': 335, 'gust': 32.01, 'lon': -71.0598,  
'lat': 42.3584, 'city': 'Boston', 'current_time': '2022-05-  
23 11:28:54.833306'}
```

Then we can call the MATLAB function `predictAirQuality` to get the predicted result.

```
>>> aq = m.predictAirQuality(data)  
>>> aq  
Good
```


The last step is to shutdown the MATLAB started by the engine API at the beginning of our notebook.

```
>>> m.exit()
```

However, your Python colleague might not have access to MATLAB. The next two sections will target this use case.

2.3. Generate a Python package from a set of MATLAB functions

For this, you will need to use a dedicated toolbox called MATLAB Compiler SDK¹⁶. You can select the Library Compiler in the Apps ribbon, or enter in the Command Window (`libraryCompiler`):

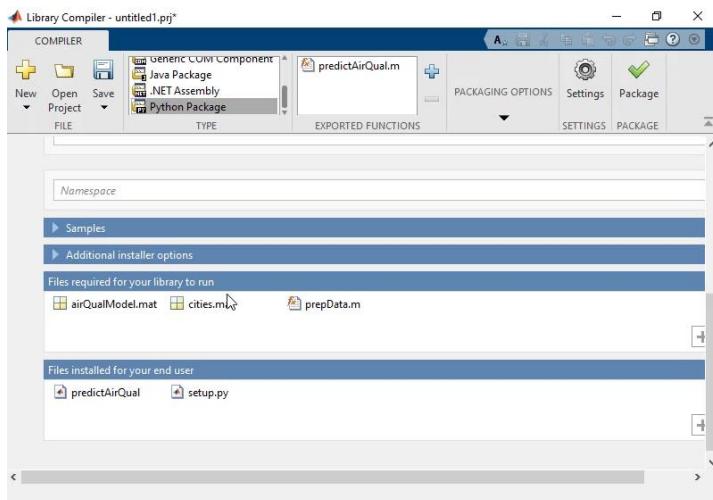

Simply select the MATLAB function(s) that you want to turn them into Python functions. The dependencies will be automatically added to the Python package (in this case, the Air Quality Model, the list of cities, and the pre-processing function).

This packages the files we need and creates a `setup.py` and `readme.txt` file with instructions for the Python steps. To learn more on how to set-up the generated package read the [section 7.1](#).

Then we need to import and initialize the package and can call the functions, like so:

¹⁶ MATLAB Compiler SDK: https://www.mathworks.com/help/compiler_sdk/

```
>>> import AirQual  
>>> aq = AirQual.initialize()  
>>> result = aq.predictAirQual()
```

When we're finished, wrap things up by terminating the process:

```
>>> aq.terminate()
```

We can go one step further in sharing the MATLAB functionality to be used as a web service (and potentially accessed by many users at once). In this case, MATLAB Production Server¹⁷ can be used for load balancing and the MATLAB code can be accessed through a RESTful API¹⁸ or Python client¹⁹.

¹⁷ MATLAB Production Server: <https://www.mathworks.com/help/mps/>

¹⁸ Create client programs using the RESTful API:

<https://www.mathworks.com/help/mps/restful-api-and-json.html>

¹⁹ Create a MATLAB Production Server Python Client:

<https://www.mathworks.com/help/mps/python/create-a-matlab-production-server-python-client.html>

3. Set-up MATLAB and Python

3.1. Install Python

You can simply go to www.python.org/downloads and select a version of Python compatible with your MATLAB version²⁰. For instance, this is the list of versions compatible with the latest releases:

MATLAB Version	Compatible Versions of Python 2	Compatible Versions of Python 3
R2023a	2.7	3.9, 3.10
R2022b	2.7	3.8, 3.9, 3.10
R2022a	2.7	3.8, 3.9
R2021b	2.7	3.7, 3.8, 3.9

3.1.1. Install Python on Windows

If you are running on Windows, download the Windows installer (64-bit)²¹: the file [python-3.10.10-amd64.exe](https://www.python.org/ftp/python/3.10.10/python-3.10.10-amd64.exe) is only 28Mo. Just run this executable (you can uncheck the admin privileges):



²⁰ Versions of Python Compatible with MATLAB Products by Release: <https://www.mathworks.com/support/requirements/python-compatibility.html>

²¹ Windows installer (64-bit): <https://www.python.org/ftp/python/3.10.10/python-3.10.10-amd64.exe>

By default, the checkbox “Add python.exe to PATH” isn’t checked. I would advise you to select it (Otherwise, you will have to add Python to your PATH manually):




Select “→ Install Now”:

→ [Install Now](#)
C:\Users\ydebray\AppData\Local\Programs\Python\Python310
Includes IDLE, pip and documentation
Creates shortcuts and file associations

A screenshot of a software window showing the "Install Now" button for Python 3.10. The button is blue with white text. Below it, there is descriptive text about what is included in the installation.

It should only take about a minute to get everything installed on your machine.

The following applications have been installed and are accessible from your Start menu:

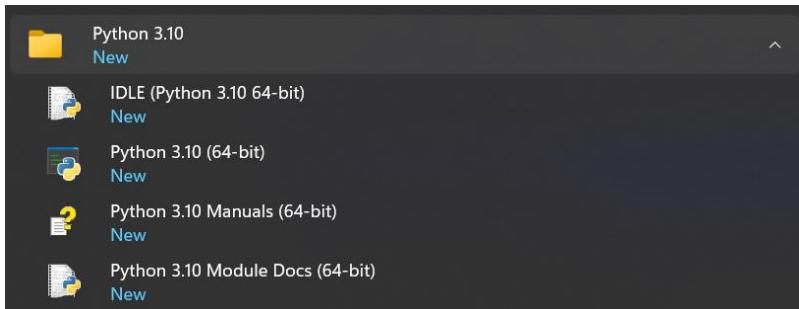


To check that you have Python installed and available to your PATH, open a command prompt:

```
C:\Users\ydebray>where python
C:\Users\ydebray\AppData\Local\Programs\Python\Python310
\python.exe
C:\Users\ydebray\AppData\Local\Microsoft\WindowsApps\pyt
hon.exe
```

If you have several versions of Python installed, it will return each of them, in the order listed in your PATH, plus the last one that isn't actually installed:
C:\Users\ydebray\AppData\Local\Microsoft\WindowsApps\python.exe

This is a link to a version packaged on the Microsoft Store. If you run it, you'll be redirect to the Store:

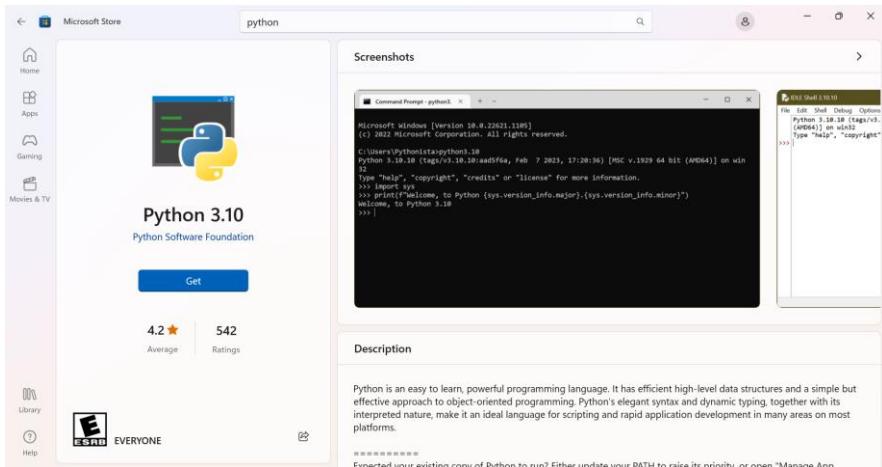

3.2. Install Anaconda or other Python distribution

With the previous version installed, you only have the base Python language. No numerical packages, or Development Environment (unlike MATLAB that ships all of those features by default). To get a set of curated data science packages pre-installed, you can download a distribution, like Anaconda:

Be aware of the fact that you now need to comply with Anaconda's terms of services²² (since September 2020): You can only use the open-source Anaconda Distribution²³ professionally for free if you are not part of an organization with more than 200 employees. Otherwise, you will need to buy a license of Anaconda Professional²⁴.

²² Anaconda's terms of services: <https://www.anaconda.com/terms-of-service>

²³ open-source Anaconda Distribution:

<https://www.anaconda.com/products/distribution>

²⁴ Anaconda Professional license:

<https://www.anaconda.com/products/professional>

If you are searching for an alternative distribution to Anaconda, I would recommend WinPython²⁵ on Windows. If you are running on Linux, I believe you don't need a distribution and can manage packages yourself.

3.2.1. Install Miniconda from conda-forge

Conda-forge²⁶ provides installers of the conda²⁷ package manager that point by default to the community channel, to remain in compliance with the terms of use of the Anaconda repo, even for “commercial activities”.

Download and run the installer of miniforge (55 MB):



3.2.2. Install Micromamba for minimal footprint

micromamba²⁸ is a 4 MB pure-C++ drop-in replacement for the conda package manager. Unlike pip or conda, it is not written in Python, so you don't need to get Python to get it, and it can retrieve python:

```
(base) $ mamba install python
```

²⁵ WinPython: <https://winpython.github.io/>

²⁶ Conda-forge: <https://conda-forge.org/>

²⁷ Miniconda installer from Conda-forge: <https://github.com/conda-forge/miniforge>

²⁸ Micromamba doc: <https://mamba.readthedocs.io/> - on Linux : curl micro.mamba.pm/install.sh | bash

Looking for: ['python']


```
conda-forge/noarch  
11.6MB @ 3.6MB/s 3.7s  
conda-forge/linux-64  
30.3MB @ 3.7MB/s 9.4s
```

3.3. Manage your PATH

When you have several versions of Python installed, the command `python --version` returns the version that is higher up in your PATH. To check which version of Python is used by default:



```
C:\Users\ydebray>python --version  
Python 3.10.10
```

To change this, you will need to modify your PATH²⁹

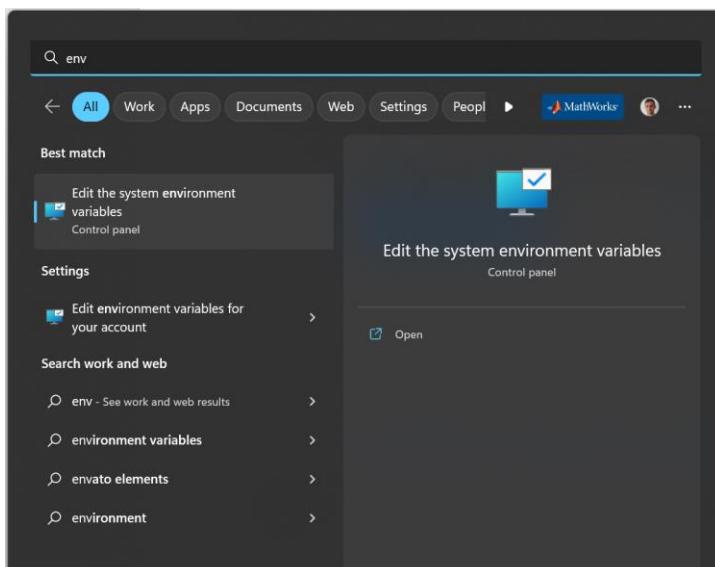


You can edit your PATH in **environment variables**, by tipping “path” in the search bar of your Windows start menu. Select the Path in the user variables (it will be written on top of the system variables):

²⁹ PATH: [https://en.wikipedia.org/wiki/PATH_\(variable\)](https://en.wikipedia.org/wiki/PATH_(variable))

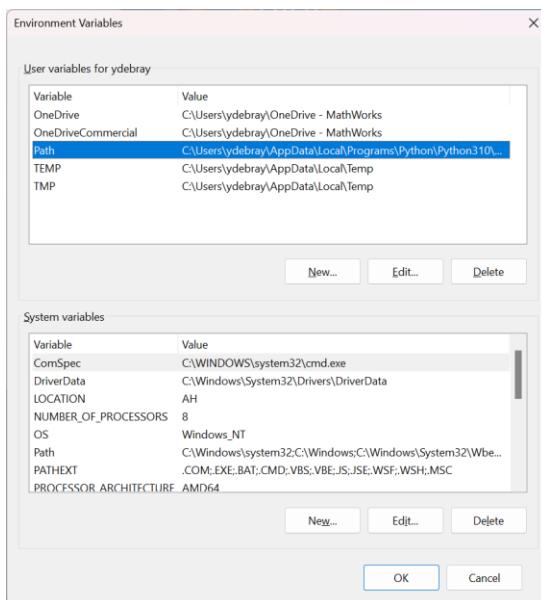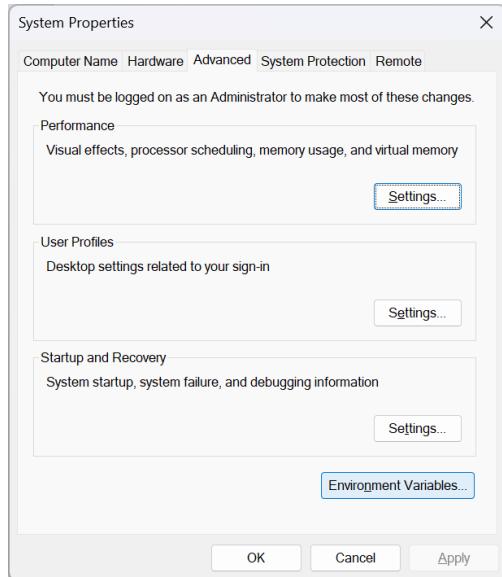

You can modify the order in which each version of Python is listed in the PATH. And in order to access pip (the Python default package manager), make sure to also list the Script folder in the PATH:

C:\Users\ydebray\AppData\Local\Programs\Python\Python310\\Scripts

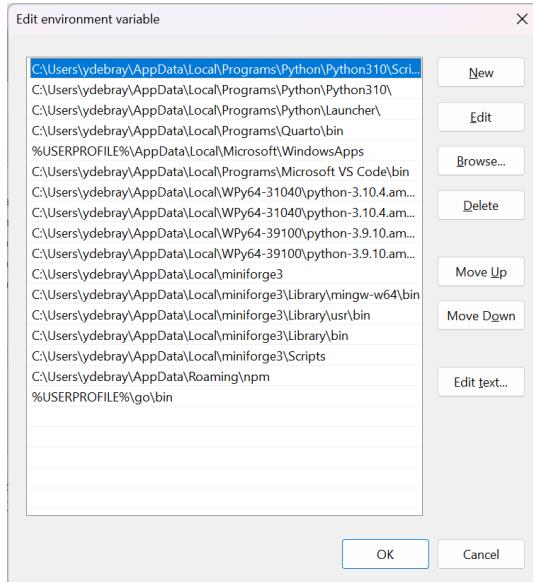

3.4. Install additional Python packages

In order to retrieve additional packages from the Python Package Index³⁰, use the pip command:

```
C:\Users\ydebray>pip install pandas
```

This will for instance install the famous pandas³¹ package. It will also automatically retrieve its dependencies (in this case numpy, python-dateutil, pytz).

You can check if a package is installed by calling the method pip show. It will show information about this package:

```
C:\Users\ydebray>pip show pandas
Name: pandas
Version: 1.3.3
Summary: Powerful data structures for data analysis,
time series, and statistics
Home-page: https://pandas.pydata.org
Author: The Pandas Development Team
Author-email: pandas-dev@python.org
License: BSD-3-Clause
```

³⁰ Python Package Index (PyPI) <https://pypi.org/>

³¹ Pandas <https://pandas.pydata.org>

Location:
c:\users\ydebray\appdata\local\programs\python\python39\
lib\site-packages
Requires: numpy, python-dateutil, pytz
Required-by: streamlit, altair

To upgrade a package previously installed with a new version:

```
C:\Users\ydebray>pip install --upgrade pandas
```

3.5. Set up a Python virtual environment

If you have different projects leveraging different versions of the same package, or if you want a way to replicate your production environment in a clean space, use Python virtual environment³². It's a type of virtualization at the language level (like Virtual Machine at the Machine level, or Docker container at the Operating System level). This is the default way (shipped with base Python) to create a virtual environment called env:

```
C:\Users\ydebray>python -m venv env
```

You then need to activate it

- On Windows:

```
C:\Users\ydebray>.\env\Scripts\activate
```

- On Linux:

```
$ source env/bin/activate
```

Once you've done that you can install the libraries you want, for instance from a list of requirements:

```
C:\Users\ydebray>pip install -r requirements.txt
```

3.6. Set up a Python Development Environment

Once you've installed Python and the relevant packages for scientific computing, you still don't quite have the same experience as with the MATLAB Integrated Development Environment (IDE).

³² Python virtual environment: <https://docs.python.org/3/tutorial/venv.html>

Two key open-source technologies are taking a stab at reshaping the tech computing landscape:

- Jupyter Notebooks
- Visual Studio Code

They are redefining the way *Languages and Development environments* are interacting. Based on open standards for interactive computing first with Jupyter. Adding richer interaction for multiple languages in the IDE, with the VS Code Language Server Protocol.

3.6.1. Jupyter Notebooks

Jupyter Notebooks have become over the years, one of the most used and appreciated data science tools. They combine text (as Markdown), code, and output (numerical and graphical). Notebooks help data scientist to communicate goals, methods and results. It can be seen as an executable form of textbook or scientific paper.



Jupyter stands for Julia, Python and R, but it is also an homage to Galileo's notebooks recording the discovery of the moons of Jupiter. Those notebooks were probably one of the first instance of open science, data-and-narrative papers. When Galileo published the Sidereal Messenger in 1610 (one of the first scientific paper), he actually published his observations with code and data. It was a log of the dates and the states of the night. There was data and metadata, and there was a narrative.

Observations of Jupiter	
2. P. Galilei March 11, 1610	O **
30. March	** O *
2. April	O *** *


Jupyter is a project that spun off in 2014³³ from IPython. IPython stands for Interactive Python and was created in 2001 by Fernando Perez. He drew his inspiration from Maple and Mathematica that both had notebook environments. He really liked the Python language, but he felt limited by the interactive prompt to do scientific computing. So he wrote a python startup file to provide the ability to hold state and capture previous results for reuse, and adding some nice features like loading the Numeric library and Gnuplot.

³³ Launch of Project Jupyter at SciPy 2014: <https://speakerdeck.com/fperez/project-jupyter>

'ipython-0.0.1'³⁴ was born, a mere 259 lines to be loaded as \$PYTHONSTARTUP.

Around 2006, the IPython project took some inspiration from another open-source project called Sage³⁵. The Sage Notebook was taking the route of using the filesystem for notebook operations. You couldn't meaningfully list files with 'ls' or move around the filesystem by changing directory with 'cd'. Sage would execute your code in hidden directories with each cell actually being a separate subdirectory.


In 2010, the architecture of IPython evolved by separating the notebook front-end from the kernel executing Python code, and communicating between the two with the ZeroMQ protocol³⁶. This design enabled the development of a Qt client, a Visual Studio extension, and finally a web frontend.

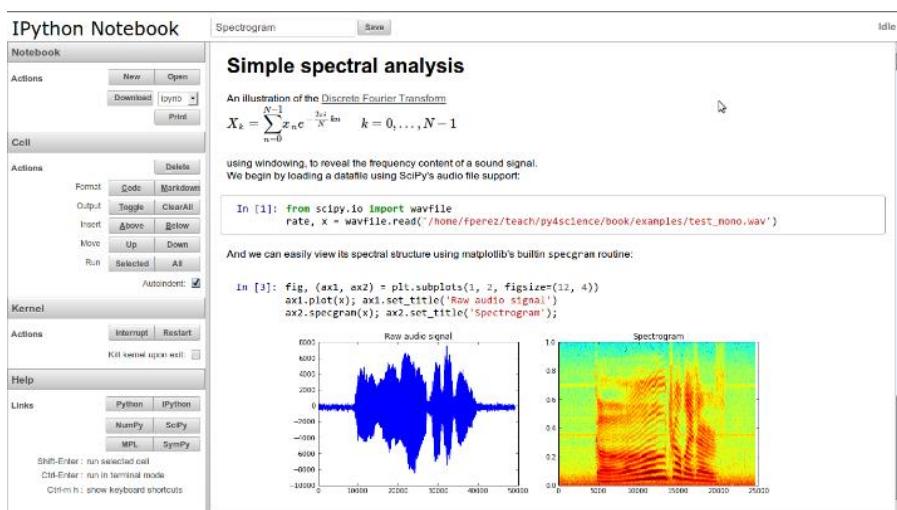

³⁴ ipython-0.0.1 - <https://gist.github.com/fperez/1579699>

³⁵ SageMath mathematics software system licensed under the GPL: <https://www.sagemath.org/>

³⁶ ZeroMQ Protocol: <https://zeromq.org/>

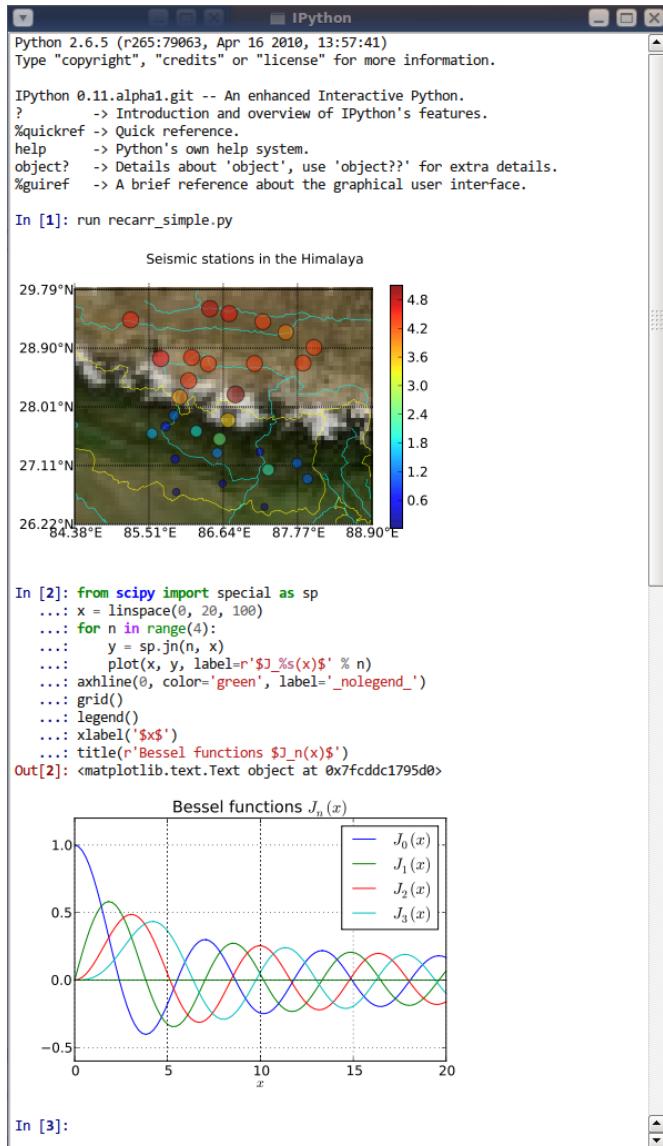

IPython gave turn to Jupyter, to become language agnostic. Jupyter supports execution environments (aka kernels) in several dozen languages among which are Julia, R, Haskell, Ruby, and of course Python (via the IPython kernel)... and MATLAB³⁷ (via a kernel maintained by the community and building on the MATLAB Engine for Python).

³⁷ MATLAB Kernel for Jupyter developed by the community:
https://github.com/Calysto/matlab_kernel

To summarize, Jupyter provides 3 key *components* to the modern scientific computing stack:



Some of the testimonies of the pervasive success of Jupyter in data science are the development of additional capabilities from the ecosystem:


- Running Notebooks on Google Colab
- Render Notebooks on GitHub

Read more on Jupyter:

- The scientific paper is obsolete, by James Somers – The Atlantic – APRIL 5, 2018
<https://www.theatlantic.com/science/archive/2018/04/the-scientific-paper-is-obsolete/556676/>
- The IPython notebook: a historical retrospective
<http://blog.fperez.org/2012/01/ipython-notebook-historical.html>
- A Brief History of Jupyter Notebooks
<https://ep2020.europython.eu/media/conference/slides/7UBMYed-a-brief-history-of-jupyter-notebooks.pdf>
- The First Notebook War - Martin Skarzynski
<https://www.youtube.com/watch?v=QR7gR3njNWw>

3.6.2. MATLAB Integration for Jupyter

MathWorks has released an official kernel for Jupyter in January 2023. In addition to this, you also have a way to integrate the MATLAB full environment as an app inside of a JupyterHub server installation. You can find this app easier in the 'New' menu, or if you are using JupyterLab, as an icon in the launcher:

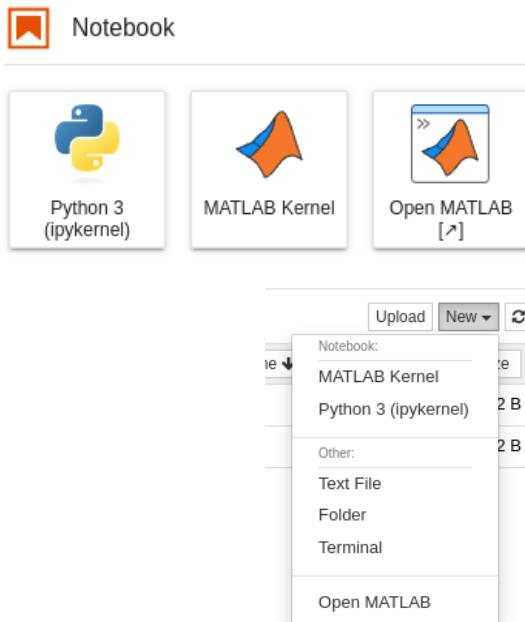

To find out more about the MATLAB Integration for Jupyter:

- <https://github.com/mathworks/jupyter-matlab-proxy>
- <https://www.mathworks.com/products/reference-architectures/jupyter.html>
- <https://blogs.mathworks.com/matlab/2023/01/30/official-mathworks-matlab-kernel-for-jupyter-released/>

3.6.3. Visual Studio Code

I adopted VS Code when I discovered that it was supporting Jupyter/IPython Notebook ipynb files.

As any other Integrated Development Environment, VS Code supports writing scripts and executing them in several languages (Python, Javascript, ...)

```

File Edit Selection View Go Run Terminal Help Interactive - coexecutionExamplePyTorch2.py - google_speech - Visual Studio Code
OPEN EDITORS ... Scripts > coexecutionExamplePyTorch2.py > ...
GROUP 1
  coexecutionExamplePyTorch2.py...
  coexecutionExamplePyTorch2.py...
  Untitled-1.pyw
GROUP 2
  Interactive - coexecutionExample...
GOOGLE SPEECH
> background
> env
> scripts
  cmdRecognition.onnx
  coexecutionExamplePyTorch.py
  coexecutionExamplePyTorch2.py
> extractTrainingFeatures.m
> extractValidationFeatures.m
> getNumerationsPerEpoch.m
> helperExtractAuditoryFeatures.m
> importDeployPretrainedOnnxModel...
> record_command.flac
> setupDatasets.m
> SpeechCommandRecognition.py
> stop_command.flac
> test
> train
> validation
Python 3.8.1 64-bit ('env': venv) 0 △ 0 Live Share
Interactive - coexecutionExamplePyTorch2.py - google_speech - Visual Studio Code
... Scripts > coexecutionExamplePyTorch2.py > ...
1 # This code is used in the 'Run MATLAB from Python' example
2 Run Cell | Run Below | Debug Cell | Go to [1]
3 # %%
4 # Copyright 2019-2021 The MathWorks, Inc.
5
6 import torch
7 from torch.utils.data import Dataset, DataLoader
8 import torch.nn as nn
9 import torch.onnx
10
11 import time
12 import os
13 Run Cell | Run Above | Debug Cell | Go to [10]
14 # %%
15 cudaAvailable = torch.cuda.is_available()
16 if cudaAvailable:
17   |   cuda = torch.device('cuda')
18 Run Cell | Run Above | Debug Cell
19 # %%
20 # start a MATLAB engine
21 import matlab.engine
22 MLEngine = matlab.engine.start_matlab()
23
24 minIBatchSize = 128_0
25 Run Cell | Run Above | Debug Cell
26 # %%
27 # Prepare training dataset
28 class TrainData(Dataset):
29   def __init__(self):
30
31
32
33
34
35
36
37
38
39
39 Run Cell | Run Below | Debug Cell | Go to [1]
40 # %%
41 # Create training data
42 # ...
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
59 Run Cell | Run Below | Debug Cell | Go to [1]
60 # %%
61 # Create training data
62 # ...
63
64
65
66
67
68
69
70
71
72
73
73 Run Cell | Run Below | Debug Cell | Go to [1]
74 # %%
75 # Create training data
76 # ...
77
78
79
80
81
82
82 Run Cell | Run Below | Debug Cell | Go to [1]
83 # %%
84 # Create training data
85 # ...
86
87
88
89
89 Run Cell | Run Below | Debug Cell | Go to [1]
90 # %%
91 # Create training data
92 # ...
93
94
95
96
96 Run Cell | Run Below | Debug Cell | Go to [1]
97 # %%
98 # Create training data
99 # ...
100
100 Run Cell | Run Below | Debug Cell | Go to [1]
101 # %%
102 # Create training data
103 # ...
104
105
106
107
107 Run Cell | Run Below | Debug Cell | Go to [1]
108 # %%
109 # Create training data
110 # ...
111
112
113
114
114 Run Cell | Run Below | Debug Cell | Go to [1]
115 # %%
116 # Create training data
117 # ...
118
119
120
121
121 Run Cell | Run Below | Debug Cell | Go to [1]
122 # %%
123 # Create training data
124 # ...
125
126
127
128
128 Run Cell | Run Below | Debug Cell | Go to [1]
129 # %%
130 # Create training data
131 # ...
132
133
134
135
135 Run Cell | Run Below | Debug Cell | Go to [1]
136 # %%
137 # Create training data
138 # ...
139
139 Run Cell | Run Below | Debug Cell | Go to [1]
140 # %%
141 # Create training data
142 # ...
143
144
145
146
146 Run Cell | Run Below | Debug Cell | Go to [1]
147 # %%
148 # Create training data
149 # ...
150
151
152
153
153 Run Cell | Run Below | Debug Cell | Go to [1]
154 # %%
155 # Create training data
156 # ...
157
158
159
159 Run Cell | Run Below | Debug Cell | Go to [1]
160 # %%
161 # Create training data
162 # ...
163
164
165
166
166 Run Cell | Run Below | Debug Cell | Go to [1]
167 # %%
168 # Create training data
169 # ...
170
171
172
173
173 Run Cell | Run Below | Debug Cell | Go to [1]
174 # %%
175 # Create training data
176 # ...
177
178
179
179 Run Cell | Run Below | Debug Cell | Go to [1]
180 # %%
181 # Create training data
182 # ...
183
184
185
185 Run Cell | Run Below | Debug Cell | Go to [1]
186 # %%
187 # Create training data
188 # ...
189
189 Run Cell | Run Below | Debug Cell | Go to [1]
190 # %%
191 # Create training data
192 # ...
193
194
195
195 Run Cell | Run Below | Debug Cell | Go to [1]
196 # %%
197 # Create training data
198 # ...
199
200
200 Run Cell | Run Below | Debug Cell | Go to [1]
201 # %%
202 # Create training data
203 # ...
204
205
206
206 Run Cell | Run Below | Debug Cell | Go to [1]
207 # %%
208 # Create training data
209 # ...
210
211
212
212 Run Cell | Run Below | Debug Cell | Go to [1]
213 # %%
214 # Create training data
215 # ...
216
217
218
218 Run Cell | Run Below | Debug Cell | Go to [1]
219 # %%
220 # Create training data
221 # ...
222
223
224
224 Run Cell | Run Below | Debug Cell | Go to [1]
225 # %%
226 # Create training data
227 # ...
228
229
230
230 Run Cell | Run Below | Debug Cell | Go to [1]
231 # %%
232 # Create training data
233 # ...
234
235
236
236 Run Cell | Run Below | Debug Cell | Go to [1]
237 # %%
238 # Create training data
239 # ...
240
241
242
242 Run Cell | Run Below | Debug Cell | Go to [1]
243 # %%
244 # Create training data
245 # ...
246
247
248
248 Run Cell | Run Below | Debug Cell | Go to [1]
249 # %%
250 # Create training data
251 # ...
252
253
254
254 Run Cell | Run Below | Debug Cell | Go to [1]
255 # %%
256 # Create training data
257 # ...
258
259
260
260 Run Cell | Run Below | Debug Cell | Go to [1]
261 # %%
262 # Create training data
263 # ...
264
265
266
266 Run Cell | Run Below | Debug Cell | Go to [1]
267 # %%
268 # Create training data
269 # ...
270
271
272
272 Run Cell | Run Below | Debug Cell | Go to [1]
273 # %%
274 # Create training data
275 # ...
276
277
278
278 Run Cell | Run Below | Debug Cell | Go to [1]
279 # %%
280 # Create training data
281 # ...
282
283
284
284 Run Cell | Run Below | Debug Cell | Go to [1]
285 # %%
286 # Create training data
287 # ...
288
289
290
290 Run Cell | Run Below | Debug Cell | Go to [1]
291 # %%
292 # Create training data
293 # ...
294
295
296
296 Run Cell | Run Below | Debug Cell | Go to [1]
297 # %%
298 # Create training data
299 # ...
300
301
302
302 Run Cell | Run Below | Debug Cell | Go to [1]
303 # %%
304 # Create training data
305 # ...
306
307
308
308 Run Cell | Run Below | Debug Cell | Go to [1]
309 # %%
310 # Create training data
311 # ...
312
313
314
314 Run Cell | Run Below | Debug Cell | Go to [1]
315 # %%
316 # Create training data
317 # ...
318
319
320
320 Run Cell | Run Below | Debug Cell | Go to [1]
321 # %%
322 # Create training data
323 # ...
324
325
326
326 Run Cell | Run Below | Debug Cell | Go to [1]
327 # %%
328 # Create training data
329 # ...
330
331
332
332 Run Cell | Run Below | Debug Cell | Go to [1]
333 # %%
334 # Create training data
335 # ...
336
337
338
338 Run Cell | Run Below | Debug Cell | Go to [1]
339 # %%
340 # Create training data
341 # ...
342
343
344
344 Run Cell | Run Below | Debug Cell | Go to [1]
345 # %%
346 # Create training data
347 # ...
348
349
350
350 Run Cell | Run Below | Debug Cell | Go to [1]
351 # %%
352 # Create training data
353 # ...
354
355
356
356 Run Cell | Run Below | Debug Cell | Go to [1]
357 # %%
358 # Create training data
359 # ...
360
361
362
362 Run Cell | Run Below | Debug Cell | Go to [1]
363 # %%
364 # Create training data
365 # ...
366
367
368
368 Run Cell | Run Below | Debug Cell | Go to [1]
369 # %%
370 # Create training data
371 # ...
372
373
374
374 Run Cell | Run Below | Debug Cell | Go to [1]
375 # %%
376 # Create training data
377 # ...
378
379
380
380 Run Cell | Run Below | Debug Cell | Go to [1]
381 # %%
382 # Create training data
383 # ...
384
385
386
386 Run Cell | Run Below | Debug Cell | Go to [1]
387 # %%
388 # Create training data
389 # ...
390
391
392
392 Run Cell | Run Below | Debug Cell | Go to [1]
393 # %%
394 # Create training data
395 # ...
396
397
398
398 Run Cell | Run Below | Debug Cell | Go to [1]
399 # %%
400 # Create training data
401 # ...
402
403
404
404 Run Cell | Run Below | Debug Cell | Go to [1]
405 # %%
406 # Create training data
407 # ...
408
409
410
410 Run Cell | Run Below | Debug Cell | Go to [1]
411 # %%
412 # Create training data
413 # ...
414
415
416
416 Run Cell | Run Below | Debug Cell | Go to [1]
417 # %%
418 # Create training data
419 # ...
420
421
422
422 Run Cell | Run Below | Debug Cell | Go to [1]
423 # %%
424 # Create training data
425 # ...
426
427
428
428 Run Cell | Run Below | Debug Cell | Go to [1]
429 # %%
430 # Create training data
431 # ...
432
433
434
434 Run Cell | Run Below | Debug Cell | Go to [1]
435 # %%
436 # Create training data
437 # ...
438
439
440
440 Run Cell | Run Below | Debug Cell | Go to [1]
441 # %%
442 # Create training data
443 # ...
444
445
446
446 Run Cell | Run Below | Debug Cell | Go to [1]
447 # %%
448 # Create training data
449 # ...
450
451
452
452 Run Cell | Run Below | Debug Cell | Go to [1]
453 # %%
454 # Create training data
455 # ...
456
457
458
458 Run Cell | Run Below | Debug Cell | Go to [1]
459 # %%
460 # Create training data
461 # ...
462
463
464
464 Run Cell | Run Below | Debug Cell | Go to [1]
465 # %%
466 # Create training data
467 # ...
468
469
470
470 Run Cell | Run Below | Debug Cell | Go to [1]
471 # %%
472 # Create training data
473 # ...
474
475
476
476 Run Cell | Run Below | Debug Cell | Go to [1]
477 # %%
478 # Create training data
479 # ...
480
481
482
482 Run Cell | Run Below | Debug Cell | Go to [1]
483 # %%
484 # Create training data
485 # ...
486
487
488
488 Run Cell | Run Below | Debug Cell | Go to [1]
489 # %%
490 # Create training data
491 # ...
492
493
494
494 Run Cell | Run Below | Debug Cell | Go to [1]
495 # %%
496 # Create training data
497 # ...
498
499
500
500 Run Cell | Run Below | Debug Cell | Go to [1]
501 # %%
502 # Create training data
503 # ...
504
505
506
506 Run Cell | Run Below | Debug Cell | Go to [1]
507 # %%
508 # Create training data
509 # ...
510
511
512
512 Run Cell | Run Below | Debug Cell | Go to [1]
513 # %%
514 # Create training data
515 # ...
516
517
518
518 Run Cell | Run Below | Debug Cell | Go to [1]
519 # %%
520 # Create training data
521 # ...
522
523
524
524 Run Cell | Run Below | Debug Cell | Go to [1]
525 # %%
526 # Create training data
527 # ...
528
529
530
530 Run Cell | Run Below | Debug Cell | Go to [1]
531 # %%
532 # Create training data
533 # ...
534
535
536
536 Run Cell | Run Below | Debug Cell | Go to [1]
537 # %%
538 # Create training data
539 # ...
540
541
542
542 Run Cell | Run Below | Debug Cell | Go to [1]
543 # %%
544 # Create training data
545 # ...
546
547
548
548 Run Cell | Run Below | Debug Cell | Go to [1]
549 # %%
550 # Create training data
551 # ...
552
553
554
554 Run Cell | Run Below | Debug Cell | Go to [1]
555 # %%
556 # Create training data
557 # ...
558
559
560
560 Run Cell | Run Below | Debug Cell | Go to [1]
561 # %%
562 # Create training data
563 # ...
564
565
566
566 Run Cell | Run Below | Debug Cell | Go to [1]
567 # %%
568 # Create training data
569 # ...
570
571
572
572 Run Cell | Run Below | Debug Cell | Go to [1]
573 # %%
574 # Create training data
575 # ...
576
577
578
578 Run Cell | Run Below | Debug Cell | Go to [1]
579 # %%
580 # Create training data
581 # ...
582
583
584
584 Run Cell | Run Below | Debug Cell | Go to [1]
585 # %%
586 # Create training data
587 # ...
588
589
590
590 Run Cell | Run Below | Debug Cell | Go to [1]
591 # %%
592 # Create training data
593 # ...
594
595
596
596 Run Cell | Run Below | Debug Cell | Go to [1]
597 # %%
598 # Create training data
599 # ...
600
601
602
602 Run Cell | Run Below | Debug Cell | Go to [1]
603 # %%
604 # Create training data
605 # ...
606
607
608
608 Run Cell | Run Below | Debug Cell | Go to [1]
609 # %%
610 # Create training data
611 # ...
612
613
614
614 Run Cell | Run Below | Debug Cell | Go to [1]
615 # %%
616 # Create training data
617 # ...
618
619
620
620 Run Cell | Run Below | Debug Cell | Go to [1]
621 # %%
622 # Create training data
623 # ...
624
625
626
626 Run Cell | Run Below | Debug Cell | Go to [1]
627 # %%
628 # Create training data
629 # ...
630
631
632
632 Run Cell | Run Below | Debug Cell | Go to [1]
633 # %%
634 # Create training data
635 # ...
636
637
638
638 Run Cell | Run Below | Debug Cell | Go to [1]
639 # %%
640 # Create training data
641 # ...
642
643
644
644 Run Cell | Run Below | Debug Cell | Go to [1]
645 # %%
646 # Create training data
647 # ...
648
649
650
650 Run Cell | Run Below | Debug Cell | Go to [1]
651 # %%
652 # Create training data
653 # ...
654
655
656
656 Run Cell | Run Below | Debug Cell | Go to [1]
657 # %%
658 # Create training data
659 # ...
660
661
662
662 Run Cell | Run Below | Debug Cell | Go to [1]
663 # %%
664 # Create training data
665 # ...
666
667
668
668 Run Cell | Run Below | Debug Cell | Go to [1]
669 # %%
670 # Create training data
671 # ...
672
673
674
674 Run Cell | Run Below | Debug Cell | Go to [1]
675 # %%
676 # Create training data
677 # ...
678
679
680
680 Run Cell | Run Below | Debug Cell | Go to [1]
681 # %%
682 # Create training data
683 # ...
684
685
686
686 Run Cell | Run Below | Debug Cell | Go to [1]
687 # %%
688 # Create training data
689 # ...
690
691
692
692 Run Cell | Run Below | Debug Cell | Go to [1]
693 # %%
694 # Create training data
695 # ...
696
697
698
698 Run Cell | Run Below | Debug Cell | Go to [1]
699 # %%
700 # Create training data
701 # ...
702
703
704
704 Run Cell | Run Below | Debug Cell | Go to [1]
705 # %%
706 # Create training data
707 # ...
708
709
710
710 Run Cell | Run Below | Debug Cell | Go to [1]
711 # %%
712 # Create training data
713 # ...
714
715
716
716 Run Cell | Run Below | Debug Cell | Go to [1]
717 # %%
718 # Create training data
719 # ...
720
721
722
722 Run Cell | Run Below | Debug Cell | Go to [1]
723 # %%
724 # Create training data
725 # ...
726
727
728
728 Run Cell | Run Below | Debug Cell | Go to [1]
729 # %%
730 # Create training data
731 # ...
732
733
734
734 Run Cell | Run Below | Debug Cell | Go to [1]
735 # %%
736 # Create training data
737 # ...
738
739
740
740 Run Cell | Run Below | Debug Cell | Go to [1]
741 # %%
742 # Create training data
743 # ...
744
745
746
746 Run Cell | Run Below | Debug Cell | Go to [1]
747 # %%
748 # Create training data
749 # ...
750
751
752
752 Run Cell | Run Below | Debug Cell | Go to [1]
753 # %%
754 # Create training data
755 # ...
756
757
758
758 Run Cell | Run Below | Debug Cell | Go to [1]
759 # %%
760 # Create training data
761 # ...
762
763
764
764 Run Cell | Run Below | Debug Cell | Go to [1]
765 # %%
766 # Create training data
767 # ...
768
769
770
770 Run Cell | Run Below | Debug Cell | Go to [1]
771 # %%
772 # Create training data
773 # ...
774
775
776
776 Run Cell | Run Below | Debug Cell | Go to [1]
777 # %%
778 # Create training data
779 # ...
780
781
782
782 Run Cell | Run Below | Debug Cell | Go to [1]
783 # %%
784 # Create training data
785 # ...
786
787
788
788 Run Cell | Run Below | Debug Cell | Go to [1]
789 # %%
790 # Create training data
791 # ...
792
793
794
794 Run Cell | Run Below | Debug Cell | Go to [1]
795 # %%
796 # Create training data
797 # ...
798
799
800
800 Run Cell | Run Below | Debug Cell | Go to [1]
801 # %%
802 # Create training data
803 # ...
804
805
806
806 Run Cell | Run Below | Debug Cell | Go to [1]
807 # %%
808 # Create training data
809 # ...
810
811
812
812 Run Cell | Run Below | Debug Cell | Go to [1]
813 # %%
814 # Create training data
815 # ...
816
817
818
818 Run Cell | Run Below | Debug Cell | Go to [1]
819 # %%
820 # Create training data
821 # ...
822
823
824
824 Run Cell | Run Below | Debug Cell | Go to [1]
825 # %%
826 # Create training data
827 # ...
828
829
830
830 Run Cell | Run Below | Debug Cell | Go to [1]
831 # %%
832 # Create training data
833 # ...
834
835
836
836 Run Cell | Run Below | Debug Cell | Go to [1]
837 # %%
838 # Create training data
839 # ...
840
841
842
842 Run Cell | Run Below | Debug Cell | Go to [1]
843 # %%
844 # Create training data
845 # ...
846
847
848
848 Run Cell | Run Below | Debug Cell | Go to [1]
849 # %%
850 # Create training data
851 # ...
852
853
854
854 Run Cell | Run Below | Debug Cell | Go to [1]
855 # %%
856 # Create training data
857 # ...
858
859
860
860 Run Cell | Run Below | Debug Cell | Go to [1]
861 # %%
862 # Create training data
863 # ...
864
865
866
866 Run Cell | Run Below | Debug Cell | Go to [1]
867 # %%
868 # Create training data
869 # ...
870
871
872
872 Run Cell | Run Below | Debug Cell | Go to [1]
873 # %%
874 # Create training data
875 # ...
876
877
878
878 Run Cell | Run Below | Debug Cell | Go to [1]
879 # %%
880 # Create training data
881 # ...
882
883
884
884 Run Cell | Run Below | Debug Cell | Go to [1]
885 # %%
886 # Create training data
887 # ...
888
889
890
890 Run Cell | Run Below | Debug Cell | Go to [1]
891 # %%
892 # Create training data
893 # ...
894
895
896
896 Run Cell | Run Below | Debug Cell | Go to [1]
897 # %%
898 # Create training data
899 # ...
900
901
902
902 Run Cell | Run Below | Debug Cell | Go to [1]
903 # %%
904 # Create training data
905 # ...
906
907
908
908 Run Cell | Run Below | Debug Cell | Go to [1]
909 # %%
910 # Create training data
911 # ...
912
913
914
914 Run Cell | Run Below | Debug Cell | Go to [1]
915 # %%
916 # Create training data
917 # ...
918
919
920
920 Run Cell | Run Below | Debug Cell | Go to [1]
921 # %%
922 # Create training data
923 # ...
924
925
926
926 Run Cell | Run Below | Debug Cell | Go to [1]
927 # %%
928 # Create training data
929 # ...
930
931
932
932 Run Cell | Run Below | Debug Cell | Go to [1]
933 # %%
934 # Create training data
935 # ...
936
937
938
938 Run Cell | Run Below | Debug Cell | Go to [1]
939 # %%
940 # Create training data
941 # ...
942
943
944
944 Run Cell | Run Below | Debug Cell | Go to [1]
945 # %%
946 # Create training data
947 # ...
948
949
950
950 Run Cell | Run Below | Debug Cell | Go to [1]
951 # %%
952 # Create training data
953 # ...
954
955
956
956 Run Cell | Run Below | Debug Cell | Go to [1]
957 # %%
958 # Create training data
959 # ...
960
961
962
962 Run Cell | Run Below | Debug Cell | Go to [1]
963 # %%
964 # Create training data
965 # ...
966
967
968
968 Run Cell | Run Below | Debug Cell | Go to [1]
969 # %%
970 # Create training data
971 # ...
972
973
974
974 Run Cell | Run Below | Debug Cell | Go to [1]
975 # %%
976 # Create training data
977 # ...
978
979
980
980 Run Cell | Run Below | Debug Cell | Go to [1]
981 # %%
982 # Create training data
983 # ...
984
985
986
986 Run Cell | Run Below | Debug Cell | Go to [1]
987 # %%
988 # Create training data
989 # ...
990
991
992
992 Run Cell | Run Below | Debug Cell | Go to [1]
993 # %%
994 # Create training data
995 # ...
996
997
998
998 Run Cell | Run Below | Debug Cell | Go to [1]
999 # %%
1000 # Create training data
1001 # ...
1002
1003
1004
1004 Run Cell | Run Below | Debug Cell | Go to [1]
1005 # %%
1006 # Create training data
1007 # ...
1008
1009
1010
1010 Run Cell | Run Below | Debug Cell | Go to [1]
1011 # %%
1012 # Create training data
1013 # ...
1014
1015
1016
1016 Run Cell | Run Below | Debug Cell | Go to [1]
1017 # %%
1018 # Create training data
1019 # ...
1020
1021
1022
1022 Run Cell | Run Below | Debug Cell | Go to [1]
1023 # %%
1024 # Create training data
1025 # ...
1026
1027
1028
1028 Run Cell | Run Below | Debug Cell | Go to [1]
1029 # %%
1030 # Create training data
1031 # ...
1032
1033
1034
1034 Run Cell | Run Below | Debug Cell | Go to [1]
1035 # %%
1036 # Create training data
1037 # ...
1038
1039
1040
1040 Run Cell | Run Below | Debug Cell | Go to [1]
1041 # %%
1042 # Create training data
1043 # ...
1044
1045
1046
1046 Run Cell | Run Below | Debug Cell | Go to [1]
1047 # %%
1048 # Create training data
1049 # ...
1050
1051
1052
1052 Run Cell | Run Below | Debug Cell | Go to [1]
1053 # %%
1054 # Create training data
1055 # ...
1056
1057
1058
1058 Run Cell | Run Below | Debug Cell | Go to [1]
1059 # %%
1060 # Create training data
1061 # ...
1062
1063
1064
1064 Run Cell | Run Below | Debug Cell | Go to [1]
1065 # %%
1066 # Create training data
1067 # ...
1068
1069
1070
1070 Run Cell | Run Below | Debug Cell | Go to [1]
1071 # %%
1072 # Create training data
1073 # ...
1074
1075
1076
1076 Run Cell | Run Below | Debug Cell | Go to [1]
1077 # %%
1078 # Create training data
1079 # ...
1080
1081
1082
1082 Run Cell | Run Below | Debug Cell | Go to [1]
1083 # %%
1084 # Create training data
1085 # ...
1086
1087
1088
1088 Run Cell | Run Below | Debug Cell | Go to [1]
1089 # %%
1090 # Create training data
1091 # ...
1092
1093
1094
1094 Run Cell | Run Below | Debug Cell | Go to [1]
1095 # %%
1096 # Create training data
1097 # ...
1098
1099
1100
1100 Run Cell | Run Below | Debug Cell | Go to [1]
1101 # %%
1102 # Create training data
1103 # ...
1104
1105
1106
1106 Run Cell | Run Below | Debug Cell | Go to [1]
1107 # %%
1108 # Create training data
1109 # ...
1110
1111
1112
1112 Run Cell | Run Below | Debug Cell | Go to [1]
1113 # %%
1114 # Create training data
1115 # ...
1116
1117
1118
1118 Run Cell | Run Below | Debug Cell | Go to [1]
1119 # %%
1120 # Create training data
1121 # ...
1122
1123
1124
1124 Run Cell | Run Below | Debug Cell | Go to [1]
1125 # %%
1126 # Create training data
1127 # ...
1128
1129
1130
1130 Run Cell | Run Below | Debug Cell | Go to [1]
1131 # %%
1132 # Create training data
1133 # ...
1134
1135
1136
1136 Run Cell | Run Below | Debug Cell | Go to [1]
1137 # %%
1138 # Create training data
1139 # ...
1140
1141
1142
1142 Run Cell | Run Below | Debug Cell | Go to [1]
1143 # %%
1144 # Create training data
1145 # ...
1146
1147
1148
1148 Run Cell | Run Below | Debug Cell | Go to [1]
1149 # %%
1150 # Create training data
1151 # ...
1152
1153
1154
1154 Run Cell | Run Below | Debug Cell | Go to [1]
1155 # %%
1156 # Create training data
1157 # ...
1158
1159
1160
1160 Run Cell | Run Below | Debug Cell | Go to [1]
1161 # %%
1162 # Create training data
1163 # ...
1164
1165
1166
1166 Run Cell | Run Below | Debug Cell | Go to [1]
1167 # %%
1168 # Create training data
1169 # ...
1170
1171
1172
1172 Run Cell | Run Below | Debug Cell | Go to [1]
1173 # %%
1174 # Create training data
1175 # ...
1176
1177
1178
1178 Run Cell | Run Below | Debug Cell | Go to [1]
1179 # %%
1180 # Create training data
1181 # ...
1182
1183
1184
1184 Run Cell | Run Below | Debug Cell | Go to [1]
1185 # %%
1186 # Create training data
1187 # ...
1188
1189
1190
1190 Run Cell | Run Below | Debug Cell | Go to [1]
1191 # %%
1192 # Create training data
1193 # ...
1194
1195
1196
1196 Run Cell | Run Below | Debug Cell | Go to [1]
1197 # %%
1198 # Create training data
1199 # ...
1200
1201
1202
1202 Run Cell | Run Below | Debug Cell | Go to [1]
1203 # %%
1204 # Create training data
1205 # ...
1206
1207
1208
1208 Run Cell | Run Below | Debug Cell | Go to [1]
1209 # %%
1210 # Create training data
1211 # ...
1212
1213
1214
1214 Run Cell | Run Below | Debug Cell | Go to [1]
1215 # %%
1216 # Create training data
1217 # ...
1218
1219
1220
1220 Run Cell | Run Below | Debug Cell | Go to [1]
1221 # %%
1222 # Create training data
1223 # ...
1224
1225
1226
1226 Run Cell | Run Below | Debug Cell | Go to [1]
1227 # %%
1228 # Create training data
1229 # ...
1230
1231
1232
1232 Run Cell | Run Below | Debug Cell | Go to [1]
1233 # %%
1234 # Create training data
1235 # ...
1236
1237
1238
1238 Run Cell | Run Below | Debug Cell | Go to [1]
1239 # %%
1240 # Create training data
1241 # ...
1242
1243
1244
1244 Run Cell | Run Below | Debug Cell | Go to [1]
1245 # %%
1246 # Create training data
1247 # ...
1248
1249
1250
1250 Run Cell | Run Below | Debug Cell | Go to [1]
1251 # %%
1252 # Create training data
1253 # ...
1254
1255
1256
1256 Run Cell | Run Below | Debug Cell | Go to [1]
1257 # %%
1258 # Create training data
1259 # ...
1260
1261
1262
1262 Run Cell | Run Below | Debug Cell | Go to [1]
1263 # %%
1264 # Create training data
1265 # ...
1266
1267
1268
1268 Run Cell | Run Below | Debug Cell | Go to [1]
1269 # %%
1270 # Create training data
1271 # ...
1272
1273
1274
1274 Run Cell | Run Below | Debug Cell | Go to [1]
1275 # %%
1276 # Create training data
1277 # ...
1278
1279
1280
1280 Run Cell | Run Below | Debug Cell | Go to [1]
1281 # %%
1282 # Create training data
1283 # ...
1284
1285
1286
1286 Run Cell | Run Below | Debug Cell | Go to [1]
1287 # %%
1288 # Create training data
1289 # ...
1290
1291
1292
1292 Run Cell | Run Below | Debug Cell | Go to [1]
1293 # %%
1294 # Create training data
1295 # ...
1296
1297
1298
1298 Run Cell | Run Below | Debug Cell | Go to [1]
1299 # %%
1300 # Create training data
1301 # ...
1302
1303
1304
1304 Run Cell | Run Below | Debug Cell | Go to [1]
1305 # %%
1306 # Create training data
1307 # ...
1308
1309
1310
1310 Run Cell | Run Below | Debug Cell | Go to [1]
1311 # %%
1312 # Create training data
1313 # ...
1314
1315
1316
1316 Run Cell | Run Below | Debug Cell | Go to [1]
1317 # %%
1318 # Create training data
1319 # ...
1320
1321
1322
1322 Run Cell | Run Below | Debug Cell | Go to [1]
1323 # %%
1324 # Create training data
1325 # ...
1326
1327
1328
1328 Run Cell | Run Below | Debug Cell | Go to [1]
1329 # %%
1330 # Create training data
1331 # ...
1332
1333
1334
1334 Run Cell | Run Below | Debug Cell | Go to [1]
1335 # %%
1336 # Create training data
1337 # ...
1338
1339
1340
1340 Run Cell | Run Below | Debug Cell | Go to [1]
1341 # %%
1342 # Create training data
1343 # ...
1344
1345
1346
1346 Run Cell | Run Below | Debug Cell | Go to [1]
1347 # %%
1348 # Create training data
1349 # ...
1350
1351
1352
1352 Run Cell | Run Below | Debug Cell | Go to [1]
1353 # %%
1354 # Create training data
1355 # ...
1356
1357
1358
1358 Run Cell | Run Below | Debug Cell | Go to [1]
1359 # %%
1360 # Create training data
1361 # ...
1362
1363
1364
1364 Run Cell | Run Below | Debug Cell | Go to [1]
1365 # %%
1366 # Create training data
1367 # ...
1368
1369
1370
1370 Run Cell | Run Below | Debug Cell | Go to [1]
1371 # %%
1372 # Create training data
1373 # ...
1374
1375
1376
1376 Run Cell | Run Below | Debug Cell | Go to [1]
1377 # %%
1378 # Create training data
1379 # ...
1380
1381
1382
1382 Run Cell | Run Below | Debug Cell | Go to [1]
1383 # %%
1384 # Create training data
1385 # ...
1386
1387
1388
1388 Run Cell | Run Below | Debug Cell | Go to [1]
1389 # %%
1390 # Create training data
1391 # ...
1392
1393
1394
1394 Run Cell | Run Below | Debug Cell | Go to [1]
1395 # %%
1396 # Create training data
1397 # ...
1398
1399
1400
1400 Run Cell | Run Below | Debug Cell | Go to [1]
1401 # %%
1402 # Create training data
1403 # ...
1404
1405
1406
1406 Run Cell | Run Below | Debug Cell | Go to [1]
1407 # %%
1408 # Create training data
1409 # ...
1410
1411
1412
1412 Run Cell | Run Below | Debug Cell | Go to [1]
1413 # %%
1414 # Create training data
1415 # ...
1416
1417
1418
1418 Run Cell | Run Below | Debug Cell | Go to [1]
1419 # %%
1420 # Create training data
1421 # ...
1422
1423
1424
1424 Run Cell | Run Below | Debug Cell | Go to [1]
1425 # %%
1426 # Create training data
1427 # ...
1428
1429
1430
1430 Run Cell | Run Below | Debug Cell | Go to [1]
1431 # %%
1432 # Create training data
1433 # ...
1434
1435
1436
1436 Run Cell | Run Below | Debug Cell | Go to [1]
1437 # %%
1438 # Create training data
1439 # ...
1440
1441
1442
1442 Run Cell | Run Below | Debug Cell | Go to [1]
1443 # %%
1444 # Create training data
1445 # ...
1446
1447
1448
1448 Run Cell | Run Below | Debug Cell | Go to [1]
1449 # %%
1450 # Create training data
1451 # ...
1452
1453
1454
1454 Run Cell | Run Below | Debug Cell | Go to [1]
1455 # %%
1456 # Create training data
1457 # ...
1458
1459
1460
1460 Run Cell | Run Below | Debug Cell | Go to [1]
1461 # %%
1462 # Create training data
1463 # ...
1464
1465
1466
1466 Run Cell | Run Below | Debug Cell | Go to [1]
1467 # %%
1468 # Create training data
1469 # ...
1470
1471
1472
1472 Run Cell | Run Below | Debug Cell | Go to [1]
1473 # %%
1474 # Create training data
1475 # ...
1476
1477
1478
1478 Run Cell | Run Below | Debug Cell | Go to [1]
1479 # %%
1480 # Create training data
1481 # ...
1482
1483
1484
1484 Run Cell | Run Below | Debug Cell | Go to [1]
1485 # %%
1
```

```
>> pyenv('Version','C:\Users\ydebray\AppData\Local\Programs\Python\Python38\python.exe')
```

This is also the way to connect to Python virtual environments:

```
>> pyenv('Version','env\Scripts\python.exe')
```

In your project folder, where you created your virtual environment called env, you simply need to point to the Python executable that is contained in the Scripts subfolder.

Execution Mode:

By default, Python runs in the same process as MATLAB. On the plus side, it means that you don't have overhead for inter-process data exchange between the two systems. But it also means that if Python encounters an error and crashes, then MATLAB crashes as well. This can happen when MATLAB uses different versions of the same library than a given package. For this reason, the *Out-of-Process* execution mode has been introduced⁴¹:

```
>> pyenv("ExecutionMode","OutOfProcess")
```

Setup Tips:

- Ensure all code is on path (both on the MATLAB and Python side⁴²)
- Check environment settings, depending on how you set up Python
- In Out-of-Process Execution, you can terminate the Python process⁴³

3.8. Install the MATLAB Engine for Python

Since the MATLAB Engine for Python has been added to the Python Package Index⁴⁴ (mid-April 2022), you can simply install it with the pip command:

```
C:\Users\ydebray>pip install matlabengine
```

⁴¹ Out-of-Process Execution of Python Functionality:

https://www.mathworks.com/help/matlab/matlab_external/out-of-process-execution-of-python-functionality.html

⁴² Add a script to the Python path: <https://github.com/hgorr/matlab-with-python/blob/master/setUpPyPath.m>

⁴³ Terminate process associated with Python interpreter:

<https://www.mathworks.com/help/matlab/ref/pythonenvironment.terminate.html>

⁴⁴ MATLAB Engine for Python on PyPI: <https://pypi.org/project/matlabengine/>

Before that and for release prior to MATLAB R2022a, you had to install in manually⁴⁵:

```
cd "matlabroot\extern\engines\python"  
python setup.py install
```

On Linux, you need to make sure that the default install location of MATLAB by calling `matlabroot` in a MATLAB Command Window. By default, Linux installs MATLAB at:

```
/usr/local/MATLAB/R2023a
```

⁴⁵ Install MATLAB Engine for Python:

https://www.mathworks.com/help/matlab/matlab_external/install-the-matlab-engine-for-python.html

4. Call Python from MATLAB

Why would you want to call Python from MATLAB. There could be a number of reasons.

First, as a single user. You might want to grab features available in Python. For instance, specialized libraries in fields like AI: Machine Learning with Scikit-Learn or XGBoost, Deep-Learning with TensorFlow or PyTorch, Reinforcement Learning with OpenAI Gym, ...

Second, if you are working with colleagues that developed Python functions, that you would like to leverage as a MATLAB user, without the need to recode.

Third, if you are deploying your MATLAB Application in a Python-based environment, where some of the services, for instance for data access like in the case of the weather app from the first chapter, are written in Python.

4.1. Execute Python statements and files in MATLAB

Since R2021b, you can run Python statements directly from MATLAB with [pyrun](#). This is convenient to simply run short snippets of Python code, without having to wrap it into a script.

```
pyrun("l = [1,2,3]")
pyrun("print(l)")
```

```
[1, 2, 3]
```

As you can see, the pyrun function is stateful, in that it maintains the variable defined in previous calls. You can retrieve the Python variable on the MATLAB side by entering it as a second argument:

```
pyrun("l2 = [k^2 for k in l]","l2")
```

```
ans =
Python list with values:
[3, 0, 1]
```

Use string, double or cell function to convert to a MATLAB array.

You can retrieve the list of variables defined in the local scope with the function [dir\(\)](#):

```
D = pyrun("d = dir()", "d")
```

D =
Python list with values:

```
['__builtins__', '__name__', 'l', 'l2']
```

Use string, double or cell function to convert to a MATLAB array.

If it feels more convenient to paste your Python code snippet into a script, you can use [pyrunfile](#).


4.2. Execute Python code in a MATLAB Live Task

Since MATLAB 2022a, you can develop your own custom live tasks. So, in mid-2021, we started prototyping a Python live task with Lucas Garcia. The truth is: I made a first crappy version, and Lucas turned it into something awesome (Lucas should get all the credits for this). Based on this Minimal Viable Product, we engaged with the development teams, both of the MATLAB editor team, and the Python interface team. We decided it would be best to release this prototype in open-source on GitHub to get early feedbacks, and potentially ship it in the product in future version.




The code is available on <https://github.com/mathworks/MATLAB-Live-Task-for-Python>

To test it, just clone or download the repo. Execute the set-up script to register the Live Task in your Task gallery. Create a new Live Script, and select Task in the Live Editor tab. You should see this icon under MY TASKS:

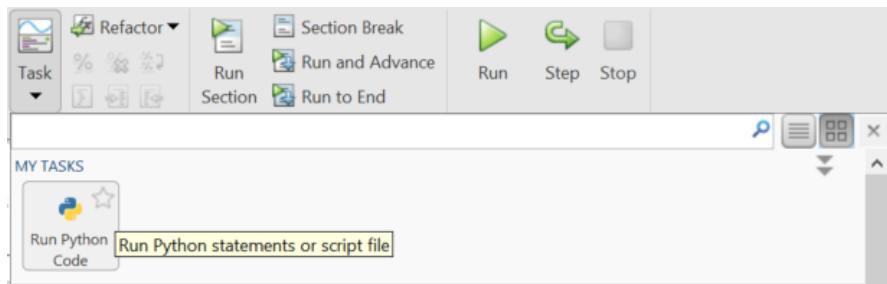

If you click on it, it will add the live task to your Live Script where the cursor is located. Alternatively, you can start typing “python” or “run” directly in your Live Script select the task:

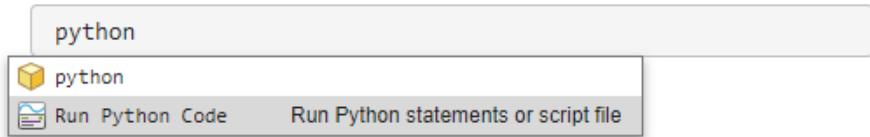

This is what the first version (mine looked like):

A screenshot of the MATLAB Live Editor. The title bar says "Live Editor - untitled2.mlx *". There are two tabs open: "pythonTask.m" and "untitled2.mlx *". A new tab button "+" is visible. A modal window titled "pythonTask" is open, prompting "Enter and execute your Python code". Inside, under "Enter Python Code", is the following Python code:

```
a = "hello"
b = "world"
print(a+b)
```

A "Run code" button is at the bottom of the modal. Below the Live Editor is the "Command Window" pane. It shows:

```
task =
pythonTask with properties:
    State: [1x1 struct]
    Summary: 'Enter and execute your Python code'
    AutoRun: 1

helloworld
```

And this is what Lucas turned it into:

Run Python Code

wrapped = Run Python statements

Select code to run

Python statements Python script file

Python Code

```
import textwrap as tw
format = tw.TextWrapper(initial_indent="", subsequent_indent="% ", width=30)
wrapped = format.wrap(T)
```

Specify input variables

Input variable MATLAB variable T → Python variable name T - + ⌂

Specify output variables


Python variable name wrapped - + ⌂

```
% Running Python statements from Live Task
pythonCode = [
    "import textwrap as tw"
    "format = tw.TextWrapper(initial_indent=""% "", subsequent_indent=""% "", width=30)"
    "wrapped = format.wrap(T)"
];
wrapped = pyrun(pythonCode, "wrapped", "T", T);
```

This is meant to be a convenient user interface on top of pyrun. Feel free to share your feedback!

4.3. Basic syntax of calling Python functions from MATLAB

All Python functions in MATLAB have the same basic syntax:



The basic example that I give to kick things off is usually calling the square root function from the math module⁴⁶, that is part of the Python standard library. It makes little sense to call mathematics functions in Python from MATLAB, but it is easy to compare the result with what you would expect directly from MATLAB:

In the MATLAB Command Window:

```
>> py.math.sqrt(42)
```

In a MATLAB Live Script:

⁴⁶ Python math module: <https://docs.python.org/3/library/math.html>

```
py.math.sqrt(42)
```

```
ans = 6.4807
```

We can create Python data structures from within MATLAB:

```
py.list([1,2,3])
```

```
ans =
Python list with values:
```

```
[1.0, 2.0, 3.0]
```

Use string, double or cell function to convert to a MATLAB array.

```
py.list({1,2,'a','b'})
```

```
ans =
Python list with values:
```

```
[1.0, 2.0, 'a', 'b']
```

Use string, double or cell function to convert to a MATLAB array.

```
s = struct('a', 1, 'b', 2)
```

```
s = struct with fields:
  a: 1
  b: 2
```

```
d = py.dict(s)
```

```
d =
Python dict with no properties.

{'a': 1.0, 'b': 2.0}
```

And we can run methods on those data structures from the MATLAB side:

```
methods(d)
```

Methods for class `py.dict`:

<code>char</code>	<code>copy</code>	<code>eq</code>	<code>get</code>	<code>items</code>	<code>le</code>
<code>ne</code>	<code>popitem</code>	<code>struct</code>	<code>values</code>		
<code>clear</code>	<code>dict</code>	<code>ge</code>	<code>gt</code>	<code>keys</code>	<code>lt</code>
<code>pop</code>	<code>setdefault</code>	<code>update</code>			

Static methods:

`fromkeys`

Methods of `py.dict` inherited from `handle`.

```
d.get('a')
```


```
ans = 1
```

4.4. Call Python User Defined Functions from MATLAB

In this chapter, we will leverage a demo developed by a Finance colleague. In this example, he is responsible for building enterprise web predictive analytics that other business critical applications can connect to as a web service. It follows the same structure as the weather example in [chapter 2](#).

This web service is **forecasting the price of cryptocurrencies**⁴⁷:


forecast.matlab.com/crypto.js?coin=ETH

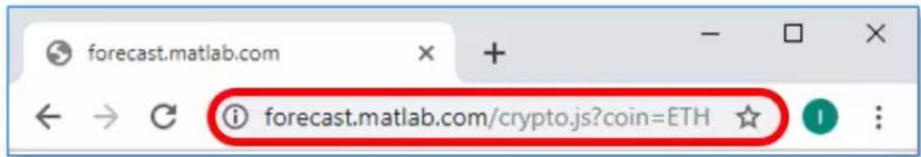

It returns data in the following form (JSON):

```
[{"Time": "2022-01-21T12:00:00Z", "predictedPrice": 2466.17},  
...  
{"Time": "2022-01-21T17:00:00Z", "predictedPrice": 2442.25}]
```

The first step is to develop an application that simply shows the historical price movement of a particular cryptocurrency:

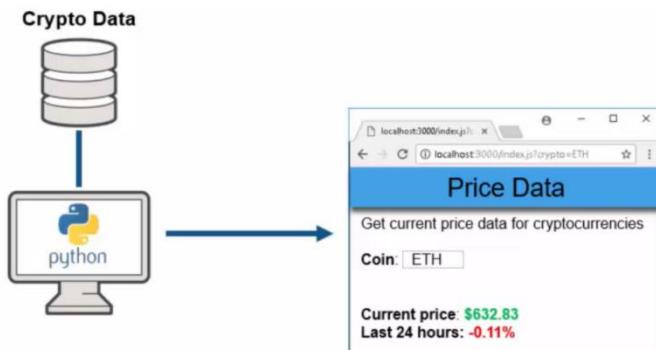

⁴⁷ Forecasting the price of cryptocurrencies with Python and MATLAB

<https://www.mathworks.com/videos/integrating-python-with-matlab-1605793241650.html>

This allows you to monitor the evolution of the price over the last 24 hours and take decisions to buy or sell your crypto assets based on this. Then one day, your manager comes to you and says:

"Hey, I have an idea. If we had access to the predicted forward-looking data as opposed to the historical data, we could make additional profit beyond what we're currently making, even if the prediction is 100% accurate."

New Idea



Let's assume the organization has a few quants that have extensive MATLAB expertise. And they know exactly how to build out such predictive models that the business users are looking for.

However, before we can get to that, our first challenge is to call the Python data scraping libraries and pull that data directly into MATLAB. Our first task at hand: Parse the cryptocurrency URL that we are connecting to, and just get out the domain name. For that, we want to use this function that's contained within the Python standard libraries and use it from within MATLAB. In this case, we are going to call a package `urllib`⁴⁸. It contains a sub-module called `parse`, that contains in turn the function `urlparse`.

```
startDate = '2022-01-21T12:00:00Z';
stopDate = '2022-01-21T17:00:00Z';
url = "https://api.pro.coinbase.com/products/ETH-
USD/candles?start="+startDate+"&end="+stopDate+"&granulari
ty=60";
urlparts = py.urllib.parse.urlparse(url)

urlparts =
Python ParseResult with properties:

    fragment
```

⁴⁸ urllib package from the Python standard library:

<https://docs.python.org/3/library/urllib.html>

```
hostname  
netloc  
params  
password  
path  
port  
query  
scheme  
username
```

```
ParseResult(scheme='https', netloc='api.pro.coinbase.com',  
path='/products/ETH-USD/candles', params='', query='start=2022-01-  
23T01:00:00Z&end=2022-01-23T06:00:00Z&granularity=60', fragment='')
```

```
domain = urlparts.netloc
```

```
domain =  
Python str with no properties.
```

```
api.pro.coinbase.com
```

To avoid the unnecessary back and forth of intermediate data between MATLAB and Python, we write a **Python User Defined Module**⁴⁹, called `dataLib.py` with a few functions in it:

```
jsonData = py.dataLib.getPriceData("ETH", startDate, stopDate)  
historicalPrices = py.dataLib.parseJson(jsonData, [0,4])
```

`dataLib.py` imports 1-minute bars from Coinbase Pro⁵⁰. Note, the API does not fetch the first minute specified by the start date so the times span (start, stop]. To return data we are using a variety of data structures from Numpy arrays to lists and dictionaries, and even JSON.

This is what the function looks like:

```
def getPriceData(coin, start, stop):  
# returns back a python list containing the historical data  
# of the cryptocurrency 'product' for the period of time  
# ('start', 'stop').
```

⁴⁹ Call User-Defined Python Module:

https://www.mathworks.com/help/matlab/matlab_external/call-user-defined-custom-module.html

⁵⁰ Coinbase Pro: <https://pro.coinbase.com/>

```

import urllib.request
import json
import os

# website we want to pull data from
hostname = 'api.pro.coinbase.com'

# all cryptocurrency products returned in USD currency
product = coin + '-USD'

# granularity is in seconds, so we are getting 1-minute
bars
granularity = '60'

# returns back: [date, low, high, open, close, volume]
url = 'https://' + hostname + '/products/' + product +
'/candles?start=' + start + '&end=' + stop +
'&granularity=' + granularity

# execute call to the website
urlRequest = urllib.request.Request(url, data=None,
headers={'User-Agent': 'Mozilla/5.0 (Macintosh; Intel Mac
OS X 10_9_3) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/35.0.1916.47 Safari/537.36'})
response = urllib.request.urlopen(urlRequest)
html = response.read()

# python 3.x requires decoding from bytes to string
data = json.loads(html.decode())
return data

```

This is how you would call this function from MATLAB:

```

product = "ETH";
startDate = '2022-01-21T12:00:00Z';
stopDate = '2022-01-21T17:00:00Z';
jsonData = py.dataLib.getPriceData(product, startDate,
stopDate)

```


```

jsonData =
    Python list with no properties.

    [[1642917600, 2466.17, 2473.56, 2468.52, 2469.96, 258.02707836],
...
    [1642899660, 2442.25, 2446.79, 2446.77, 2445.17,
276.4743004]]


```

If you want to add interactivity to your Live Script, you can add so called **Live Controls**⁵¹. This is helpful to point other people to areas where you may want to change parameters or select things to do scenario analysis.



```
product = "ETH"
```

You can insert controls from the ribbon:

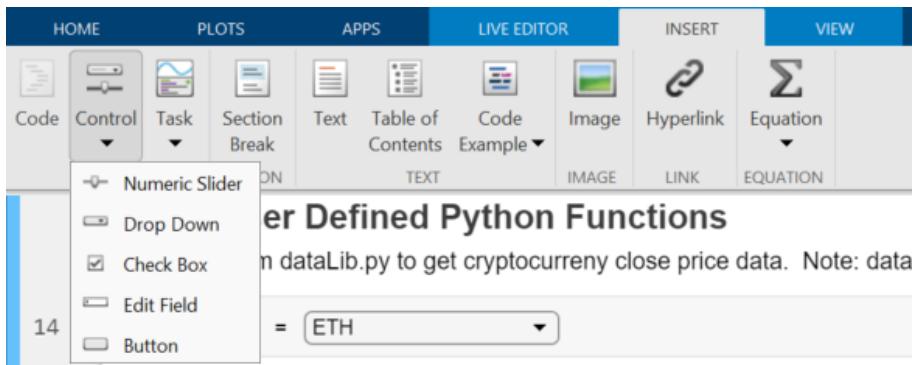

This is how you would parametrize the Live Control:

⁵¹ Add Interactive Controls to a Live Script:

https://www.mathworks.com/help/matlab/matlab_prog/add-interactive-controls-to-a-live-script.html

```

product = product | ETH
    ▾ LABEL
product
Enter text to display when code is hidden
Label product
    ▾ ITEMS
jsonData
jsonData
Python
[[16
Item labels
BTC
ETH
LTC
BCH
Item values
"BTC"
"ETH"
"LTC"
"BCH"
    ▾ DEFAULTS
Default item ETH
    ▾ EXECUTION
Run All sections

```

Another type of Live Control that is useful here are simple checkboxes to select the information we want to return from the `parseJson` function:

```

Dates =  ;
Low =  ;
High =  ;
Open =  ;
Close =  ;
Volume =  ;

% subtract 1 to convert to Python index starting at 0
selectedColumns = find([Dates Low High Open Close Volume])-1

```

```

selectedColumns = 1x2
0      4

```

Pay attention to the fact that we are subtracting 1 to the resulting array to adapt to Python indexing starting at 0.

```
% this function returns back two outputs as a tuple  
data = py.dataLib.parseJson(jsonData, selectedColumns);
```

The last thing we will do in this part of the story is to convert the Python function outputs do MATLAB Data types (this will be covered in the last section of this chapter on [mapping data between Python and MATLAB](#)).

In this case, we have a complex tuple that has a Numpy arrays inside of it, as well as a list. We can easily split up the tuple by using syntax like this:

```
priceData = data{1}
```

```
priceData =  
  Python ndarray:  
  
    1.0e+09 *  
  
    1.6429    0.0000  
    1.6429    0.0000  
    ...  
    1.6429    0.0000  
    1.6429    0.0000
```

Use details function to view the properties of the Python object.

Use double function to convert to a MATLAB array.

```
columnNames = data{2}
```

```
columnNames =  
  Python list with no properties.  
  
  ['Date', 'Close']
```

Then we can cast over the Numpy array on the right-hand side by just using the double command:

```
priceData = double(priceData)
```

```
priceData = 300x2  
109 *
```

Likewise, we have a variety of commands for casting lists like string (or cell before R2022a):

```
columnNames = string(columnNames);
```

Once we have those data in MATLAB, we will convert it over to the MATLAB table, which is basically equivalent to Pandas data frames:

```
data = array2table(priceData, 'VariableNames',  
columnNames);
```

Like tables, timetable are built-in data constructs that appeared in MATLAB over the last couple of years to make our lives easy for doing simple types of tasks or even complex types of tasks. If I want to deal with time zones and convert the times – which are with respect to universal time zone – to a view of someone who is in New York, the command `datetime`⁵² allows us to do that conversion:

```
data.Date = datetime(data.Date, 'ConvertFrom',  
'posixtime', 'TimeZone', 'America/New_York')
```

data = 300×2 table


	Date	Close
1	21-Jan-2022 12:00:00	2.8073e+03
2	21-Jan-2022 11:59:00	2.8108e+03
3	21-Jan-2022 11:58:00	2.8051e+03
4	21-Jan-2022 11:57:00	2.8071e+03

⁵² MATLAB datetime:

<https://www.mathworks.com/help/matlab/ref/datetime.html#d123e298898>

	Date	Close
5	21-Jan-2022 11:56:00	2.8051e+03
	⋮	

```
plot(data.Date, data.Close)
```

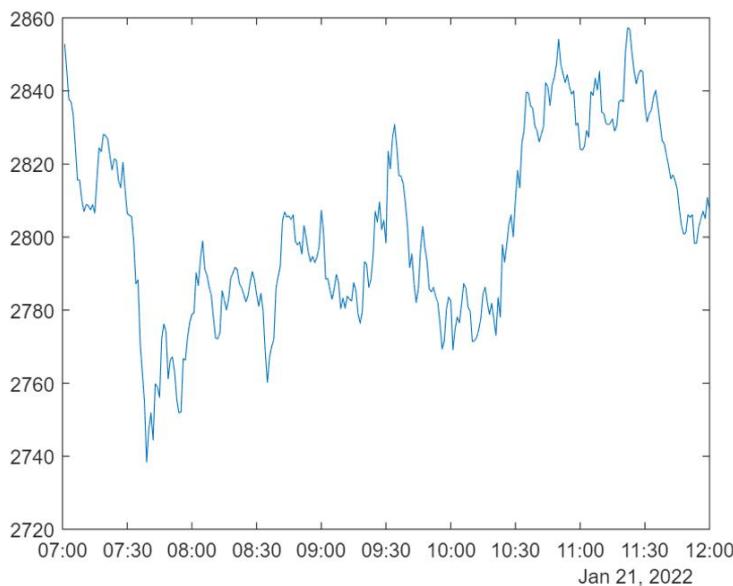

Reload Modified User-Defined Python Module⁵³

What if you've made modifications to the functions inside of your `dataLib` module? You call those again from MATLAB, but you don't see any difference. It is because you need to reload the module:

```
mod = py.importlib.import_module('dataLib');
py.importlib.reload(mod);
```

You may need to unload the module first, by clearing the classes. This will delete all variables, scripts and classes in your MATLAB workspace.

```
clear classes
```

⁵³ Reload Modified User-Defined Python Module:

https://www.mathworks.com/help/matlab/matlab_external/call-user-defined-custom-module.html#buuz303


If you're running Python out-of-process, another approach is to simply terminate the process⁵⁴.

```
terminate(pyenv)
```

4.5. Call Python community packages from MATLAB

In some scientific fields like earth and climate sciences, we observe a growing Python community. But as programming skills may vary a lot in researchers and engineers, a MATLAB interface to Python community packages can open up some domain specific capabilities to the 5M+ MATLAB community.

One great example of this is the Climate Data Store Toolbox⁵⁵ developed by Rob Purser, a fellow MathWorker. Rob and I are part of the MathWorks Open Source Program. We are promoting open-source, both to support the use of open-source software in MathWorks products and to help for MathWorkers to contribute their work on GitHub and the MATLAB File Exchange⁵⁶.

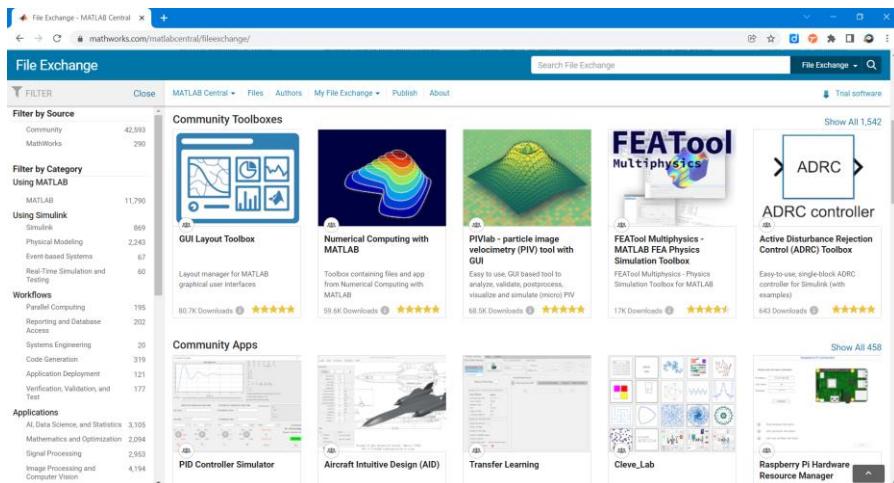

⁵⁴ Reload Out-of-Process Python Interpreter:

https://www.mathworks.com/help/matlab/matlab_external/reload-python-interpreter.html

⁵⁵ Rob Purser (2022). Climate Data Store Toolbox for MATLAB


<https://github.com/mathworks/climatedatastore>

⁵⁶ MATLAB File Exchange:

<https://www.mathworks.com/matlabcentral/fileexchange/>

In this section we will demonstrate with the Climate Data Store Toolbox how to build MATLAB toolboxes on top of Python packages. It relies on the CDS Python API⁵⁷ created by the European Centre for Medium-Range Weather Forecasts (ECMWF). The toolbox will automatically configure Python, download and install the CDSAPI package (you can manually do it using pip install cdsapi). You will need to create an account on <https://cds.climate.copernicus.eu/> to retrieve data.

The first time you use it, it will prompt you for CSAPI credentials.

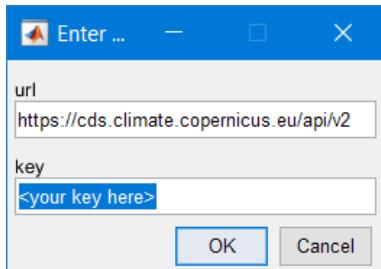

A well written toolbox like this one throwing an error coming from Python will forward this error:

```
datasetName = "satellite-sea-ice-thickness";
options.version = "1_0";
options.variable = "all";
options.satellite = "cryosat_2";
options.cdr_type = ["cdr","icdr"];
options.year = ["2011","2021"];
options.month = "03";
[downloadedFilePaths,citation] =
climateDataStoreDownload('satellite-sea-ice-
thickness',options);
```

2022-01-20 19:33:13,558 INFO Welcome to the CDS

2022-01-20 19:33:13,577 INFO Sending request to https://cds.climate.copernicus.eu/api/v2/resources/satellite-sea-ice-thickness

Error using api>_api
Python Error: Exception: Client has not agreed to the required terms and conditions.. To access this resource, you first need to accept the terms of 'Licence to use Copernicus Products' at

⁵⁷ CDS Python API: <https://github.com/ecmwf/cdsapi>

<https://cds.climate.copernicus.eu/cdsapp#!/terms/licence-to-use-copernicus-products>

Error in api>retrieve (line 348)

Error in climateDataStoreDownload (line 60)
retrieveFromCDS(name,options,zipfilePath);

This error for instance indicates that an exception has been raised on the Python side. In this case the culprit is located in the following MATLAB function:

```
function retrieveFromCDS(name,options,zipfilePath)
% Utility function to isolate python code so that we don't
trigger the
% python check until after python install checks are done.

% Copyright 2021 The MathWorks, Inc.
c = py.cdsapi.Client();

% Don't show the progress information
c.quiet = true;
c.progress = false;
c.retrieve(name,options,zipfilePath);
end
```

Once imported with Python, the NetCDF files are read with MATLAB using ncread⁵⁸ and storing information as timetable⁵⁹ with the function readSatelliteSeaIceThickness⁶⁰:

```
ice2011 = readSatelliteSeaIceThickness("satellite-sea-
ice-thickness\ice_thickness_nh_ease2-250_cdr-
v1p0_201103.nc");
ice2021 = readSatelliteSeaIceThickness("satellite-sea-
ice-thickness\ice_thickness_nh_ease2-250_icdr-
v1p0_202103.nc");
head(ice2021)
```

⁵⁸ Read data from variable in NetCDF data source

<https://www.mathworks.com/help/matlab/ref/ncread.html>

⁵⁹ MATLAB timetable: <https://www.mathworks.com/help/matlab/timetables.html>

⁶⁰

<https://github.com/mathworks/climatedatastore/blob/main/doc/readSatelliteSealceThickness.m>

```
ans = 8x3 timetable
```

	time	lat	lon	thickness
1	01-Mar-2021	47.6290	144.0296	2.4566
2	01-Mar-2021	47.9655	144.0990	2.5800
3	01-Mar-2021	50.5072	148.0122	-0.0364
4	01-Mar-2021	50.8360	148.1187	1.0242
5	01-Mar-2021	50.3237	146.9969	0.0518
6	01-Mar-2021	51.1642	148.2269	0.2445
7	01-Mar-2021	50.9112	147.6573	0.8933
8	01-Mar-2021	50.6540	147.0948	0.1271

```
disp(citation)
```


Generated using Copernicus Climate Change Service information 2022

This toolbox leverages the beautiful geoplotting⁶¹ capabilities of MATLAB:


```
subplot(1,2,1)
geodensityplot(ice2011.lat,ice2011.lon,ice2011.thickness,
"FaceColor","interp")
geolimits([23 85],[-181.4 16.4])
geobasemap("grayterrain")
title("Ice Thickness, March 2011")
subplot(1,2,2)
geodensityplot(ice2021.lat,ice2021.lon,ice2021.thickness,
"FaceColor","interp")
geolimits([23 85],[-181.4 16.4])
geobasemap("grayterrain")
title("Ice Thickness, March 2021")
f = gcf;
f.Position(3) = f.Position(3)*2;
```

⁶¹ Geographic density plot:

<https://www.mathworks.com/help/matlab/ref/geodensityplot.html>

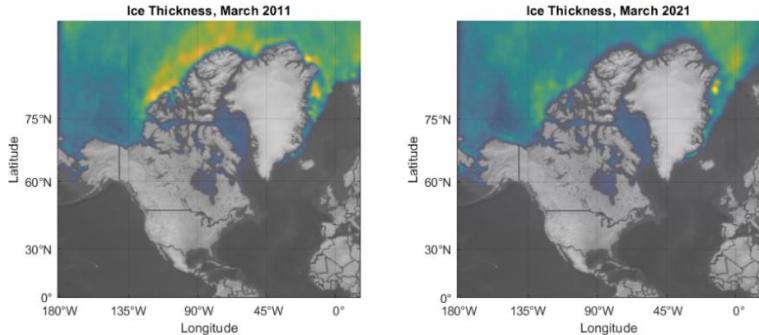

In a well written toolbox like this one, you find a documentation that is packaged directly with it.

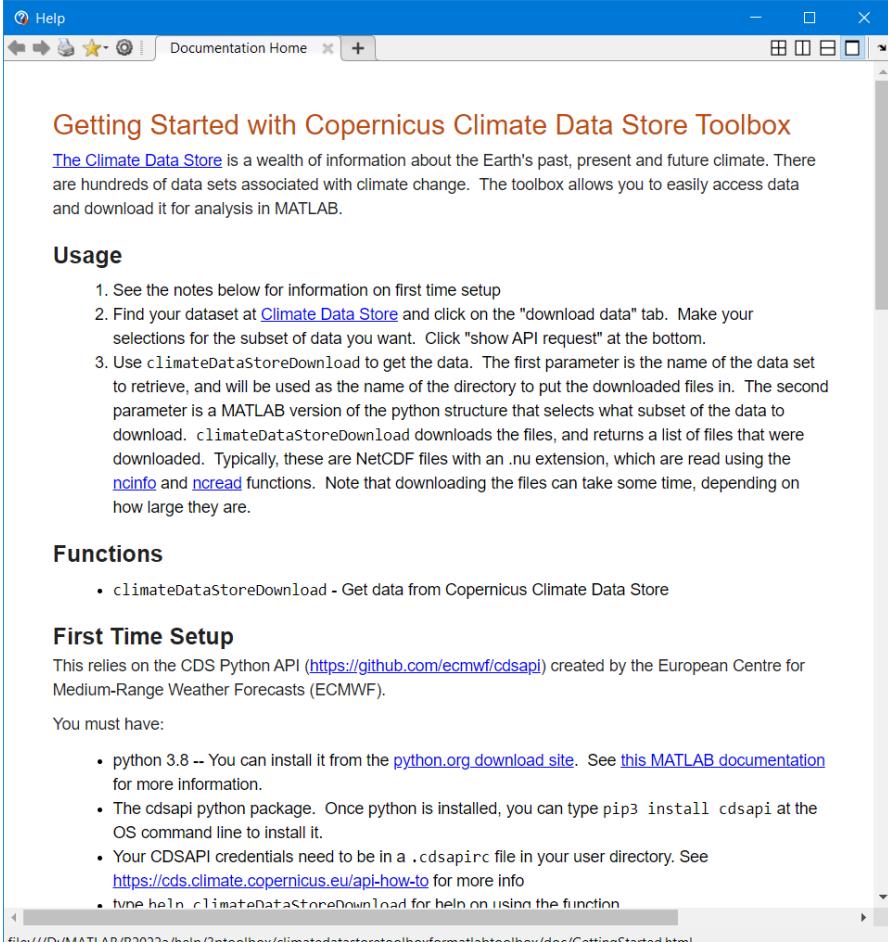A screenshot of a MATLAB web browser window. The title bar says "Documentation Home". The main content is titled "Getting Started with Copernicus Climate Data Store Toolbox". It includes a brief introduction about the Climate Data Store and its use with MATLAB. Below that is a section titled "Usage" with a numbered list of steps for downloading data. There's also a "Functions" section with a bullet point for the "climateDataStoreDownload" function, and a "First Time Setup" section with information about the CDS Python API.

Getting Started with Copernicus Climate Data Store Toolbox

The [Climate Data Store](#) is a wealth of information about the Earth's past, present and future climate. There are hundreds of data sets associated with climate change. The toolbox allows you to easily access data and download it for analysis in MATLAB.

Usage

1. See the notes below for information on first time setup
2. Find your dataset at [Climate Data Store](#) and click on the "download data" tab. Make your selections for the subset of data you want. Click "show API request" at the bottom.
3. Use `climateDataStoreDownload` to get the data. The first parameter is the name of the data set to retrieve, and will be used as the name of the directory to put the downloaded files in. The second parameter is a MATLAB version of the python structure that selects what subset of the data to download. `climateDataStoreDownload` downloads the files, and returns a list of files that were downloaded. Typically, these are NetCDF files with an .nu extension, which are read using the `ncinfo` and `ncread` functions. Note that downloading the files can take some time, depending on how large they are.

Functions

- `climateDataStoreDownload` - Get data from Copernicus Climate Data Store

First Time Setup

This relies on the CDS Python API (<https://github.com/ecmwf/cdsapi>) created by the European Centre for Medium-Range Weather Forecasts (ECMWF).

You must have:

- python 3.8 -- You can install it from the [python.org download site](https://www.python.org/downloads/). See [this MATLAB documentation](#) for more information.
- The cdsapi python package. Once python is installed, you can type `pip3 install cdsapi` at the OS command line to install it.
- Your CDSAPI credentials need to be in a `.cdsapirc` file in your user directory. See <https://cds.climate.copernicus.eu/api-how-to> for more info
- `type help climateDatastoreDownload` for help on using the function

file:///D:/MATLAB/R2022a/help/3ptoolbox/climatedatastoretoolboxformatlabtoolbox/doc/GettingStarted.html

You can create your own toolbox and share it with others. These files can include MATLAB code, data, apps, examples, and documentation. When you

create a toolbox, MATLAB generates a single installation file (.mltbx) that enables you or others to install your toolbox.

Read more on how to create and share toolboxes⁶²

4.6. Debug Python code called by MATLAB

One of the first difficulty you will face when developing bilingual applications, is debugging across the language boundary. In the following examples we will demonstrate how to attach a MATLAB session to a VSCode or Visual Studio process to debug the Python part of your app. In the next chapter, we will see how to do the opposite, debug the MATLAB part with the nice MATLAB Debugger.

4.6.1. Debug with Visual Studio Code

This section is showing in 8 steps how to debug Python code called from MATLAB with VSCode⁶³:

1. Install VS Code and create a project.

See the official tutorial⁶⁴ for instructions on how to install Visual Studio Code, set up a Python project, select a Python interpreter, and create a `launch.json` file.

2. In a terminal, install the `debugpy` module using, for example,

```
$ python -m pip install debugpy
```

3. In VS Code, add the following debugging code to the top of your Python module.

```
import debugpy  
debugpy.debug_this_thread()
```

⁶² Create and share toolboxes:

https://www.mathworks.com/help/matlab/matlab_prog/create-and-share-custom-matlab-toolboxes.html

⁶³ How can I debug Python code using MATLAB's Python Interface and Visual Studio Code: <https://www.mathworks.com/matlabcentral/answers/1645680-how-can-i-debug-python-code-using-matlab-s-python-interface-and-visual-studio-code>

⁶⁴ Configure and run the debugger:

https://code.visualstudio.com/docs/python/python-tutorial#_configure-and-run-the-debugger

4. Configure the `launch.json` file to select and attach to MATLAB using the code below.

```
{  
    "version": "0.2.0",  
    "configurations": [  
        {  
            "name": "Attach to MATLAB",  
            "type": "python",  
            "request": "attach",  
            "processId": "${command:pickProcess}"  
        }  
    ]  
}
```

5. Add breakpoints to your code.

6. Set up your Python environment in MATLAB and get the ProcessID number. In this example, the ExecutionMode is set to InProcess.


```
>> pyenv  
  
ans =  
  
PythonEnvironment with properties:  
  
    Version: "3.9"  
    Executable:  
    "C:\Users\username\AppData\Local\Programs\Python\Python39\python.exe"  
    Library:  
    "C:\Users\username\AppData\Local\Programs\Python\Python39\python39.dll"  
    Home:  
    "C:\Users\username\AppData\Local\Programs\Python\Python39"  
    Status: Loaded  
    ExecutionMode: InProcess  
    ProcessID: "27664"  
    ProcessName: "MATLAB"
```

If you see Status: NotLoaded, execute any Python command to load the Python interpreter (for example `>> py.list`) then execute the `pyenv` command to get the ProcessID for the MATLAB process.


7. Attach the MATLAB process to VS Code.

In VS Code, select "Run and Debug" (Ctrl+Shift+D), then select the arrow to Start Debugging (F5). In this example, the green arrow has the label "Attach to MATLAB". Note that this corresponds to the value of the "name" parameter that you specified in the launch.json file. Type "matlab" in the search bar of the dropdown menu and select the "MATLAB.exe" process that matches the ProcessID from the output of the pyenv command. Note that if you are using OutOfProcess execution mode, you will need to search for a "MATLABPyHost.exe" process.

In-process:

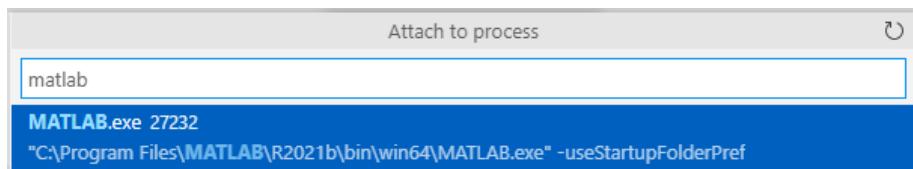

Out-of-Process:

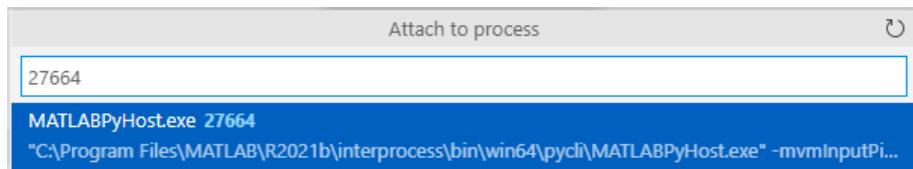

8. Invoke the Python function from MATLAB. Execution should stop at the breakpoint.

```
# mymod.py
import debugpy
debugpy.debug_this_thread()

"""python module demonstrates passing MATLAB types to Python functions"""
def search(words):
    """Return list of words containing 'son'"""
    newlist = [w for w in words if 'son' in w]
    return newlist

def theend(words):
    """Append 'The End' to list of words"""
    words.append('The End')
    return words
```

Run the following MATLAB code to step into the Python function `search`:



```
>> N = py.list({'Jones','Johnson','James'})
>> py.mymod.search(N)
```

4.6.2. Debug with Visual Studio

If you have access to Visual Studio and you are more familiar with it, you can do the same as before with Visual Studio⁶⁵. Open Visual Studio and create a new Python project from existing code. Then, select Attach to Process from the Debug menu:

⁶⁵ Calling Python from Matlab - how to debug Python code?

<https://stackoverflow.com/questions/61708900/calling-python-from-matlab-how-to-debug-python-code>

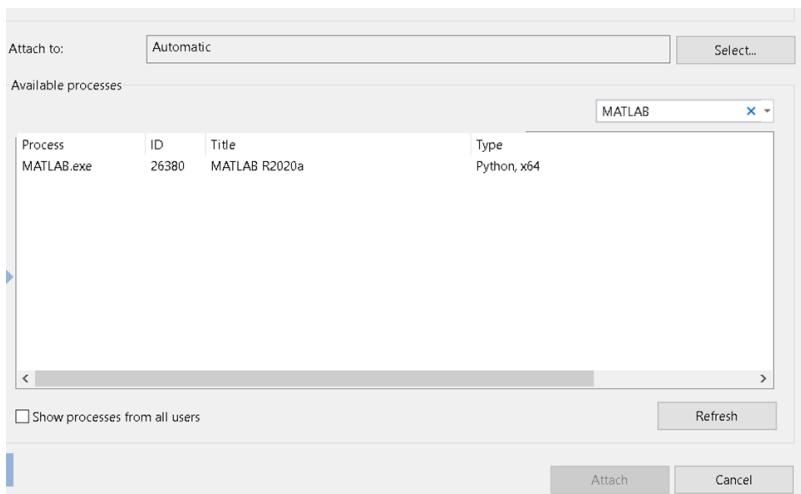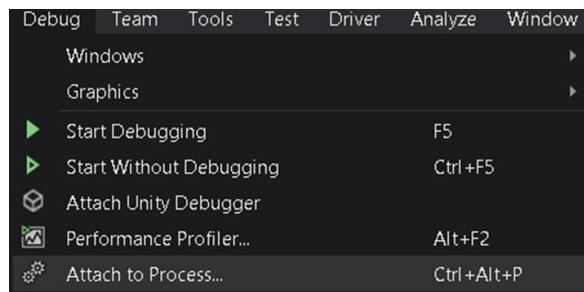

A screenshot of the MATLAB Editor window. The title bar shows 'mymod.py'. The code editor contains the following Python script:

```
# mymod.py
"""Python module demonstrates passing MATLAB types to Python functions"""

def search(words):
    """Return list of words containing 'son'"""
    newlist = [w for w in words if 'son' in w]
    return newlist
```

The code editor has a dark theme. On the left, there is a vertical toolbar with icons for 'Server Explorer' (highlighted with a red circle) and 'Toolbox'. The status bar at the bottom shows the path 'C:\Users\Public\Documents\MathWorks\MATLAB\R2020a\mymod.py'.

4.7. Mapping data between Python and MATLAB

In his book about *Python for MATLAB Development*⁶⁶, Albert Danial shares some clever functions to convert MATLAB variables into an equivalent Python-native variable with `mat2py`⁶⁷, and vice-versa with `py2mat`⁶⁸.

Converting data⁶⁹ returned by Python function inside of MATLAB may require understanding some of the differences in the native datatypes of the two languages:

- Scalars (integers, floating point numbers, ...), text and Booleans
- Dictionaries and lists
- Arrays and dataframes

Some specialized MATLAB data types like *timetable* or *categorical* will require some extra love and need to be converted manually. Of course, we can still use these data types in our functions, but the functions need to return types that the Python interpreter can understand.

4.7.1. Scalars

The table below shows the mappings for common scalar data types:

MATLAB	Python
<code>double</code> , <code>single</code>	<code>float</code>
<code>complex</code> <code>single</code> , <code>complex double</code>	<code>complex</code>
<code>(u)int8</code> , <code>(u)int16</code> , <code>(u)int32</code> , <code>(u)int64</code>	<code>int</code>
<code>Nan</code>	<code>float(nan)</code>
<code>Inf</code>	<code>float(inf)</code>
<code>string</code> , <code>char</code>	<code>str</code>
<code>logical</code>	<code>bool</code>

⁶⁶ Python for MATLAB Development, Albert Danial:

<https://link.springer.com/book/10.1007/978-1-4842-7223-7>

⁶⁷ mat2py: https://github.com/Apress/python-for-matlab-development/blob/main/code/matlab_py/mat2py.m

⁶⁸ py2mat: https://github.com/Apress/python-for-matlab-development/blob/main/code/matlab_py/py2mat.m

⁶⁹ Converting data:

https://www.mathworks.com/help/matlab/matlab_external/passing-data-to-python.html

By default, numbers in MATLAB are double, whereas numbers without decimal point in Python are integers.

```
a = py.dataExchange.get_float()
```

```
a = 1
```

```
class(a)
```

```
ans = 'double'
```

```
b = py.dataExchange.get_complex()
```

```
b = 2.0000 + 0.0000i
```

```
class(b)
```

```
ans = 'double'
```

There are several kinds of integers in MATLAB, depending on the precision you require.

For instance [uint8](#) can only store positive numbers between 0 and 255, whereas [int8](#) covers the range [- 2^7 , 2^7 -1]. The most generic type to convert Python integers are int64, which you can do explicitly.

```
c = py.dataExchange.get_integer()
```

```
c =
```

```
Python int with properties:
```

```
denominator: [1x1 py.int]
    imag: [1x1 py.int]
 numerator: [1x1 py.int]
    real: [1x1 py.int]
```

```
3
```

```
class(c)
```

```
ans = 'py.int'
```

```
int64(c)
```

```
ans = int64  
    3
```

When getting a string from a Python function, the conversion isn't obvious. It can either be turned into a [char](#) (character array) or a [string](#). You can distinguish them by the single quotation marks for chars, and double quotes for strings.

```
abc = py.dataExchange.get_string()
```

```
abc =  
  
Python str with no properties.  
  
abc
```

```
char(abc)
```

```
ans = 'abc'
```

```
class(char(abc))
```

```
ans = 'char'
```

```
string(abc)
```

```
ans = "abc"
```

```
class(string(abc))
```

```
ans = 'string'
```

Finally, the last basic datatype that contains a logical information is called a boolean in Python:

```
py.dataExchange.get_boolean()
```

```
ans = Logical  
  
1
```

4.7.2. Dictionaries and Lists

This is how containers map to each other between the two languages:

MATLAB	Python
structure	dict
cell arrays	list, tuple

To illustrate the conversion of Python dictionaries and lists into MATLAB containers, we will reuse the example from chapter 2. JSON data are really close to dictionaries in Python, which makes the data processing very easy when accessing data from web services.

```
url=
webread("https://samples.openweathermap.org").products.current_weather.samples{1};
r = py.urllib.request.urlopen(url).read();
json_data = py.json.loads(r);
py.weather.parse_current_json(json_data)
```

```
ans =
Python dict with no properties.

{'temp': 280.32, 'pressure': 1012, 'humidity': 81, 'temp_min': 279.15, 'temp_max': 281.15, 'speed': 4.1, 'deg': 80, 'lon': -0.13, 'lat': 51.51, 'city': 'London', 'current_time': '2022-05-22 22:15:18.161296'}
```

Dictionaries can contain scalars, but also other datatypes like lists.

```
url2 =
webread("https://samples.openweathermap.org").products.forecast_5days.samples{1};
r2 = py.urllib.request.urlopen(url2).read();
json_data2 = py.json.loads(r2);
forecast =
struct(py.weather.parse_forecast_json(json_data2))
```

```
forecast = struct with fields:
    current_time: [1x40 py.list]
        temp: [1x40 py.list]
        deg: [1x40 py.list]
        speed: [1x40 py.list]
        humidity: [1x40 py.list]
        pressure: [1x40 py.list]
```

```
forecastTemp = forecast.temp;
forecastTime = forecast.current_time;
```

Lists containing only numeric data can be converted into doubles since MATLAB R2022a:

```
double(forecastTemp)
```

```
ans = 1x40
261.4500 261.4100 261.7600 261.4600 260.9810
262.3080 263.7600 ...
```

And any lists can be converted to string (even those containing a mix of text and numeric data).

```
forecastTimeString = string(forecastTime);
datetime(forecastTimeString)
```

```
ans = 1x40 datetime
30-Jan-2017 18:00:00 30-Jan-2017 21:00:00 31-Jan-2017
00:00:00 31-Jan-2017 03:00: ...
```

Before MATLAB R2022a, Python lists need to be converted into MATLAB cell arrays⁷⁰. Cells can then be transformed to double, strings, with the cellfun⁷¹ function. The previous code would look like this until R2021b:

```
forecastTempCell = cell(forecastTemp)
```

```
forecastTempCell = 1x40 cell
1 261.4500 261.4100 261.7600 261.4600 260.9810 262.3080 263.7600 ...
```

```
cellfun(@double, forecastTempCell)
```

⁷⁰ MATLAB Cell Arrays: <https://www.mathworks.com/help/matlab/cell-arrays.html>

⁷¹ MATLAB cellfun Function:

<https://www.mathworks.com/help/matlab/ref/cellfun.html>

```
ans = 1x40
    261.4500 261.4100 261.7600 261.4600 260.9810
    262.3080 263.7600 ...
```

```
forecastTimeCell = cell(forecastTime)
```

```
forecastTimeCell = 1x40 cell
```

	1	2	3	4	5	6	7	...
1	1x19 str							

```
cellfun(@string,forecastTimeCell)
```

```
ans = 1x40 string
"2017-01-30 18:0..." "2017-01-30 21:0..." "2017-01-31 00:0...
"2017-01-31 03:0..." "2 ...
```

4.7.3. Arrays

By modifying the `parse_forecast_json` function in the `weather` module, we output Python arrays⁷² instead of lists. There exists indeed a native array datatype in base Python.

```
forecast2 =
struct(py.weather.parse_forecast_json2(json_data2))
```

```
forecast2 = struct with fields:
    current_time: [1x40 py.list]
        temp: [1x1 py.array.array]
        deg: [1x1 py.array.array]
        speed: [1x1 py.array.array]
        humidity: [1x1 py.array.array]
        pressure: [1x1 py.array.array]
```

The MATLAB `double` function will convert the Python array into a MATLAB array

```
double(forecast2.temp)
```

⁷² Python Array: <https://docs.python.org/3/library/array.html>

```
ans = 1x40
      261.4500  261.4100  261.7600  261.4600  260.9810
     262.3080  263.7600 ...
```

Those data conversion also apply to Numpy arrays:

```
npA = py.numpy.array([1,2,3;4,5,6;7,8,9])
```

```
npA =
Python ndarray:
```

```
1      2      3
4      5      6
7      8      9
```

Use details function to view the properties of the Python object.

Use double function to convert to a MATLAB array.

```
double(npA)
```

```
ans = 3x3
      1      2      3
      4      5      6
      7      8      9
```


4.7.4. Dataframes

One common question on data transfer, is how to exchange data between MATLAB tables and Pandas Dataframes. The recommended solution for that is to rely on Parquet files⁷³. Parquet is a columnar storage format that enables to store & transfer tabular data between languages. It is available to any project in the Hadoop big data ecosystem, regardless of the choice of data

⁷³ Parquet file support in MATLAB:

<https://www.mathworks.com/help/matlab/parquet-files.html>

processing framework, data model or programming language (more on Parquet⁷⁴).

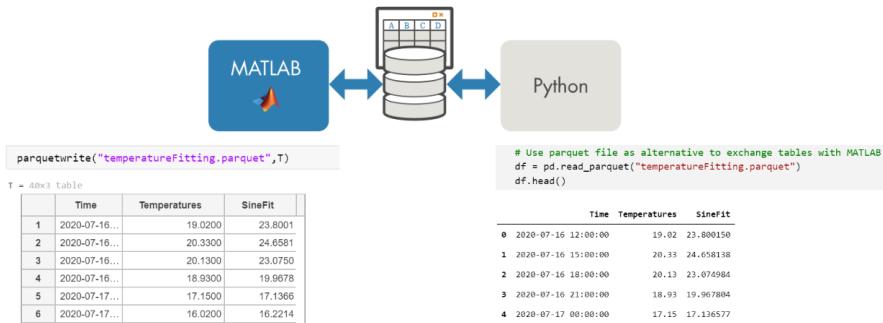

This example demonstrates a back and forth between Pandas DataFrames and MATLAB Tables:

pg_CreateDataframe.py

```
import pandas as pd
import numpy as np

# create dataframe
df = pd.DataFrame({'column1': [-1, np.nan, 2.5],
'column2': ['foo', 'bar', 'tree'],
'column3': [True, False, True]})

print(df)

# save dataframe to parquet file via pyarrow library
df.to_parquet('data.parquet', index=False)
```

Read in parquet file

```
% info = parquetinfo('data.parquet')
data = parquetread('data.parquet')
```

data = 3x3 table

	column1	column2	column3
1	-1	"foo"	1

⁷⁴ Apache Parquet project: <https://parquet.apache.org/>

	column1	column2	column3
2	NaN	"bar"	0
3	2.5000	"tree"	1

Examine datatype of a particular column

```
class(data.column2)
```

```
ans = 'string'
```

Change data in table

```
data.column2 = ["orange"; "apple"; "banana"];
```

Write the results back to parquet

```
parquetwrite('newdata.parquet', data)
```

Finally read the modified DataFrame back in Python:

[pq ReadTable.py](#)

```
import pandas as pd

# read parquet file via pyarrow library
df = pd.read_parquet('newdata.parquet')
print(df)
```

5. Call Python AI libraries from MATLAB

In this Chapter we will look at different Python libraries for Artificial Intelligence, both Machine Learning & Deep Learning (like Scikit-learn and TensorFlow) and how to call them from MATLAB.

Those steps can be integrated in a typical AI workflow⁷⁵:




5.1. Call Scikit-learn from MATLAB

The Iris flower dataset⁷⁶ is a multivariate data set introduced by the British statistician and biologist Ronald Fisher. This data set consists of 3 different types of irises' (Setosa, Versicolour, and Virginica) petal and sepal length, stored in a `150x4` `numpy.ndarray`. The rows being the samples and the columns being: Sepal Length, Sepal Width, Petal Length and Petal Width.

You can also find this dataset in MATLAB, as it is shipped with a list of Sample Data Sets⁷⁷:

```
load fisheriris.mat  
gscatter(meas(:,1),meas(:,2),species)
```

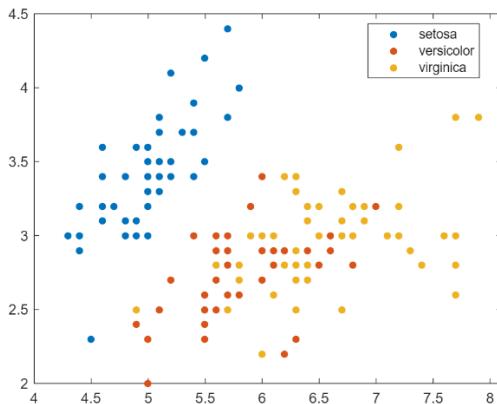

⁷⁵ AI Workflow: <https://www.mathworks.com/discovery/artificial-intelligence.html>

⁷⁶ Iris dataset: https://en.wikipedia.org/wiki/Iris_flower_data_set

⁷⁷ Sample Data Sets in MATLAB: <https://www.mathworks.com/help/stats/sample-data-sets.html>

Or retrieve the dataset from the Scikit-learn library⁷⁸ (inside of MATLAB still):


```
iris_dataset = py.sklearn.datasets.load_iris()
```

```
iris_dataset =
Python Bunch with no properties.

{'data': array([[5.1, 3.5, 1.4, 0.2],
   [4.9, 3. , 1.4, 0.2],
   [4.7, 3.2, 1.3, 0.2],
   [4.6, 3.1, 1.5, 0.2],
   [5. , 3.6, 1.4, 0.2],
   [5.4, 3.9, 1.7, 0.4],
   ...
   [6.2, 3.4, 5.4, 2.3],
   [5.9, 3. , 5.1, 1.8]]),
 'target': array([0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
  0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
  0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
  0, 0, 0, 0, 0, 0, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
  1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
  1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 2, 2, 2,
  2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
  2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,
  2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2]),
 'frame': None, 'target_names': array(['setosa', 'versicolor',
 'virginica']), dtype='<U10'), 'DESCR': ...}
```

Scikit-learn datasets are returned as a “Bunch object”. You can access the Python modules documentation directly from within MATLAB:

⁷⁸ Iris dataset in Scikit-learn: https://scikit-learn.org/stable/auto_examples/datasets/plot_iris_dataset.html

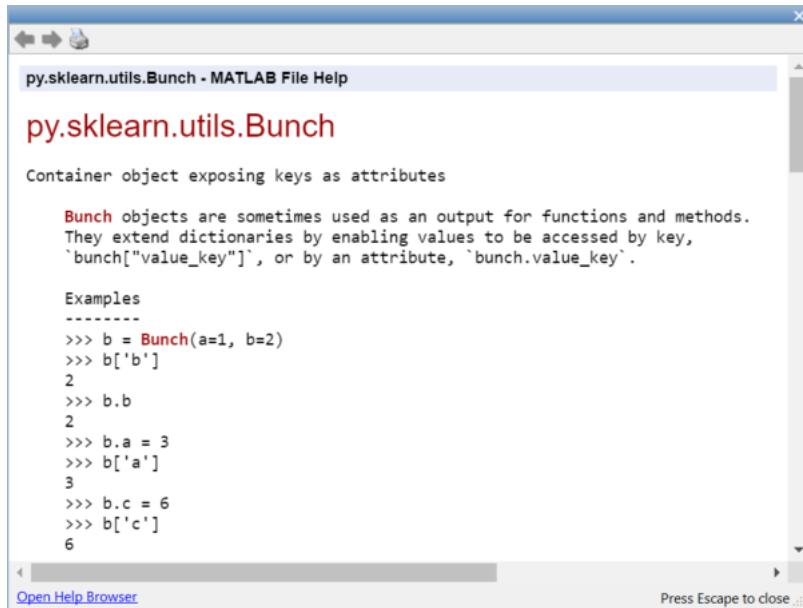

This dataset can be passed to MATLAB as a struct:

```
struct(iris_dataset)
```

```
ans = struct with fields:
    data: [1x1 py.numpy.ndarray]
    target: [1x1 py.numpy.ndarray]
    frame: [1x1 py.NoneType]
    target_names: [1x1 py.numpy.ndarray]
    DESCR: [1x2782 py.str]
    feature_names: [1x4 py.list]
    filename: [1x8 py.str]
    data_module: [1x21 py.str]
```

The data manipulated in this dataset are by default stored as Numpy arrays. Read more on how to Pass Matrices and Multidimensional Arrays to Python⁷⁹

```
X_np = iris_dataset{'data'}
```

⁷⁹ https://www.mathworks.com/help/matlab/matlab_external/passing-data-to-python.html#mw_b64f3777-2204-45e9-8ced-f3f363096a49 - Pass Matrices and Multidimensional Arrays to Python

```
X_np =  
Python ndarray:  
5.1000    3.5000    1.4000    0.2000  
4.9000    3.0000    1.4000    0.2000  
4.7000    3.2000    1.3000    0.2000  
...  
...
```

Use details function to view the properties of the Python object.

Use double function to convert to a MATLAB array.

```
X_ml = double(X_np);  
X = X_ml(:,1:2)
```

```
X = 150x2  
5.1000    3.5000  
4.9000    3.0000  
4.7000    3.2000  
4.6000    3.1000  
5.0000    3.6000  
5.4000    3.9000  
4.6000    3.4000  
5.0000    3.4000  
4.4000    2.9000  
4.9000    3.1000  
:  
:
```

```
y = iris_dataset{'target'}
```

```
y =  
Python ndarray:  
0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0  
0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0  
0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   0   1   1  
1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1  
1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1   1  
1   1   1   1   1   1   1   1   1   1   1   1   2   2   2   2   2   2   2   2  
2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2  
2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2  
2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2   2
```

Use [details](#) function to view the properties of the Python object.

Use [int64](#) function to convert to a MATLAB array.

We won't translate the Python ndarray into a MATLAB datatype just yet, as we will use a cool feature of Python to translate the list of ordinal values into a list of categorical species. Those features can be leveraged in MATLAB with a few calls to pyrun⁸⁰

```
pyrun('dict = {0: "setosa",1: "versicolor", 2:  
"virginica"})  
% pass y as input, and retrieve species as output  
s = pyrun('species = [dict[i] for i in y]', 'species', y =  
y)
```

s =

Python [list](#) with no properties.

```
['setosa', 'setosa', 'setosa', 'setosa', 'setosa', 'setosa',  
'setosa', 'setosa', ...]
```

Finally, you can retrieve the Python list as a [MATLAB categorical](#) variable:

```
s = string(s);  
species = categorical(s)
```

```
species = 1x150 categorical array  
    setosa      setosa      setosa      setosa      setosa  
setosa      setosa      ...
```

Another approach for the preprocessing in Python can be performed with [pyrunfile](#)

```
[X,y,species] =  
pyrunfile('iris_data.py',{'X1','y','species'})
```

X =

⁸⁰ pyrun: <https://www.mathworks.com/help/matlab/ref/pyrun.html>

Python [list](#) with no properties.

```
[[5.1, 3.5], [4.9, 3.0], [4.7, 3.2], [4.6, 3.1], [5.0, 3.6],  
[5.4, 3.9], [4.6, 3.4],...]
```

```
y =
```

Python [ndarray](#):

```
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1  
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1  
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1  
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2  
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2  
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2  
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
```

Use [details](#) function to view the properties of the Python object.

Use [int64](#) function to convert to a MATLAB array.

```
species =
```

Python [list](#) with no properties.

```
['setosa', 'setosa', 'setosa', 'setosa', 'setosa', 'setosa',  
'setosa', 'setosa', ...]
```

This is what the python scripts looks like:

[iris data.py](#)

```
from sklearn import datasets  
iris = datasets.load_iris()  
  
X = iris.data[:, :2] # we only take the first two features  
(sepal)  
Xl = X.tolist()  
y = iris.target  
dict = {0: "setosa", 1: "versicolor", 2: "virginica"}  
species = [dict[i] for i in y]
```

In this case, we are retrieving a list of lists, instead of a Numpy array. This will require some manual data marshalling:

```
Xc = cell(X)'
```

```
Xc = 150×1 cell array
{1×2 py.list}
{1×2 py.list}
{1×2 py.list}
{1×2 py.list}
{1×2 py.list}
...
...
```

```
Xc1 = cell(Xc{1})
```

```
Xc1 = 1×2 cell array
{[5.1000]}    {[3.5000]}
```

```
cell2mat(Xc1)
```

```
ans =
5.1000    3.5000
```


The previous steps are included in the helper function `dataprep` (at the end of the live script):

```
function Xp = dataprep(X)
Xc = cell(X)';
Xcc = cellfun(@cell,Xc,'UniformOutput',false);
Xcm = cellfun(@cell2mat,Xcc,'UniformOutput',false);
Xp = cell2mat(Xcm);
end
```

```
X_ml = dataprep(X);
y_ml = double(y);
s = string(species);
species = categorical(s);
```

Call the Scikit-Learn Logistic Regression and its fit and predict methods directly:

```
model = py.sklearn.linear_model.LogisticRegression();
model = model.fit(X,y); % pass by object reference
y2 = model.predict(X);
y2_ml = double(y2);
confusionchart(y_ml,y2_ml)
```

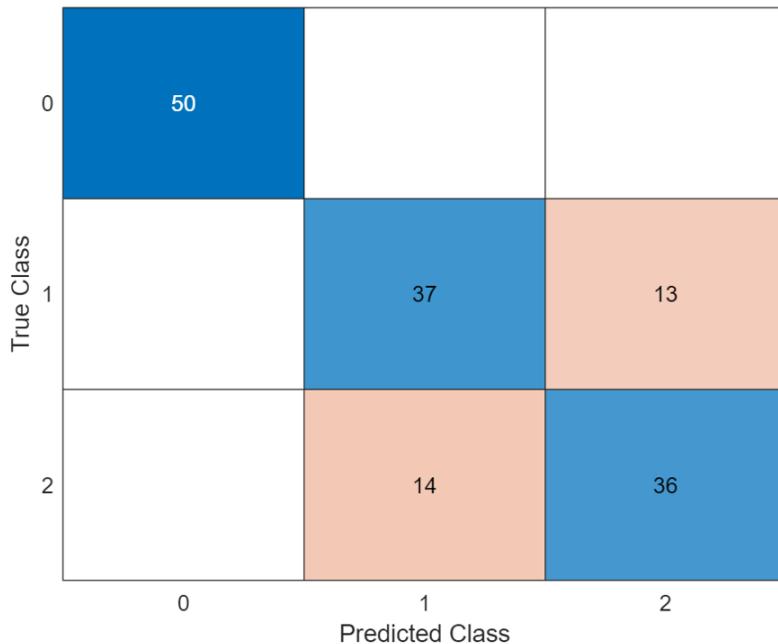

Call the Scikit-Learn model through a wrapper module:

```
model = py.iris_model.train(X,y);
y2 = py.iris_model.predict(model, X)
```

```
y2 =  
    Python ndarray:  
  
    0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 2 2  
1 2 1 2 1 2 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1  
1 1 1 2 2 2 1 1 1 1 1 1 2 2 1 1 1 1 1 1
```

```

1 1 1 1 1 1 1 1 1 1 1 1 2 1 2 2 2
2 2 2 2 2 2 1 1 2 2 2 2 1 2 1 2 1 2
2 1 1 2 2 2 2 2 1 2 2 2 1 2 2 2 2 1
2 2 2 1 2 2 1

```

Use details function to view the properties of the Python object.

Use int64 function to convert to a MATLAB array.

```


sum(y_ml == y2)/length(y_ml) % precision of the model
based on training set

```

```
ans = 0.8200
```

Alternatively, you can train all sorts of classification models in MATLAB. If you don't feel too comfortable with the various machine learning methods, you can simply try out the results from different types of models with an app:

```
classificationLearner(X_ml,species)
```

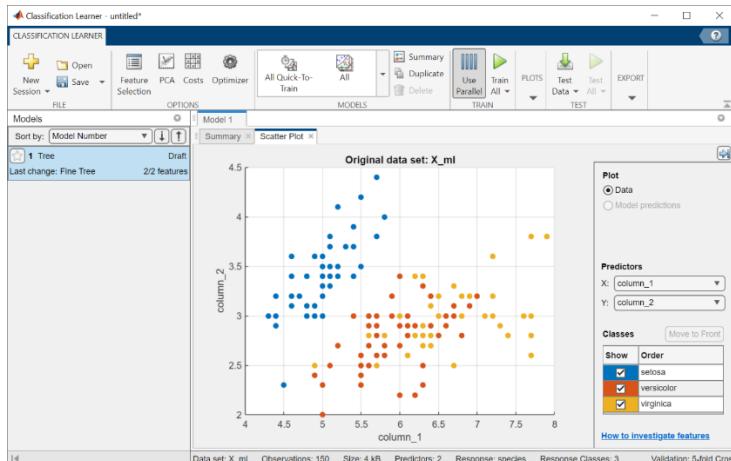

5.2. Call TensorFlow from MATLAB

Let's introduce the use of Tensorflow with the getting started tutorial⁸¹:

This guide uses the Fashion MNIST⁸² dataset which contains 70,000 grayscale images in 10 categories. The images show individual articles of clothing at low resolution (28 by 28 pixels).

This example is curated by Zalando, under a MIT License.

First let's **load tensorflow** explicitly, and check the version of tensorflow installed:

```
tf = py.importlib.import_module('tensorflow');
pyrun('import tensorflow as tf; print(tf.__version__)')
```

2.8.0

Then let's **retrieve the dataset**

```
fashion_mnist = tf.keras.datasets.fashion_mnist;
train_test_tuple = fashion_mnist.load_data();
```

And store the images and labels for training and testing separately.

Indexing into Python tuples in MATLAB⁸³ is done with curly brackets:
pytuple{1}

(Remember that indexing starts at 1 in MATLAB unlike Python starting at 0)

```
% ND array containing gray scale images (values from 0 to
255)
```


⁸¹ Basic classification – Classify images of clothing:

<https://www.tensorflow.org/tutorials/keras/classification>

⁸² Fashion MNIST: <https://github.com/zalandoresearch/fashion-mnist>

⁸³ Python tuples in MATLAB:

www.mathworks.com/help/matlab/matlab_external/pythontuplevariables.html

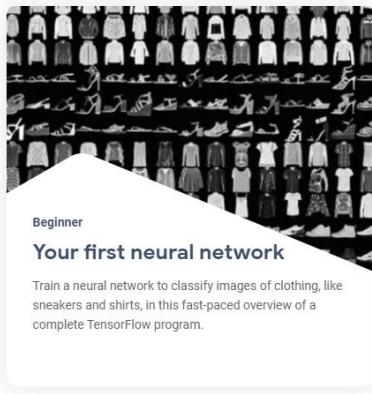

```
train_images = train_test_tuple{1}{1};  
test_images = train_test_tuple{2}{1};  
% values from 0 to 9: can be converted as uint8  
train_labels = train_test_tuple{1}{2};  
test_labels = train_test_tuple{2}{2};
```

Define the list of classes directly in MATLAB:

```
class_names = ["T-shirt/top", "Trouser", "Pullover",  
"Dress", "Coat", "Sandal", "Shirt", "Sneaker", "Bag",  
"Ankle boot"]
```

```
class_names = 1x10 string  
"T-shirt/top"    "Trouser"      "Pullover"     "Dress"  
"Coat"           "Sandal"       ...
```

If we want to use the index of the training labels from the list above in MATLAB, we need to shift the range from [0:9] to [1:10]

```
tl = uint8(train_labels)+1; % shifting range from [0:9]  
to [1:10]  
l = length(tl)
```

```
l = 60000
```

The following shows there are 60,000 images in the training set, with each image represented as 28 x 28 pixels:

```
train_images_m = uint8(train_images);  
size(train_images_m)
```

```
ans = 1x3  
60000          28          28
```

To **resize a single image** from the dataset, use the reshape function:

```
size(train_images_m(1,:,:))
```

```
ans = 1x3  
1      28      28
```

```
size(reshape(train_images_m(1,:,:),[28,28]))
```

```
ans = 1x2
```

```
28 28
```

You can add a live control to your live script to **explore your dataset**:

```
i = 42 ;  
img = reshape(train_images_m(i,:,:),[28,28]);  
imshow(img)  
title(class_names(tl(i)))
```

Sneaker



You must **preprocess the data** before training the network.

If you inspect the first image in the training set, you will see that the pixel values fall in the range of 0 to 255:

```
train_images = train_images / 255;  
test_images = test_images / 255;
```

Finally, **build the model** with the function specified in the [tf_helper](#) file / module:

```
model = py.tf_helper.build_model();
```

You can look at the architecture of the model by retrieving the layers in a cell array:

```
cell(model.layers)
```

```
ans = 1x3 cell
```

	1	2	3
1	1x1 Flatten	1x1 Dense	1x1 Dense

```
py.tf_helper.compile_model(model);
py.tf_helper.train_model(model,train_images,train_labels)
```

Epoch 1/10

```
1/1875 [...........................] - ETA: 12:59 - loss:
159.1949 - accuracy: 0.2500
39/1875 [...........................] - ETA: 2s - loss: 52.8977
- accuracy: 0.5256
76/1875 [>...........................] - ETA: 2s - loss: 34.8739
- accuracy: 0.6049
113/1875 [>...........................] - ETA: 2s - loss: 28.4213
- accuracy: 0.6350
157/1875 [=>...........................] - ETA: 2s - loss: 22.9735
- accuracy: 0.6616
194/1875 [==>...........................] - ETA: 2s - loss: 20.3405
- accuracy: 0.6740
229/1875 [==>...........................] - ETA: 2s - loss: 18.3792
- accuracy: 0.6861
265/1875 [====>...........................] - ETA: 2s - loss: 16.7848
- accuracy: 0.6943
```

...

Evaluate the model by comparing how the model performs on the test dataset:

```
test_tuple =
py.tf_helper.evaluate_model(model,test_images,test_labels)
```

```
313/313 - 0s - loss: 0.5592 - accuracy: 0.8086 - 412ms/epoch -
1ms/step
test_tuple =
```

Python tuple with values:

```
(0.5592399835586548, 0.8086000084877014)
```

Use string, double or cell function to convert to a MATLAB array.

```
test_acc = test_tuple{2}
```

```
test_acc = 0.8086
```

Test the model on the first image from the test dataset:

```
test_images_m = uint8(test_images);
prob =
py.tf_helper.test_model(model,py.numpy.array(test_images_m
(1,:,:)))
```

```
prob =
Python ndarray:
```

```
0.0000    0.0000    0.0000    0.0000    0.0000    0.0002    0.0000
0.0033    0.0000    0.9965
```

Use details function to view the properties of the Python object.

Use single function to convert to a MATLAB array.

```
[argvalue, argmax] = max(double(prob))
```

```
argvalue = 0.9965
```

```
argmax = 10
```


```
imshow(reshape(test_images_m(1,:,:),[28,28])*255)
title(class_names(argmax))
```

Ankle boot




5.3. Import TensorFlow model into MATLAB

To illustrate the TensorFlow & ONNX import/export capabilities⁸⁴, we will take a workflow around an autonomous driving use case.



⁸⁴ blogs.mathworks.com/deep-learning/2022/03/18/importing-models-from-tensorflow-pytorch-and-onnx/

The data is generated by a simple open-source driving simulator⁸⁵ from Udacity. And the model comes from a real-life experiment from NVIDIA about End-to-end learning for self-driving cars⁸⁶.

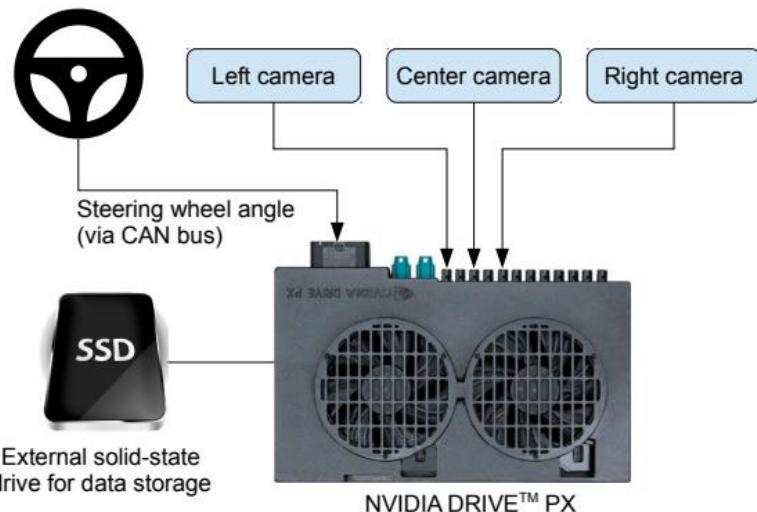


The inputs of the neural network are images from the camera and the output to predict the steering angle (between -1 and 1). We will simplify the problem with only 5 classes (from left to right).

First, import csv file created by the driving simulator with images locations and steering ground truth:

```
filename = "driving_log.csv";
drivinglog = import_driving_log(
filename );
drivinglog = drivinglog(2:end,:)
```

drivinglog = 7935x8 table

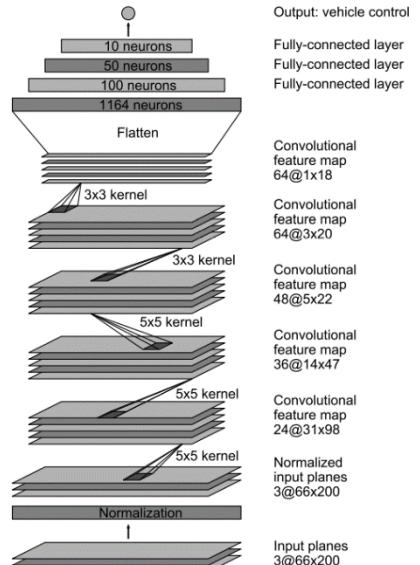

⁸⁵ Open-source driving simulator: <https://github.com/udacity/self-driving-car-sim>

⁸⁶ End-to-end learning for self-driving cars: <https://arxiv.org/pdf/1604.07316.pdf>


	VarName e1	center	left	...
1	0	"center_2021_04_25_11_32_45_622.jpg"	"left_2021_04_25_11_32_45_62.jpg"	
2	1	"center_2021_04_25_11_32_45_689.jpg"	"left_2021_04_25_11_32_45_689.jpg"	
3	2	"center_2021_04_25_11_32_45_765.jpg"	"left_2021_04_25_11_32_45_765.jpg"	
4	3	"center_2021_04_25_11_32_45_834.jpg"	"left_2021_04_25_11_32_45_834.jpg"	
5	4	"center_2021_04_25_11_32_45_905.jpg"	"left_2021_04_25_11_32_45_905.jpg"	

:

Prepare the data

Analyze the range of values for the steering angle to find the optimal class values.

```
histogram(drivinglog.steering);
title("Original steering angle distribution");
```

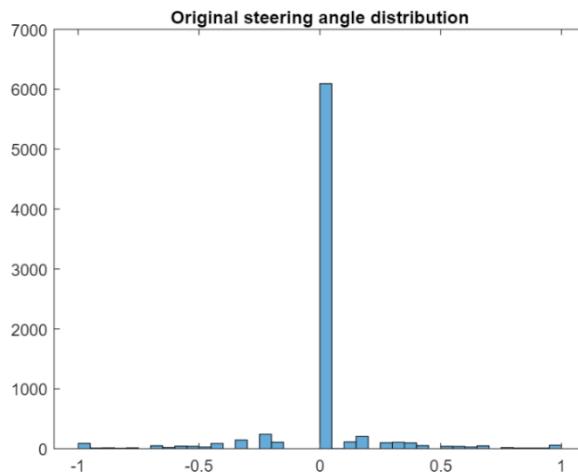

Use discretize to group the steering angles into discrete bins.

```
steeringLimits = [-1 -0.5 -0.05 0 0.05 0.5 1];
```

```

steeringClasses=discretize(drivinglog.steering,steeringLimits,
                           'categorical');
classNames = categories(steeringClasses);


```

Merge the two bins that represent the angle close to 0 degrees.

```

steeringClasses=mergecats(steeringClasses,["[-0.05,
0)", "[0, 0.05]", "0.0"]);
histogramClasses = histogram(steeringClasses);
title("Angle distribution discretized (5 categories)");

```

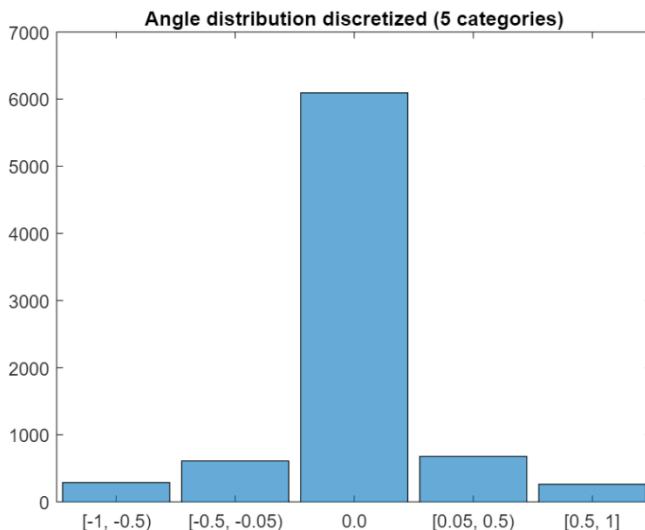

Create image datastore and balance data (undersampling)

The previous histogram shows that the dataset is highly unbalanced. Use countEachLabel to check how many instances there are of each class.

```

imds=imageDatastore("sim_data/" + drivinglog.center, "Labels",
                     steeringClasses);
countEachLabel(imds)

```


ans = 5×2 table

	Label	Count
1	[-1, -0.5)	288

	Label	Count
2	[-0.5, -0.05)	611
3	0	6093
4	[0.05, 0.5)	679
5	[0.5, 1]	264

Define how many samples of the unbalanced class should be kept and randomly select these samples.

```
maxSamples = 800;
countLabel = countEachLabel(imds);
[~, unbalancedLabelIdx] = max(countLabel.Count);
unbalanced = imds.Labels ==
countLabel.Label(unbalancedLabelIdx);
idx = find(unbalanced);
randomIdx = randperm(numel(idx));
downsampled = idx(randomIdx(1:maxSamples));
retained = [find(~unbalanced) ; downsampled];
imds = subset(imds, retained');
histogram(imds.Labels)
```

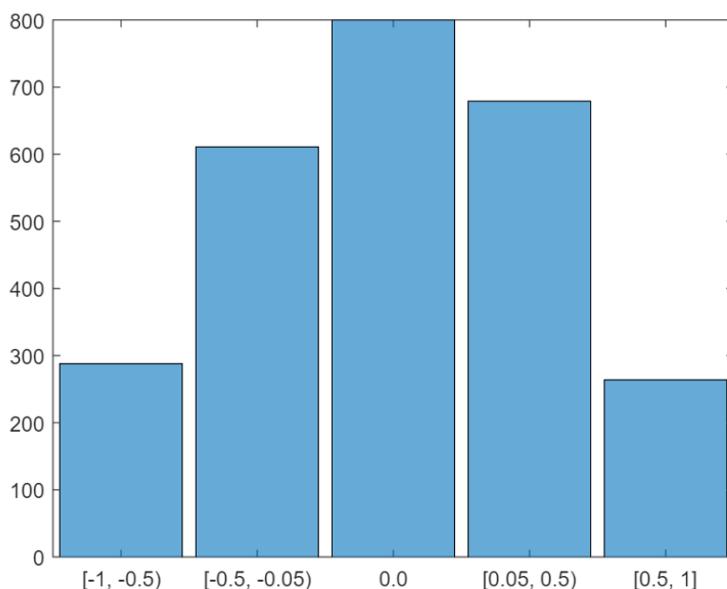

Separate the dataset into training, validation and testing

Extract 90% of the data for training and the remaining for testing and validation.

```
[imdsTrain, imdsValid,imdsTest] = splitEachLabel(imds,  
0.9, 0.05, 0.05);
```

Preprocess the images by resizing it and converting it to the YCbCr color space.

```
trainData = transform(imdsTrain, @imagePreprocess,  
"IncludeInfo", true);  
testData = transform(imdsTest, @imagePreprocess,  
"IncludeInfo", true);  
valData = transform(imdsValid, @imagePreprocess,  
"IncludeInfo", true);  
imds_origI = imdsTrain.read;  
imds_newI = trainData.read{1};  
subplot(211), imshow(imds_origI), title("Original image  
from imds")  
subplot(212), imshow(imds_newI), title("Preprocessed  
image from imds")
```

Original image from imds



Preprocessed image from imds



Modify the model:

Load the network from keras model and display with Deep Network Designer⁸⁷

It is recommended to save and import the model in the SavedModel format instead of the HDF5 format⁸⁸ (you might get a warning).

```
layers = importKerasLayers("tf_model.h5")
```

Warning: File 'tf_model.h5' was saved in Keras version '2.4.0'. Import of Keras versions newer than '2.2.4' is not supported. The imported model may not exactly match the model saved in the Keras file.

```
layers =  
20x1 Layer array with layers:
```

1	'conv2d_5_input'	Image Input	66x200x3
---	------------------	-------------	----------

⁸⁷ <https://www.mathworks.com/help/deeplearning/gs/get-started-with-deep-network-designer.html>

⁸⁸ www.tensorflow.org/tutorials/keras/save_and_load#save_the_entire_model


```

    2  'conv2d_5'                      Convolution      24 5x5
convolutions with stride [2 2] and padding [0 0 0 0]
    3  'conv2d_5_elu'                  ELU             ELU with
Alpha 1
    4  'conv2d_6'                      Convolution      36 5x5
convolutions with stride [2 2] and padding [0 0 0 0]
    5  'conv2d_6_elu'                  ELU             ELU with
Alpha 1
    6  'conv2d_7'                      Convolution      48 5x5
convolutions with stride [2 2] and padding [0 0 0 0]
    7  'conv2d_7_elu'                  ELU             ELU with
Alpha 1
    8  'conv2d_8'                      Convolution      64 3x3
convolutions with stride [1 1] and padding [0 0 0 0]
    9  'conv2d_8_elu'                  ELU             ELU with
Alpha 1
    10 'conv2d_9'                     Convolution      64 3x3
convolutions with stride [1 1] and padding [0 0 0 0]
    11 'conv2d_9_elu'                  ELU             ELU with
Alpha 1
    12 'flatten'                     Keras Flatten   Flatten
activations into 1-D assuming C-style (row-major) order
    13 'dense'                        Fully Connected 100 fully
connected layer
    14 'dense_elu'                   ELU             ELU with
Alpha 1
    15 'dense_1'                     Fully Connected 50 fully
connected layer
    16 'dense_1_elu'                 ELU             ELU with
Alpha 1
    17 'dense_2'                     Fully Connected 10 fully
connected layer
    18 'dense_2_elu'                 ELU             ELU with
Alpha 1
    19 'dense_3'                     Fully Connected 1 fully
connected layer
    20 'RegressionLayer_dense_3'    Regression Output mean-
squared-error

```

deepNetworkDesigner(layers)


Remove the last layer used for regression and add the layers for a classification with 5 classes (then export net as **layers_1**)

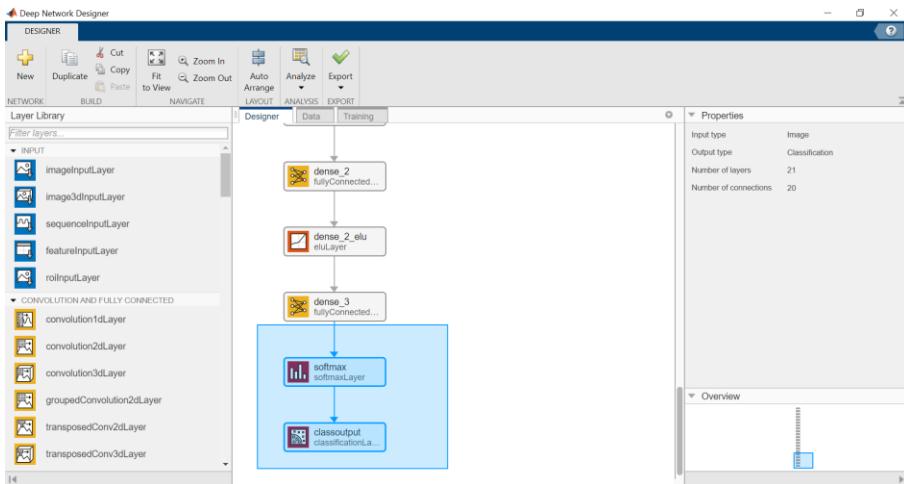

(programmatic alternative)

Remove layers used for regression and add the layers for a classification with 5 classes

```
netGraph = layerGraph(layers);
clf; plot(netGraph)
```

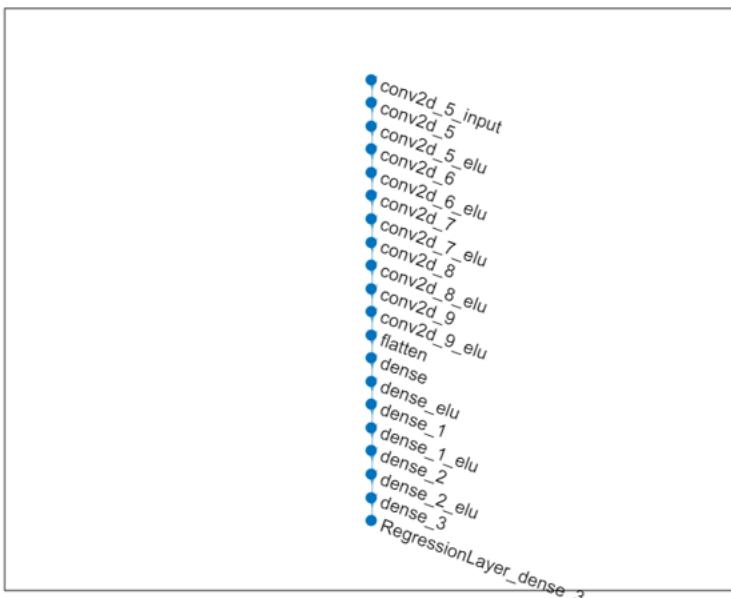

```

classificationLayers =
[fullyConnectedLayer(5, "Name", "dense_3"), ...
    softmaxLayer("Name", "softmax"),
...
classificationLayer("Name", "classoutput")];
netGraph = removeLayers(netGraph, {'dense_3',
'RegressionLayer_dense_3'});
netGraph = addLayers(netGraph, classificationLayers);
layers_1 = netGraph.Layers

```

layers_1 =

21x1 Layer array with layers:


1	'conv2d_5_input'	Image Input	66x200x3 images
2	'conv2d_5'	Convolution	24 5x5
convolutions with stride [2 2] and padding [0 0 0 0]			
3	'conv2d_5_elu'	ELU	ELU with Alpha 1
4	'conv2d_6'	Convolution	36 5x5
convolutions with stride [2 2] and padding [0 0 0 0]			
5	'conv2d_6_elu'	ELU	ELU with Alpha 1
6	'conv2d_7'	Convolution	48 5x5
convolutions with stride [2 2] and padding [0 0 0 0]			
7	'conv2d_7_elu'	ELU	ELU with Alpha 1
8	'conv2d_8'	Convolution	64 3x3
convolutions with stride [1 1] and padding [0 0 0 0]			
9	'conv2d_8_elu'	ELU	ELU with Alpha 1
10	'conv2d_9'	Convolution	64 3x3
convolutions with stride [1 1] and padding [0 0 0 0]			
11	'conv2d_9_elu'	ELU	ELU with Alpha 1
12	'flatten'	Keras Flatten	Flatten
activations into 1-D assuming C-style (row-major) order			
13	'dense'	Fully Connected	100 fully
connected layer			
14	'dense_elu'	ELU	ELU with Alpha 1
15	'dense_1'	Fully Connected	50 fully
connected layer			
16	'dense_1_elu'	ELU	ELU with Alpha 1
17	'dense_2'	Fully Connected	10 fully
connected layer			
18	'dense_2_elu'	ELU	ELU with Alpha 1
19	'dense_3'	Fully Connected	5 fully connected
layer			
20	'softmax'	Softmax	softmax
21	'classoutput'	Classification Output	crossentropyex

Train the model: (I am using my CPU here, but I recommend to speed it up on a GPU)

```
initialLearnRate = 0.001;
maxEpochs = 30;
miniBatchSize = 100;

options = trainingOptions("adam", ...
    "MaxEpochs",maxEpochs, ...
    "InitialLearnRate",initialLearnRate, ...
    "Plots","training-progress", ...
    "ValidationData",valData, ...
    "ValidationFrequency",10, ...
    "LearnRateSchedule","piecewise", ...
    "LearnRateDropPeriod",10, ...
    "LearnRateDropFactor",0.5, ...
    "ExecutionEnvironment","parallel",...
    "Shuffle","every-epoch");

net = trainNetwork(trainData, layers_1, options);
```

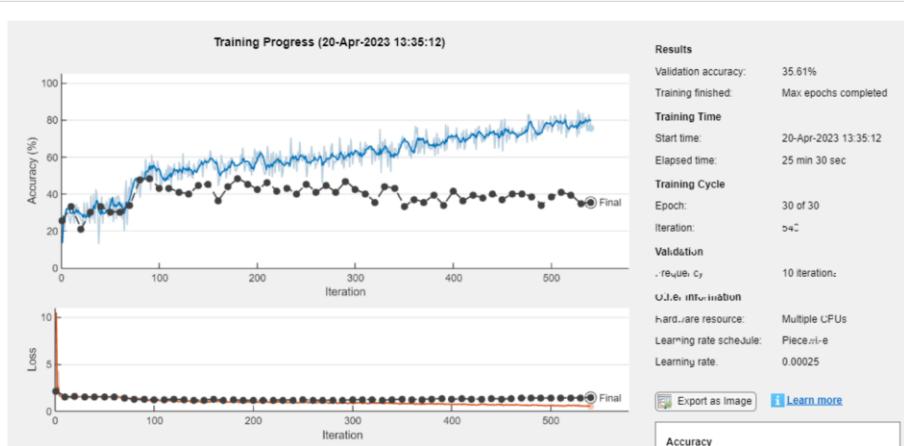

Save the model: Save the new trained network in a MAT format.

```
model_name = "net-class-30-1e-4-drop10-0_5";
% classification-epochs-learning_rate-drop_period-
drop_factor
save("model_name+.mat","net")
```


Export it to a ONNX Network format.

```
exportONNXNetwork(net,model_name+".onnx")
```

Test the model:

Plot predicted and ground truth values for steering angle using the testing dataset.

```
model_name = "net-class-30-1e-4-drop10-0_7"; %  
classification-epochs-learning_rate-drop_period-  
drop_factor  
load("models/"+model_name+".mat","net")  
predSteering = classify(net, testData);  
  
figure  
startTest = 1;  
endTest = 20;  
plot(predSteering(startTest:endTest), 'r*',  
"MarkerSize",10)  
hold on  
plot(imdsTest.Labels(startTest:endTest), 'b*')  
legend("Predictions", "Actual")  
hold off
```

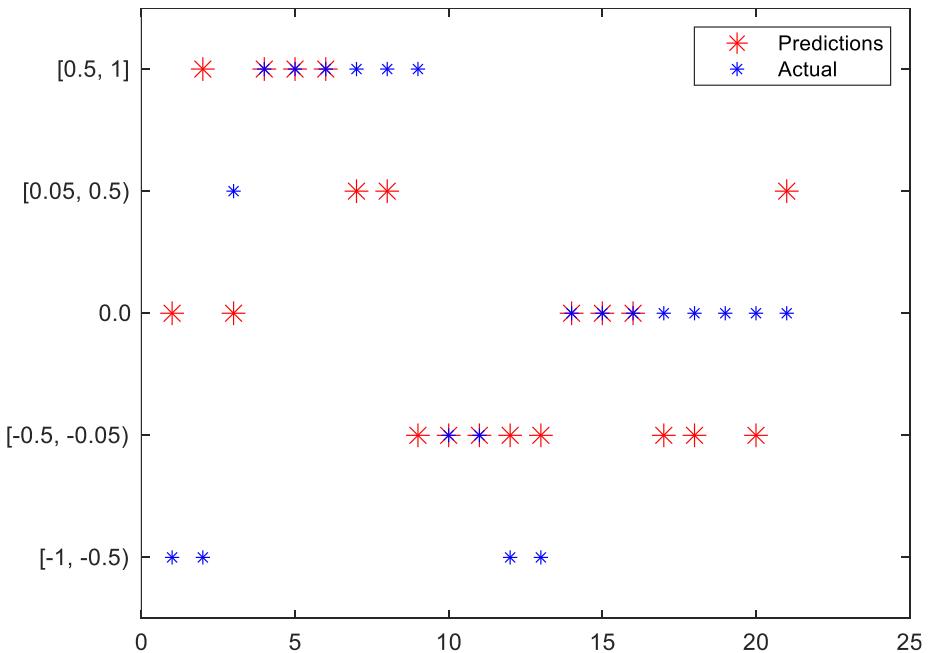

Display the confusion matrix.

```
confMat = confusionmat(imdsTest.Labels, predSteering);
confusionchart(confMat)
```

	1	2	3	4	5
1	2	5	4	1	2
2	4	14	12	1	
3	2	11	17	8	2
4	1	3	6	11	13
5		1		8	4
Predicted Class					

Display the testing image and the predicted label along with the ground truth.

```
numberImages = length(imdsTest.Labels);
i = 42;
img = readimage(imdsTest, i);
imshow(img),title(char(imdsTest.Labels(i)) + "/" + char(predSteering(i)));
```



To test your model directly with the driving simulator, you can switch the simulator to “autonomous mode” and run the script [drive.py](#).

6. Call MATLAB from Python

If you are a Python user and you are wondering *why you should consider MATLAB*, this chapter is probably a better entry point into this book. One of my favorite colleagues, Lucas Garcia – Deep Learning Product Manager – tried to answer this question at a Python Meetup⁸⁹ in Madrid:

- **Facilitate** AI development by using a simplified MATLAB workflow
- Need **functionality** available in MATLAB (e.g. Simulink)
- Leverage the work from the MATLAB **community**

But first let's start with a few basics on how to call MATLAB from Python.

6.1. Getting started with the MATLAB Engine API for Python

First, make sure you have the MATLAB Engine for Python installed (as described in section 3.8).

In your python script or jupyter notebook, the first statement you will need to enter in order to load the MATLAB Engine package is:

```
>>> import matlab.engine
```

You have then two options to interact with MATLAB from Python:

1. Start a new session (in batch or interactive)

By default, the engine will be started in batch with the “-nodesktop” mode:

```
>>> m = matlab.engine.start_matlab()
```

⁸⁹ Lucas Garcia – Python Madrid Meetup:

<https://mathinking.github.io/blog/en/a-trick-you-dont-know-about-python-matlab/>

```
(option: str = "-nodesktop", **kwargs: Any) -> (Any | Future)
```

Start the MATLAB Engine. This function creates an instance of the MatlabEngine class. The local version of MATLAB will be launched with the "-nodesktop" argument.

Please note the invocation of this function is synchronous, which means it only returns after MATLAB launches.

Parameters

option - MATLAB startup option.
async, background: bool - start MATLAB asynchronously or not. This parameter is optional and false by default. "async" is a synonym for "background" that will be removed in a future release.

(this is the contextual help provided by VSCode when you enter the function)

If you wish to have the MATLAB Desktop apparent to visualize which values are stored in the workspace or to debug interactively with the console, you can specify the “desktop” argument:

```
>>> m = matlab.engine.start_matlab("-desktop")
```

2. Connect to an existing session

First you need to start MATLAB manually. For convenience, it's easier to have the MATLAB Desktop and your Python development environment (Jupyter or VSCode) open side by side. To share the MATLAB Engine session, simply type inside of MATLAB:

```
>> matlab.engine.shareEngine
```

You can also request the name of the MATLAB Engine session, in case Python doesn't find it automatically:

```
>> matlab.engine.engineName  
  
ans =  
  
'MATLAB_11388'
```

Then on the Python side, enter the following command:

```
>>> m = matlab.engine.connect_matlab()  
(name: Any | None = None, **kwargs: Any) -> (Any | Future)  
name: str - the name of the shared MATLAB session, which is  
optional.  
Connect to a shared MATLAB session. This function creates an  
instance of the MatlabEngine class and connects it to a MATLAB  
session. The MATLAB session must be a shared session on the local  
machine.  
If name is not specified and there is no shared MATLAB available,  
this function launches a shared MATLAB session with default  
options. If name is not specified and there are shared MATLAB  
sessions available, the first shared MATLAB created is connected. If
```

(this is the contextual help provided by VSCode when you enter the function)

If Python does not find automatically the running session, you can enter the engine name requested previously in MATLAB ('MATLAB_11388').

6.2. Facilitate AI development by using MATLAB Apps

6.2.1. Data Cleaner App

The first step in an AI pipeline is often to clean the data. This process requires some level of interactivity for the data analyst to understand which variables she is manipulating. Once the input format of the data is fixed, this process can be automated to scale it to the whole dataset.

Let's take an example with the weather data from chapter 2. In this first example, we will start MATLAB in `'-nodesktop` mode (which is the default mode for the engine). In the next two sections, we will use the `'-desktop` mode to show how to use the MATLAB desktop to interact with the data, but also connect to an already running MATLAB session.

Set up the environment

```
!git clone https://github.com/hgorr/weather-matlab-python
```

```
import matlab.engine
m = matlab.engine.start_matlab()
m.cd('weather-matlab-python') # returns the previous dir
location
# m.cd('..')
```

```
'C:\\\\Users\\\\ydebray\\\\Downloads\\\\python-book-github'
```

```
m.getcwd()
```

```
'C:\\\\Users\\\\ydebray\\\\Downloads\\\\python-book-github\\\\weat
her-matlab-python'
```

```
# Make sure that your Python interpreter follows along
import os
os.getcwd()
os.chdir('weather-matlab-python')
# os.chdir('..')
```

Retrieve Weather Data

```
import weather
appid = 'b1b15e88fa797225412429c1c50c122a1'
json_data =
weather.get_forecast('Muenchen', 'DE', appid, api='samples')
data = weather.parse_forecast_json(json_data)
data.keys()
```

```
dict_keys(['current_time', 'temp', 'deg', 'speed', 'humidity', 'pressure'])
```

```
print(len(data['temp']))
data['temp'][0:5]
```

36

```
[286.67, 285.66, 277.05, 272.78, 273.341]
```

```
t = matlab.double(data['temp'])  
t
```

```
matlab.double([[286.67,285.66,277.05,272.78,273.341,275.  
568,276.478,276.67,278.253,276.455,275.639,275.459,275.0  
35,274.965,274.562,275.648,277.927,278.367,273.797,271.2  
39,269.553,268.198,267.295,272.956,277.422,277.984,272.4  
59,269.473,268.793,268.106,267.655,273.75,279.302,279.34  
3,274.443,272.424]])
```


Format into a Timetable


```
# Transform into a timetable for data cleaning  
m.workspace['data'] = data  
m.eval("TT =  
timetable(datetime(string(data.current_time))',cell2mat(da  
ta.temp)','VariableNames',{'Temp'})",nargout=0)  
m.who()  
  
['TT', 'data']
```

Interact manually with the app


```
m.dataCleaner(nargout=0)
```

The app will appear, with a blank canvas, giving you the option to import data. Select the timetable from your workspace.

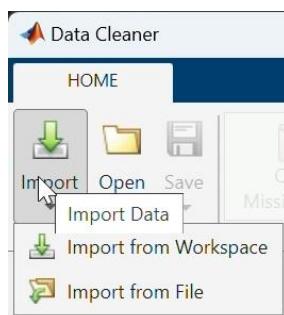

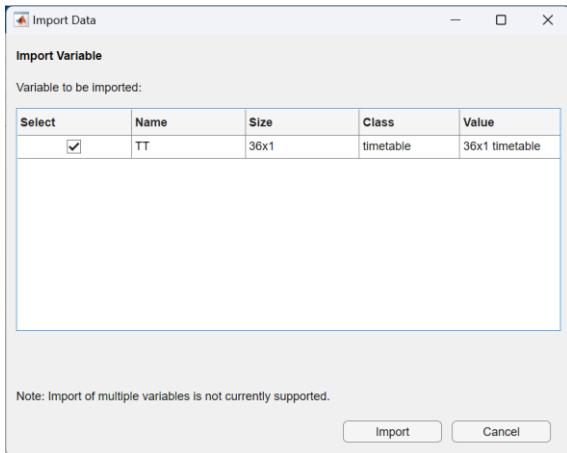


This will open your data into the app main view:

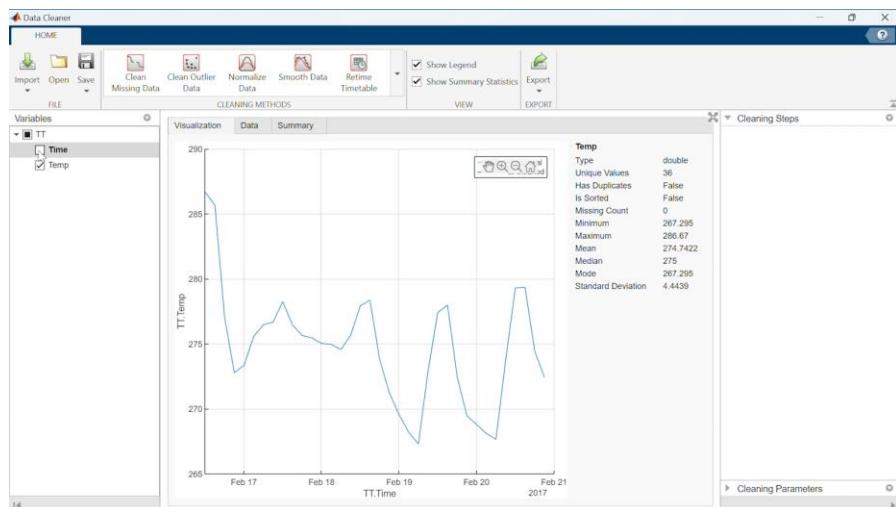


In the left panel, you can select the variables that you want to visualize and manipulate.

We will select the Time variable, and use the **Retime Timetable** cleaning method:

This will display options in the right panel, where we will specify the new sampling, Time step: 1 (hour). Once you are happy with the results, click accept (bottom right).



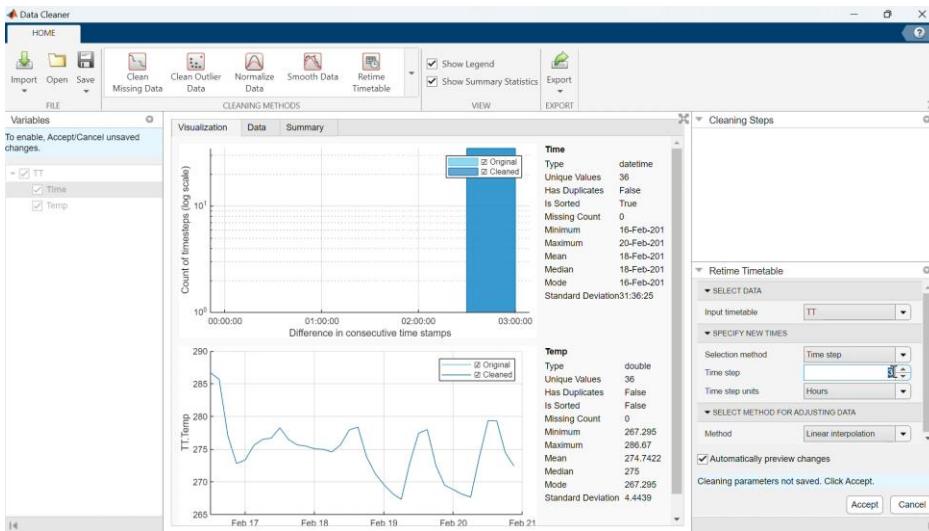


You can see the results of this transformation on your data by changing the tabs in the center panel:

	Time	Temp
Min	16-Feb-2017 12:00:00	267.295
Max	20-Feb-2017 21:00:00	286.67
Mean	18-Feb-2017 16:30:00	274.6515
Std Dev	30:44:36	4.113
Missing	0	0
Class	datetime	double
1	16-Feb-2017 12:00:00	286.6700
2	16-Feb-2017 13:00:00	286.3333
3	16-Feb-2017 14:00:00	285.9967
4	16-Feb-2017 15:00:00	285.6600
5	16-Feb-2017 16:00:00	282.7900
6	16-Feb-2017 17:00:00	279.9200
7	16-Feb-2017 18:00:00	277.0500
8	16-Feb-2017 19:00:00	275.6267
9	16-Feb-2017 20:00:00	274.2033
10	16-Feb-2017 21:00:00	272.7800

The second transformation we will operate on this is **Smooth Data**. You can select the smoothing method (we will stick with the default moving average) and play around with the smoothing factor.



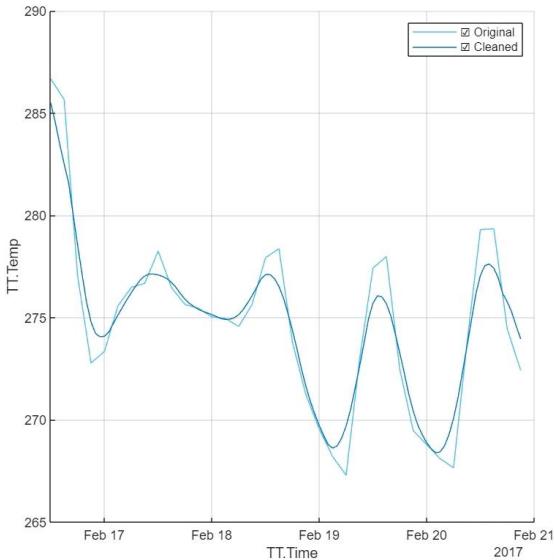


Export the cleaning steps

Once you are happy with the way your data looks, you can save your manual operations as a function that you will apply to any new weather data that comes in, to automate the preprocessing.


preprocess.m

```
function TT = preprocess(TT)
    % Retime timetable
    TT = retime(TT,"regular","linear","TimeStep",hours(1));
    % Smooth input data
    TT = smoothdata(TT,"movmean","SmoothingFactor",0.25);
end
```

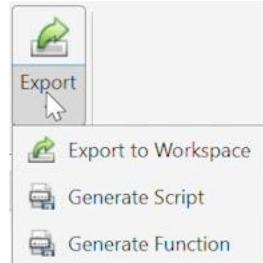

You can call this function from Python, and test that it works.

```
TT = m.workspace['TT']
TT2 = m.preprocess(TT)
m.parquetwrite("data.parquet",TT2,nargout=0)
import pandas as pd
pd.read_parquet('data.parquet').plot(y='Temp')
```

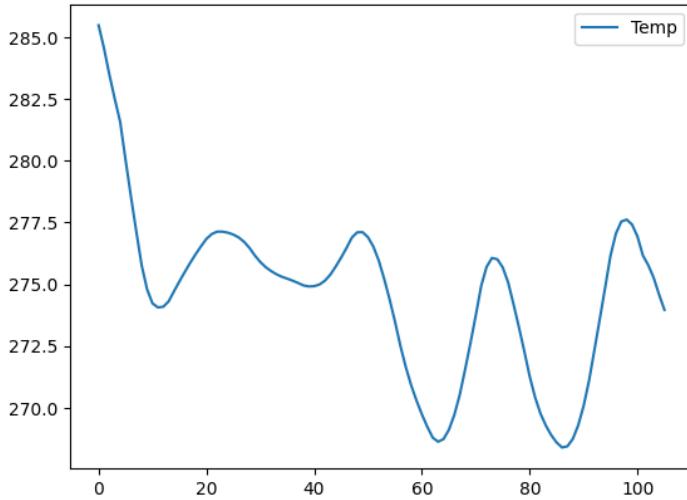

6.2.2. Regression and Classification Learner Apps

We will take the Boston housing example that is part of the Scikit-Learn sample datasets to call MATLAB from Python.

Open a Jupyter notebook and connect to a running MATLAB session from Python:

```
import matlab.engine  
m = matlab.engine.connect_matlab()
```

Retrieve the dataset:

```
import sklearn.datasets  
dataset = sklearn.datasets.load_boston()  
dataset.keys()  
  
dict_keys(['data', 'target', 'feature_names', 'DESCR',  
          'filename', 'data_module'])  
  
data = dataset['data']  
target = dataset['target']
```

Depending on the version of MATLAB you are using, you might require converting the data and target arrays to MATLAB double:

- Before 22a, Numpy arrays were not accepted, so you need to translate them to lists.
- In 22a, Numpy arrays can be passed into MATLAB object constructor (double, int32, ...).
- From 22b, Numpy arrays can be passed directly into MATLAB functions.

```
# Before 22a
X_m = matlab.double(data.tolist())
Y_m = matlab.double(target.tolist())
# In 22a
X_m = matlab.double(data)
Y_m = matlab.double(target)
# From 22b
X_m = data
Y_m = target
# Call the regression Learner app with data coming from
# Python
m.regressionLearner(X_m,Y_m,nargout=0)
```

The session is automatically created in the Regression Learner, with the passed data:

New Session from Arguments

Data set

Data Set Variable
 506x13 double

Use columns as variables
 Use rows as variables

Response
 1x506 double

Validation

Validation Scheme

Protects against overfitting by partitioning the data set into folds and estimating accuracy on each fold.

Cross-validation folds:

[Read about validation](#)

Predictors

	Name	Type	Range
<input checked="" type="checkbox"/>	column_1	double	0.00632 .. 88.9762
<input checked="" type="checkbox"/>	column_2	double	0 .. 100
<input checked="" type="checkbox"/>	column_3	double	0.46 .. 27.74
<input checked="" type="checkbox"/>	column_4	double	0 .. 1

[How to prepare data](#)

Test

Set aside a test data set
 Test Data Percent:


Use test set to evaluate model performance. You can import a stand alone test set from the toolbar after starting a session


[Read about test data](#)

You have several models and categories to choose from:




You can visualize certain indicators during the training:

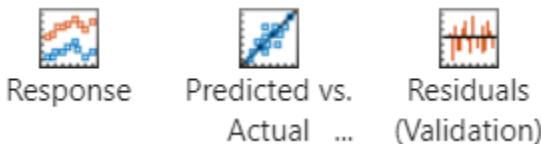

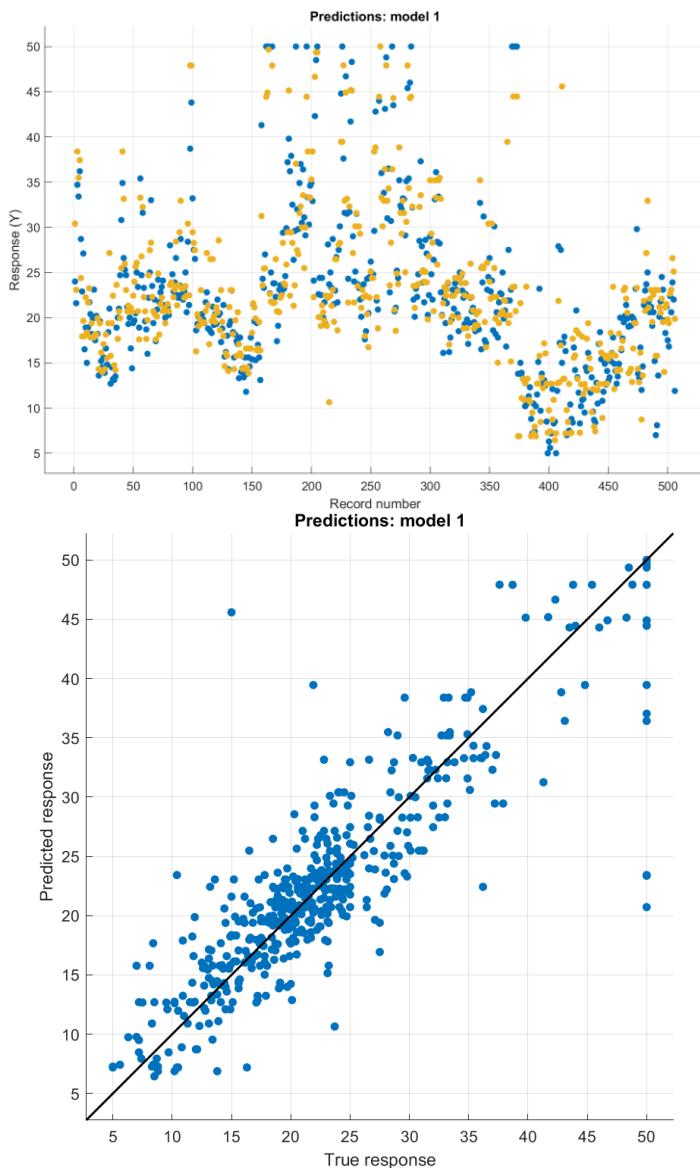

Once you are happy with one of the models you've trained, you can generate a function or export it:

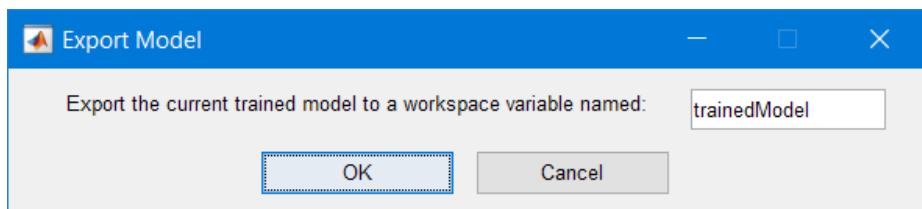

Informations are shared in the MATLAB Command Window:

Variables have been created in the base workspace.
Structure 'trainedModel' exported from Regression Learner.

To make predictions on a new predictor column matrix, X:

```
yfit = trainedModel.predictFcn(X)
```

For more information, see [How to predict using an exported model](#).

Finally, you can retrieve the model to assign the prediction function to a variable in Python:

```
model = m.workspace['trainedModel']
m.fieldnames(model)
```

```
['predictFcn', 'RegressionTree', 'About', 'HowToPredict']
```

```
predFcn = model.get('predictFcn')
```

This way, you can test the model directly from within Python:

```
X_test = data[0]
y_test = target[0]
X_test,y_test
```

```
(array([6.320e-03, 1.800e+01, 2.310e+00, 0.000e+00, 5.38
0e-01, 6.575e+00,
       6.520e+01, 4.090e+00, 1.000e+00, 2.960e+02, 1.53
0e+01, 3.969e+02,
       4.980e+00]),
 24.0)
```

```
m.feval(predFcn,X_test)
```

```
23.46666666666667
```

You can iterate and test another model to see if the predictions are closer to the test target.

6.2.3. Image Labeler App


Data preparation is key in developing Machine Learning and Deep Learning applications. No matter how much effort you put into your ML model, it will likely perform poorly if you didn't spend the right time in preparing your data to be consumed by your model.

In this example, we start with a set of images to label for a Deep Learning application.

```
import os
cwd = os.getcwd()
vehicleImagesPath = os.path.join(cwd, "vehicleImages")
vehicleImagesPath
```


We then start the MATLAB Engine API for Python and open the *Image Labeler App*, passing the location of the images as an input:

```
import matlab.engine
m = matlab.engine.start_matlab()
m.imageLabeler(vehicleImagePath, nargout=0)
```

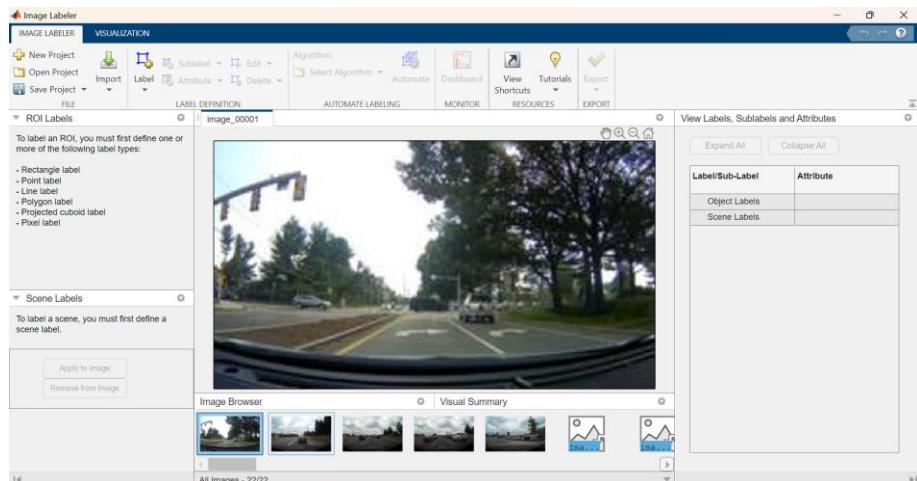


Note that because the App returns no output arguments back to Python, you need to specify nargout=0 (number of output arguments equals 0).


Now you can interactively create a new ROI Label:

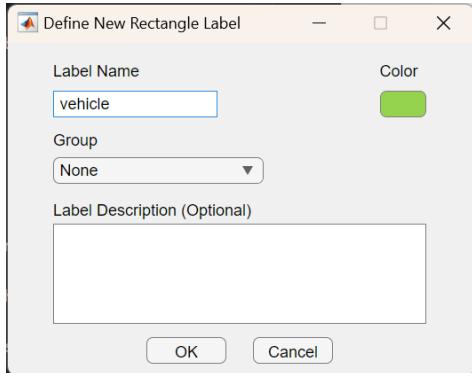


and start to manually label your vehicles:

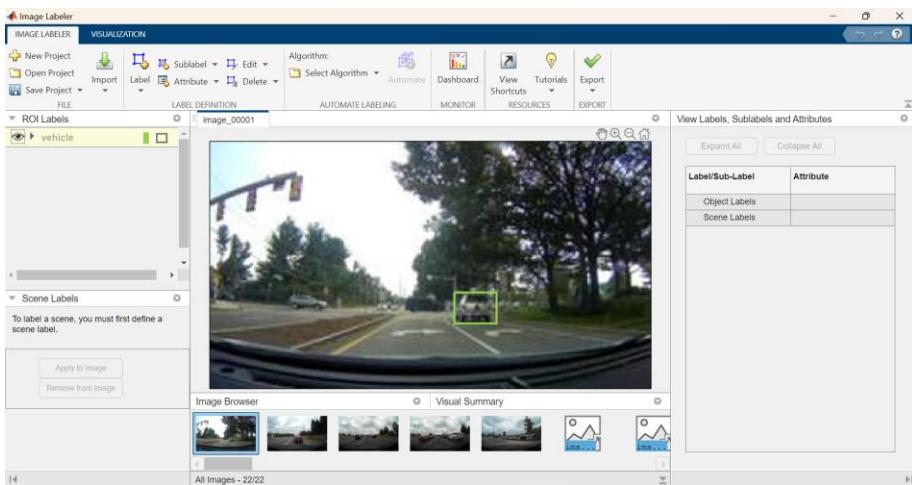

This process is rather tedious, especially considering that the number of required labeled images for the problem might be significant for Deep Learning workflows. Thus, the following shows how to facilitate labeling by automating (or semi-automating) the labeling process. After selecting the images you would like to automatically label, you can choose among various algorithms (*ACF vehicle detector*, *ACF people detector*, or import your custom detector). In this particular case, after choosing *ACF vehicle detector*, the selected images are automatically labeled. Earlier I mentioned that the process is semi-automated, as it might not detect all vehicles, or you might want to correct some bounding boxes before exporting your results.

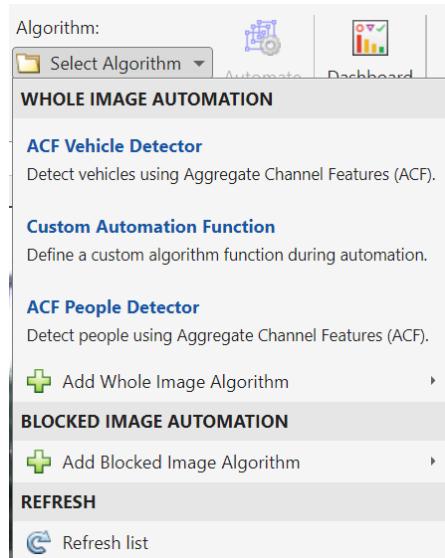

Finally, export your labeling process as a MATLAB table to continue your work back in Python:

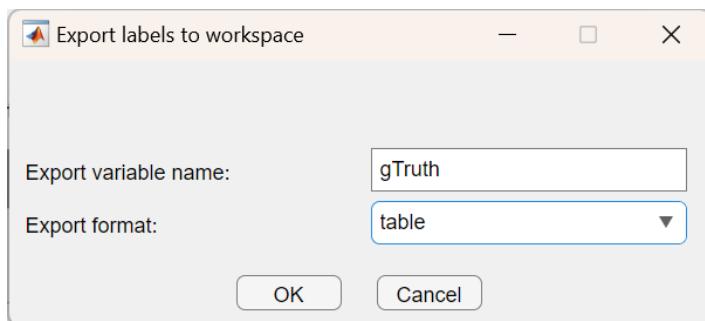

Back in Python, gather the variables you are interested in:

```
imageFilename = m.eval("gTruth.imageFilename")
labels = m.eval("gTruth.vehicle")
```

and put them into a convenient form to continue your work:

```
import pandas as pd
import numpy as np
# Bring data to convenient form as DataFrame
labels = [np.array(x) for x in labels]
```

```
df = pd.DataFrame({"imageFileName":imagefilename,  
"vehicle":labels})
```

Labeled data is now conveniently shaped into a DataFrame with information regarding file location and bounding boxes for each vehicle, and can be easily accessed:


```
df.iloc[[13]]
```

```
           imageFileName  
13  c:\Users\ydebray\Downloads\matlab-with-python-... \  
  
           vehicle  
13  [[32.0, 118.0, 40.0, 25.0], [76.0, 110.0, 40.0...  
  
m.exit()
```

6.3. Leverage the work from the MATLAB community

MATLAB has a vibrant and established community. It is actually quite complementary to the Python community, that is younger and growing fast in particular in areas related to Machine/Deep Learning. MATLAB File Exchange⁹⁰ enables you to share your own files or browse and download files contributed by other users. It does not require you to use source control with Git, but can be connected with your code repositories on GitHub if you want to. This enables to access community contributions directly from MATLAB via the add-on manager.

In this example, we will use a MATLAB community toolbox to fit a sine function⁹¹ over weather data.



⁹⁰ <https://www.mathworks.com/matlabcentral/fileexchange/>

⁹¹ <https://www.mathworks.com/matlabcentral/fileexchange/66793-sine-fitting>

Set-up the environment

```
!git clone https://github.com/hgorr/weather-matlab-python

# download the zip file and unzip it
url_zip = 'https://www.mathworks.com/matlabcentral/mlc-downloads/downloads/a1ca242b-82c2-4a89-b280-38d2243276da/4d399976-e76f-418a-a227-c97d2f7a85f7/packages/zip'

import requests, zipfile, io, os
r = requests.get(url_zip)
z = zipfile.ZipFile(io.BytesIO(r.content))
os.makedirs('sineFit', exist_ok=True)
z.extractall('sineFit')
```

Retrieve weather data

```
import os
os.chdir('weather-matlab-python')
```

We will use the sample dataset from the forecast in Munich.

```
import weather
appid = 'b1b15e88fa797225412429c1c50c122a1'
json_data =
weather.get_forecast('Muenchen', 'DE', appid, api='samples')
data = weather.parse_forecast_json(json_data)
```


The MATLAB engine is going to start in the current directory of the Python interpreter.

```
import matlab.engine
m = matlab.engine.connect_matlab()
m.getcwd()
```

```
'C:\\\\Users\\\\ydebray\\\\...\\\\code\\\\weather-matlab-python'
```

Let's convert the data into MATLAB datatypes (datetime and double precision floats).

```
dt = m.datetime(data['current_time'])
temp = matlab.double(data['temp'])
m.plot(dt,temp)
m.print(m.tempdir()+"myPlot.png",' -dpng ', '-r300 ',nargout=0)
from IPython.display import Image
Image(m.tempdir()+"myPlot.png")
```

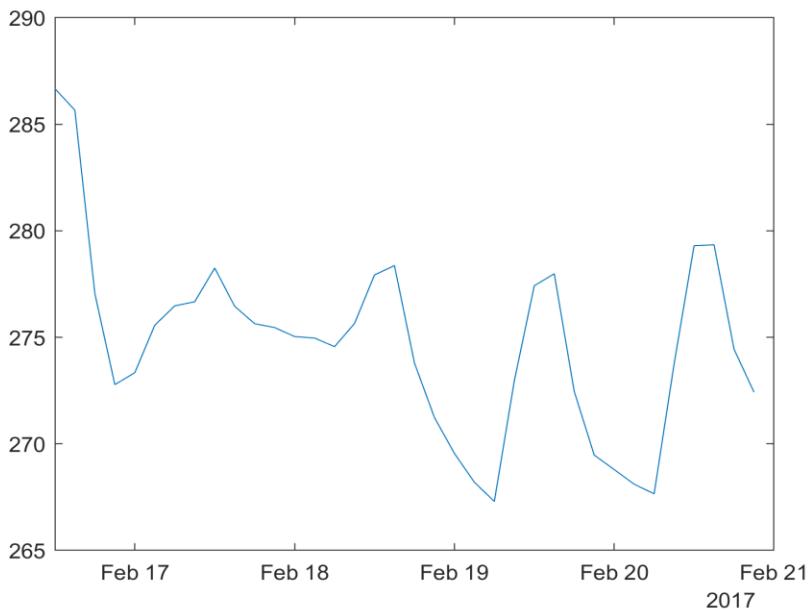

You can create a function to simplify the process of saving MATLAB plots in your notebook.

```
from IPython.display import Image
def mplot(x,y):
    m.plot(x,y)
    m.print(m.tempdir()+"myPlot.png",' -dpng ', '-r300 ',nargout=0)
    return Image(m.tempdir()+"myPlot.png")
# mplot(dt,temp)
```

Sine Fitting

Retrieve description from the webpage

```
import requests
from bs4 import BeautifulSoup
from IPython.display import HTML
url='https://www.mathworks.com/matlabcentral/fileexchange/6
6793-sine-fitting'
r = requests.get(url)
soup = BeautifulSoup(r.text, 'html.parser')
description = soup.find('div',
id='description')#.get_text()
HTML(str(description))
```

sineFit is a function to detect the parameters of a noisy sine curve, even less than one period long. It requires only x and y values and no additional parameters as input. No toolbox required

Syntax:

[SineParams]=sineFit(x,y,optional)

optional: plot graphics if omitted. Do not plot if 0

Input:

x and y values, $y = \text{offs} + \text{amp} * \sin(2\pi * f * x + \phi) + \text{noise}$

x and y may be row or column vectors

x may be not equidistant

Output:

SineParams(1): offset (offs)

SineParams(2): amplitude (amp)

SineParams(3): frequency (f)

SineParams(4): phaseshift (phi)

SineParams(5): MSE , if negative then SineParams are from FFT


```
m.cd('..')
m.cd('sineFit/')
```

```
'C:\\\\Users\\\\ydebray\\\\Downloads\\\\python-book-github\\\\code
```


```
t = matlab.double(range(36))
SineParams = m.sineFit(t,temp)
SineParams
```

```
matlab.double([[274.51842044220115,4.390270295890297,0.1
2378139169121775,1.3187000578012196,9.61367024285807]])
```

```
m.print(m.tempdir()+"fft.png",' -dpng ', '-r300 ',nargout=0)
m.close(m(gcf()) # close the current figure
Image(m.tempdir()+"fft.png")
```

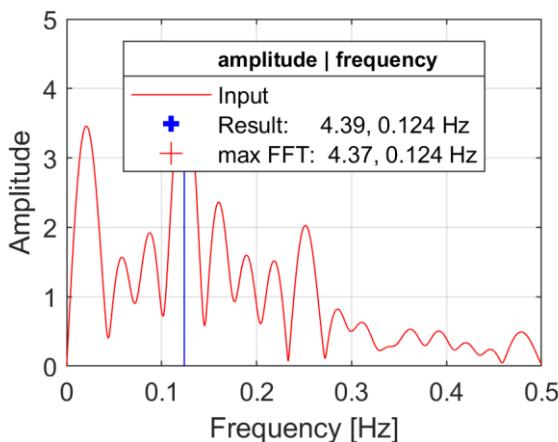

```
m.print(m.tempdir()+"sine.png",' -dpng ', '-r300 ',nargout=0)
m.close(m(gcf())
Image(m.tempdir()+"sine.png")
```

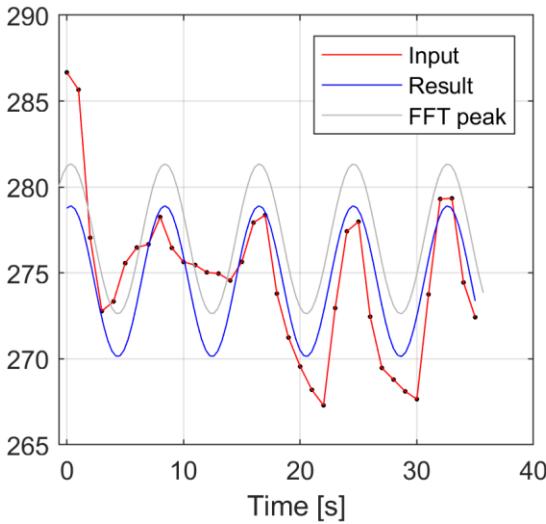

Sine Fit 2: retrieve the values of the sine model

Create a function in MATLAB that returns the values of the sine model for a given set of parameters and a given set of x values.

```
m.edit('sineFit2.m',nargout=0)
```

```
function Sine=sineFit2(y)
    s = size(y);
    if s(1)>s(2)
        y = y';
    end
    n=length(y);
    x = linspace(1,n,n);
    SineP = sineFit(x,y,0); % does not generate plots
    Sine = SineP(1)+SineP(2)*sin(2*pi*SineP(3)*x+SineP(4));
);;
end
```

```
mat_temp = matlab.double(temp)
SineVal = m.sineFit2(mat_temp)[0]
SineVal
```

```
matlab.double([278.76990973043, 278.3159918142903, 275.678
45197258595, 272.3738730375523, 270.3023846684254, 270.6550
9065371265, 273.22918539644996, 276.5445669343253, 278.6948
```

```


941220223,278.44373092737726,275.9354959419373,272.61242
18319101,270.38527296408427,270.5346577616464,272.974680
1119398,276.3023295473256,278.60421089340406,278.5567446
2500303,276.187223800081,272.85812057806464,270.48366605
92461,270.429169272226,272.72596581629216,276.053399922
47,278.4982002304407,278.6546089515687,276.432691224009,
273.11004757040575,270.59719484552426,270.33902091123986
,272.48397552754307,275.7987118855729,278.37725981779397
,278.7369567822915,276.67097737588534,273.3672577389005]
)

```

```

m.plot(dt,temp,dt,SineVal)
m.print(m.tempdir()+"sine2.png",' -dpng ',' -r300 ',nargout=0)
m.close(m.gcf())
Image(m.tempdir()+"sine2.png")

```

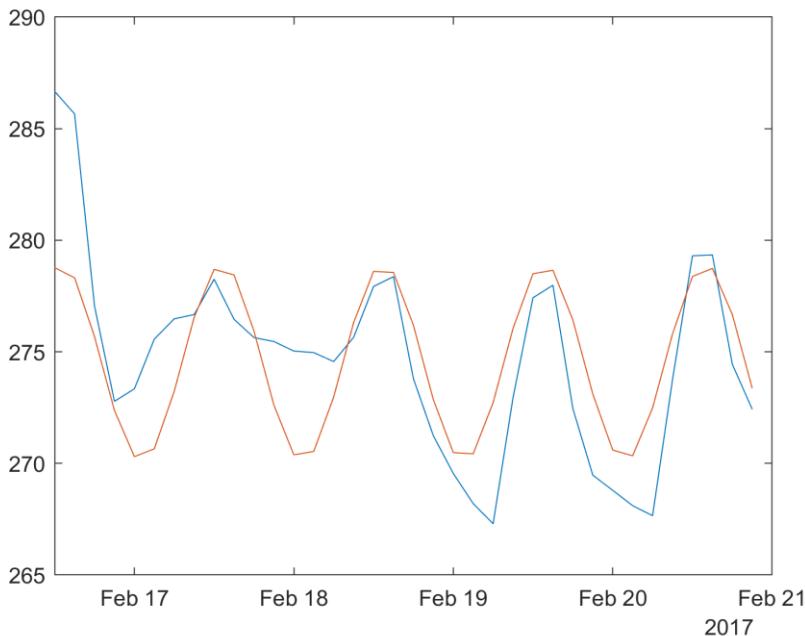

```
m.quit()
```

Sine Fit 2: retrieve only the parameters

This second implementation does a minimal work from the MATLAB side, of fitting the parameters (a,b,c,d) of the Sine model:

$$a + b * \sin(2 * \pi * c + d)$$

```
# need to grab the first element of the matlab double
array, to return a list
SineP = SineParams[0]
SineP
```

```
matlab.double([274.51842044220115,4.390270295890297,0.12
378139169121775,1.3187000578012196,9.61367024285807])
```

```
from math import sin,pi
# SineP(1)+SineP(2)*sin(2*pi*SineP(3)*tt+SineP(4)));
def Sine(t):
    return SineP[0]+SineP[1]*sin(2*pi*SineP[2]*t+SineP[3])
```

```
# generate a List from 1 to 40
t = list(range(1,41))
Sine(t[0])
```

278.3160060160971

```
# need to use the concept of list comprehension in
Python to generate a list of Sine values
SineFit = [ Sine(x) for x in t ]
SineFit
```

```
[278.3160060160971,
275.67847973668944,
272.3739196764843,
...
275.539336033496,
278.2419051283501]
```


```
import plotly.graph_objects as go
fig = go.Figure()
fig.add_trace(go.Scatter(x=data['current_time'],
y=data['temp'],
mode='markers',
name='Temperatures'))
```

```

fig.add_trace(go.Scatter(x=data['current_time'],
y=SineFit,
    mode='lines',
    name='SineFit'))

fig.show()

```

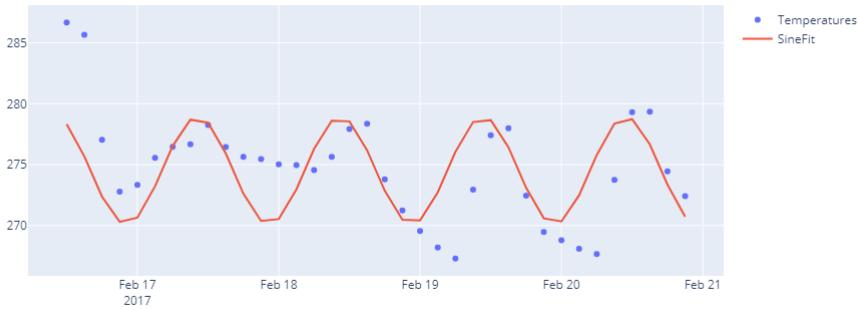

A recorded demo of this chapter can be found here:

- Part 1:
<https://github.com/yanndebray/matlab-with-python-book/assets/128002745/dc9b069e-bf73-4294-aa1d-79813df9c62d>
- Part 2:
<https://github.com/yanndebray/matlab-with-python-book/assets/128002745/6b777298-76ea-405e-b3ee-57fa5a18e211>

7. Simulink with Python

Simulink is a software based on MATLAB that enables the modeling, simulation and generation of code for physical and control systems. It is heavily used in the development of embedded systems, in applications such as automotive vehicle dynamics or flight control.

At the MATLAB Expo 2023⁹², my colleague Weiwu and I looked at 4 typical scenarios we observe where Simulink is used with Python. In those scenarios, Weiwu is representing the Simulink usage, and I'm representing the Python usage (bearing in mind that in some cases they are the same users).

The 4 scenarios explored in this chapter:

- Bring Python code into Simulink as a library for co-execution
- Integrate TensorFlow and PyTorch models for both simulation and code generation
- Simulate a Simulink model directly from Python
- Export a Simulink model as a Python package for deployment

7.1. Bring Python code into Simulink as a library for co-execution

In the first scenario, an algorithm has been developed for computer vision using Python, and it needs to be integrated into a larger system for simulation.



Yann

I'm an algorithm developer using Python; I develop image processing and computer vision algorithms (and many more).



Weiwu


I'm a system engineer who integrates multiple components together. I want to **simulate the whole virtual system including Yann's Python algorithm in Simulink.**

⁹² Video of Simulink with Python:

<https://www.mathworks.com/videos/using-simulink-with-python-1683218506123.html>

7.1.1. Python Importer for Simulink

In Simulink 23a, we shipped a new feature called the Python Importer. It can help you to bring your Python function in the Simulink as a library block easily. It provides a graphical wizard for step-by-step guidance. In this demo, we will use a Python Human Detector algorithm calling OpenCV from Python⁹³.

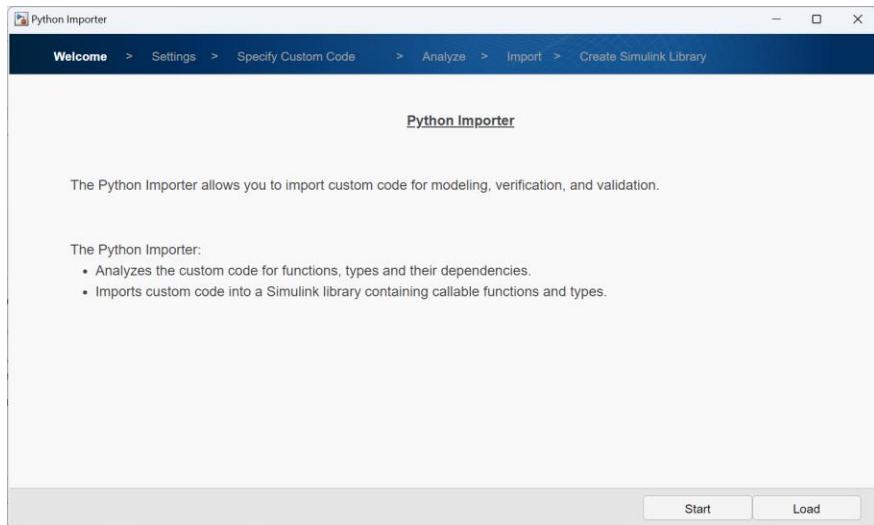

The importer will walk you through the following steps:

Welcome > Settings > Specify Custom Code > Analyze > Import > Create Simulink Library

The Python Importer allows you to import custom code for modeling, verification, and validation.


The Python Importer:

- Analyzes the custom code for functions, types and their dependencies.
- Imports custom code into a Simulink library containing callable functions and types.


⁹³ Demo calling OpenCV from Simulink:

https://github.com/mathworks/Integrate_Python_code_with_Simulink



Settings

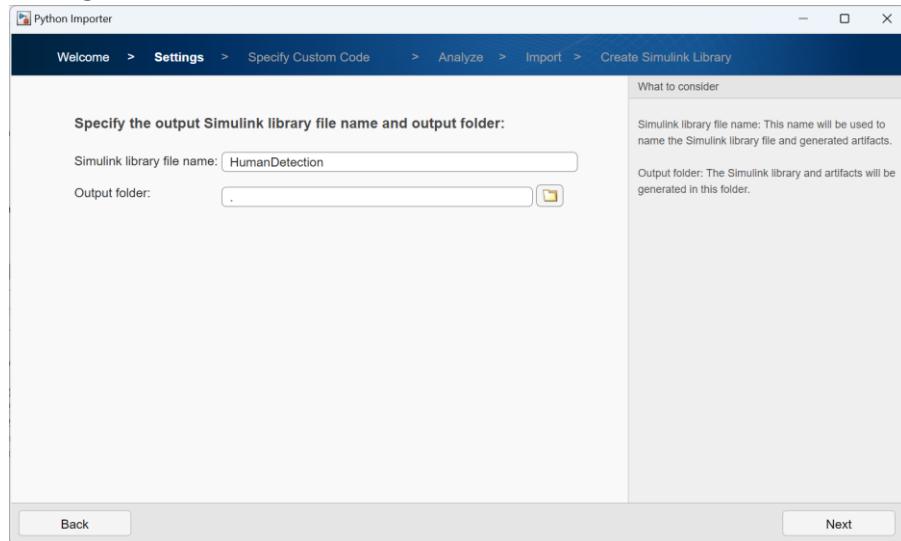


Specify Custom Code

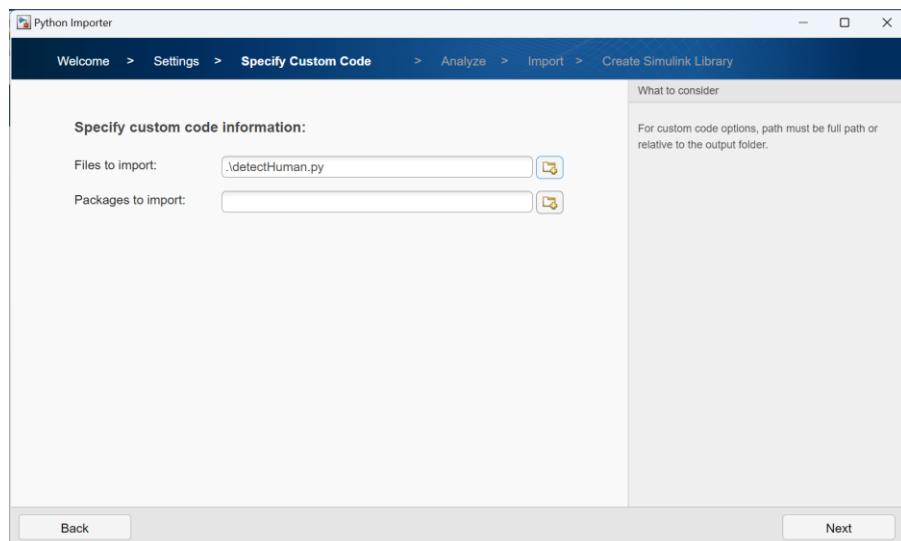

Analyze

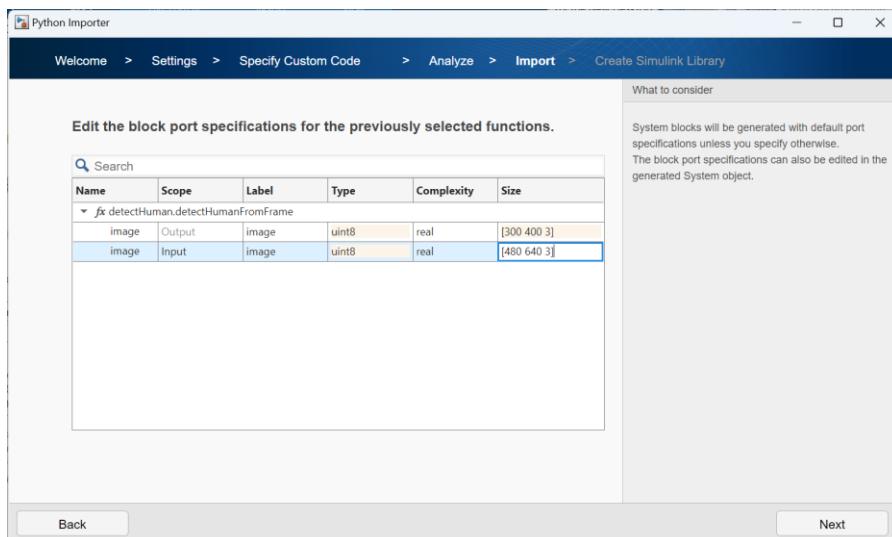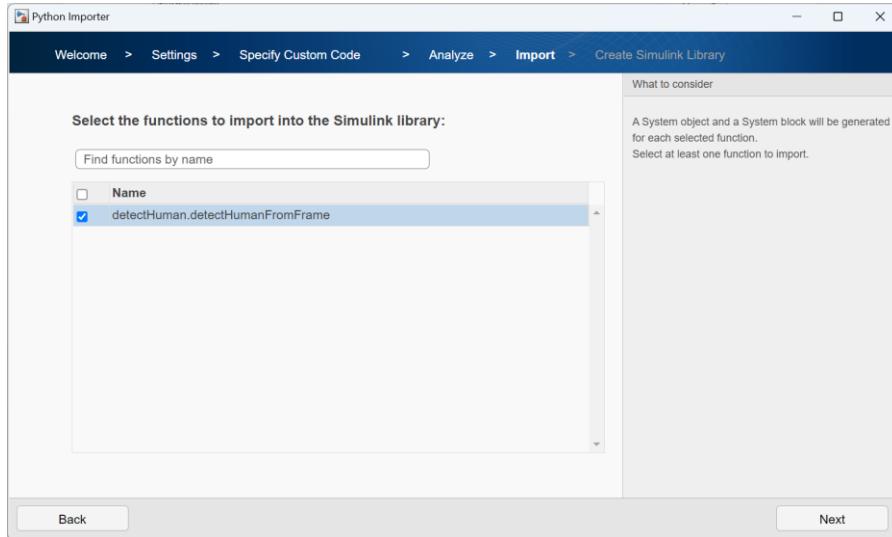

The library is created and can be drag and dropped into a new diagram.

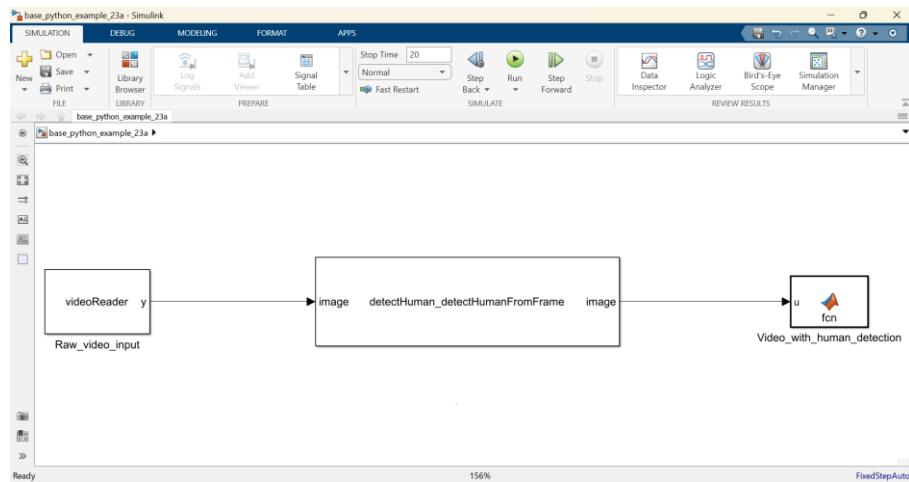


7.1.2. MATLAB function and system objects

Prior to 23a, you had two different ways of calling Python from within a Simulink block:

- Using a MATLAB function
- Using a MATLAB system object

In both cases you are wrapping the Python code with the `py.` prefix.

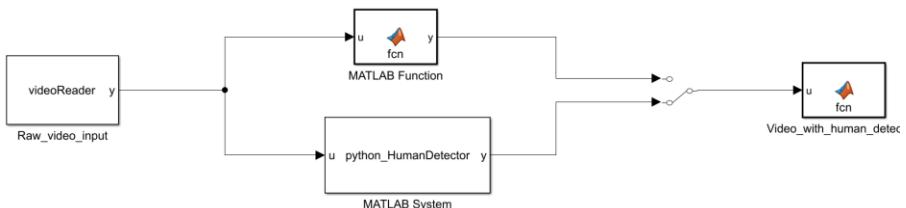

The first option is with a MATLAB Function⁹⁴. The only trick is the `coder.extrinsic`⁹⁵ function that specifies to explicitly call MATLAB and not generate code for the Simulink simulation.

If you double click on the block, you can see this code:


```
function y = fcn(u)
coder.extrinsic('py.detectHuman.getHogObject')
coder.extrinsic('py.detectHuman.detectHumanFromFrame')

persistent hog;
if isempty(hog)
    hog = py.detectHuman.getHogObject();
end

out = py.detectHuman.detectHumanFromFrame(u, hog);

y = uint8(out);
end
```

The second option is with a MATLAB System⁹⁶ block. You need to set it up to “*Simulate using: Interpreted execution*”. In both of those options, you cannot generate the code for Python.

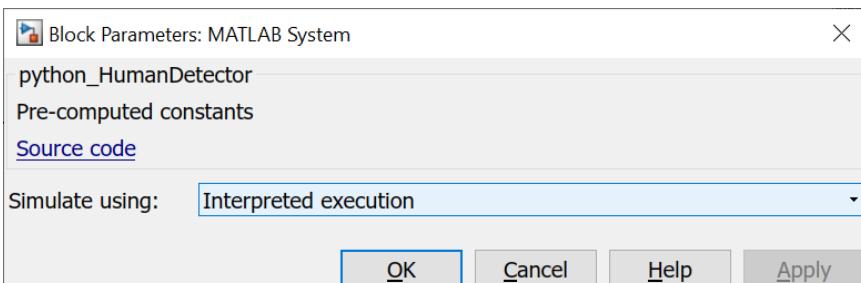

⁹⁴ Include MATLAB code in models:

<https://www.mathworks.com/help/simulink/slref/matlabfunction.html>

⁹⁵ Declare a function as extrinsic:

<https://www.mathworks.com/help/simulink/slref/coder.extrinsic.html>

⁹⁶ Include System object in models:

<https://www.mathworks.com/help/simulink/slref/matlabsystem.html>

The source code for this MATLAB System follows the paradigm of Object-Oriented Programming⁹⁷:

```
classdef python_HumanDetector < matlab.System
    % Pre-computed constants
    properties(Access = private, Nontunable)
        hog
    end

    methods(Access = protected)
        function setupImpl(obj)
            % Perform one-time calculations, such as computing
            % constants
            obj.hog = py.detectHuman.getHogObject();
        end

        function y = stepImpl(obj,u)
            % Calculate y as a function of input u and
            % discrete states.
            out = py.detectHuman.detectHumanFromFrame(u,
                obj.hog);
            y = uint8(out);
        end

        function out = getOutputSizeImpl(obj)
            out = [300 400 3];
        end

        function y1 = getOutputDataTypeImpl(obj)
            y1 = 'uint8';
        end

        function y1 = isOutputComplexImpl(~)
            y1 = false;
        end

        function out = isOutputFixedSizeImpl(obj)
            out = true;
        end

    end
end
```

⁹⁷ OOP in MATLAB: <https://www.mathworks.com/products/matlab/object-oriented-programming.html>

The limitation with this approach is that you cannot generate code for embedded systems.

7.2. Integrate TensorFlow and PyTorch models for both simulation and code generation

In the second scenario, an AI deep learning model has been developed with TensorFlow or PyTorch, and it needs not only to be simulated with the whole system, but the code for AI model needs to be generated in order to be integrated into an embedded system.



Yann

I'm a data scientist using TensorFlow & PyTorch to develop deep learning models (e.g., Battery State of Charge estimation)



Weiwu

I need to bring Yann's pretrained deep learning model into Simulink for system validation. But **co-simulation is not enough, we also need code generation for hardware implementation.**

One example of this workflow was presented by MBDA at the MATLAB UK Expo 2023⁹⁸.

Before we dive in, there are two options to integrate a python AI model into Simulink if code generation is a must have. The first one is importing the deep learning model in MATLAB directly with the Deep Learning Toolbox. And the second one is to simulate and generate code using TensorFlow Lite. The plus and delta for those two approaches are the following:

Those are library-free C and C++ code, some optimized code for Intel and ARM processor, and CUDA code for GPUs. The delta is, in this case, that the

⁹⁸ Integrating AI into Simulink for Simulation and Deployment:


<https://www.mathworks.com/videos/integrating-ai-into-simulink-for-simulation-and-deployment-1699640610671.html>

input process can sometimes be painful. And there's a bit of a need of custom code and manual validation testing.

- Import your deep learning model in MATLAB directly
 - + Multi-platform code generation: library-free C/C++ code, optimized code for Intel and ARM processors, and CUDA code for NVIDIA® GPU
 - Δ import process can be painful, need for custom code, and validation testing
- Integrate deep learning models from TensorFlow Lite (TFLite)
 - + requiring only a simple Python code to compile the model
 - Δ requires the TensorFlow Lite interpreter and libraries built on the target hardware, which is currently limited to Windows and Linux targets

7.2.1. Import your deep learning model in MATLAB directly

You can convert models from TensorFlow, PyTorch, and ONNX into MATLAB. Once the model is converted in MATLAB, you can use the deep neural networks blocks to bring it in Simulink for both simulation and code generation.

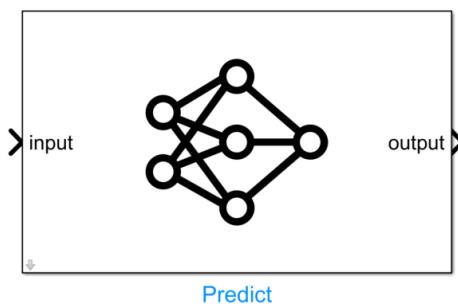

Let us use a TensorFlow model to predict the state of charge of a battery⁹⁹, and generate C-code to be integrated in the battery management system.

```
>> battery_SOC_net = importTensorFlowNetwork('BatterySOC_net','OutputLayerType','regression')
Importing the saved model...
Translating the model, this may take a few minutes...
Finished translation. Assembling network...
Import finished.

battery_SOC_net =
    DAGNetwork with properties:

        Layers: [9x1 nnet.cnn.layer.Layer]
        Connections: [8x2 table]
        InputNames: {'input_2'}
        OutputNames: {'RegressionLayer_dense_7'}
```

Convert the
pretrained tensorflow
model into MATLAB


You can visualize the model with the deep network designer, in order to understand what the imported network looks like.

⁹⁹ Deep learning-based battery state-of-charge estimation:

<https://www.mathworks.com/videos/integrate-tensorflow-model-into-simulink-for-simulation-and-code-generation-1649142078929.html>




Then save the imported model as a .mat file and load it in a Simulink block.

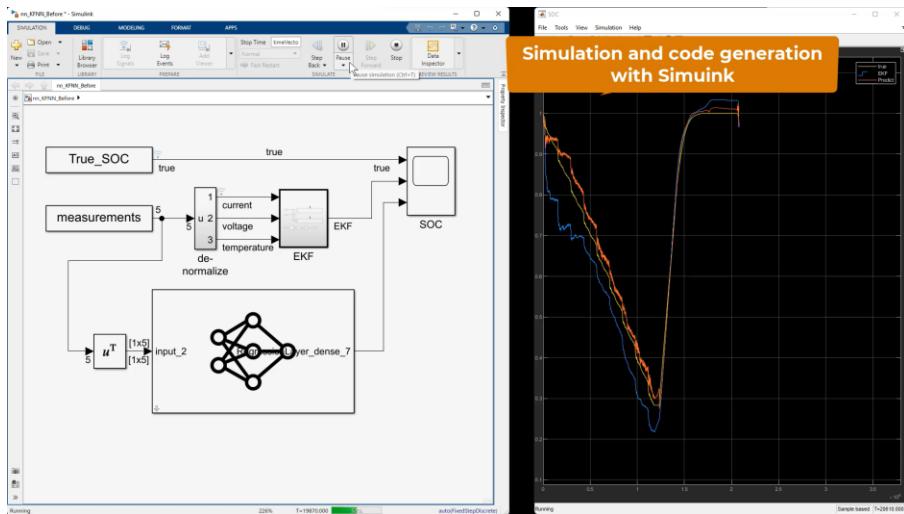

Another use case for the integration of Python AI models into Simulink is the replacement of a control system or a physical system by a reduced model of this system.

7.2.2. Integrate deep learning models from TensorFlow Lite (TFLite)

In the scenario of a TensorFlow user willing to integrate AI into Simulink, one alternative approach would be to iterate through the use of TensorFlow Lite. We will illustrate this with an example of a TFLite Object Detector integrated through a MATLAB function. When generating the equivalent of this model, it will wrap the code with the TFLite runtime.

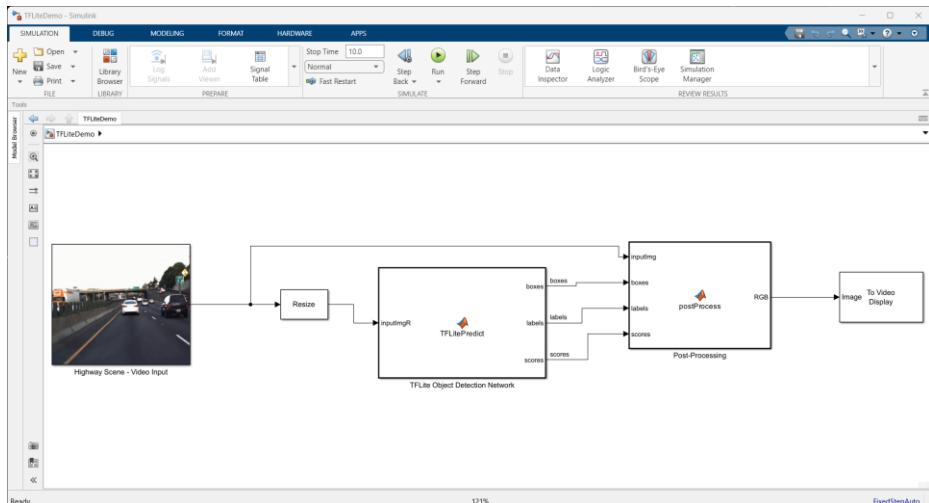

```

172 // Function for MATLAB Function: '<Root>/TFLite Object Detection Network'
173 static void TFLiteDemo_TFLiteModel_predict(coder_TFLiteModel_TFLiteDemo_T
174     *b_this, const uint8_T varargin_1[307200], real32_T varargout_1[400], real32_T
175     varargout_2[100], real32_T varargout_3[100], real32_T *varargout_4)
176 {
177     real_T count;
178     std::mem_fn(&invokeinterpreter::setVerbose)(b_this->Network, b_this->Verbose);
179     std::mem_fn(&invokeinterpreter::setProfiling)(b_this->Network,
180         b_this->EnableProfiling);
181     std::mem_fn(&invokeinterpreter::setNumThreads)(b_this->Network,
182         b_this->NumThreads);
183     std::mem_fn(&invokeinterpreter::setInputMean)(b_this->Network, b_this->Mean);
184     std::mem_fn(&invokeinterpreter::setInputStdDeviation)(b_this->Network,
185         b_this->StandardDeviation);

```

7.3. Simulate a Simulink model directly from Python

In the third scenario, we start to look at the reverse problem, of calling Simulink from Python. I encounter this scenario a lot when it comes to test and automation of simulations by DevOps engineers, often as part of a CI/CD process¹⁰⁰.

¹⁰⁰ Continuous Integration and Delivery: <https://about.gitlab.com/topics/ci-cd/>



Weiwu


I use Simulink to model a dynamic system, for example, a vehicle suspension system.



Yann

I want to use a Python based automation framework to run Simulink simulations. I need to **invoke Weiwu's Simulink model from Python** for automated testing.

In this scenario and the next one, we will be using a road suspension model.

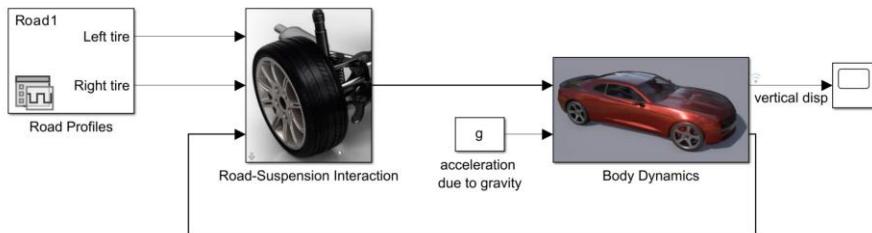

The first step is to use MATLAB functions to wrap the simulation. This function can make use of the simulation input object¹⁰¹ in order to update the model parameters (in this case the body mass). Next, you need to use the sim¹⁰² command in order to run the simulation in batch. You can then post-process the simulation results in MATLAB and/or Python.

MATLAB functions:

```
function res = sim_the_model(args)
% Utility function to simulate a Simulink model with the
specified parameters.
%
% Inputs:
%   StopTime: simulation stop time, default is nan
%   TunableParameters:
```

¹⁰¹ Simulation input object:

<https://www.mathworks.com/help/simulink/slref/simulink.simulationinput.html>

¹⁰² Simulate Simulink model:

<https://www.mathworks.com/help/simulink/slref/sim.html>

```

%      A struct where the fields are the tunable
%      referenced
%      workspace variables with the values to use for the
%      simulation.
%
%      Values of nan or empty for the above inputs indicate
%      that sim should
%      run with the default values set in the model.
%
% Outputs:
%      res: A structure with the time and data values of the
%      logged signals.

arguments
    args.StopTime (1,1) double = nan
    args.TunableParameters = []
end

%% Create the SimulationInput object
si = Simulink.SimulationInput('suspension_3dof');
%% Load the StopTime into the SimulationInput object
if ~isnan(args.StopTime)
    si = si.setModelParameter('StopTime',
num2str(args.StopTime));
end

%% Load the specified tunable parameters into the
simulation input object
if isstruct(args.TunableParameters)
    tpNames = fieldnames(args.TunableParameters);
    for itp = 1:numel(tpNames)
        tpn = tpNames{itp};
        tpv = args.TunableParameters.(tpn);
        si = si.setVariable(tpn, tpv);
    end
end

%% call sim
so = sim(si);

```

```

    %% Extract the simulation results
    % Package the time and data values of the logged
    signals into a structure
    res = extractResults(so,nan);

end % sim_the_model_using_matlab_runtime

function res = extractResults(so, prevSimTime)
    % Package the time and data values of the logged
    signals into a structure
    ts =
simulink.compiler.internal.extractTimeseriesFromDataset(so.
logtout);
    for its=1:numel(ts)
        if isnan(prevSimTime)
            idx = find(ts{its}.Time > prevSimTime);
            res.(ts{its}.Name).Time = ts{its}.Time(idx);
            res.(ts{its}.Name).Data = ts{its}.Data(idx);
        else
            res.(ts{its}.Name).Time = ts{its}.Time;
            res.(ts{its}.Name).Data = ts{its}.Data;
        end
    end
end

function figHndl = plot_results(res, plotTitle)
%PLOT_RESULTS Plot results from call_sim_the_model

figHndl = figure; hold on; cols = colororder;

plot(res{1}.vertical_disp.Time, res{1}.vertical_disp.Data,
'Color', cols(1,:), ...
    'DisplayName', 'vertical displacement: 1st sim with
default Mb value');
plot(res{2}.vertical_disp.Time, res{2}.vertical_disp.Data,
'Color', cols(2,:), ...

```

```

'DisplayName', 'vertical displacement: 2nd sim with new
Mb value');

hold off; grid;

title(plotTitle,'Interpreter','none');
set(get(gca,'Children'),'LineWidth',2);
legend('Location','southeast');

end

```

Python code:

```

import matlab.engine

mle = matlab.engine.start_matlab() # start the matlab
engine

# Allocate res list to hold the results from 2 calls to
sim_the_model
res = [0]*2
# 1st sim: with default parameter values: Mb = 1200 Kg
res[0] = mle.sim_the_model('StopTime', 30)

# 2nd sim: with new values for tunable parameters
tunableParams = {
    # use a new parameter for body mass: Mb = 5000 Kg
    'Mb': 5000.0
}
res[1] = mle.sim_the_model('StopTime', 30,
'TunableParameters', tunableParams)


# callback into MATLAB to plot the results
mle.plot_results(res, "Results from sim_the_model using
MATLAB Engine")

input("Press enter to close the MATLAB figure and exit
...")

```

```
mle.quit() # stop the matlab engine
```

This code will produce the following MATLAB plot:

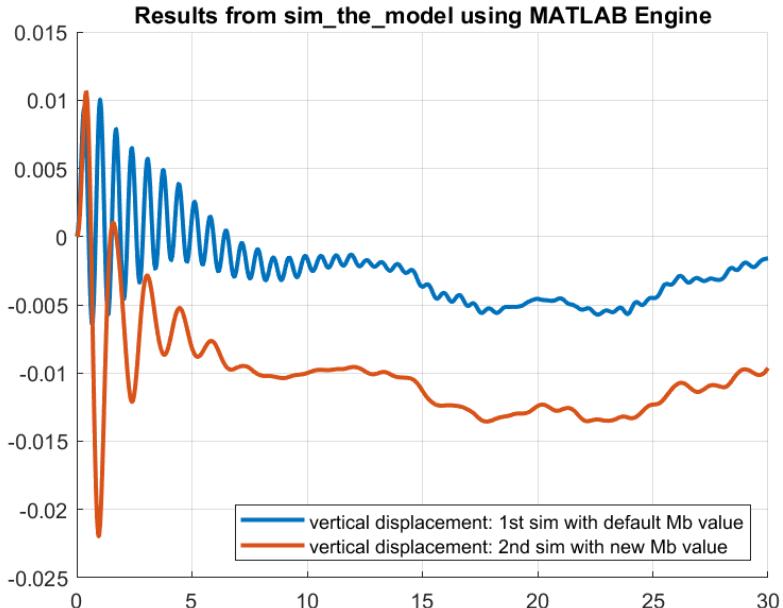

7.4. Export a Simulink model as a Python package for deployment

In the fourth scenario, the goal is to deploy a Simulink model into a Python-based production system.



Weiwu

I use Simulink to model a dynamic system, for example, a vehicle suspension system.



Yann

We need to deploy Weiwu's Simulink model in a Python-based production environment. I want to **get a Python package which encapsulates a Simulink simulation** which can be used for deployment.

The steps are going to be the same here. The only difference is that you need to configure your model for deployment. That's because not all Simulink models are deployable. So you need to add the following line to transform the simulation input object before calling sim:

```
si = simulink.compiler.configureForDeployment(si);
```

Then the next step is to compile the MATLAB function as a Python package:

```
appFile = which('sim_the_model2');
outDir =
fullfile(origDir, 'sim_the_model2_python_package_installer');
compiler.build.pythonPackage(appFile, ...
    'PackageName','sim_the_model2', ...
    'OutputDir',outDir);
```

Finally, you need to install the Python package and call it from as such:

```
import sim_the_model2
import matplotlib.pyplot as plt
# initialize sim_the_model package
mlr = sim_the_model2.initialize()

# Allocate res list to hold the results from 2 calls to
# sim_the_model
res = [0]*2
# 1st sim: with default parameter values: Mb = 1200 Kg
res[0] = mlr.sim_the_model2('StopTime', 30)
```

```

# 2nd sim: with new values for tunable parameters
tunableParams = {
    'Mb': 5000.0    # use a new parameter for body mass Kg
}
res[1] = mlr.sim_the_model2('StopTime', 30,
'TunableParameters', tunableParams)

# Plot the results
cols = plt.rcParams['axes.prop_cycle'].by_key()['color']
fig, ax = plt.subplots(1, 1, sharex=True)
ax.plot(res[0]['vertical_disp']['Time'],
res[0]['vertical_disp']['Data'], color=cols[0],
        label="vertical displacement: 1st sim with default
body mass Mb")
ax.plot(res[1]['vertical_disp']['Time'],
res[1]['vertical_disp']['Data'],
        color=cols[1], label="vertical displacement: 2nd
sim with updated body mass Mb ")


ax.grid()
lg = ax.legend(fontsize='x-small')
lg.set_draggable(True)
ax.set_title("Results from sim_the_model using MATLAB
Runtime")
plt.show()

mlr.terminate() # stop the MATLAB Runtime

```

This code will produce the following Python plot:

Results from sim_the_model using MATLAB Runtime

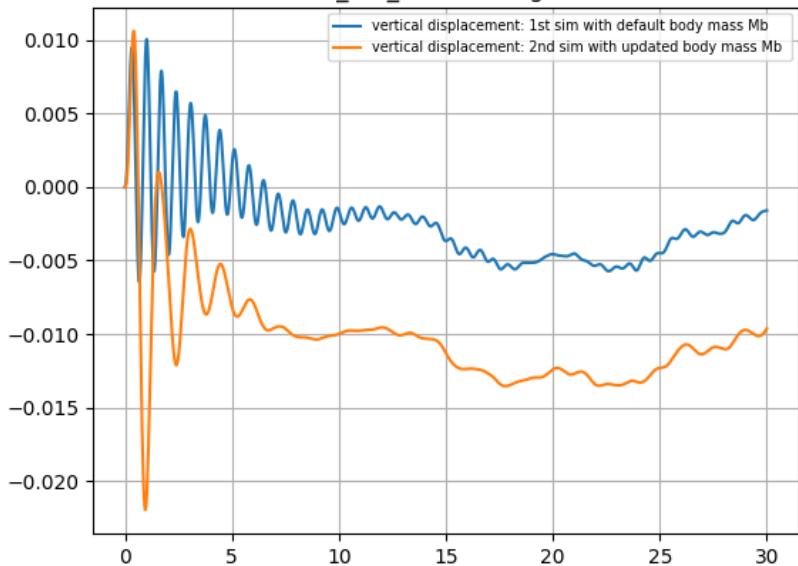

8. Resources

8.1. Getting Python packages on MATLAB Online

MATLAB Online is a great pre-configured environment to demo MATLAB with Python. And I'm not just saying this now that I've joined the MATLAB Online product team (mid 2023). I have been using it since 2022 to run workshops with Heather, either for large public events like MATLAB EXPO, or for customer dedicated hands-on workshops. This avoids wasting the first half hour of any conversation in setting up the MATLAB & Python environments (see [chapter 3](#)), as Python 3 is pre-installed there.

But there's a catch: what always prevented me from using this nice online environment productively for bilingual workflows was the lack of Python packages, and a way to customize the environment. I obviously tried to find ways around this limitation, by uploading the packages sources as zipped files, and unzip it in MATLAB Online. However, for foundational packages like Numpy, it was already amounting for over 7,000 files to write to disk (only 50 Mb uncompressed). So, it takes a while...

Then recently, after looking at how ChatGPT Code Interpreter works (now called Advanced Data Analysis), I realized it would be possible to retrieve Python wheels and install them on the remote machine¹⁰³. Python wheels¹⁰⁴ are a way to distribute Python packages. They are similar to zip files, but they contain all of the information needed to install a package, including the code, the dependencies, and the metadata. Wheels are typically used with the pip package manager.

Having understood that the pip wheel can be used as an executable, all you have to do to enable pip in MATLAB Online is to retrieve the pip wheel, and use the following system command:

```
>> !python pip.whl/pip --version  
pip 23.3 from /MATLAB Drive/pip.whl/pip (python 3.10)
```

¹⁰³ Install python wheel file without using pip

<https://stackoverflow.com/questions/36132350/install-python-wheel-file-without-using-pip>

¹⁰⁴ What Are Python Wheels and Why Should You Care?

<https://realpython.com/python-wheels/>

You can create a simple setup file, setuppip.m:

```
piploc = "/tmp/";
pipwhlname = getwheel("pip");
copyfile(pipwhlname, piploc+"pip.whl")
disp("pip set up in folder: "+piploc)
```

And wrap the code that gets the wheel in a function:

```
function whlname = getwheel(pkg)
url = "https://pypi.org/pypi/" + pkg + "/json";
jason = webread(url);
urlwhl = jason.urls(1).url;
[~, filename, fileext] = fileparts(urlwhl);
whlname = [filename fileext];
websave(whlname,urlwhl);
end
```

8.2. Generate this book with Quarto and Pandoc

This book is written with different editing tools: Word, Live scripts, , Jupyter Notebook and Markdown. In order to maintain consistency and automate the generation of the different formats, different conversions are applied:

- live scripts > word
- live scripts > markdown
- live scripts > jupyter notebook
- jupyter notebook > markdown
- jupyter notebook > word

I am leveraging an open-source software called Quarto¹⁰⁵, developed by Posit (formerly known as the company RStudio). Quarto is built on Pandoc¹⁰⁶ a universal document converter that allows you to write in Markdown, and generate a book in multiple formats, including Word, PDF, HTML, Markdown, and Jupyter Notebooks.

¹⁰⁵ <https://quarto.org/>

¹⁰⁶ <https://pandoc.org/>

Quarto is a great tool to write technical books, as it complements Pandoc by supporting code in multiple languages, including MATLAB and Python, with interactive code snippets, that can be executed in VS Code or Jupyter.

Here is one example of a command to generate word documents from the Jupyter notebooks:

```
quarto pandoc notebook.ipynb -s -o README.md
```