


(a) Sparse-window UAV-IoT service

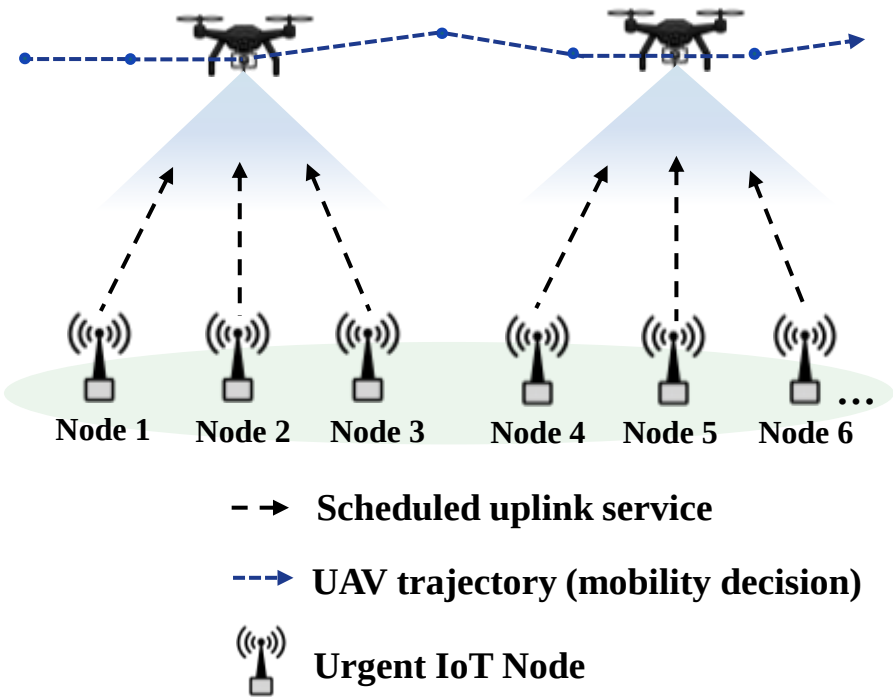

Packet j

$$P_j = (L_j, r_j, [a_j, b_j])$$

Valid service requires:

- ✓ Service – start valid: $s_{ik} \in [a_j, b_j]$
- ✓ Rate feasible: $R_{ij}(s_{ik}) \geq R_{min}$
- ✓ Completion check: $cR_{ij}(s_{ik}) \geq L_j$

(b) FT-HSBO workflow

