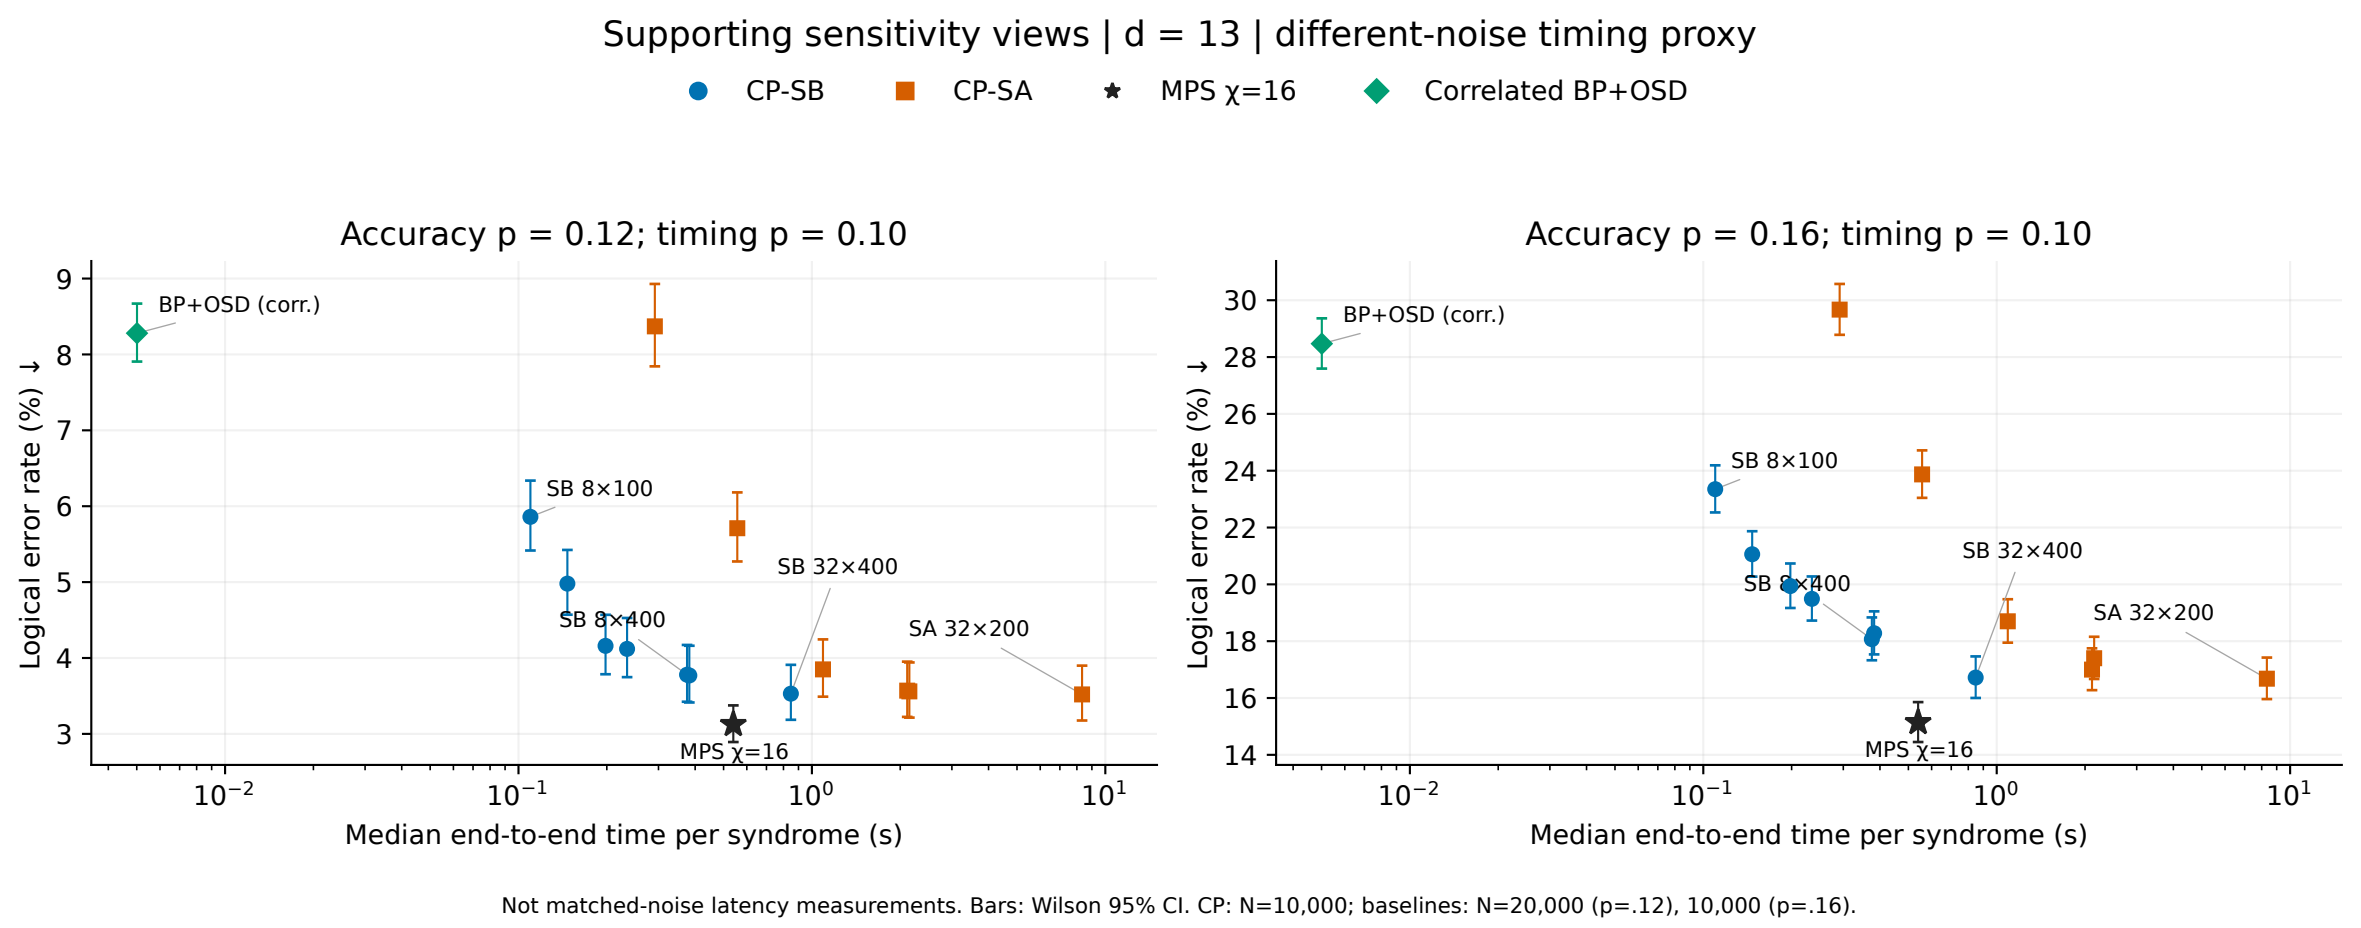
Supporting sensitivity views | d = 13 | different-noise timing proxy
CP-SB
CP-SA
MPS χ=16
Correlated BP+OSD
Accuracy p = 0.12; timing p = 0.10
Accuracy p = 0.16; timing p = 0.10
Logical error rate (%) ↓
Median end-to-end time per syndrome (s)
BP+OSD (corr.)
SB 8×100
SB 8×400
SB 32×400
SA 32×200
MPS χ=16
Not matched-noise latency measurements. Bars: Wilson 95% CI. CP: N=10,000; baselines: N=20,000 (p=.12), 10,000 (p=.16).