VPCS 下面是什么? 函数的本质是什么? 在学校, 我得到了一些基础答案, DNA 的基元是 ACGTU 嘌呤 和 嘧啶, 后端架构的基元是VPCS, 事物逻辑的基元是 AOPM, 数据库的基元是IDUC 增删改查. 函数的基元是IOAON 入出与或非, 我只能在我能理解的和我已有的知识结构中寻找. 怎么论证? 论据怎么确定?

4. 2 DETA Finding initions development, 德塔催化计算算子单元寻找发展

The first demonstration process is DETA word segmentation. In 2019, I continued to refine, optimize and refine the word segmentation, and found an exciting argument. My word segmentation function was continuously split rationally. Finally, a pile of simple combination application fragments of addition, deletion and modification were displayed by IOAON. For the most powerful argument, when I was processing nouns in word segmentation, the final function was formed. Memory takes out 4 words, compares 4 words proverbs, does not? then compare 3 words, does not? then compare 2 words, and does not? then split into single words. This process is summarized in one sentence as a combined decision-making process of adding, deleting, modifying and checking memory data according to John von Neumann's time flow form.

第一个论证过程是德塔分词, 2019 年我不断地进行分词的细化, 优化, 反复的提炼, 发现了一些振奋人心的论点, 我的分词函数进行不断地有理拆分, 最后是一堆 结构比较简单的 增删改查的组合应用片段 通过 IOAON 的方式 来展示. 举个最有力的论证 我在分词处理名词的时候, 最后函数形成了, 内存拿出 4 字词, 比较 4 字谚语, 没有比较 3 字词, 没有比较 2 字词, 没有拆分成单字, 这个过程 一句话概括就是按照 冯, 若依曼 的时间流水形式, 对内存数据 的 增, 删, 改, 查 的组合决策过程.

When I think about this, my eyes shine. IDUC is not only the operation mode of database, but also the operation mode of memory data, and it is absolutely focused continuously!!! Assuming that IDUC is effective for all data operation modes, assuming it is successful, if it is coded, it is a very strict coding mode of data DNA. I found it! I began to refine my sorting algorithm, word segmentation algorithm, ETL, YangLiaoJing, etc., and found one thing in common. All my works were refined to the rational function level that I could understand, which were small fragments of the combined decision-making process of adding, deleting, modifying and checking linear, multidimensional, database and memory data. These fragments can be coded effectively.

我思考到这, 眼前一亮, IDUC 不仅是数据库的操作方式, 也是内存数据的操作方式, 持续地绝对专注!!! 假设 IDUC 这个组合决策过程 对所有数据的操作方式 都有效, 假设成功, 如果编码, 那这就是数据 DNA 的一种非常严谨的编码方式. 我找到了! 我开始细化我的排序算法, 分词算法, ETL, 养疗经, 等作品, 发现一个共同点, 我的所有作品细化到我能理解的有理函数级别, 都是对线性, 多维, 数据库, 内存数据 的 增, 删, 改, 查 的组合决策过程的小片段. 这些片段都能进行有效地编码.

4. 3 DETA Finding initions application, 德塔催化计算算子单元寻找应用

With this in mind, I have determined a ternary mapping coding mode of DNA to ETL neuron nodes, AOPM -VPCS- IDUC 3D coding mode. 4*4*4 Then each primitive is a 64-bit space, which is the computing primitive I have been looking for decades.

想到这, 我的确定了一个三元的 DNA 对 ETL 神经元节点的映射编码方式 AOPM -VPCS- IDUC 3D 编码方式. 4*4*4 那么每一个基元是一个 64 位的空间, 这个空间就是我苦苦数十年要寻找的计算基元.

5 DETA DNA decoding

If the AOPM -VPCS- IDUC 3D computational neuron mapped by DNA IDUC is established, how to decode it? I thought about what I have, about YangLiaoJing! It is the only way that I can do at present to construct the system of YangLiaoJing and demonstrate this idea and technology. It is still the absolute focus of that sentence.

如果DNA IDUC 映射的 AOPM -VPCS- IDUC 3D 计算神经元 成立, 那么怎么解码呢? 我思考了我有什么, 对养疗经! 养疗经 系统, 将这种思想和技术进行论证, 是我目前能做的唯一方式. 还是那句话持续地不断地绝对地专注.

5. 1 DETA DNA decoding history, 德塔催化单元的DNA解码历史

At present, what we know is that DNA peptide group has billions of long, double chains and 24 pairs of chromosomes. There are five primitives of ACGTU. If ACGT can encode human higher intelligent logic, then humanoid data DNA with IDUC units can also write hundreds of thousands of business transaction processing logic of AOPM VPCS. These two logics did not conflict each other.

目前人类所知道的是 DNA 肽团有数十亿长, 双链, 23 对染色体. ACGTU 5 种基元, 如果 ACGT 能编码出人类的高等智慧逻辑. 那么 IDUC 为单位的 类人数据DNA 同样能编写出 数十万行 AOPM VPCS 商业的事物处理逻辑. 这 2 种逻辑并不冲突.

5. 2 DETA DNA decoding development, 德塔催化单元的DNA解码发展


These two logics do not conflict. Are they one? I got an exciting argument, and I had to find an argument, so I screened my study and work style in recent 20 years, my own thinking style and the execution logic style of my software, hoping to find a negative theory to overturn it, but unfortunately, I couldn't find it. So, I followed up and re-examined my soft works, optimized them, and found that once optimized to the edge of rational function to irrational function, they were all linear. Small fragments of the combined decision-making process of adding, deleting, modifying and checking multidimensional, database and memory data. These fragments can be coded effectively. AOPM -VPCS- IDUC seems to explain all the answers I want.


这两种逻辑并不冲突, 难道他们本身就是一体? 我得到一个振奋人心的论点, 我得找到论据, 于是我将最近这20 年的学习和工作方式, 我的本身思维方式和 我的软件的执行逻辑方式进行筛选, 希望能找到否定的理论来推翻它, 可惜我没有找到. 于是我跟进了一步, 重新审阅了我的软著作品, 优化它们, 发现一旦优化到有理函数到无理函数的边缘, 都是对线性, 多维, 数据库, 内存数据 的 增, 删, 改, 查 的组合决策过程的小片段. 这些片段都能进行有效地编码 AOPM -VPCS- IDUC 似乎能解释一切我要的答案.


5. 3 DETA DNA decoding application, 德塔催化单元的DNA解码应用


In order to overthrow my argument, I began to look for arguments everywhere to attack this argument. First, I found the topic of eternal life. According to AOPM -VPCS- IDUC, IDMC is true. Since it can be perfectly explained, I found the topic of infection in COVID-19, that is, DUOP is true, which is an exciting conclusion! I have been searching for answers to all the problems for decades from AOPM -VPCS- IDUC, so I started mapping and coding as follows:


为了推翻我的这个论点, 我开始到处寻找论据来攻击这个论点, 首先我找了生命永生的话题, 按照 AOPM-VPCS-IDUC 来理解 便是 IDMC 为 ture, 既然能完美的解释, 于是我又找了新冠的感染话题, 便是 DUOP 为 ture, 令人振奋人心的结论! 我苦寻数十年的问题全部能从 AOPM -VPCS- IDUC 中找到答案, 于是我开始了映射编码如下:

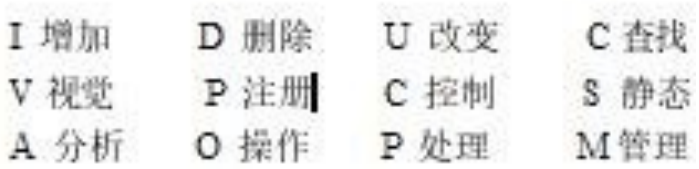

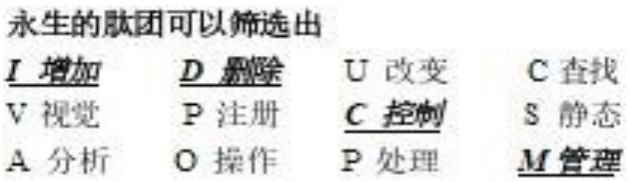

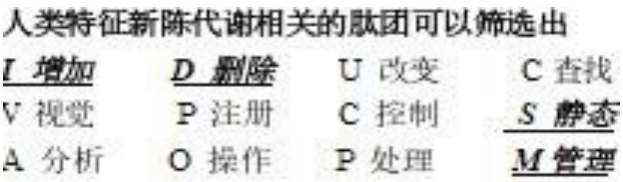

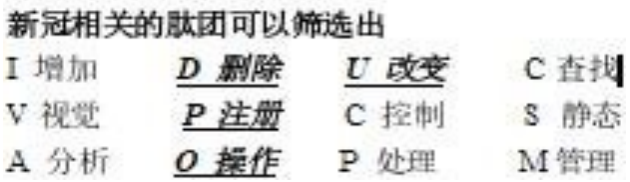

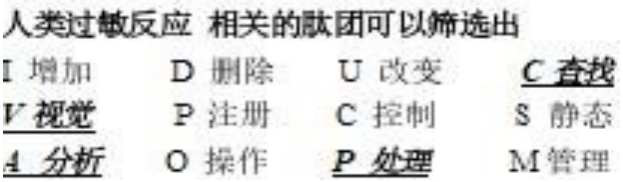

I got a clear DNA theorem: The essence of DNA is a combination indexing linklist of four meta-operations of adding, deleting modifying and Querying data.

10-04-2020 DC是的我无法推翻这个编码规范. 我得到一个清晰的DNA 定理: DNA 的本质是一种智慧体对数据增删改查的四个元操作的组合方式编码索引. 2020 年10 月4 日

6 IDUC DNA and Its Applications, IDUC DNA与它的应用

These were all the later stories. The application was too wide. First of all, my ETL began to expand in the three-dimensional direction to better serve medicine. Secondly, virus immunology and immortal virus exploration will never stop. Why ETL was used as the expansion point is inspired by my OSGI paper on October 17, 2013. It was as follows.

这些都是后话. 应用面太广泛了, 首先, 我的 ETL 开始往 3 维方向拓展更好的为医学服务. 其次, 病毒免疫学和 永生病毒 探索, 永不停歇. 为什么采用 ETL 来作为拓展点, 灵感来自于我 2013 年 10 月 17 日一篇 OSGI 的感想论文. 如下论证作品: 人工智能的达尔文进化思想 (The Darwin's Theory of The Artificial Intelligence)

In the latest knowledge of engineering structure, the traditional expert system occupies a dominant position, but the world's demand system is in a changeable operating environment, so the data persistence theory is a goal to strive for. Artificial intelligence software, too, can't escape the disadvantages brought by natural updating. Where artificial intelligence will go, It will be planned naturally. Just like 'Darwin's theory of biological evolution', the new intelligent system standards are naturally selected by needs, which is the central idea I want to express. In the past 50 years, some classic software can't escape the choice of demand, and finally It turns yellow and dim. Of course, some enterprises rewrite and upgrade their products desperately. Because of the aging of core developers, new reformers can't master the original development ideas and theories. Finally, the quality of products suffers a huge impact and suffers heavy losses. A new software development theory needs to be confirmed, which is my thought. Software, too, needs an evolutionary system with self-artificial selection.

最新的知识工程结构中, 传统的专家系统占据着主导的地位, 可是世界的需求体系处在一个多变的运行环境, 所以数据持久化理论是一个为之奋斗的目标. 人工智能软件也一样, 逃避不了自然的更新所带来的种种弊端. 人工智能何去何从, 自然会规划它, 正如达尔文的生物进化论一样, 新的智能体系标准都是被需求自然选择出来, 这就是我要表达的中心思想. 过去 50 年里, 一些经典的软件逃不过需求的抉择, 最终枯黄暗淡, 当然一些企业将产品拼命的重写升级, 因为核心开发者的年龄老化, 新的改造者无法掌握原始开发思想和理论, 最后产品的品质遭受巨大的冲击, 损失惨重, 一种新的软件开发理论需要被人所证实, 这也就是我的思想. 软件也一样, 需要有自我的人工选择的进化体系.

Through the recent construction, design and coding test of Unicorn AI software, I found that many computer theories created by fantasy have great differences, in actual programming analysis. I used JAVA-based language, and I found that the inheritance of JAVA did not meet the language standard with evolutionary thought, but Its methodology in this initial evolutionary standard test was far superior to C/C++. I didn't bring any troubles to my actual programming when I wrote JAVA program in C style, but JAVA still needs to be improved. For example, you abstract a parent class, and the variable function of your subclass still needs to be written in the way of "Object parent class= (subclass) parent class" to make subclass operation. If grandchildren inherit subclasses, how can Object get grandchildren? (I use the Object subclass to inherit the parent class, and then the Object subclass = (grandson) subclass. In this way, the grandchildren get the operation), but this is a big problem of dynamic memory structure allocation! The design is rather cumbersome. JAVA still stays at the level of primary language evolution, and does not have advanced evolutionary ideas. Secondly, if a subclass has more than one grandchild, only the subclass can operate, and the parent class cannot operate accordingly. This is also a criticism. Is It realized by adding Object subclass = (grandson) subclass and Object parent class = (subclass) parent class? This is even more complicated.

通过最近的 Unicorn AI 软件的构造, 设计和编码测试中, 我发现了许多因空想而创造的计算机理论在实际的编程分析中有巨大的差异, 我用的是 JAVA 为主的语言, 我就发现 JAVA 的继承没有达到具有进化思想的语言标准, 但是 JAVA 在这个初期的进化标准测试中其方法论远远胜出 C/C++, 我用 C 风格写 JAVA 程序并没有给我的实际编程带来种种麻烦, 但是 JAVA 仍然需要改进, 比如你抽象了一个父类, 而你的子类的变量函数还是需要在"Object 父类=(子类)父类" 这样的写法中的才能做出子类运算. 如果孙类又继承子类, 怎么让 Object 得到孙类? (我的用的是 Object 子类继承父类, 然后 Object 子类=(孙类)子类. 这样孙类得到了运算), 可是这就是一个动态内存结构分配的大问题! 设计的相当繁琐. JAVA 还停留在初级语言进化级别, 没有具备高级的进化思想. 其次, 子类如果有多个孙类, 也只有子类可以运算, 父类就被无法作出相应地运算. 这也是一个诟病, 难道再加上Object 子类=(孙类)子类, Object 父类=(子类)父类 来实现? 这就更加繁琐了.

Through the above description, I have my own views, but I still chose JAVA, even though it is cumbersome, but there is no mistake, because it will be more cumbersome to implement in the underlying language. There are more traps. It is a natural choice for artificial intelligence to choose JAVA. JAVA and C# are both high-level languages, but JAVA's personality is born to deal with data, because JAVA was a WEB language in Its early days, and WEB has unique advantages in dealing with data information, which is a real example of JAVA evolving into a data analysis language. C# has been improving itself in this problem, just like JAVA, even like JAVA, but there is no system to evaluate it. The WEB data engineers who applied JAVA in the early days will not transfer to C#, so the biggest advantage of C# is that it is only applied to controls on WINDOWS.

通过上面的描述, 我有自己的看法, 可是我还是选择了 JAVA, 即使繁琐, 但是没有任何错误, 因为用底层语言来实现就会更加繁琐. 陷阱更多. 人工智能选择了 JAVA 是一个自然的抉择. JAVA 和 C#都是高层语言, 可是 JAVA 的个性就是天生对数据来处理的, 因为 JAVA 早期是一个 WEB 语言, WEB 处理数据信息有独特的优势, 这是 JAVA 进化为数据分析语言的一个真实的例子. C#在这个问题里一直在改进自己, 类似 JAVA 一样, 甚至和 JAVA 一样, 可是没有一个体系来评估它. 早期应用 JAVA 的 WEB 数据工程师也不会转移到 C#. 所以 C#的最大优势还是仅仅在WINDOWS 上的控件应用.

Through this description, it only proves that the greatest advantage of any language is only reflected in Its creative theory and thought at the beginning of Its birth. Therefore, JAVA and C# are not comparable at all. Because their original creative theory, system and ideological structure are different. If JAVA and C# really fail, finally, through the prediction of evolutionary thought, JAVA will go in the direction of graphics, big data analysis, WEB and C# should go in the direction of interface, control and WINDOWS device integration. The evolution of artificial intelligence software is mainly divided into update of parent class, variation and inheritance of subclass.

通过这段的描述, 仅仅证明任何一种语言的最大优势也仅仅体现在它诞生之初的创造理论和思想. 所以 JAVA和 C# 根本就没有什么可比性. 因为他们最原始的创造理论, 体系和思想结构就不一样. 如果真的 JAVA 和 C#不倒, 最后, 通过进化的思想预测, JAVA 最后走图形, 大数据分析, WEB, 方向, 而 C# 应该走界面, 控件, WINDOWS 设备集成方向. 人工智能软件的进化主要分为父类的更新, 子类的变异和继承.

JAVA is perfect for dealing with subclass functions, and people who have used JAVA to develop large projects are quite experienced in dealing with interfaces and inheritance. But is there any variation in JAVA? It can be said that there is no, for example, when the parent class public attribute 1 = 0; Subclasses can't have the public attribute 1= 1, which is a mutational failure problem. JAVA is more flexible, but not as flexible as scripting language. Secondly, I want to say that the variation of JAVA is a variation with quotation marks. Its characteristic is that subclasses modify the functions of the parent class, and subclasses of JAVA can modify the processing procedure of functions with the same name of the parent class. However, you have to make the subclass and the parent class have the same function names. This is a JAVA default mechanism, which executes the same name of the parent class first, and then executes the same name of the subclass. Then return to the parent class, and then return to the procedure of. Therefore, the function with the same name can be modified in subclasses, thus ensuring parameter variation. In this way, the software is also very flexible and unique in the actual writing process. Finally, I have a deep experience through the expression of language evolution thought and program evolution thought mentioned above. Every language needs Its needs if It is to be deeply rooted, and Its functions shall be selectively evolved in the needs. Otherwise, this is the biggest reason why languages have been eliminated. I don't like to see various languages emerge one after another in today's world. This is the biggest criticism that many languages have not evolved and can't reflect their needs. Secondly, languages need to be extended, and the appearance of API class libraries and some architecture systems of high-level languages is a good proof of extension. Finally, variation is similar to scripting language, which is flexible and convenient.

JAVA 处理子类函数是比较完美的, 用过 JAVA 开发大型项目的人都相当有经验处理接口和继承. 可是 JAVA 有没有变异的特性呢？ 可以说无, 比如我举个例子, 当父类 Public 属性 1=0;, 子类就无法在 Public 属性 1=1 了, 这就是一个变异失效的问题. JAVA 很灵活, 但是不够脚本语言灵活. 其次我要说的是 JAVA 的变异是带引号的变异, 其特点就是子类修改父类函数, JAVA 的子类是可以修改父类的同名函数处理过程的. 不过你要让子类和父类的函数名一样, 这是一个 JAVA 默认的机制, 先执行父类同名, 再执行子类同名. 然后返回到父类, 然后返回的过程. 所以同名函数可以在子类里得到修改, 保证了参数变异. 这样, 软件在实际的编写过程中也非常的灵活和独到. 最后通过上述的语言进化思想, 程序进化思想的表述, 我有一个很深的体会. 每一种语言要根深蒂固, 需要 有它的需求, 它的功能在需求中要有选择的得到进化. 不然, 这就是语言被淘汰的最大原因, 我不喜欢看到当今世界上各种语言层出不穷, 这就是许多语言没有得到进化, 体现不了需求的最大诟病. 其次, 语言需要扩展, 高级语言的 API 类库和一些架构体系的出现是一个很好地扩展证明. 最后是变异, 类似脚本语言, 灵活, 方便.


What about software? The same is true for software. It is particularly important to choose a language that suits your own needs. Secondly, the architecture of the software shall have loose coupling, which is similar to OSGI and Felix. The OSGI idea of KNIME is consistent with that of LIFERAY. Although the API design style is different, the effect is very thick.

Biology needs Darwin's thought, and artificial intelligence also exists, which is the basis of demand persistence. This is also the basic condition for my research and development of Unicorn AI platform.

那么软件呢？软件也一样, 选择一门适应自己需求的语言来设计尤为重要. 其次, 软件的架构要有松耦度, 类似于 OSGI, FELIX 那样, 进行组件持久化, KNIME 的 OSGI 思想和 LIFERAY 的 OSGI 思想是一致的, 虽然 API 设计风格不一样, 但是效果都很笃厚. 生物需要有达尔文思想, 人工智能同样也存在, 这是需求持久化的基础. 这也是我研发 Unicorn AI 平台的基本条件.

Now I have enough confidence to continue to focus on the argument of making ETL mapped by my DNA code with evolutionary system reuse the perfect guarantee requirement persistence. On how to use ETL to map the code, I will go back to the previous year again and analyze the design idea of this picture at that time as follows

现在我有足够信心持续专注在让我的带进化系统的 DNA 编码所映射的ETL 重用 完美的保障 需求持久化 论点. 关于怎么用 ETL 来映射编码, 我会再次回到前年, 分析当时这张图片的设计思路如下:

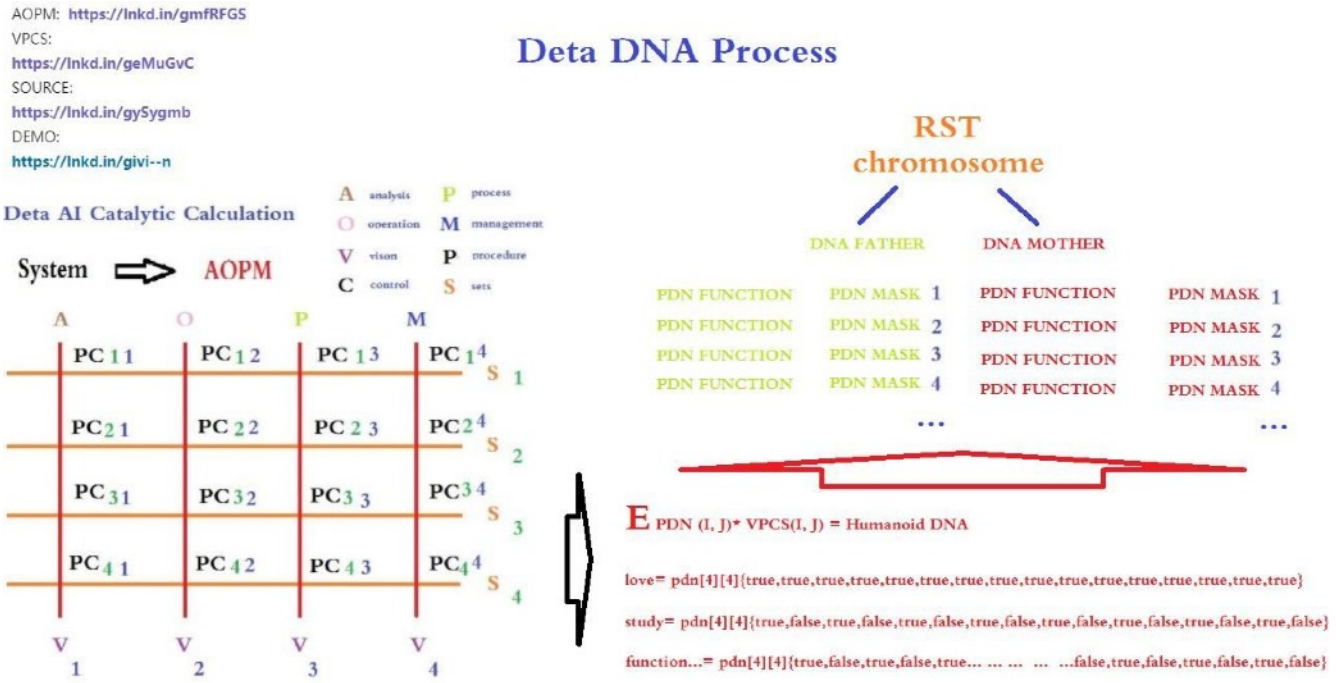

Yes, I have an idea already!! Exciting, ETL node three-dimensional classification. This vocabulary

是的我已经有想法了!! 令人兴奋, ETL 节点 三维分类. 这个词汇.

7 IDUC VPCS AOPM 3D Nero Cell and Its Applications, 3维神经建模与应用

These are the following words. ETL begins to expand in the direction of 3D. First of all, I want to design the 3D functional area of neurons, based on the DNA mapping of DETA IDUC. This is the real humanoid independent thinking way that I can understand.

这些也是后话, ETL 开始往3 维方向拓展, 首先我要做的是基于德塔IDUC DNA 映射 的 神经元的3D 功能区设计. 这是我所能理解的真正的类人自主思考方式.

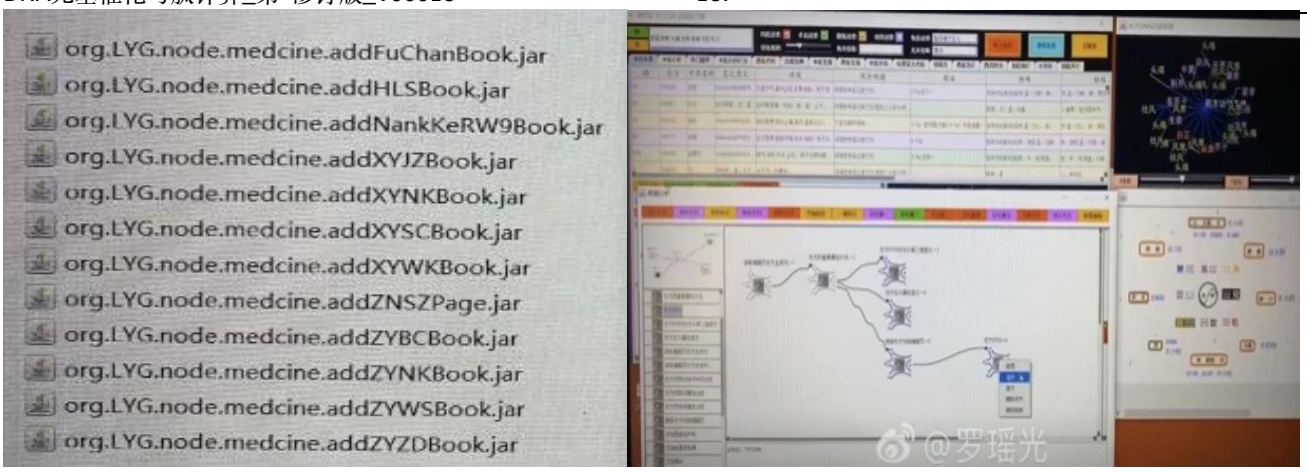


Figure701

具体 养疗经 应用实例

养疗经软件 的 书籍节点导入我会分类到O 操作 S 静态 C 查找 I 增加 的节点分类中.

养疗经软件 的 医学专科节点导入我会分类到 O 操作 P 注册 S 静态 I 增加 的节点分类中. 养疗经软件 的 处方分析节点导入我会分类到 A 分析 V 视觉 C 控制 U 改变 的节点分类中. (缩进删除如figure701 右图类似)

This is the first index application idea of DNA coding manual in human history.

这就是DNA 编码手册的人类历上第一次索引应用思路.

我会把 Org. lyg. node. medcine. addchufangattributeH. jar 修改成 Org. node. a. v. c. u. medcine. addchufangattributeH. Jar

This a. v. c. u will form a DNA mapping system code for analyzing visual control changes, which is convenient for future evolutionary optimization tests. After that, I will systematically encode these ETL index mapping sets into DNA index chains for YangLiaoJing. The ideas given to me in this paper are all creative ideas. Thank you for everything. I can first design AOPM VPCS IDUC INITON 64-bit single chain for the integrity of coding, such as

这个 a. v. c. u 会形成一个分析 视觉 控制 改变的 DNA 映射体系编码. 方便之后的进化优化测试. 再之后这些ETL 索引映射集合 我会系统编码成 养疗经的DNA 索引链. 这篇论文给我的思路都是创世的思路. 感谢一切. 关于编码的整体性我可以先设计成 AOPM VPCS IDUC INITON 64 位单链, 如

AVI-AVD-AVU-AVQ	AEI-AED-AEU-AEQ	ACI-ACD-ACU-ACQ	ASI-ASD-ASU-ASQ
OVI-OVD-OVU-OVQ	OEI-OED-OEU-OEQ	OCI-OCD-OCU-OCQ	OSI-OSD-OSU-OSQ
PVI-PVD-PVU-PVQ	PEI-PED-PEU-PEQ	PCI-PCD-PCU-PCQ	PSI-PSD-PSU-PSQ
MVI-MVD-MVU-MVQ	MEI-MED-MEU-MEQ	MCI-MCD-MCU-MCQ	MSI-MSD-MSU-MSQ

This index mode, even though it is not the final index of organic DNA of human beings, has become the first mapping execution mode of humanoid artificial design representing evolutionarily encoded DNA.

这个索引方式, 即使不是最终的人类生物 有机DNA 对应索引, 但是它已经成为第一次人类人工设计代表可进化编码的 DNA 的映射执行方式.

Not The End结论:

In this paper, I spent 20 years of basic study, 7 years of work practice, 2 years of open source implementation(2020), 18 corresponding data subprojects, 6 data fields, 2 big data works, 7 artificial intelligence papers, and gradually demonstrated some essence, such as这篇论文, 我花了 20 年的基础学习, 7 年的工作实践, 2 年的开源实现, 18 个相应数据子工程, 6 个数据领域软著, 2 个大数据作品, 7 篇人工智能论文, 逐步论证一些本质, 如

The essence of DNA is a combination indexing linklist of four meta-operations of adding, deleting, modifying and Querying data. DNA 定理: DNA 的本质是一种智慧体对数据增删改查的四个元操作的组合方式编码索引.

另外:Execution mode of neuron calculation: a neuron time′s series calculation chain of specific function calculation by mapping of DNA coding index reflection神经元计算执行方式: DNA 编码索引的映射的具体功能计算的神经元时序计算链.

The essence of adapting to the environment is that DNA coding indexes map related neurons compiler link to achieve better addition, deletion, modification and query the environment data. 适应环境的本质: 就是 DNA 编码索引映射相关的神经元实现更好的增删改查.

The essence of humanoid evolution off spring: the offspring produced by optimizing the hybridization of the same coding logic part in the DNA encoding index chain mapped and retained by the neuron calculation method of data efficient processing. 类人进化子代的本质: 对数据高效处理的神经元计算方式所映射保留的DNA 编码索引链中相同编码逻辑部分的进行优化杂交所产生的子代.

It seems that the topic will never end, so I might as well boldly put forward new arguments, continuously and tenaciously focus and demonstrate, and I still enjoy it. 话题似乎永远不会结束, 不妨大胆的提出新论点 持续不断地坚韧地专注. 论证. 而我依然乐在其中^_^

第八章 肽展公式推导与元基编码进化计算以及它的应用发现

AOPM-VECS-IDUQ Catalytic INITON PDE LAW and Its Application AOPM VECS IDUQ

肽展公式推导与元基编码进化计算以及它的应用发现

Yaoguang Luo罗瑶光

观点: 作为拥有研发背景的认知观点, 作者每次发现了一些理论和创造性思维, 便开始工程设计, 在真实的场景中应用, 进行论证, 确定它的社会价值: 改变生产力, 创造新的生产力, 优化和归纳生产资料, 最后适应生产环境并进行有效地从局部到整体的修复, 优化, 改善, 改变, 创造新的更好的环境的过程. 作者认为 一个命题论点必须经过严谨地推导论证, 确定它的真实性和有效性. 这 篇著作于是形成了骨架.

OUTLOOK: Due to the cognitively researching background, the author always prepare more and more real world software projects where supporting the proof in true way: Emancipate the productive forces, Create new productivity, Optimize existing production tools to better adapt to the production environment and Better assists Humanoid in where understanding, adaptation and transformation of the environment, there for, Thus proofs and factors where could be gathered to the parts of backbone in catalytic computing of the humanoid DNA.

Keywords: Chromosome, PDC, PDW, TVM, PDE, PDE-Code, Eternal-tons, L-Pyrimidine, Discrete

关键词: 染色体, 生命词根库, 象契文字典, 肽虚拟机器, 磁基肽展公式, 非对称肽加密, 永生苷, 变嘧啶, 离散定律

1 DETA INITON classify/德塔元基分类

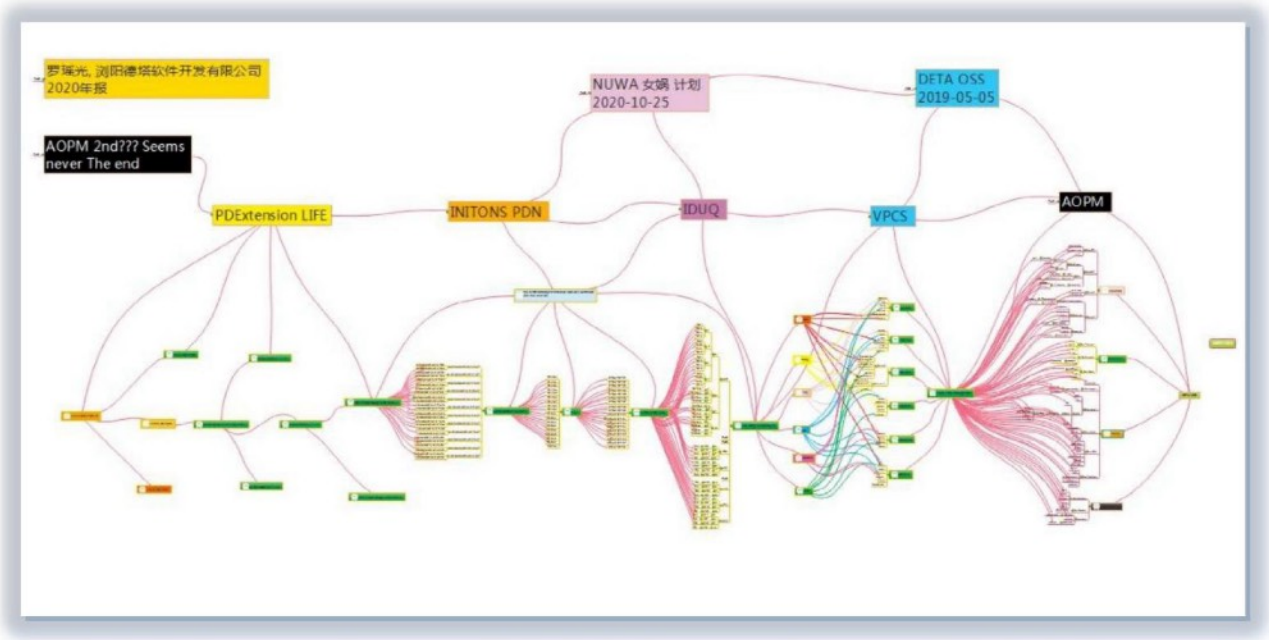


Figure 1

选个切入点说起, 自从作者在上一篇著作 DNA 编码规范中发现了类 DNA 的编码元 AOPM VPCS IDUC 后进行了简单的去重生成 AOPM VECS IDUQ, 于是开始女娲计划设计如 Figure 1, 现在按照主谓宾, 定状补的语法组成形式设计 3 元词根如: 单元基 AOPM VECS IDUQ. 双元基 AA.. AO.. AP.. AM. . OA.. OO.. OP.. OM.. 三元基

AAA.. AAO.. AAP.. AAM.. 通过编码, 发现 仅仅 1 维词根便包含上千的逻辑含义, 如果 2 维词根如. . AAA. AAO.. . 便瞬间膨胀到(1000+) * (1000+)= 100 万+, 这个意识远远大于人类现在的最高学术水平, 于是惊叹, 如何合理的应用这种知识结构? 似乎有点远, 先从养疗经上做元 INITON 分类实验. 如下 FIGURE 1-1

Since the latest document paper' The INITON Catalytic Reflection Between Humanoid DNA and Nero Cell' finished, the author changed the name of AOPM-VPCS-IDUC INITON into AOPM-VECS-IDUQ due to the duplication of the same chars P and C. Then started the NUWA plan, please see at Figure 1, similar to the Human's grammar, could format the INITON as three types, one for Single-tons A, O, P, M, V, E, C, S, I, D, U, Q; two for Double-tons AA, AO, AP, AM. ..... OA, OP, OM... AND Tripper-tons AAA, AAO, AAP, AAM.... Then we could find out more than 1800 Tripper INITON word's root. If Its root words appeared in 2 dimension or more dimension root links.... It could happen and detail out the combination features of more than one million real world verbals, so let's talking about the 'YANGLIAOJING' software on a researching way as FIGURE 1-1.

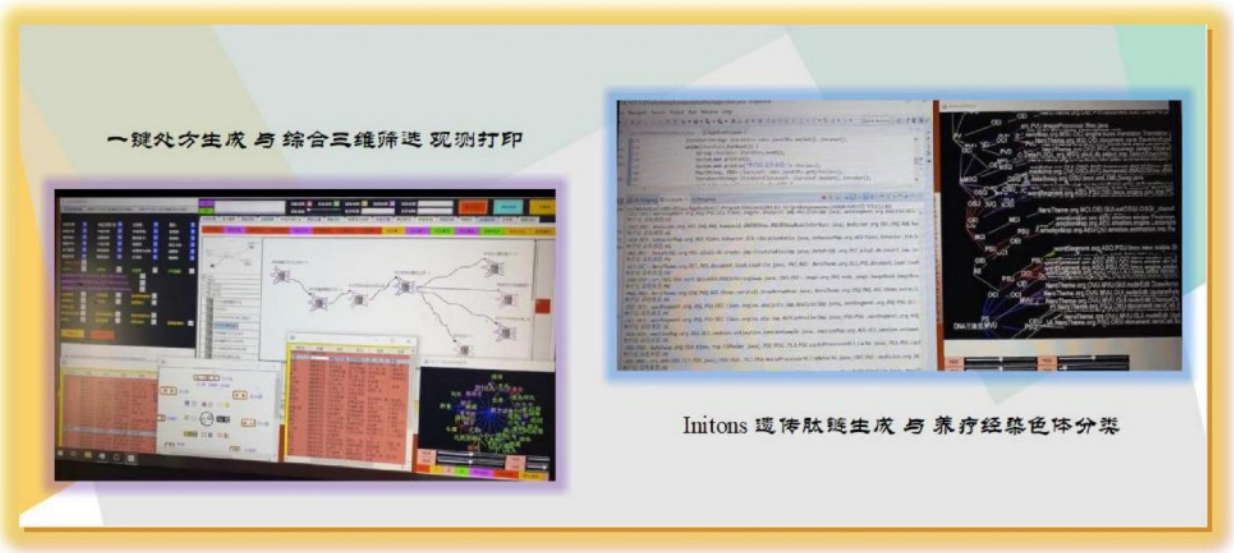


Figure 1-1

一开始养疗经的 ETL 节点 通过插件的方式扩充, 作者想设计成肽化插件形式, 通过 TVM 肽化虚拟机来添加 jar 包, 这样 jar 包也可以设计成肽文件编码. 既可以加密保存又可以作为肽节点拓展. 于是作者开始验证可行性, 先按简单的分类和聚类索引模式, 按 A, AO, AOP, 进行节点归类. 研究发现, 一个肽索引世界展现在眼前, 原来这种染色体化的结构数不尽, 于是开始按主谓宾的方式开始模拟明显特征规范的 3 元染色体层, 结果发现也有 24 对, 如Figure 2

Base through the DETA Unicorn Nodes in ETL OSGI plug-in way, the author tried to code the ETL node files where transporting into a PDN files by using DNA catalytic 1. 2. 2 INITON encoding technology, at that time, author thought It could be used in Data encoding domain. Let's proving, for example the first, used classify method, defined the A, AO, AOP. did the PDN files name's statistic in an observer view upon the classify mode. Then got a true answer of the main features of tripper-tons classify, where similar to 24 basic types. as Figure 2 shows.

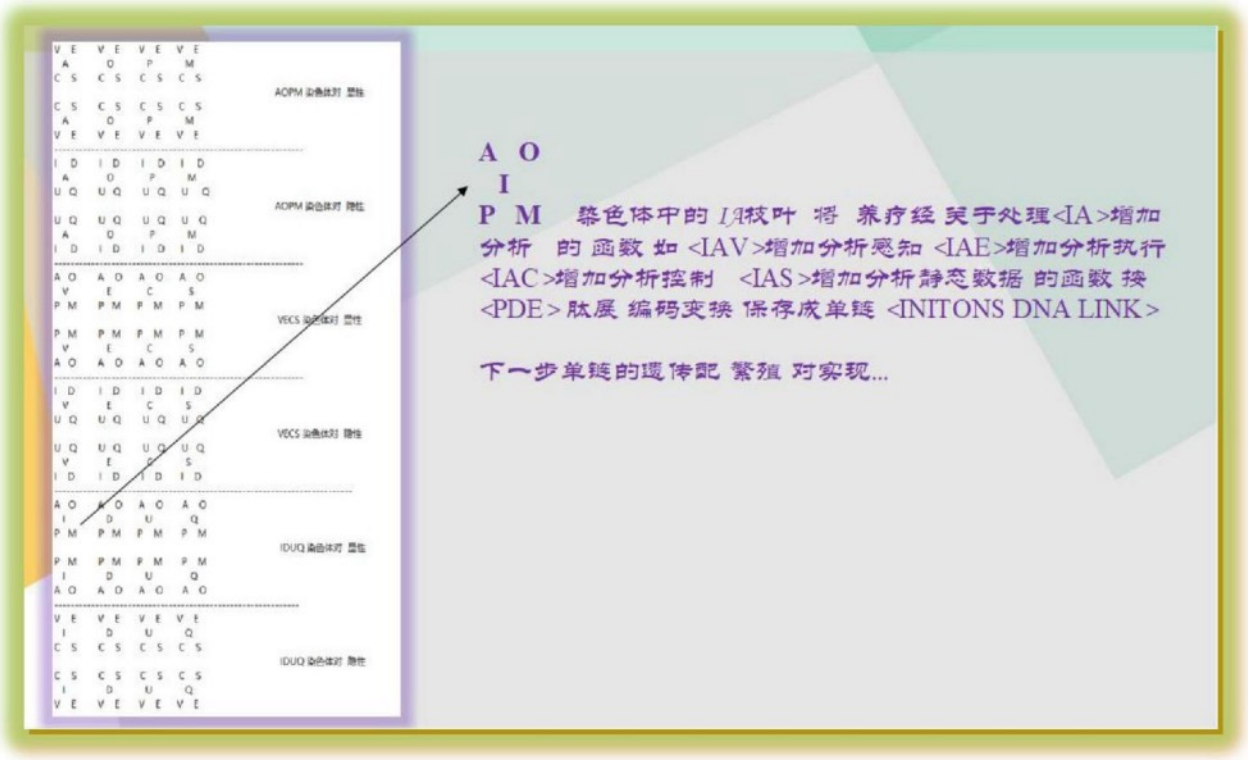


Figure 2

如下文字. 如图先将 12 个元基 INITON AOPM VECS IDUQ 进行 root 根拓展, 发现生成 AOPM- VECS 和AOPM-IDUQ 显隐模式于是发现了 24 类组, 正如 figure 2 这些类组一开始作者的思路是染色体索引, 后来思考如果这种索引能进行功能化, 那么就是一个个函数的主要功能区, 于是按DNA 编码规范1. 2. 2 开始定义词根, 发现了很多惊讶和有趣的研究结果如 Figure4 词根的发现.

let's proving that the root extension of the INITON AOPM-VECS-IDUQ, we could see there have 2 types INITON section-extensions per each same INITON section. For example, we could find AOPM has AOPM-VECS and AOPM-IDUQ, the author named dominant chromosome and recessive chromosome, after named, it proved the software's function also could be extended to the PDN function Observer mode. Then following 'The INITON Catalytic Reflection Between Humanoid DNA and Nero Cell 1. 2. 2' Author began to make a definition of the PDN's word (PDW) by using PDN root INITON chars (PDC), and those PDCs where could build an extension link-list mode in the PDN files (PDE). See Figure 4(PDC).

2 DETA INITON PDN words root/德塔元基分类词根

分类组成词根 代表 动词, 名词和形容词, 动词 IDUC-前缀根, 名词 VPCS-前缀根, 形容词 AOPM-前缀根, 形成DNA 语言的 有效元染色体, 如图 4, 按照编码规范, 2 元词根有明确逻辑价值的组合竟然也是 24 个组, 作者开始专注思考. 这 24 组的功能进行深入研究..

After the classification of the PDC and into the 4-pairs-chromosome mode, it proved the IDUC-PDC root where similar to the humanoid Verb definition; the VPCS-PDC root similar to the humanoid Noun definition; and the AOPM-PDC root similar to the humanoid Adj definition. See the Figure 4, by following DNA encoding 1. 2. 2 researching, then got 24 types useful 4-pairs-chromosome mode, let's continuing proving as below.



Figure 4

3 DETA INITON PDN words/德塔元基分类词典

词根开始各种组合形成世界首个象契文字 DNA 语言, 按照罗瑶光先生的思维逻辑进行人类语言和象契语言转换如动词, 名词, 形容词.. . 于是我归纳了下 AOPM 体现了养疗经的智慧高级功能形态, VECS 体现了养疗经的多样化特征, IDUQ 体现了养疗经的生物应激活性, 这个归纳和总结, 用人类的认知的语义理解方式, 作者按照罗瑶光先生的思考方式进行词汇提炼, 确定了软件工程 AOPM 属于生命周期的系统分类, 是一种高级形态, 具有可描述的智慧性, VPCS 因为涉及到控制执行, 插件扩展和静态属性, 作者认为是具有逻辑特征的多样性. 最后 IDUQ 因为涉及到增删改查, 都是运动方式, 作者定义为应激性表达. 于是再次归纳为 Figure 5, 作者开始思考, DNA 的肽 竟然可以形成一篇具有阅读性的文章, 这篇文章竟然还有思维活性, 应激活性和智慧活性, 于是再次切入实际的论证 将java 语言进行翻译成肽语言.

After researching, it proved that DNA language was a hieroglyph-sphenogram word which had intently hieroglyph details and sphenogram formats. Then next proof, the author changed his thinking and mind reading ways into the

word sentences, for example changed the human's verb, noun and adj into DNA PDC roots PDW link-list. Then found out that AOPM-VECS INITON, wisdom dominant chromosome pair determines the way of wisdom association; AOPM-IDUQ INITON, wisdom recessive chromosome pair determines the way of wisdom expression; VECS-AOPM INITON, diversity dominant chromosome pairs, determine the diversity of consciousness characteristic; VECS-IDUQ INITON, diversified recessive chromosome pairs to determine diversified motion characteristics; IDUQ-AOPM INITON, stress dominant chromosome pair to determine the functional aspects of stress; IDUQ-VECS INITON, stress recessive chromosome pairs to determine the expression object of stress. please see Figure 5, It proves that

DNA PDW could be a topic paper, and this paper could become to a life. Its reflections as three instances: AOPM the diversity of consciousness characteristic, VECS wisdom association and IDUQ diversified motion characteristics. let's proving in a real wold project 'YANGLIAOJING': Change the Java file into the PDE file.

AOPM-vecs 智慧 <显性> 染色体对, 确定智慧联想方式
AOPM-iduq 智慧 <隐性> 染色体对, 确定智慧表达方式
VECS-aopm 多样性 <显性> 染色体对, 确定多样化的意识特征
VECS-iduq 多样性 <隐性> 染色体对, 确定多样化的运动特征
IDUQ-aopm 应激性 <显性> 染色体对, 确定应激性的功能方面
IDUQ-vecs 应激性 <隐性> 染色体对, 确定应激性的表达对象

Figure 5

4 DETA TVM/德塔词典肽翻译虚拟机

于是开始将一个养疗经java 文件翻译成肽文, 这个过程可以细分为几个细节, 如 Figure6, 先简单转成java 行格式肽文有利于区分. 有理观测. 然后再进行肽链化, 这时候作者发现了一些细节问题, 其中最主要的问题是怎么将AOPM 和 VECS 向 IDUQ 层展开. 于是开始设计肽展函数. 我一直在思考一种可行的虚拟机形式, 如果我不设计而是依赖一种编程语言, 会出现平台移植困难, 于是先从肽翻译机开始.

After beginning of the PDE translation, the duration of operations could be parsed in a small detail as Figure 6, first into TVM file, then into TVM-PDN list file. Finally, into a TVM-PDN-PDE IDUQ list file. This real operation needs a logic extension formula collection of PDE AOPM <-SWAP-> VECS <-SWAP->IDUQ ASAP. The author thought JVM could embedded into other OS platform, TVM PDW needs inherit JVM this formation: TVM could embedded into other programming languages environment (c/c++, QT, RUBY, C#. ETC..). let's continuing proving TVM's application.

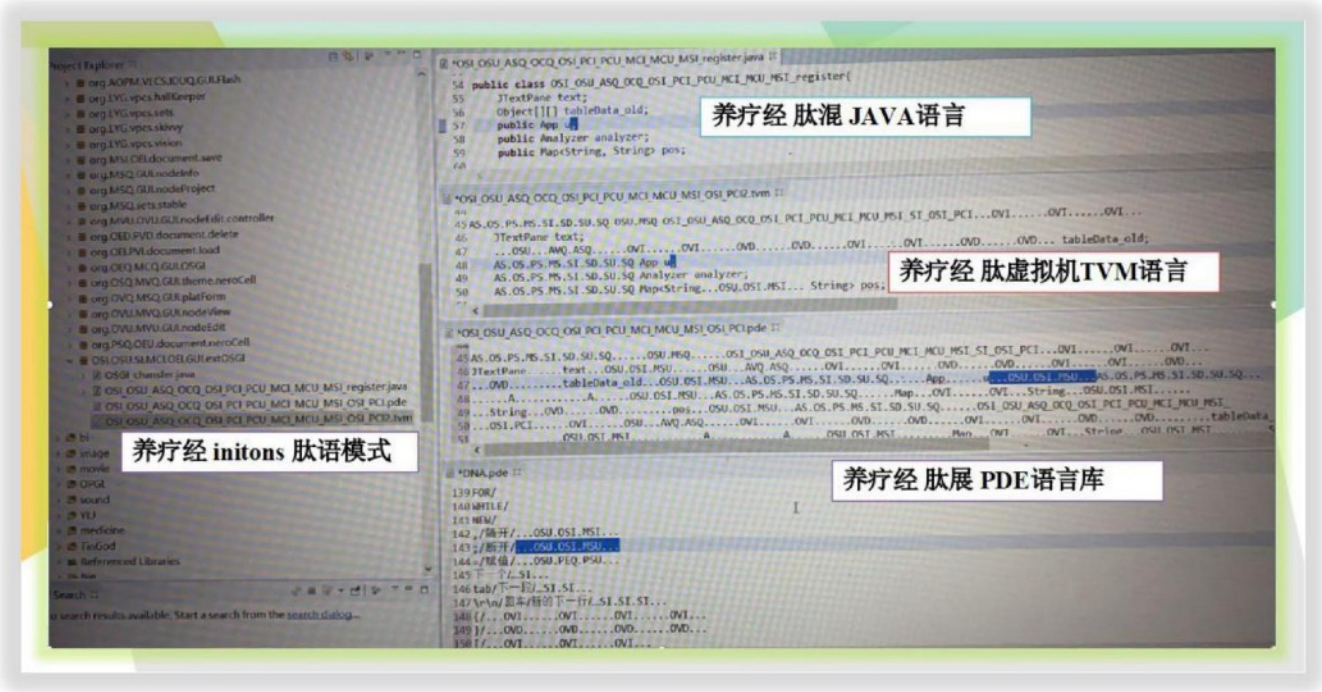


Figure 6

5 DETA TVM applications/德塔肽翻译虚拟机应用技术

首先想到的是加密应用, 比如我最近10 年常用MD5 加密, 筛子加密, 单握手非对称加密, DNA 加密的效果因为有规则词库和规则概率钥匙, 然后丝化不饱和肽展失真, 所以加密无规律可循, 甚至越解越乱. 是很好的非对称加密方式.

The first real world imagination of application is Asymmetrically Communications Encryption, such likes MD5 and Dice communication, DNA Encryption Includes the probably extension and statistic method, lets the probably extension build a key, and statistic method for indexing, its very hard to rollback without personal PDE laws, therefore, the level of the safe is pending highly. let's proving.



Figure7

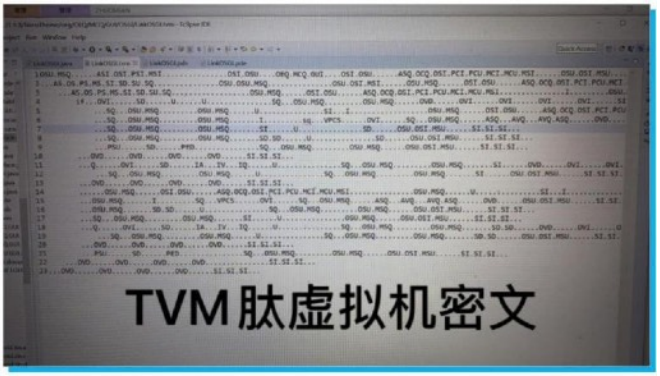


Figure 8

我选了一个比较简洁的插件源码进行肽化, 这个源码首先短小, 词汇量少, 所以肽化的过程实现快, 比较好观测中间过程, 拓展我的研发思维. 通过 INITON 词根进行语义编码后, 如 Figure8, 因为空格和回车等符号没有 intion 词根转码, 保留了一些程序的特征. 这种文可以作为虚拟机文, 方便以后词库优化.

Initially, the author chooses a short Java file for PDN extending. because of short, its easy to understand how does TVM working for the translation. after observation of the duration, please see figure 8, without the symbol ENTER and TAB, TVM and JAVA all include the programming features. By following John von Neumann's flow chat, in order to optimize to a PDE file in the next step, now save this programming features is sufficiency and necessary.

6 D E T A T V M P D C / 虚 拟 机 应 用 优 化

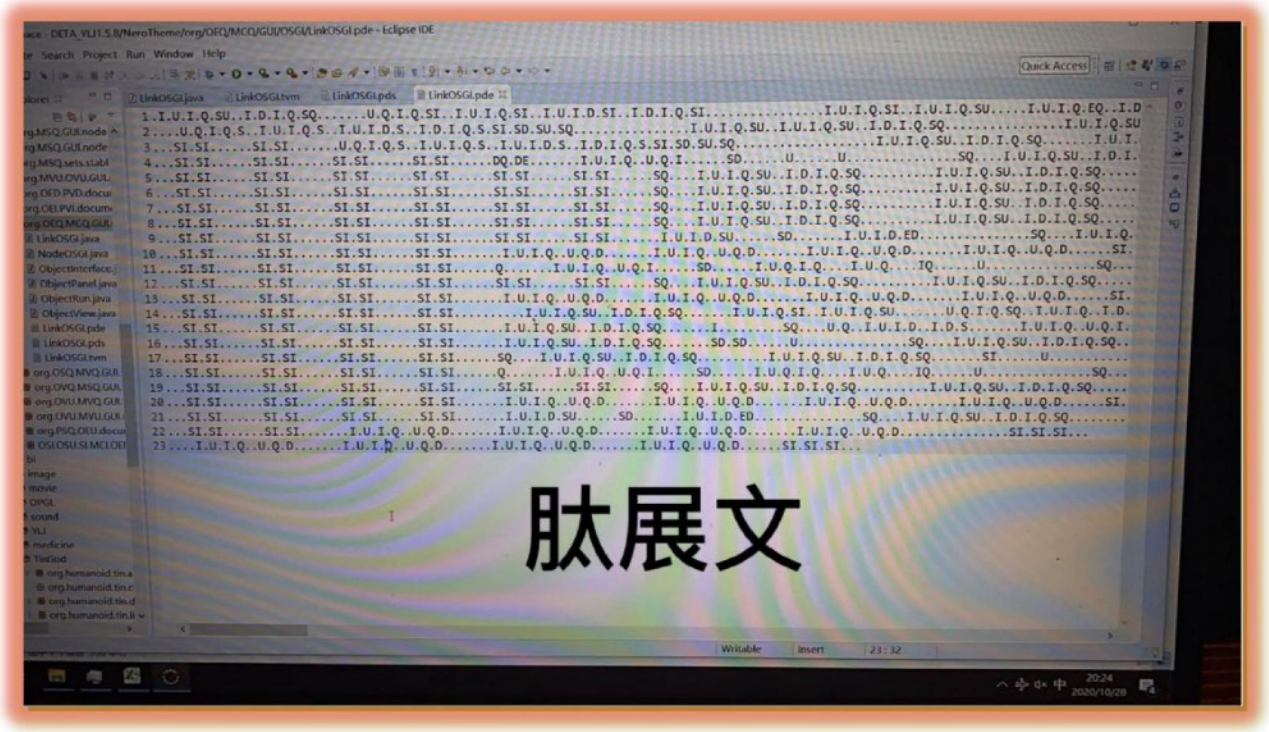


Figure 9

加密后于是开始 设计非词汇的符号, 如空格和回车等. 更好的将 TVM 肽虚拟机密文对比肽展文是因为在肽展公式论证中, 推导出概率变化 如 S = I, S =Q, (D=DD 之后用于丝化计算), 如图Figure9 虚拟机文在全部肽化后会惊奇的发现整个文件 好比一个很长的链条. 这个链条有明确的序列和意思. 通过肽展的变换, 作者根据自身的对词汇的理解概括发现了.

After the DNA PDE Encryption, it proves alot of PDE Law in Figure 9, we get a lot of basic PDE formula like S = I, S = Q, (D = DD for PDE comp's calculation, proof lately), then proves the Java or PDE file could be a PDE IDUQ INITON linklist, this list has an absolutely hieroglyph-grammar in sphenogram-sequency. in Author's collections, means from Human verbal list into a DNA verbal list by using PDE Formula. let's continuing proving as below...

I-INCREMENT/ADD	**D-DECREMENT/FILTER**	**U-UPDATE**	**C/Q-QUERY/CHECK**
V-VITIONARY/FEEL	**P/E-EXECUTE**	**C-CONTROL**	**S-SET/STATIC**
A-ANALYSIS	**O-OPERATION**	**P-PROCESS**	**M-MANAGEMENT**

A 分析 = V感知+ S静态= U改变+ Q查询+ I可增加+ Q可查询= U+ Q+ I= V+ I.. .

A analysis = V visionary + S static sets = U update + Q query + I increment + Q query= U update + Q query+ I increment = V visionary + I increment.. .

O= E + S = I + U + I + Q = I + U + Q = E + Q.. .. ..

P= E + C = I + U + I + D = I + U + D = E + D.. .. ..

M= C + S = I + D + I + Q = I + D + Q = C + Q.. .. ..


这些比较简单的分类, 为了决定它的有效性, 于是开始论证, 用作者的话语便是从语文词汇上的语义的概括到离散数学公式的变换过程展开式. 于是开始各种模拟推导.

Then Author proves that makes a lot of real word POS words into PDW by using PDE logic classify method, in order to find more and more PDE formula LAW ASAP with a higher quality.

7 DETA TVM PDE/德塔肽翻译推导

完美的单链化后 开始思考怎么还原 迫切需要论证一些编码解码公式

After the link list modulation, then need roll back the IDUQ into a higher style likes VECS and AOPM, so It seems Mr. Yaoguang need proving more, then continuing proving.

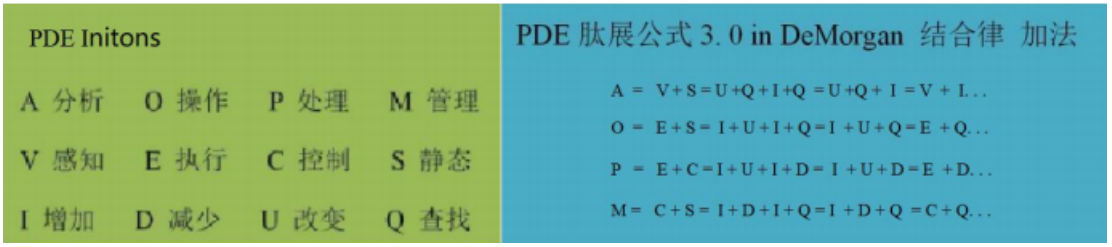

=>通过推导发现有些肽展过程是可以可逆变换的. (后来论证得到准确答案这是不严谨的)

=>After the perfect single chain, let's started to think about how to rollback or restore it. It is urgent to demonstrate some encoding and decoding formulas.

A= S- I= I- S=..

O= S- Q= Q- S=..

P= C- D= D- C=..

M= S- Q= Q- S=..

=> 关于减法运算, 作者想到计算汇编指令计算的反码和补码思路, 于是想到可肽增方式. 于是停止了, 研究, 因为减法其实也是加法的一种形式.于是跟进论证优先级降低.

=> Regarding the subtraction of operation, the author thought of calculating the mask and 2's complies of the calculation of the assembly instruction, so he thought that the same with the PDE increment method. After researching, because subtraction was definitely a form of an addition. So, the priority level of the sequence were reduced. By Mr. Yaoguang.

有价值的推导和假设如下

The valuable derivations and assumptions are as follows:

V+ S= V+ I=> S= I ~联想/Imagination~~ A= U;

E+ S= E+ Q=> S= Q ~联想/Imagination~~ A= T;

E+ C= E+ D=> C= D ~联想/Imagination~~ G= C;

C+ S= C+ Q=> S= Q ~联想/Imagination~~ A= T=> 联想: 竟然和人类的 ACGTU 腺吻合! 论证下~;

假设 S 已经彻底解码为 A 腺嘌呤, 假设 A 腺嘌呤在 DNA 中属于原生静态物质, 于是得到可持续假设论证如下.

VECS-S 为 A-腺嘌呤 在 DNA 函数中属于原生活性物质

IDUQ-Q 为 T-胸腺嘧啶 在 DNA 函数中属于感应活性物质

IDUQ-I 为 U-尿嘧啶 在 DNA 函数中属于增生活性物质

VECS-C 为 G-鸟嘌呤 在 DNA 函数中属于控制活性物质

IDUQ-D 为 C-胞嘧啶 在 DNA 函数中属于降解活性物质

=> Lenovo/Imagination: It actually coincides with the human ACGTU gland! Under the argument~.

Assuming that S has been completely decoded as A-adenine, and assuming that A-adenine is a primitive static substance in DNA, the sustainable hypothesis is demonstrated as follows.

VECS-S is A-adenine INITON, which is the original active substance in DNA function IDUQ-Q is T-thymine INITON, which is an active substance in the DNA function IDUQ-I is U-uracil INITON is a life-enhancing substance in the DNA function. VECS-C is G-guanine INITON which is a controlling active substance in DNA function IDUQ-D is C-cytosine INITON which is a degradation active substance in DNA function.

=> 可持续论证如下. 嘌呤 生物多样化特征 属于 VPCS INITON 肽, 嘧啶 生物应激性特征 属于 IDUQ INTIONS肽.

=> The sustainable proof is as follows. Purine and its biological diversity characteristics where belong to VPCS INITON peptides, and pyrimidine and its biological stress characteristics where belong to IDUQ INITON peptides.

最后通过推导公式归纳了下: V= U+ Q,

E= I+ U, C= I+ D, S= I+ Q, I= !D, U= !Q.

Then we find: V = U + Q, E= I+ U, C= I+ D, S= I+ Q, I= !D, U= !Q.

罗瑶光, 2020 年 10 月 25 日 6:00 AM D8+ 我得到严谨的语义假设公式 推导论证结果:

Luo Yaoguang, October 25, 2020 6:00 AM D8+ got the rigorous semantic hypothesis formula deduction result:

A 分析, O 操作, P 处理, M 管理, V 感知, E 执行, C 控制(G 鸟嘌呤), S 静态(A 腺嘌呤), I 增加(U 尿嘧啶), D 减少(C 胞嘧啶), U 改变, Q 查找(T 胸腺嘧啶).

A analysis, O operation, P process, M management.

V visionary, E execute, C control(G Guanine INITON), S static(A Adenine INITON).

I increment(U uracil INITON), D decrement(C cytosine INITON), U update, Q query(T thymine INITON).

可以推断:(因为一开始作者没有定 AOPM 的名称方式, 于是先统一高级元 INITON 用嘌呤名称)

A 分析(TA 变感腺嘌呤),	O 操作(UA 增变腺嘌呤),	P 处理(UG 增变鸟嘌呤),	M 管理(GA 鸟腺嘌呤)
V 感知(T 变感嘌呤),	E 执行(U 增变嘌呤),	C 控制(G 鸟嘌呤),	S 静态(A 腺嘌呤)
I 增加(U 尿嘧啶)	D 减少(C 胞嘧啶),	U 改变(变嘧啶),	Q 感应(T 胸腺嘧啶)

--括号中的字母是医学领域的定义字母, 括号外的开头的字母是元基语义字母, 别混淆.

Then prove:(in the first Mr. Yaoguang didn't name the AOPM INITON then using Purine INITON (PI) instead.

A analysis (LTA -Adenine-PI), O operation (ULA -Adenine-PI), P process (UG - Guanine- PI), M management (GA-PI),

V visionary (LT yaoguang-T-PI), E execute (UL -yaoguang-PI), C control (G Guanine INITON), S static (A Adenine INITON),

I increment (U uracil INITON), D decrement (C cytosine INITON), U update (L yaoguang INITON), Q query (T thymine INITON).

U 改变(变嘧啶) Named by Yaoguang. Luo 20201025

U UPDATE(L-pyramidine yaoguang INITON) Named by Yaoguang. Luo 20201025

8 DETA TVM PDC functions/德塔肽推导函数化

于是通过罗瑶光先生的认知思维与 模拟最简单的几个小词汇 组合, 有了这些小词汇, 于是开始降元推理, 进行统计观测, 作者开启了意识肽展公式推导体系如下:

书写:. .. OVQ. OEQ. MVQ. OSU.. .

物体:. .. AVQ. ASQ.. .

桌子:. .. OVQ. OEQ. MVQ. OSU.. . AVQ. ASQ.. .

教育:. .. AVQ. OEQ. PVU. PSU. MSU. MSQ.. . OVQ. OEQ. MVQ. OSU.. .

Mr. Luo transferred the human words into PDW by using his real word cognitions, then began to make a logic proof of PDE calculations.

HAND WRITE:. .. OVQ. OEQ. MVQ. OSU.. .
OBJECT: .. . AVQ. ASQ.. .
TABLE: .. . OVQ. OEQ. MVQ. OSU_. .. AVQ. ASQ.. .
EDUCATION: .. . AVQ. OEQ. PVU. PSU. MSU. MSQ. .. OVQ. OEQ. MVQ. OSU.. .

9 DETA TVM PDC function optimization and PDE/德塔肽推导函数逻辑优化

于是开始这些组合的有理合理性演化推理. //SORT 20201025 19:47 AM D8+ 继续持续绝对专注论证肽增公式 1. 0 BY USING ENGLISH FOR - 4 BITS DIUQ WAY 通过已有逻辑公式

PDE SWAP LAW	PDE MASK LAW	PDE COMPS LAW	VECS PDE LAW
S = I	I = !D	I = ++D	V= U + Q
S = Q	D = !I	U = ++I	E= I + U
C = D	U = !Q	Q = ++U	C= I + D
	Q = !U	DD = ++Q	S= I + Q

AOPM PDE LAW
A = V + S
O = E + S
P = E + C
M= C + S

SO :

I 增加	!->	D	~->	I	!->	D ~->	I
D 减少	!->	I	~->	U	!->	Q ~->	DD (肽增)
U 改变	!->	I	~->	U	!->	I ~->	U
Q 查找	!->	U	~->	Q	!->	U ~->	Q

THEN WE FIND? 于是我们推导发现了一些新的肽展变换定律 (PDE SWAP NEW LAW: D = DD)

在如下公式中 符号解释 !-> 为反码, ~-> 为补码

Proof !-> MASK, ~-> COMPS :

V 感 知 -> U + Q !-> QU ~-> QQ !-> UU ~-> UQ = V;

E 执行 -> I + U !-> DQ ~-> DDD !-> III ~-> IIU = I + E (肽增/PDE INCREMENT);

C 控制 -> I + D !-> DI ~-> DU !-> IQ ~-> UDD = U + D (肽展/PDE) = U + D + D (肽增/PDE INCREMENT);

THEN WE FIND 我们发现 补码变换计算中间态生成两个公式 U = E, I = U ;

V visionary -> U + Q !-> QU ~-> QQ !-> UU ~-> UQ = V;

E execute -> I + U !-> DQ ~-> DDD !-> III ~-> IIU = I + E (肽增/PDINCREMENT);

C control -> I + D !-> DI ~-> DU !-> IQ ~-> UDD = U + D (肽展/PDE) = U + D + D (肽增/PDE INCREMENT);

THEN WE FIND two formulas in comp's duration: U = E, I = U;

第一种方法 饱和 4 元子肽展 /first way 4 bits proof

A = V + S = U + Q + I + Q = UQIQ !-> QUDU ~-> QUDQ !-> UQIU ~-> UQIQ = A;

O = E + S = I + U + I + Q = IUIQ !-> DQDU ~-> DQDQ !-> IUIU ~-> IUIQ = O;

P = E + C = I + U + I + D = IUID !-> DQDI ~-> DQDU !-> IUIQ ~-> IUIDD = P + D (肽增/PDE INCREMENT);

M = C + S = I + D + I + Q = IDIQ !-> DIDU ~-> DIDQ !-> IDIU ~-> IDIQ = M;

第二种方法不饱和 3 元子肽展 /second way 3 bits proof

A = V + S = U + Q + I + Q = UQI !-> QUD ~-> QUI !-> UQD ~-> UQI = A ;

O = E + S = I + U + I + Q = IUQ !-> DQU ~-> DQQ !-> IUU ~-> IUQ = O;

P = E + C = I + U + I + D = IUD !-> DQI ~-> DQU !-> IUQ ~-> IUDD = P + D (肽增/PDE INCREMENT);

M = C + S = I + D + I + Q = IDQ !-> DIU ~-> DIQ !-> IDU ~-> IDQ = M;

结论, 看起来似乎是很好的方式 这里描述下为什么我会 4bit 计算, 因为一开始用 3bit 也能很好地论证, 为了找到伪命题, 我思考, VECS 如果进行增元倍增, 最好是倍数 4bit, 于是觉得有必要推导论证

In conclusion, It proves 4bits discrete calculation is a better way. Then Author makes an arrangement as below.

于是开始整理, 归纳为下面肽展公式.

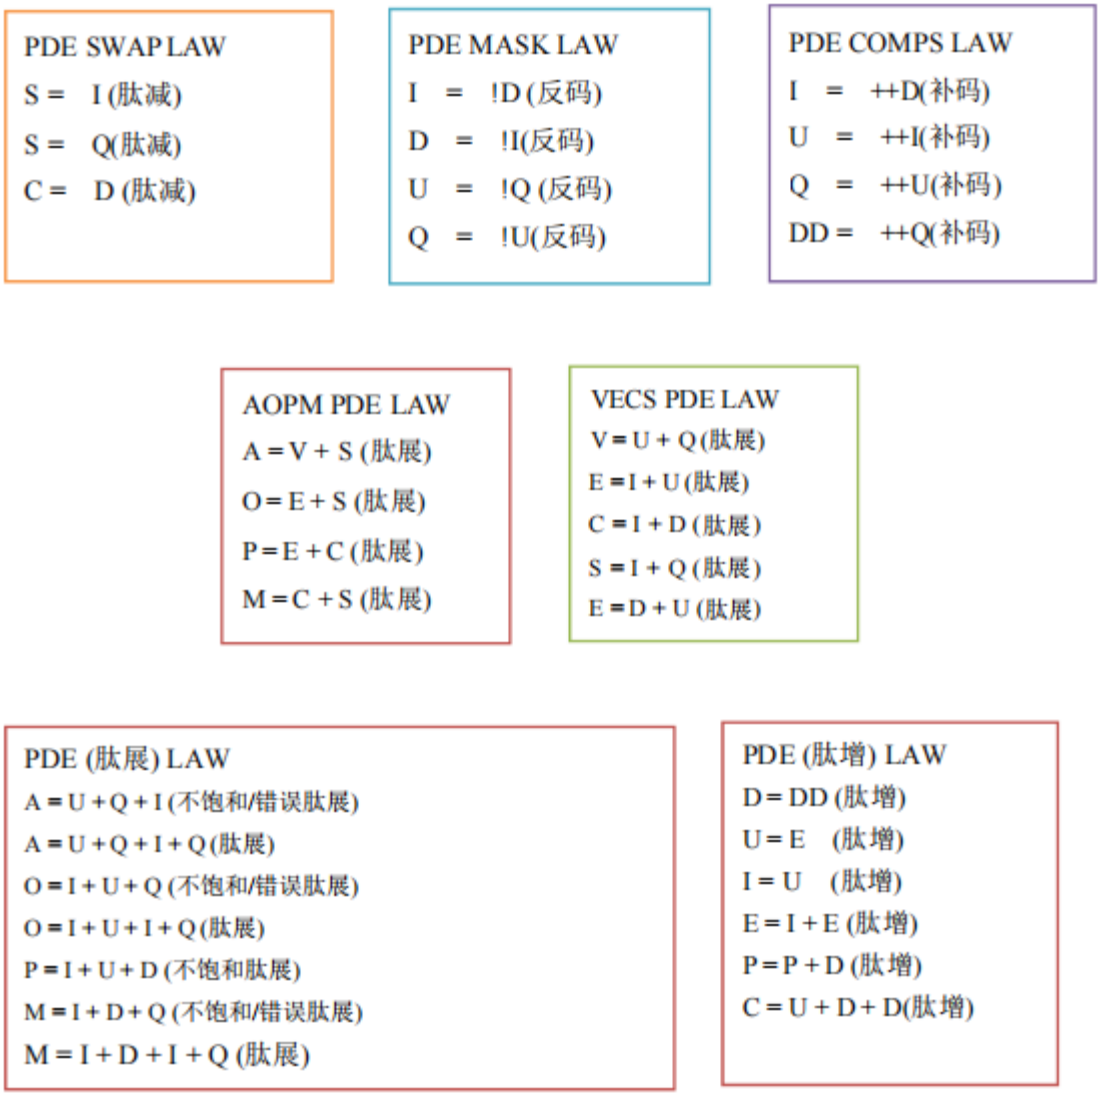


Figure 11-1

PDE MASK LAW/ 离散反码定理

I= D!;

D= I!;

U= Q!;

Q= U!;

PDE COMP'S LAW/ 离散补码定理

DD= ++Q;

I= ++D;

U= ++I;

Q= ++U;

PDE (肽减/PDE DECREMENT) LAW;

C= D (肽减/PDE DECREMENT);

S= I (肽减/PDE DECREMENT); -

S= Q (肽减/PDE DECREMENT);

PDE (肽增/PDE INCREMENT) LAW

D= DD (肽增/PDE INCREMENT);

U= E (肽增/PDE INCREMENT);

I= U (肽增/PDE INCREMENT);

E= I+ E (肽增/PDE INCREMENT);

P= P+ D (肽增/PDE INCREMENT);

C= U+ D+ D(肽增/PDE INCREMENT);

A= U+ Q+ I (不饱和 / 错误肽展/UNSAFE PDE); A= V+ S (肽展/PDE);

O= I+ U+ Q (不饱和 / 错误肽展/UNSAFE PDE); O= E+ S (肽展/PDE);

P= I+ U+ D (不饱和 / 错误肽展/UNSAFE PDE); P= E+ C (肽展/PDE);

M= I+ D+ Q (不饱和 / 错误肽展/UNSAFE PDE); M= C+ S (肽展);

E= I+ U (肽展/PDE);

V= U+ Q (肽展/PDE);

E= D+ U (肽展/PDE);

C= I+ D (肽展/PDE);

S= I+ Q (肽展/PDE);

10 DETA TVM PDE Logic/德塔肽推导函数逻辑优化成肽展公式化
于是发现了一些简单的推导公式 和 不饱和公式, 于是找到了很多东西 如 L 变嘧啶

FLASH A NEW NAME 可以得到联想假设推断:

A 分析(LTA 变胸腺腺苷), O 操作(UCLA 尿胞变腺苷), P 处理(UCLG 尿胞变鸟苷), M 管理(GA 鸟腺苷)

V 感知(LT 变胸腺嘌呤), E 执行(UCL 尿胞变嘌呤), C 控制(G 鸟嘌呤), S 静态(A 腺嘌呤)

I 增加(U 尿嘧啶), D 减少(C 胞嘧啶), U 改变(L 变嘧啶), Q 感应(T 胸腺嘧啶)

改变(L 变嘧啶)定义为 L(L-Pyrimidine) the first char of luo YG, Li, Liang and Liu, Named by yaoguangluo 20201025
END 2020-10-25 21:30 PM, D8+, YAOGUANGLUO, LIUYANG

A analysis(LTA -Glycoside) O operation(UCLA – Glycoside) P process(UCLG - Glycoside) M management (GA - Glycoside);

V visionary(LT yaoguang-T-PI) E execute(UL -yaoguang-PI) C control(G Guanine INITON) S static(A Adenine INITON);

I increment(U uracil INITON) D decrement(C cytosine INITON) U update(L yaoguang INITON) Q query(T thymine INITON);

U update(L update-Pyrimidine) 定义为L(L-Pyrimidine) the first char of luo YG and liang BY, Named by yaoguangluo 20201025 END 2020-10-25 21:30 PM, D8+, YAOGUANGLUO LIUYANG;

今天发现 A = U + Q + I (肽展) 与 O = I + U + Q (肽展) 出现逆对称 引起了我的注意 为了避免定义为误差变换, 于是现在我增加 4BIT LAW 演化如下,

Today find out that (paper time) A = U + Q + I (PDE) 与 O = I + U + Q (PDE) will cause a Direction Inverse Symmetry, Then makes more attension that increments 4 formulars of 4 bits PDE Law as below

A= U+ Q+ I+ Q ; O= I+ U+ I+ Q ; P= I+ U+ I+ D ; M= I+ D+ I+ Q. ;

11 DETA TVM PDE and Its application/德塔肽展公式应用论证技术

于是想到文件加密, DNA, 有丝分裂等. 于是开始从文件加密上论证, 肽展函数模拟酸碱 控制 概率丝化 方式 S= I, S= Q, E= IU, E= DU.. 等TVM PDE and Its application where not only could be used in document encoding, DNA moniter, humanoid cognitions or other domains, and also for the probability real word issues by using PDE LAW. for example S= I, S= Q, E= IU, E= DU.. etc.

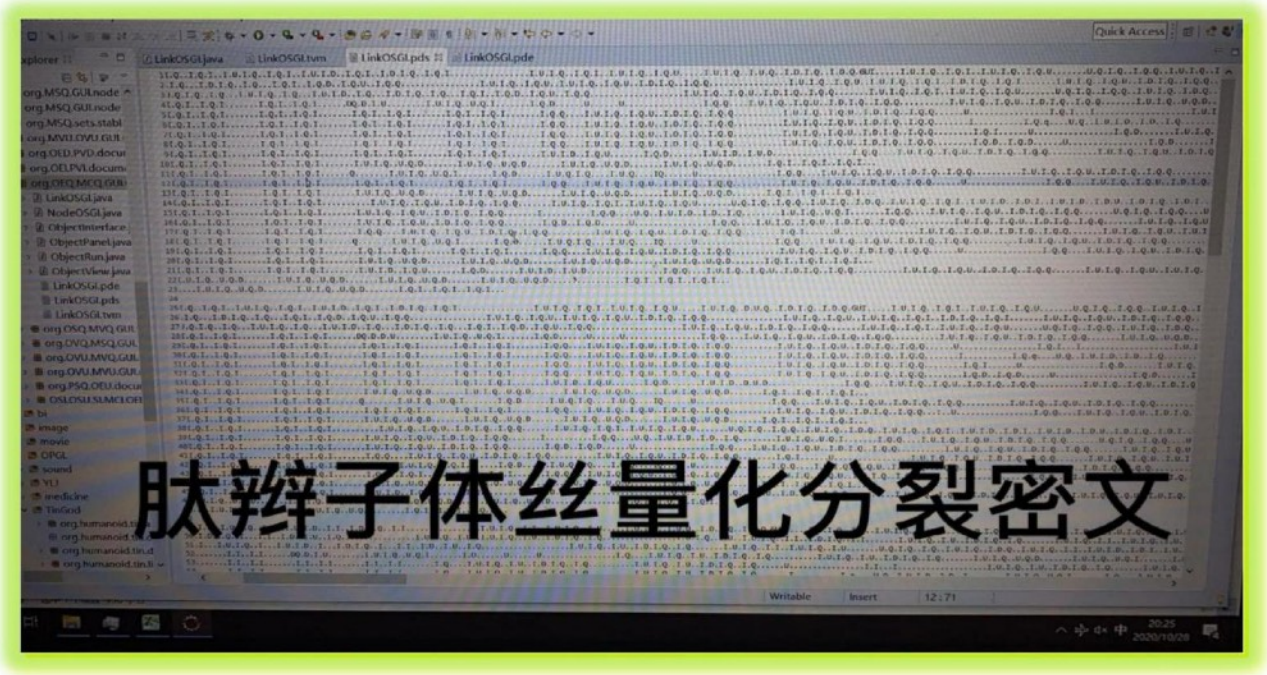


FIGURE 12

12 TVM humanoid life Research/应用在类人生命进化中

发现有重大价值后, 开始高级应用, 模拟新冠和永生等词汇推导

A 分析(LTA 变胸腺腺苷)， O 操作(UCLA 尿胞变腺苷)， P 处理(UCLG 尿胞变鸟苷)， M 管理(GA 鸟腺苷);

V 感知(LT 变胸腺嘌呤)， E 执行(UCL 尿胞变嘌呤)， C 控制(G 鸟嘌呤)， S 静态(A 腺嘌呤);

I 增加(U 尿嘧啶)， D 减少(C 胞嘧啶)， U 改变(L 变嘧啶)，Q 感应(T 胸腺嘧啶);

A analysis(LTA -Glycoside)，O operation(UCLA -Glycoside)，P process(UCLG - Glycoside)，M management (GA-Glycoside).

V visionary(LT yaoguang-T-PI)， E execute(UL -yaoguang-PI)， C control(G Guanine INITON) ，S static(A Adenine INITON).

I increment(U uracil INITON)， D decrement(C cytosine INITON)， U update(L yaoguang INITON) ，Q query(T thymine INITON).

1 新冠语义解释模拟 Monitoring COVID-19 verbal AND Immortal life verbal

.. . MSI. OCU. OCI. PCU. PCI.. . 罗瑶光按照人类的理解方式认为 管理静态增加, 操作控制增加处理控制增加

.. . MSI. OCU. OCI. PCU. PCI.. . in yaoguangluo's cognitive way is manage set increment, operat control increment, process control increment.. .

作者认为可以用在 OSGI 插件肽化上.

.. . GAAU. UCLAGL. UCLAGU. UCLGGL. UCLGGU.. . 一种核酸抑制新冠苷糖

.. . 鸟腺苷-腺嘌呤-尿嘧啶. 尿胞变腺苷-鸟嘌呤-变嘧啶. 尿胞变腺苷-鸟嘌呤-尿嘧啶. 尿胞变鸟苷-鸟嘌呤-变嘧啶. 尿胞变鸟苷-鸟嘌呤-尿嘧啶.. .. .. Guanosine-adenine-uracil. Cytarabine-guanine-pyrimidine. Cytarabine-guanine-uracil. Cytidine-guanine-pyrimidine.. .. cytidine-guanine-uracil PDN INITON MONITER.

.. . MSI. OCU. OCI. PCU. PCI.. .

仅仅做不饱和分解聚合的肽展计算为:let's proving by using Yaoguang's PDE law in an unsaturated way

.. . M. S. I. O. C. U. O. C. I. P. C. U. P. C. I.. .

.. . CS. S. I. ES. C. U. ES. C. I. EC. C. U. EC. C. I.. .

E= IU;

...CS.S.I.IUS.C.U.IUS.C.I.IUC.C.U.IUC.C.I...

1.1 S=I probability

...CI.I.I.IUI.C.U.IUI.C.I.IUC.C.U.IUC.C.I...

...C.I.I.I.I.U.I.C.U.I.U.I.C.I.I.U.C.C.U.I.U.C.C.I...

...I.D.I.I.I.I.U.I.I.D.U.I.U.I.I.D.I.I.U.I.D.I.D.U.I.U.I.D.I.D.I...

...C.I.I.I.E.I.I.E.I.U.I.C.I.E.C.I.E.E.C.C.I...

...C.I.I.I.E.I.I.E.I.U.I.C.I.P.I.E.P.C.I...

...CI.I.IE.I.IEI.UIC.IPI.EPC.I...

生成人体饮食难以形成的染色体 同元基 IEI IPI 物质 INITON 语义翻译做用就是 DNA 执行钥匙

Could be extended into a PDE-INITON where includs IEI(add an execute's increment) IPI(add a processor's increment), such like the execute key of DNA languages.

1. 2 S= Q probability

.. . CQ. Q. I. IUQ. C. U. IUQ. C. I. IUC. C. U. IUC. C. I.. .

3 第一个 S=I 第二个 S=Q,, , 这是一个概率问题. 停止论证. 之后可以设计成证书或者概率钥匙

Following the PDE formulas, we know s equals to i or q which is an unforeseeable probability issues, so stop, guess could build It into a probability key certificate for the software encryption communications.

E= DU

.. . CS. S. I. DUS. C. U. DUS. C. I. DUC. C. U. DUC. C. I.. .

1 S= Q probability

...CQ.Q.I.DUQ.C.U.DUQ.C.I.DUC.C.U.DUC.C.I...

...I.D.Q.Q.I.D.U.Q.I.D.U.D.U.Q.I.D.I.D.U.I.D.I.D.U.D.U.I.D.I.D.I...

...I.D.Q.Q.I.D.U.Q.I.D.U.D.U.Q.I.D.I.E.C.I.E.E.C.C.I...

...C.Q.Q.C.V.I.E.D.V.I.D.I.E.C.I.E.E.C.C.I...

...CQQ.CVI.EDV.IDI.ECI.EEC.CI...

生成人体饮食难以形成的染色体 EDV 执行胞嘧啶的查看增加, EEC. CI 同连元基 执行控制的增加钥匙.

Could be extended into a PDE-INITON where includes EDV (executing the decrement's visionaries), EEC (executing the execute's controller) and CI (control the increment) to find the free D INITON, such likes the controller key of DNA languages.

2. 2 如 1. 3/ 2. 2 same with 1. 3

实验推导证明: 补充均衡营养, 多运动, 多喝水, 远离脏乱环境(因为脏乱的环境有增加不饱和肽展几率) 提高免疫力可以有效地预防新冠. 另外过程可模拟 酸碱化, 磁化等概率论 来控制 合成趋势. 作者准备在编码的非对称钥匙证书中广泛应用.

Then proving: with in a sufficiency nutritions, do more sports, drink more water and get away from the dirty environment (dirty environment will cause an unsaturated PDN extensions which bad for human heathy) where in order to raise up the body energy to avoid the COVID-19, the authors thought this processing durations where could be controlled by Biology, magnetism and probability domains. So, let's proving as below in a way of probability.

论证人 罗瑶光 2020-10-28 23:17 PM D8+.. .. 概率论证很多, 这里不一一例举. /etc

2 永生语义解释模拟/ The real world words of the Eternal INITON about nuclease as below.

永生有关 核酸成分. .. MCI. MSI. OSU. OSI. SDI.. .

罗瑶光按照人类的理解方式认为 管理控制增加, 管理静态增加, 操作静态的 胞嘧啶增加可以补充核酸链的胞嘧啶. 作者同样认为可以用在 OSGI 函数插件过滤的肽化上. Mr. YaoguangLuo thought It could do an arrangement likes managing a controller's increment, managing set's increment, operate the static sets, operate to add the set and decrements.

->. .. GAGU. GAAU. UCLAA. UCLAAU. LACU.. ., 一种核酸永生苷糖, 肿瘤增生苷糖.

->. .. 鸟腺苷-鸟嘌呤-尿嘧啶. 鸟腺苷-腺嘌呤-尿嘧啶. 尿胞变腺苷-腺嘌呤-变嘧啶. 尿胞变腺苷-腺嘌呤-尿嘧啶. 腺嘌呤-胞嘧啶-尿嘧啶... 根据肽展公式 1. 2. 2 分解为 为-> . . . Guanosine-guanine-uracil. Guanosine-adenine-uracil. UCLA-Glycoside-adenine-L-pyrimidine. UCLA-Glycoside-adenine-URACIL... ADENINE-CYTOSINE-URACIL...

=...MCI.MSI.OSU.OSI.SDI...

=...IDQ-ID-I.IDQ-IQ-I.IUQ-IQ-U.IUQ-IQ-I.IQ-D-I...

=...I.D.Q.I.D.I.I.D.Q.I.Q.I.I.U.Q.I.Q.U.I.U.Q.I.Q.I.I.Q.D.I...

根据肽增公式 1.2.2 聚合为/ PDN

combination

=...C.Q.C.I.C.Q.S.I.I.U.Q.S.U.I.U.Q.S.I.S.D.I...

=...C.Q.C.I.C.Q.S.I.P.S.U.P.S.I.S.D.I...

=...CQ.CI.CQ.SI.PSU.PSI.SDI...完美变换过程 全程透明

论证结果:永生苷糖, 肿瘤增生苷糖核酸成分 可以转换为 控制执行 静态胞嘧啶增加 (SDI) 论证人: 罗瑶光.

2020-10-27 11:37 AM

It proves eternal INITON and Tumor Hyperplasia INITON could swap into CP(control the process) to let the static decrements incremented. where means SDI, yaoguangluo, 2020-10-27 11:37 AM.

A 分析(LTA 变胸腺腺苷)	O 操作(UCLA 尿胞变腺苷)	P 处理(UCLG 尿胞变鸟苷)	M管理(GA 鸟腺苷)
V 感知(LT 变胸腺嘌呤)	E 执行(UCL 尿胞变嘌呤)	C 控制(G 鸟嘌呤)	S 静态(A 腺嘌呤)
I 增加(U 尿嘧啶)	D 减少(C 胞嘧啶)	U 改变(L 变嘧啶)	Q 感应(T 胸腺嘧啶)

A analysis(LTA -Glycoside),O operation(UCLA -Glycoside),P process(UCLG - Glycoside),M management (GA - Glycoside).

V visionary(LT yaoguang-T-PI),E execute(UL -yaoguang-PI),C control(G Guanine INITON),S static(A Adenine INITON).

I increment(U uracil INITON),D decrement(C cytosine INITON),U update(L yaoguang INITON),Q query(T thymine INITON).

//same delete.. . //.. //.. .

then 2 = ...CS-ID-I.CS-IQ-I.ES-IQ-U.ES-IQ-I.IQ-D-I...

then E= DU =2 ...CS-ID-I.CS-IQ-I.DUS-IQ-U.DUS-IQ-I.IQ-D-I...

then S= IQ =2.1 ...IDIQ-ID-I.IDIQ-IQ-I.DUIQ-IQ-U.DUIQ-IQ-I.IQ-D-I...= 略.

then S= I =2.2 ...IDI-ID-I.IDI-IQ-I.DUI-IQ-U.DUI-IQ-I.IQ-D-I...

= 2.2 ...I.D.I.I.D.I.I.D.I.I.Q.I.D.U.I.I.Q.U.D.U.I.I.Q.I.I.Q.D.I...

= 2.2 ...ID.I.ID.I.ID.I.IQ.ID.U.I.IQ.U.D.U.I.IQ.I.IQ.D.I...

= 2.2 ...C.I.C.I.C.I.S.C.U.I.S.U.D.U.I.S.I.S.D.I...

= 2.2 ...CI.CI.CIS.CUI.SUD.UIS.ISD.I...

= ISD 增加静态删除, I 代谢/ add a static set's decrement.

分解 S= Q =2.3 ...IDQ-ID-I.IDQ-IQ-I.DUQ-IQ-U.DUQ-IQ-I.IQ-D-I...

= 2.3 ...I.D.Q.I.D.I.I.D.Q.I.Q.I.D.U.Q.I.Q.U.D.U.Q.I.Q.I.I.Q.D.I...

= 2.3 ...ID.Q.ID.I.ID.Q.IQ.ID.UQ.IQ.U.D.UQ.IQ.I.IQ.D.I...

= 2.3 ...C.Q.C.I.C.Q.S.C.V.S.U.D.V.S.I.S.D.I...

= 2.3 ...C.Q.C.I.C.Q.S.C.VS.U.D.VS.I.S.D.I...

= 2.3 ...C.Q.C.I.C.Q.S.C.A.U.D.A.I.S.D.I...

= 2.3 ...CQ.CI.CQ.SCA.UDA.ISD.I...

= SCA UDA 变胸腺腺苷代谢, ISD 生成静态嘧胞啶, I 代谢 根据肽增公式 1.2.2 聚合为 完美变换过程 全程透明.

= SCA(Static controller's analysis) UDA(update the decrement's analysis) mean check the D INITON and …I. SD. I… (ADD more static decrements-cytosine INITON)

论证结果:永生苷糖, 肿瘤增生苷糖核酸成分 可以转换为 变嘧啶控制执行 静态胞嘧啶增加 (SDI)

It proves Eternal INITON word could update the decrement's analysis how many D-INITON need be incremented.

论证人: 罗瑶光 2020-10-27 11:37 AM 过程可 酸碱 化 控制 合成趋势.

Yaoguang 2020-10-27 11:37 AM this trending durations could be controlled by the ratio of ACID or Alkali.

13 Eternal Research/应用在类人生命永生探索领域

于是找到了很多 新东西, 如 核酸 执行钥匙. .. IEI. IPI. EPC. I... 应用如永生之匙类 族重要肽丝 激素注射液 1. 0

...CI.I.IE.I.IEI.UIC.IPI.EPC.I...IEI.IPI.EPC.I. DNA control absorb E KEY;

...CI.CI.CI.SI.EI.SU.EI.SI.SDI...IEI.IPI.EPC.I.. DNA execute absorb E KEY;

...CQ.CI.CQ.SI.IAU.IA.ISI.D...IEI.IPI.EPC.I.. => 同元基 增补 钥匙

...IAI.IOI.IPI.IMI...IEI.IPI.EPC.I..

...IVI.IEI.ICI.ISI...IEI.IPI.EPC.I..

...CQQ.CVI...EVV.IDI.ECI.EEC.CI... DNA check V KEY;

...CQQ.CPI...EPV.IDI.ECI.EEC.CI... DNA check P/E(VPCS-VECS) KEY;

...CQQ.CCI...ECV.IDI.ECI.EEC.CI... DNA check C KEY;

...CQQ.CSI...ESV.IDI.ECI.EEC.CI... DNA check S KEY;

=> 罗瑶光于 2020-10-20 命名为 <大同连元基鸟胸腺苷肽丝碱 1. 1> 永生活性钥匙组合 如下:

...CQQ.CEI.EEV.IDI...ECI.EEC.CI... DNA check E KEY;

...CII.IEI.IEI.UIC.IPI.EPC.I...IEI.IPI.EPC.I.. DNA control absorb E KEY;

...CIC.ICI.SIE.ISU.EIS.ISD.I...IEI.IPI.EPC.I.. DNA execute absorb E KEY;

...CQQ.CVI.EVV.IDI...ECI.EEC.CI... DNA check V KEY;

...CII.IVI.IVI.UIC.IPI.EPC.I...IEI.IPI.EPC.I.. DNA control absorb V KEY;

...CIC.ICI.SIE.ISU.EIS.ISD.I...IEI.IPI.EPC.I.. DNA execute absorb V KEY;

...CQQ.COI.EOV.IDI...ECI.EEC.CI... DNA check O KEY;

...CII.IOI.IOI.UIC.IPI.EPC.I...IEI.IPI.EPC.I.. DNA control absorb O KEY;

...CIC.ICI.SIE.ISU.EIS.ISD.I...IEI.IPI.EPC.I.. DNA execute absorb O KEY;

...CQQ.CMI.EMV.IDI...ECI.EEC.CI... DNA check M KEY;

...CII.IMI.IMI.UIC.IPI.EPC.I...IEI.IPI.EPC.I.. DNA control absorb M KEY;

...CIC.ICI.SIE.ISU.EIS.ISD.I...IEI.IPI.EPC.I.. DNA execute absorb M KEY;

...CQQ.CPI.EPV.IDI...ECI.EEC.CI... DNA check P KEY;

...CII.IPI.IPI.UIC.IPI.EPC.I...IEI.IPI.EPC.I.. DNA control absorb P KEY;

...CIC.ICI.SIE.ISU.EIS.ISD.I...IEI.IPI.EPC.I.. DNA execute absorb P KEY;

警告!!

禁止科学家 实验取材于 智慧生物. 必将 受到 所在国和联合国的 相关法律制裁 !

作者提出警示 这类物质含有癌变, 肿瘤增生等功能, 呼吁禁止在生物(特别是有智慧的生物)上尝试研究..

现在的纳米技术人工可以低廉合成. 这些成分在植物中都普遍存在, 不要用为伪科学方法提炼.

--现在是21世纪了, 我就举个论点, 一个老鼠胚胎水解后的DRNA物质大分子集进行离心筛选, 跟人符合的分子团提取会难吗? 这还不是纳米人造级别的. 至于嗦啶嘌呤, 外面的杂草中细胞核内几乎应有尽有, 搞得这么玄乎干嘛, 估计归咎于当前科技普遍繁华, 但真正需求的技术却又极度落后的矛盾场景-如纳米工艺制造技术的落后, 所以大家要努力多读书多实践. 不要去萎靡, 盲目, 跟风, 激进和浮躁.

由于医学人员没有变嗦啶, 不要在生物(特别是有智慧的生物)上尝试研究..

FATAR WARNING!

Damguers! Under The National Law in Biology!

Unsafe! Will Cause The Tumor Growth or Canceration.

Reasearching Must Under The Sufficency and Sciency Logic Proofs.

Forbidden the research with the object of Bio-humanoid-intellgence. Because the U(L-pyrimidine INITON) is unforeseeably.

14 Not the End/似乎刚刚开始…

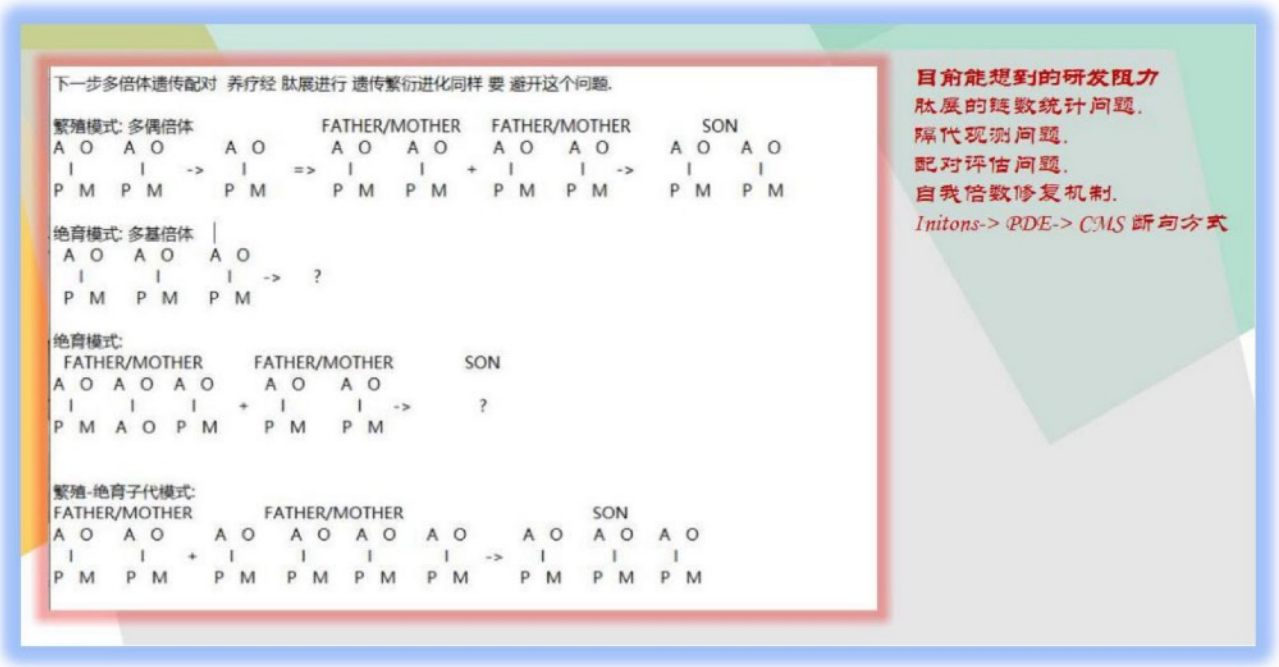


FIGURE 13

人类要做的事情太多了. 如图 13, 养疗经繁衍以后肯定会遇到这个问题. 是一个课题. 这篇文章通过大量的模拟论证和概率丝化推导,作者得到具体论证结果:

软件具备生命肽化特征. 可以实现软件的进化. 增删改查中改 L-变嘧啶 (L-Pyrimidine) 的存在性 如 I = U. 在很多语义肽化计算中起到基础催化算子计算的作用AOPM VECS IDUQ 肽展公式 Figure 11-1 完整的推导过程具备离散数学严谨性. DNA 的编码方式和生命词库可以实现非对称加密. 并可以进行概率化钥匙生成. 人类历史首次论证 DNA 的执行钥匙是一种同连元基(.. . CII.. .. .. IEI. IPI. EPC. I.. .).. . 肽丝组合. 世界首个象契文字典 DNA INITON 生命字典 具有巨大应用价值. TVM 做为函数的肽化虚拟机可以进行 肽文和代码间的自由变换. 也为下一步肽函数执行逻辑做铺垫. 人类历史首次发现 肽展公式 确定 DNA 的唯一进化方式, 途径执行方式., 还有很多启发点 因为科学的严谨性, 没有丰富的持续论证, 所以没有一一在此列举.

15 Conclusion

SEE FIGURE 13, THE Inherit Way of YANGLIAOJING will cause a lot of problems, need proving. In conclusion about this article, the author did alot proofs as below:

Yaoguangluo proves Software could be a Life. definitely Software could born a Life.

Yaoguangluo proves out the L-Pyrimidine INITON and swap formula: I = U. in data increment, decrement, update and query, which is very useful in the data catalytic calculations.

Yaoguangluo proves AOPM VECS IDUQ PDE Law see at Figure 11-1 is very useful in the DNA data encoding.

Yaoguangluo proves AOPM VECS IDUQ PDE Law could use in the data Asymmetry crypt. And intion key store Certs.

Yaoguangluo proves (...CII.....IEI.IPI.EPC.I...) ...is a format PDE key

Yaoguangluo named the world first hieroglyph-sphenogram dictionary DNA INITON PDW. 7 Yaoguangluo named TVM where do a swap between programming file and PDN file.

Yaoguangluo finds out the world first PDE Formula List, where can translate the humanoid cognitive words into DNA PDN encoding. ETC.. .

16 Thanks

感谢父亲在医学上提供了许多可借鉴的研究思维经验, 比如医学的严谨性和可扩展性, 为 DNA 非对称方法模拟丰富了作者的联想, 因为这篇文章主要是离散数学公式推导论证, 于是署名为独立作者, 在此感谢. 感谢 md 格式规范, 方便我美观编辑.

新增疑问 20201031:

3 第一个 S = I 第二个 S = Q ...., 这是一个概率问题. (20201031 - 我思考了下男性染色体生育 X 还是 Y 与精囊组织液和执行腺体钥匙 IEI…IEE 这类同连元基肽展的酸碱浓度有关, 可以让医学家去论证.) 停止论证. 之后可以设计成证书或者概率钥匙 用于非对称量子丝化加密.

另外计算机减法的 D = DD 消耗大量 D, 我猜想 肽 计算的过程在生物学解释属于一种智慧的新陈代谢, 可以让医学家去论证, 停止论证, 之后可以设计软件应激进化工程 20201031

关于警告中的肿瘤增生和癌变 意思是 这篇文章仅仅论证出 DNA 执行钥匙同连元基 片段, 如果要永生 至少要明确人体 DNA 的语法, 然后根据语法将 语言 " 寻找肠胃里的某物质合成某高级分分子用于补充干细胞这种精确肽文, 癌变和肿瘤 就会大大减少. 20201031

DNA 完整解码与肽展计算公式, 欢迎人类社会达到宇宙中等级文明. 罗瑶光. 浏阳

--关于AOPM级别元基，为什么我没有用激素类 甾体来表达分子式推理，是因为甾体 对应的嘧啶和嘌呤对 明显无法形成DNA和RNA链式结构。 所以一开始就基于类似甾体的对马蹄铁口形嘌呤对进行推测推导计算。


--罗瑶光

第九章 DNA催化与肽展计算和AOPM-TXH-VECS-IDUQ元基解码

The DNA Catalytic & PDE Computing and The Derivation of New TXH INITON DNA

催化 与 肽展计算 和 AOPM-TXH-VECS-IDUQ 元基解码 013026 中文 --罗瑶光

观点: 1: 解放生产力, 创造新的生产力. 2: 优化已有的生产工具更好地适应生产环境. 3: 更好的辅助智慧生物 理解, 适应和 改造环境; 医学教育领域实践, 商品与 API 需求分解; DNA 与神经元函数 肽展编码, 类人与进化系统设计. 关键词: 元基, 肽展公式, 黄嘌呤, 次黄嘌呤, 2 氨基腺嘌呤, 触发, 探索, 嘌呤弧, 碱基对, 催化神经网络引言: 在 DNA 编码 与肽计算定理公式 推导出来后, 作者 根据变嘧啶定义 顺藤摸瓜 通过肽计算来 反演推导DNA 编码的存在性和 解码真实性, 于是又有了些新发现, 如 TX-H-U 活泼元基在 DNA 催化计算的准确定义, 和元基在 生化计算环境中 的存在模型. 这些新发现 将在这篇文章细节中 一一阐述:目录:

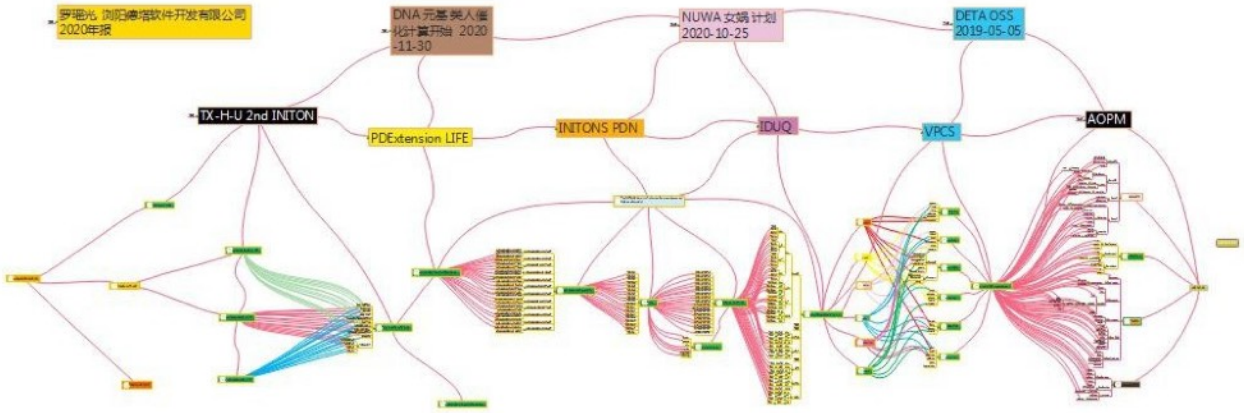

1. 推导与定义:甲基胞嘧啶在DNA编码和肽计算中具体定义为IDUQ-U变嘧啶

下述文字不仅阐述了 IDUQ 应激元基中的变嘧啶存在形式和参与催化计算的方式, 作者通过论证找到了它真实存在形态. 和在 DNA 中具体应用功能和定义. 肽展公式, 智慧性元基, 多样性元基, 应激性元基, 遗传核酸, 变嘧啶, 嘧啶, 嘌呤, 甲基胞嘧啶.

自从德塔 AOPM VECS IDUQ 的 DNA 意识编码 1. 2. 2 体系出来后, 我一直在思考 怎么进行单链化, 在 肽展公式 1. 2. 2 推导 出来后, 我很惊讶, DNA 竟然可以展开成一篇文章, 我得到很多新奇的发现, 同时, 我还推出了变嘧啶 这个 莫须有的东西, 在不断地 推导和模拟我的语义词汇时候, 我发现, 变嘧啶成了不可缺失的组成部分. 于是觉得 有必要进行理论化的进行描述这个 莫须有的物质客观上是否真的存在. 是否有 合理性的分子表达式. 因为主观上 变嘧啶是 IDUQ 中的 U, DNA 和肽计算不可缺少的一个核心微元基单位.

L pyrimidine INITON. 为了很好地描述这个 变嘧啶, 我开始观察 尿 嘧啶, 胞嘧啶, 鸟嘌呤, 腺嘌呤, 胸腺嘧啶, 在人卫九的 生物化学与分子生物学中第 32 页 核苷酸嘌呤嘧啶结构式, 第 39 页, TAT 和 第 46 页 tRNA 以及 59 页 酶的给工作原理, 于是我首先确定嘧啶结构 如图 第 11 处, 我得到一个 通用嘧 啶结构. 在肽展公式推导中, 我已经有了比较具体的完整的 逻辑公式, 比如 C = U +D, D = DD, S = I +Q, C = D, I = U, 我开始持续地绝对专注, 我只能依靠这些公式来推导 变嘧啶. 通过图片, 推导出 11 和 6, 7, 8, 我思考了下, 氨基 对上进行 5 碳环肽解, 腺嘧啶需要 共价氧, 那 鸟嘌呤元基 C 上的公共价氧 应该对应的 UD 一定需要胺基来维 持 DNA 平衡, 于是得到 9 和 10, 我不确定 10 的 第五个位置的氮是共价 NH, 还是不共价 NH2, 于是开始继续思 考. 非常的幸运, 按照数字逻辑和离散数学 补码原理 推导见 肽展公式 1. 2. 2 国家论著, 我得到了 C = D 这个公 式, 同时又得到 C = U + D 这个公式, 于是我不妨大胆一点, U 应该类似 D, 变嘧啶应该类似 胞嘧啶的结构. 于是确定 苯环上第 5 位的氮应该是 共价存在. 于是得到了 13 的 嘧啶物质. 我又迷惑了 13 不就是 胞嘧啶吗? 我思考了 下, I = U, 我还有这个公式, 尿嘧啶推导 变嘧啶, 可是 13 是胞嘧啶呀. 开始疑惑了我的肽展公式有 问题? 我一直 在思考, I = U, U 和 胞嘧啶一样, 如果确定我的公式是正确的, 那我只有一个答案, 就是 U 包含 胞嘧啶. 结构 于是 我又看了下 胸腺嘧啶的甲基, 又看了下 胞嘧啶++ 酸化成尿嘧啶, 我得

到一种思路, 难道 尿嘧啶 通过碱化可得 到一种包含胞嘧啶分子结构的氨基嘧啶? 氢氧化钠? 不, 那是烧碱, 烈着呢, 甲烷? 甲烷有可能,

想起（去小广告）, 我又开始思考, 我来了些灵感, 人体的组织液里面 细胞核裂变怎么会有甲烷和烧碱呢? 除了胃和放屁, 有甲烷, 硫铵,. .. 硫铵,, , 氨碱? 难道是氨基碱? 尿嘧啶 与氨基碱类, 可以得到 15 类 一大把 胞嘧 啶族的分子, 我又看了下 胸腺嘧啶的甲基, 难道是氨碱? NH2CH3 ? 这就对上号了, 最终我的得到, 15 这个物质, 因为, 人体组织液里不可能会有强碱分子的, 所以, 氨基碱类这种弱碱性普遍存在的组织液里, 尿嘧啶可以被氨化 重复利用参与核计算.


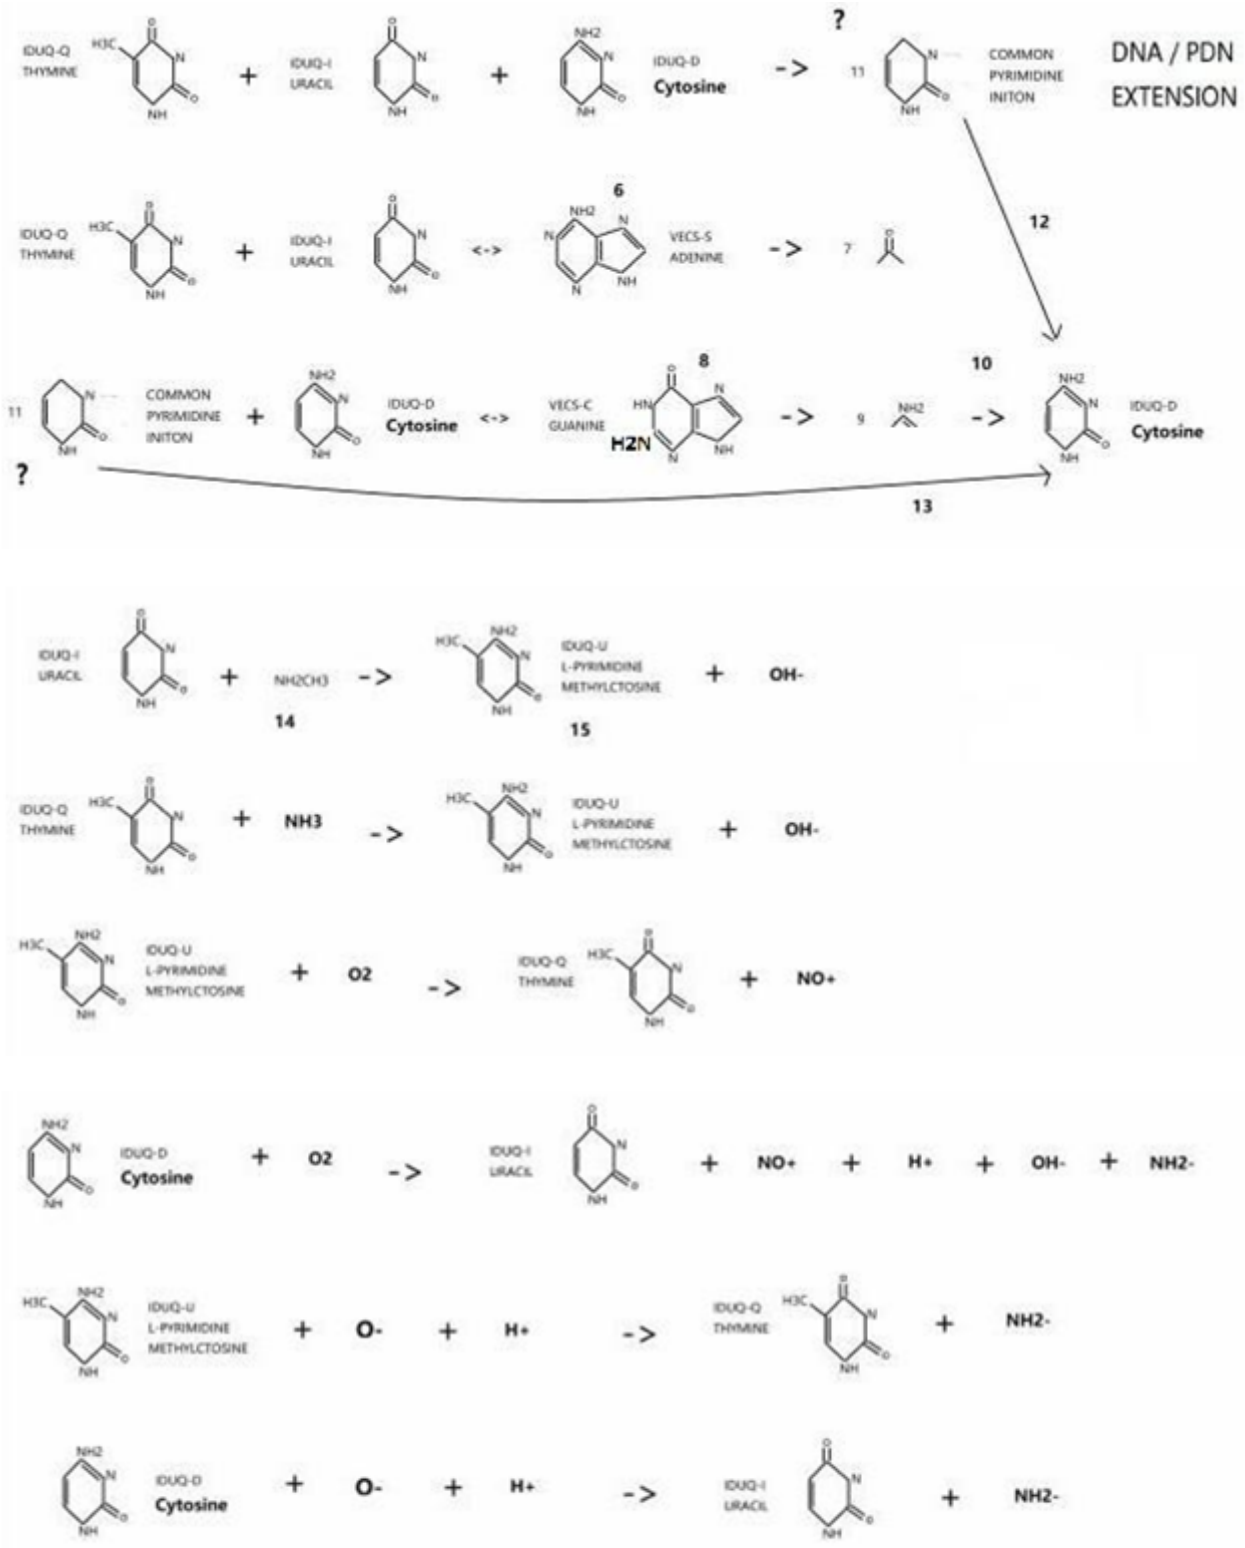


Figure 1

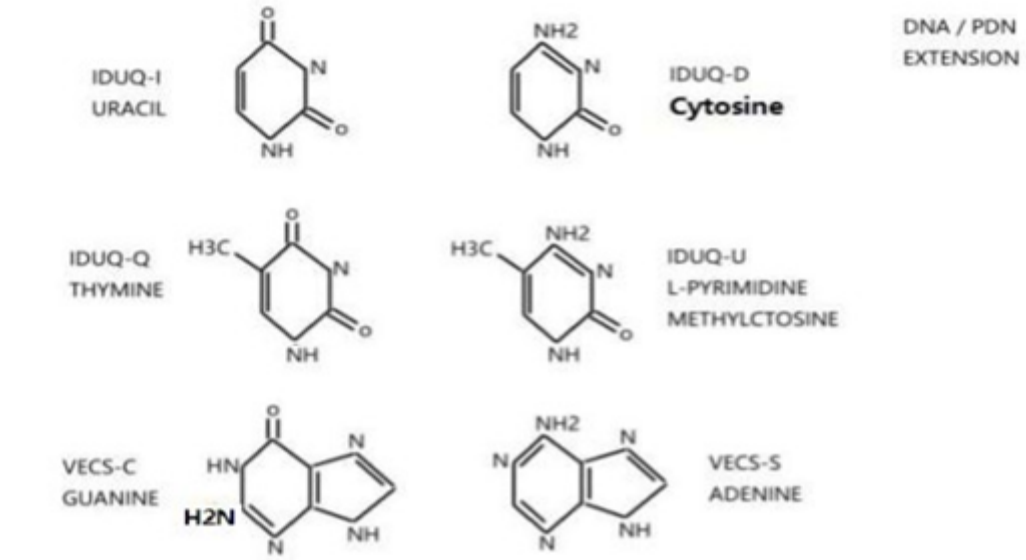

PDE MASK LAW	I = D!	D = I!	U = Q!	Q = U!
PDE SWAP LAW	S = I	S = Q	C = D	
PDE MASK LAW	I = !D	D = !I	U = !Q	Q = !U

VECS PDE LAW	V = U + Q	E = I + U	C = I + D	S = I + Q
AOPM PDE LAW	A = V + S	O = E + S	P = E + C	M = C + S
PDE COMP'S LAW	DD = ++Q	I = ++D	U = ++I	Q = ++U

PDE (PDE DECREMENT) LAW

C = D (PDE DECREMENT)	S = I (PDE DECREMENT)	S = Q (PDE DECREMENT)

PDE (PDE INCREMENT) LAW

D = DD (PDE INCREMENT)	U = E (PDE INCREMENT)	I = U (PDE INCREMENT)
E = I + E (PDE INCREMENT)	P = P + D (PDE INCREMENT)	C = U + D + D(PDE INCREMENT)

PDE (PDE) LAW A = V + S (PDE)	A = U + Q + I (UNSAFE PDE)	O = E + S (PDE)
S = Q (PDE Reduce)	P = I + U + D (UNSAFE PDE)	M = C + S (PDE)
M = I + D + Q (UNSAFE PDE)	V = U + Q (PDE)	E = I + U (PDE)
S = I + Q (PDE)	A = U + Q + I + Q (PDE)	O = I + U + I + Q (PDE)
O = I + U + Q (UNSAFE PDE)	P = E + C (PDE)	M = I + D + I + Q (PDE)
S = I (PDE Reduce)	C = I + D (PDE)	E = D + U (PDE)

Figure 2

小结论:

作者归纳通过计算逻辑推导, 如 Figure1 的第 15 处, 甲基胞嘧啶 的客观真实存在 在微分催化中执行变嘧啶的改元基逻辑. 作者用姓氏的首字母命名为变嘧啶 L-Pyrimidine.

The Definition of The Methyl-cytosine in DNA Catalytic Computing and The Derivation of The IDUQ-U of The L-Pyrimidine

Since The 'AOPM VECS IDUQ and The INITON Catalytics were Reflected Between Humanoid DNA and Nero Cell 1.2.2' finished. The author has been thinking about how to let the software programming code, was built as the AOPM VECS

IDUQ linklist. Until the 'AOPM-VECS-IDUQ Catalytic INITON PDE LAW and Its Application1.2.2' finished. Human began to know that the DNA could be extended for an article. At the same time, the author did research out a lot of results. For example, L-Pyrimidine. Because of the large derivations and simulations from the human thinking and mind cognitions. It proved that L-pyrimidine became an important part of the NLP and DNA catalytic computing. Then the author began to prove that 'Does the L-pyrimidine a real thing in this real world?'. 'Does the L-pyrimidine which has Its own chemical mode?'. Since we had AOPM VECS IDUQ, the U/update was one of a basic INITON, not only the U/update INITON was an important part of the DNA catalytic computing. It also was a basic part of the PDN extension INITON. L pyrimidine INITON. At the first, the author named It as L-pyrimidine INITON, the first char of 'Luo', 'Liang', 'Li' and 'Liu'. (Author's family). Since he had Uracil, Cytosine, Guanine, Adenine and Thymine. From the Biochemistry and Molecular Biology, page 32, It showed the chemical mode of the Purines and Pyrimidines. From the page 39, page 46 and page 59, It showed the TAT, tRNA, and Enzyme tasks. So, the author did a definition of a common structure of Pyrimidine. The author did an identification with a figure 11 at the picture: https://gitee.com/DetaChina/collection-of-papers-by-deta/blob/master/lpyrimidine1.jpg.

Since we had already got a DNA PDE formula for C= U+ D, D= DD, S= I+ Q, C= D and I= U etc. Ok lets continue, according to those formulas, author could find out the 11, 6, 7, 8 factors in the picture1. It showed for the Amino pair. Adenine and Thymine needed a covalent oxygen. Also, Cytosine and Guanine need Amino base, the author proved the DNA catalytic computing absolutely was an accumulation of PLC digital logic computing. The 'Covalent Oxygen' and 'Amino base' was the DNA clock. Base from the human heart beats. There-fore, it showed the results of 9 and 10, For the position of 5, which was NH or NH2, the author began to fall in thinking. From the 'Catalytic INITON PDE law and Its Application's formula', It had C= D, C= U+ D, then could get U-> D. The mode of L-pyrimidine will similar to Cytosine. Above all, it proved that the position of 5, of the Pyrimidine was a covalent Nitrogen. As the figure of 13. Definitely, the figure 13 was Cytosine. Please see the I= U formula. The Uracil could be an L-pyrimidine, but L-pyrimidine was similar to Cytosine. If the PDE formula was a true function and the L-pyrimidine was not the same with Cytosine, then proved L-pyrimidine, which contained Cytosine. Finally seen the Thymine, the CH3 with the position of 1, the author thought, NH2-CH3, which added Uracil, could be a Methyl-cytosine. Because scientist was hard to find NaOH, CH4. In human's tissue fluid, only the result that was NH2-CH3 or an Amino Alkali. Finally, author proved the figure 15, Methyl-cytosine was an L-pyrimidine.

2. 推导与定义:2氨基腺嘌呤在DNA编码和肽计算中具体定义为VECS-V变感腺嘌呤

自从 DNA 编码, DNA 计算, 肽展公式, 变嘧啶和甲级胞嘧啶具体定义以及血氧峰时钟出发去模拟, IDUQ 元基已经破解. 作者开始跟进思考 设计, 通过 DNA 与 肽展公式 计算推导 变感腺嘌呤 与 尿变嘌呤的 具体结构已经有所突破. 如下.

出发点已经不再像前几年从无到有的过程了, 现在, 作者已经有 DNA 语义 AOPM VECS IDUQ 12 元基INITON, 和具体的肽展公式, 以及 鸟嘌呤, 腺嘌呤, 尿嘧啶, 胞嘧啶, 变嘧啶(甲基胞嘧啶), 胸腺嘧啶(甲基尿嘧啶). 具体结构.

作者思考方式比较朴素, 先从尿变嘌呤开始. 作者思考了下已经具备的推导公式

肽展公式 PDN EXTENSION LAW

肽展定理 E = I + U;

染色体 语义分类 DNA 编码

VECS-E 执行元基. 和鸟嘌呤一类 属于动词.

肽展公式 PDN COMP'S LAW 离散补码定律则有

I = ++D, U= ++ I, Q = ++U;

血氧时钟计算峰 触发器 数字逻辑

推导: 于是作者首先可以得到一个通用的嘌呤结构. 通过 DNA 语义 可以得知, VECS-E 和 VECS-C 都属于动词, 属于酸性嘌呤结构含有共价氧. 通过 E = I + U, 可以推导出 S = I (I-- = D)+ Q(Q-- = U), 在血氧时钟峰来临后 触发肽补码 单位时钟碱计算, S-IQ 腺嘌呤变成 E-DU 尿变嘌呤. 同理 V= U + Q 血氧时钟峰到来, C = U + (DD --)触发肽补码 单位时钟酸碱计算, 鸟嘌呤变成变感腺嘌呤.

C = U + D	PDE DL	S = I + Q;
UD	结合计算	IQ;
QI	反码计算	DU;
QU	++补码计算	DQ;
UQ = V	掩码输出	IU=E;

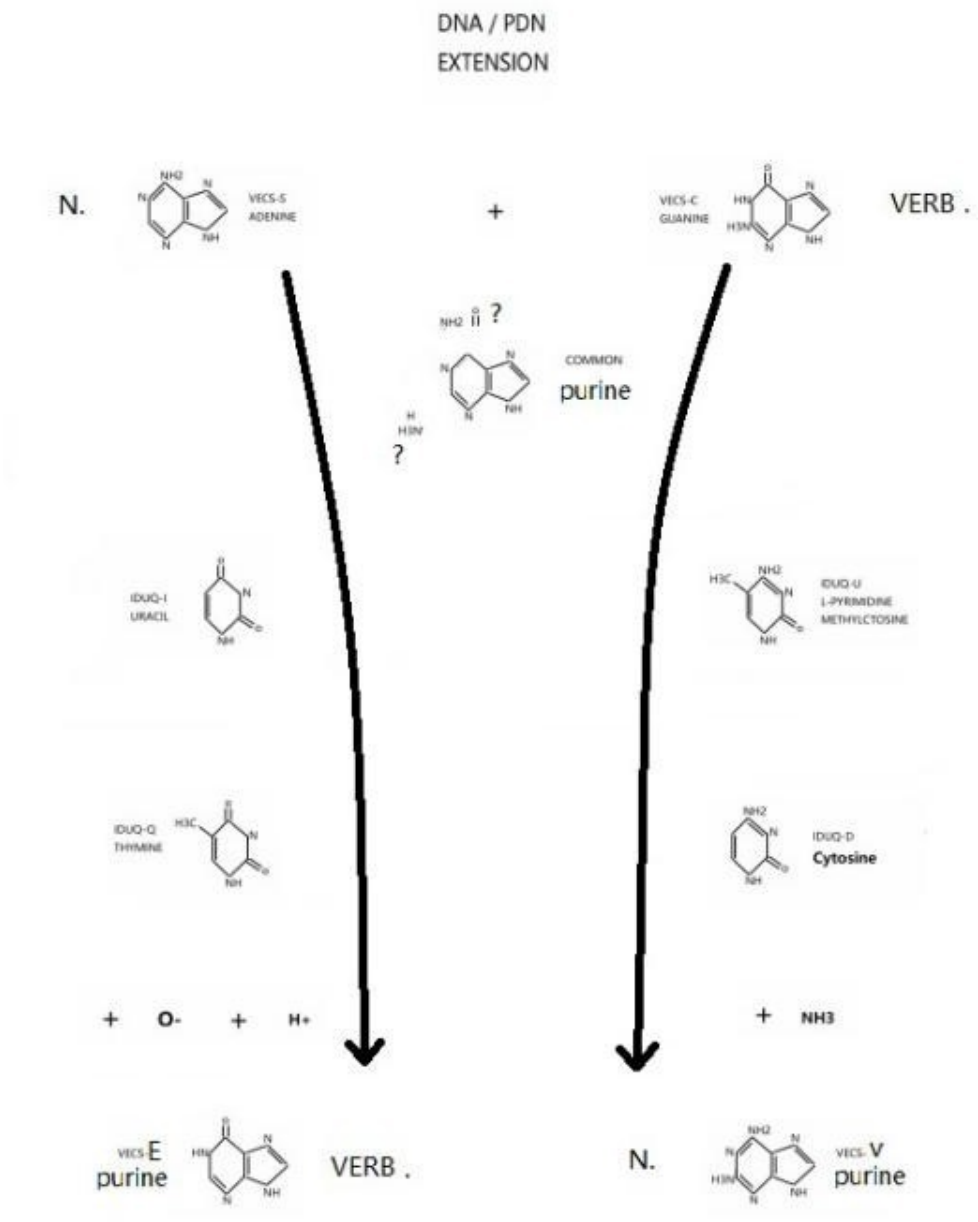


Figure3

附加论证结论:一 鸟嘌呤变成变感腺嘌呤 时候, 因为是碱化, 所以 NH3 氨基保留. 逻辑正确.

二 在已经完整论证出 IDUQ 为 应激性 元组后, VECS 在酸碱血氧时钟峰下进行嘌呤动名词 补码变换 DNA 和肽展计算. 计算逻辑 为 变嘧啶 的 催化 ++ 和 – 如这篇文描述的.

三 这篇文章中标名的名词 如 腺嘌呤 和 变感腺嘌呤, 其实更严谨推导归纳 应为 动名词. 作为肽催化钥匙驱动 在血氧峰时钟触发器中 逻辑驱动 DNA 和 RNA 的 肽计算.

四 百度百科上搜索到 VECS-V 感知元基 变感腺嘌呤 对应英文名为 2Aminoadnine, 2 氨基腺嘌呤.

3. 推导与定义:次黄嘌呤在DNA编码和肽计算中具体定义为VECS-E尿变嘌呤

作者在 人卫9 生物化学与分子生物学 第203 页找到VECS-E 执行元基 尿变嘌呤 的 对应化学名为次黄嘌呤, 百科搜索对应英文名为 Hypoxanthine.

4. 推导与定义:AOPM-A变胸腺苷, AOPM-O尿胞变腺苷, AOPM-P尿胞变鸟苷, AOPM-M鸟腺苷

的S形螺旋纹血氧峰触发器分子式催化计算严谨完整过程

随着 VECS-IDUQ完整解码, AOPM就简单了. 准备描述下.

作者已经拥有 肽展公式 A= V+ S, O= E+ S, P= E+ C, M= C+ S, 可以归纳为:AOPM-A 变胸腺苷: 组合成份为 变感腺嘌呤 - 腺嘌呤 苷. AOPM-O 尿胞变腺苷: 组合成份为 尿变嘌呤 - 腺嘌呤 苷. AOPM-P 尿胞变鸟苷: 组合成份为 尿变嘌呤 - 鸟嘌呤 苷. AOPM-M 鸟腺苷:组合成份为 鸟嘌呤 - 腺嘌呤 苷.

作者思考了下观测结构, 这种高级苷 可能存在 氢离子苷, 氮离子苷和氧离子苷, 存在形态准备在下文中开始一一计算观测论证. 作者在这个时候进行描述下: 作者的思维推导能力来自于 在已经推导出来的 DNA 编码 1. 2. 2 和肽计算定理 1. 2. 2, 作者仅仅根据已知的结论进行拓展, 无法确定AOPM 的客观存在形式, 于是将所有可能存在的模型一一观测模拟论证如下. 首先作者可以推论出在 DNA 计算中, 关于苷, 作者认为可以观测的模型可以有很多种, 因为这篇著作是生化计算的 研究推导, 不是生化建模和生化医药, 这篇文章不讨论.

Derivation of pyrimidineMidazolo[1,2-a]pyrimidineMidazole

About Derivation about 'S-arc' shape of 'AOPM-A, LTA', 'AOPM-O, UCLA', 'AOPM-P, UCLG', 'AOPM-M, GA', 'AOPM-OP-T, LTUCL', and 'AOPM-OP-X, LTG'.;

First from the mentioned page of 152, A 分析(LTA 变胸腺腺苷), O 操作(UCLA 尿胞变腺苷), P 处理(UCLG 尿胞变鸟苷), M管理(GA 鸟腺苷), V 感知(LT 变胸腺嘌呤), E 执行(UCL 尿胞变嘌呤), C 控制(G 鸟嘌呤), S 静态(A 腺嘌呤), I 增加(U 尿嘧啶), D 减少(C 胞嘧啶), U 改变(L 变嘧啶), Q 感应(T 胸腺嘧啶).

A-Analysis(LTA-Glycoside), O-Operation(UCLA-Glycoside), P-Process(UCLG-Glycoside), M-Management(GA-Glycoside), V-Vitionary(LT-Yaoguang-T-PI), E-Execute(UL-Yaoguang-PI), C-Control(G-Guanine INITON), S-Static(A-Adenine INITON), I-Increment(U-Uracil INITON), D-Decrement(C-Cytosine INITON), U-Update(L-Yaoguang INITON), Q-Query(T-thymine INITON).

A spiral trigger flip-flops and its catalytic observation. Once the author did a proof of PDN extension formulas for A= V+S, O= E+ S, P= E+ C, M= C+ S. It could be concluded as 'A' equals to two purines combined with V and S, then did an observation of this structure of 'A' INITON, 'A' might contain Hybrogen-atom, Oxide-atom and Nitride-atom. Then did a proof of Its real-world sample. Finally proved a pyrimidineMidazolo[1,2-a]pyrimidineMidazole, was a common INITON's

structure of A, O, P, M, T and X. Initially he found out four potential structures, which needed to be calculated of what was a true, and these proofs are needed by following an ordinary provided source, 1 Nitride-parts position couldn't be changed of where in Midazolos, 2 It might need TWO fully pyrimidines to do a DNA base pair connected conditions, to distinct to the 'Steroid's which only had one base pair connected conditions, not two. Finally the author did a structure of pyrimidineMidazolo[1,2-a]pyrimidineMidazole, which resonated with author's thinking. And now these definitional structures catalyzed a Three-INITON-Char-Code-Nodes of PDC and PDW encodings. For example, AOP.POM.VEC. etc.

The author connected his human literary structures were learned at school, for example SVO of subjects, predicates, and objects. He considered the DNA should had Its own literature 3 node-branches (Nouns, Verbs and Adverbs). Because the SVO could support structure of Nouns, Verbs and Adverbs, or a structure of Nouns, Adjectives and gerunds, those Three-INITON-Char-Code-Nodes of PDC and PDW encodes sample, see the original pages of 150, 153 and 154, refers '2020年10月31日 8. 罗瑶光. 《肽展公式推导与元基编码进化计算以及它的应用发现》. 中华人民共和国国家版权局, 国作登字-2021-A-00042587. 2021. ' and '2020年10月09日 7. 罗瑶光, 罗荣武. 《类人DNA与 神经元基于催化算子映射编码方式V_1. 2. 2》. 中华人民共和国国家版权局, 国作登字-2021-A-00097017. 2021.' The author YaoguangLuo 稍后优化语法.

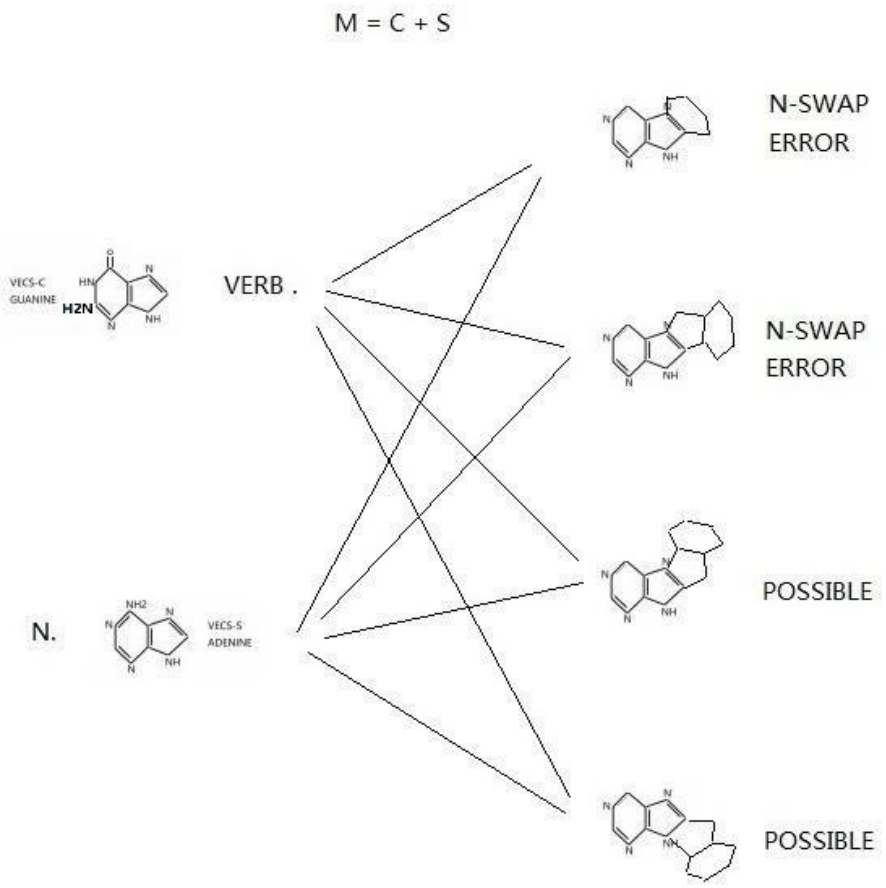


Figure 4

关于元基的降解 聚合 变换, 起主导作用仍是 变嘧啶(甲基胞嘧啶) 作为肽钥匙, 在血氧峰 心跳时钟 下 做酸碱触发器信号的 数字逻辑计算. 大体归纳出图中右边 4 种重要特征属性类. 作者通过上图左边进行的嘌呤结构进行元基催化解码定义, 发现了 4 种结构, 右边从上到下 前 2 个因为的氮基的位移错误于是不讨论, 则有右下 2 个 possible 可能, 上旋弧和下旋弧. 于是开始跟进推导计算观测论证它的具体定义.

5. 推导与定义:VECS-VECS嘌呤对, VECS嘌呤弧, VECS-IDUQ碱基对, IDUQ-IDUQ嘧啶对的催化模型

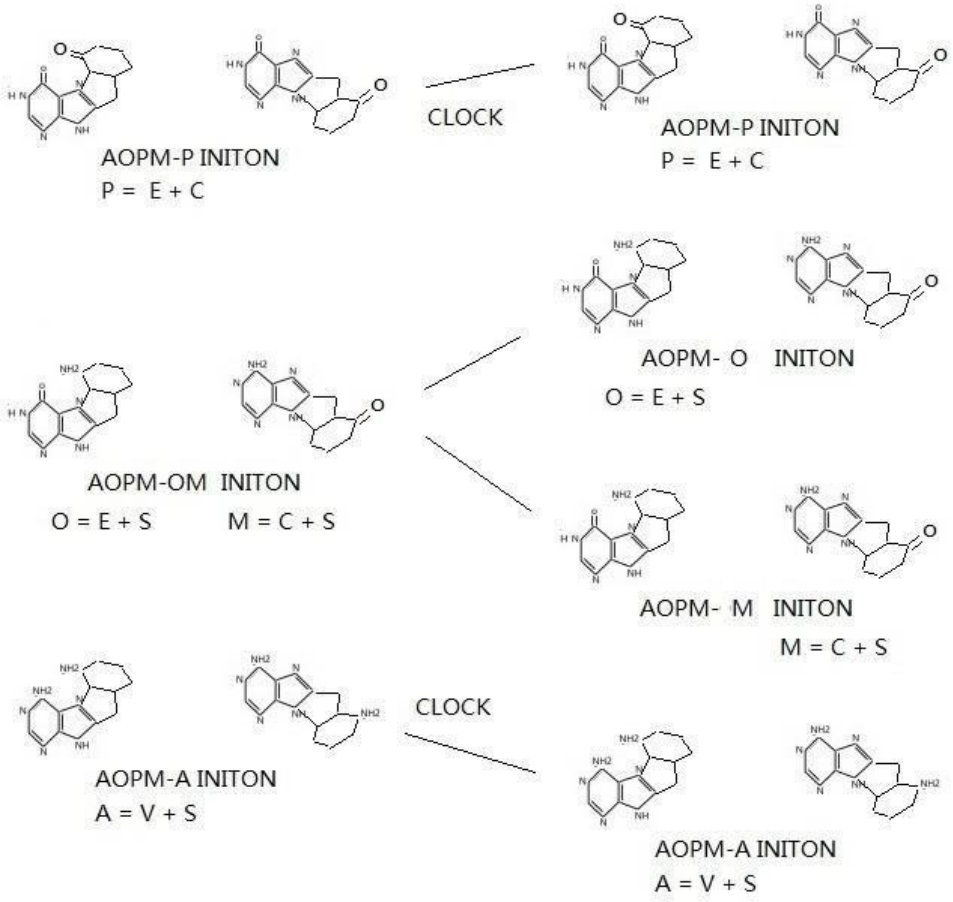
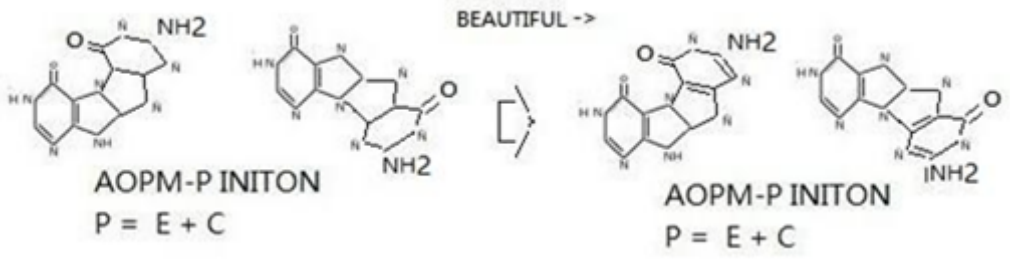


Figure5

如上图, 通过酮基和 氨基匹配观测推导, 作者 筛选出图中右边 4 种结构元基弧, 作者有了一些新发现, 于是从上旋弧和下旋弧两种 新定义和归纳为 外旋弧 和 内旋弧于是继续跟进计算推导观测其具体定义. 作者可以依靠的仅有 DNA 编码 和 语义肽展公式 和 作者的学历基础知识 和 软件研发能力.

另外作者得到一些推导结论, 1 这些苷糖 正如 DNA 计算 1. 2. 2 版本中, 作者描述的, 其具备 动名词的固定描述作用, 在人类语义中, 已经存在的定义为形容词 谓语等. 属于智慧性 词汇 DNA 标识. 将图中左边进行完善下 可以得到右边这种弧形分子结构.



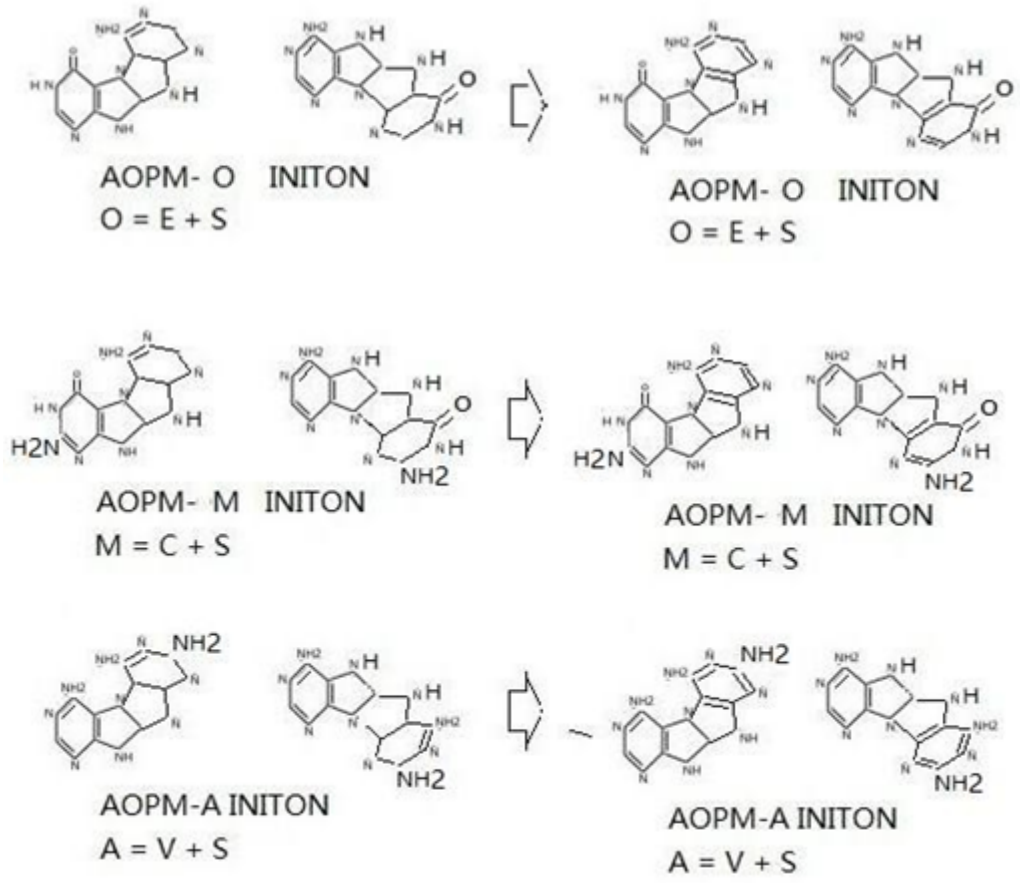
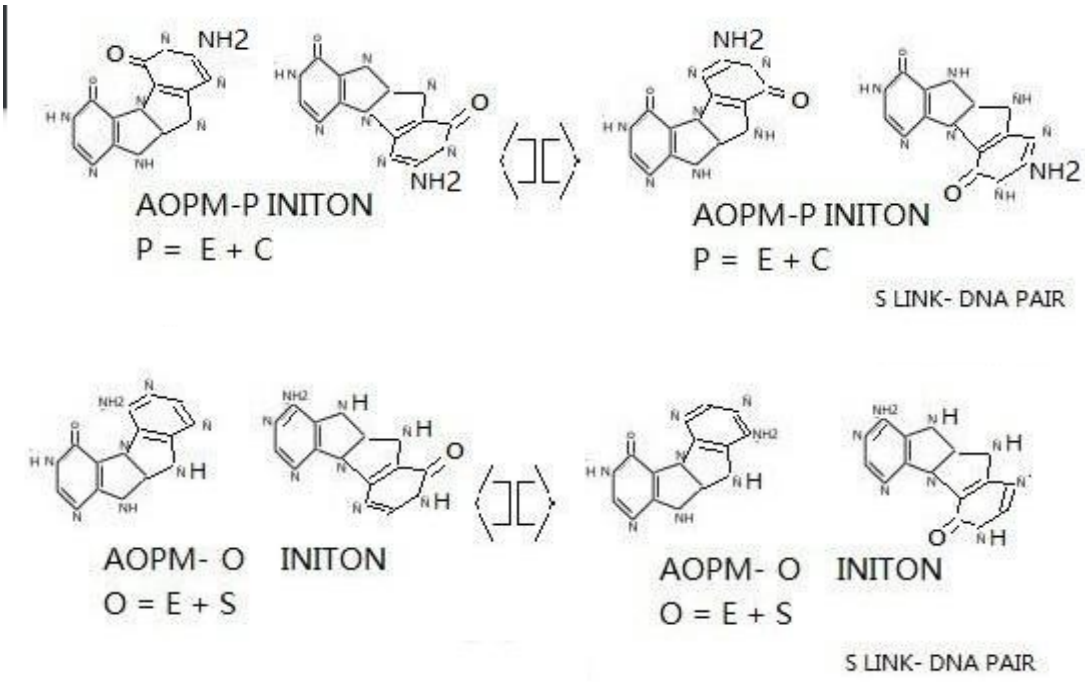


Figure 6

将下图中左边的环苷 向右边进行 S 形 变换, 便能生成一种固定的 AOPM 弧形链条. 可以概率性 结合成DNA 螺旋. 图中包含腺嘌呤, 鸟嘌呤, 变感腺嘌呤和 尿变嘌呤的 AOPM 肽展计算弧



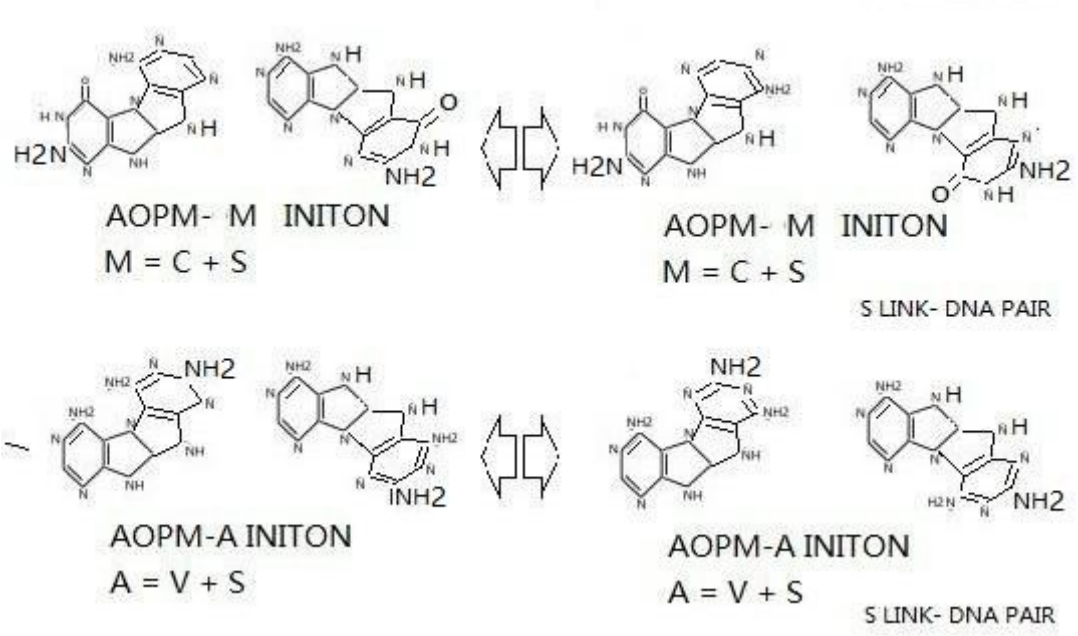


Figure7

小结论:1 作者在世界首次推导出带具体语义功能的 DNA 的 肽展计算弧 INITON 单元. 2 AOPM INITON 形成的弧单元 具备形成链式 结构催化可能.

心跳带来的血氧时钟峰 同样可以对 AOPM 元基进行 DNA 催化计算. 形成生物计算机. 生化学上的人工多肽 和 人造大分子, 可以基于此文进行扩展研发. 世界史首次通过 语义DNA 和 肽展公式 进行具体逻辑论证.

永生的基础理论已经趋于完善. 同时 费罗蒙完整解码. 之后跟进的费洛蒙编码应用因为涉及生化武器设计, 作者研究课题截止放弃. (希望人类将这技术用于正道. (改变生产力, 发展生产力, 适应环境, 优化完善环境, 保护环境, 创造更好的环境…).

罗瑶光先生的 AOPM VECS IDUQ 12 元基 INITON DNA 催化计算算子 于今天彻底解码.

推导与定义: VECS-VECS 嘌呤对, VECS 嘌呤弧, VECS-IDUQ 碱基对, IDUQ-IDUQ 嘧啶对的催化模型

通过观测, 发现 T 和X 的真实存在性. 于是补充在这里, 作者定义为触发 AOPM-OP-T 和AOPM-OP-X 中文命名为:

触发TRIGGER: AOPM-OP-T变感腺尿变苷

探索 EXPLORE: AOPM-OP-X变感腺鸟苷

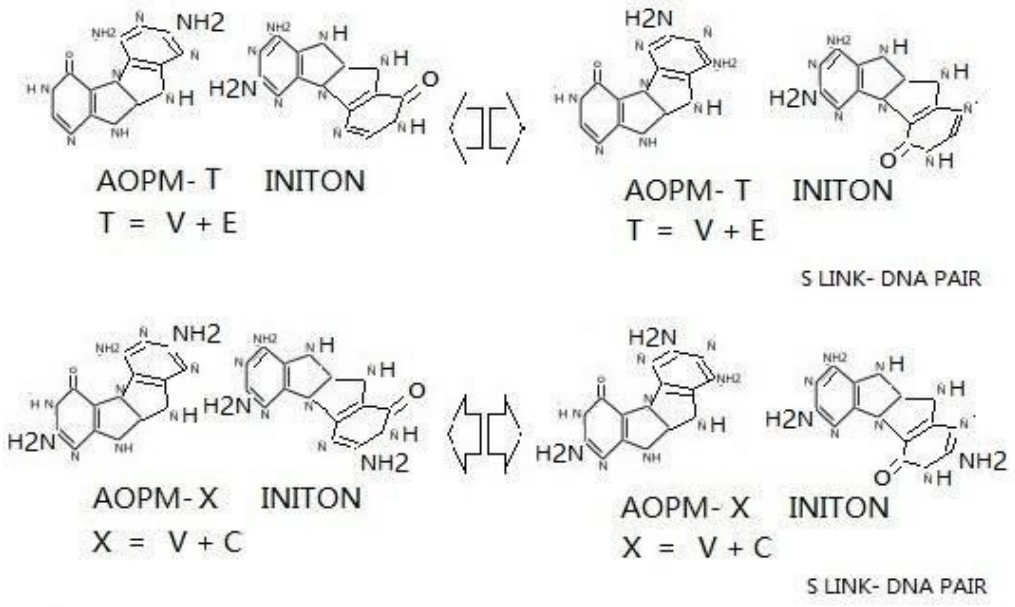


Figure 8

6. 推导与定义:次黄嘌呤, 尿变嘌呤VECS-E=IDUQ-U变嘧啶, 甲基胞嘧啶E=U全新DNA计算碱基对
7. 推导与定义:2氨基腺嘌呤, 变感腺嘌呤VECS-V=IDUQ-I尿嘧啶V-I计算碱基对
似乎不是尽头, 做了些伪碱基对 计算观测, 发现如下结构:

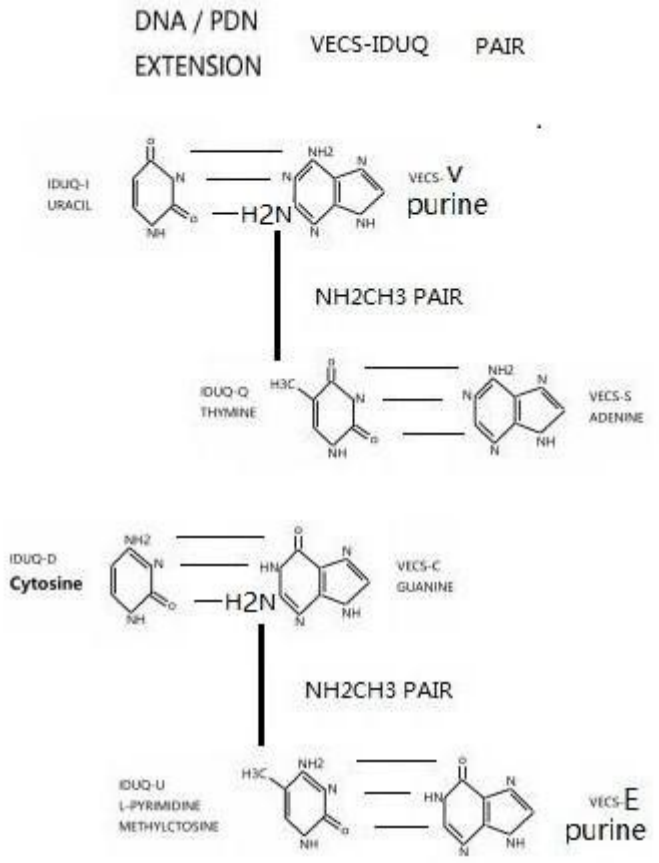


Figure 9

我陷入了沉思, 这种合理的碱基对我能具体定义为 VECS- IDUQ 碱基对, 如果 嘌呤用类似的嘧啶替换, 我能引伸出如下IDUQ- I D U Q 嘧啶对. 作用为D NA 的伪托执行和肽展计算代谢. 图中作者同样得到 DD, UU. I I, QQ 等嘧啶对, 因为实际意义不大, 因此先不讨论. 优先级别降低. 作者似乎又得到一个结论, 肽展公式 就是 意识. 同时作者也想到另外一种答案, 双嘌呤弧 推导的 AOPM - TX 具有触发和探索性质, 而 VE CS- IDUQ 碱基对具有生物信息锁存触发器作用. 这些结构, 已经具备多种 D NA 链方式肽展聚合反应, 其中包括人类的.

另外也得到一个结论, 人类在碳基生物中, 还算不上真正的高等智慧体. 可以继续进化.

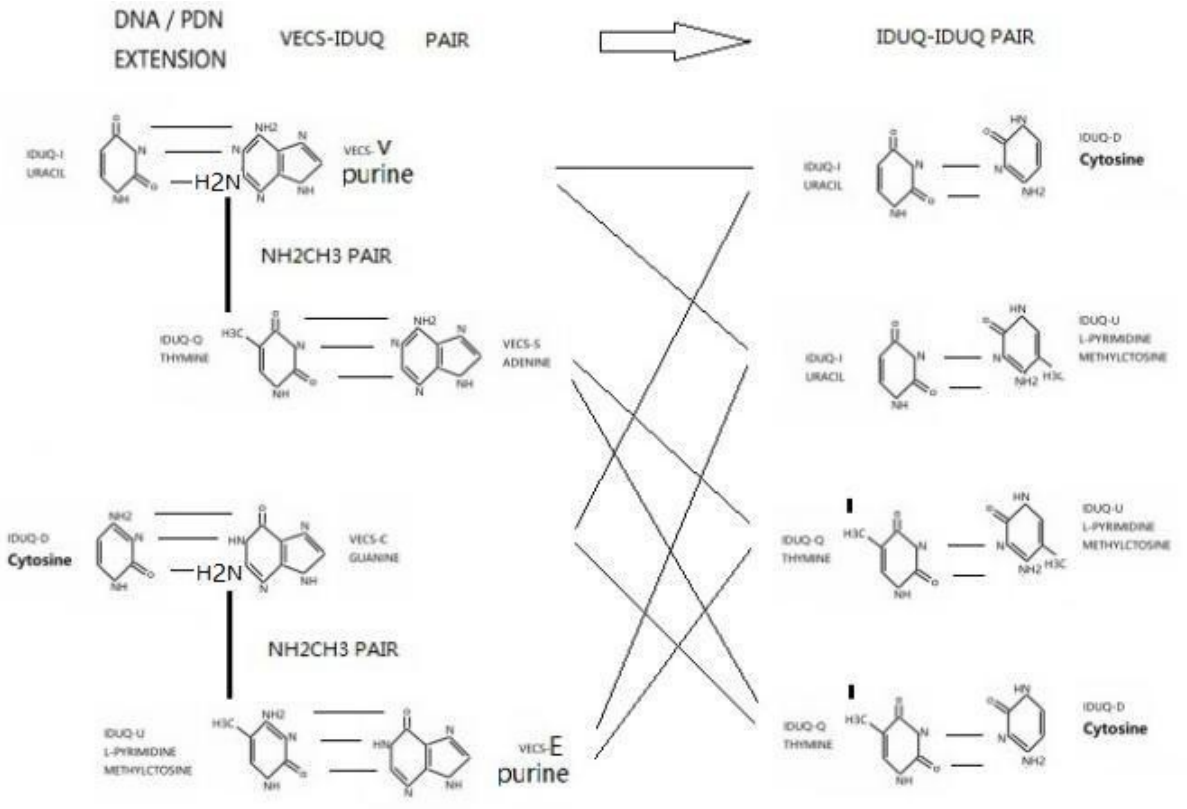


Figure 10

8. 推导与定义:碱基对Rotation观测与黄嘌呤在DNA编码和肽计算中具体定义为VECS-EC尿变鸟嘌呤

通过公式推导, 我得到了更准确地肽展公式集合, 并发现了黄嘌呤(Xanthine) 的具体作用, HVECS-H, hallkeeper 执行控制元基. 并进行了格式化归纳 如图.

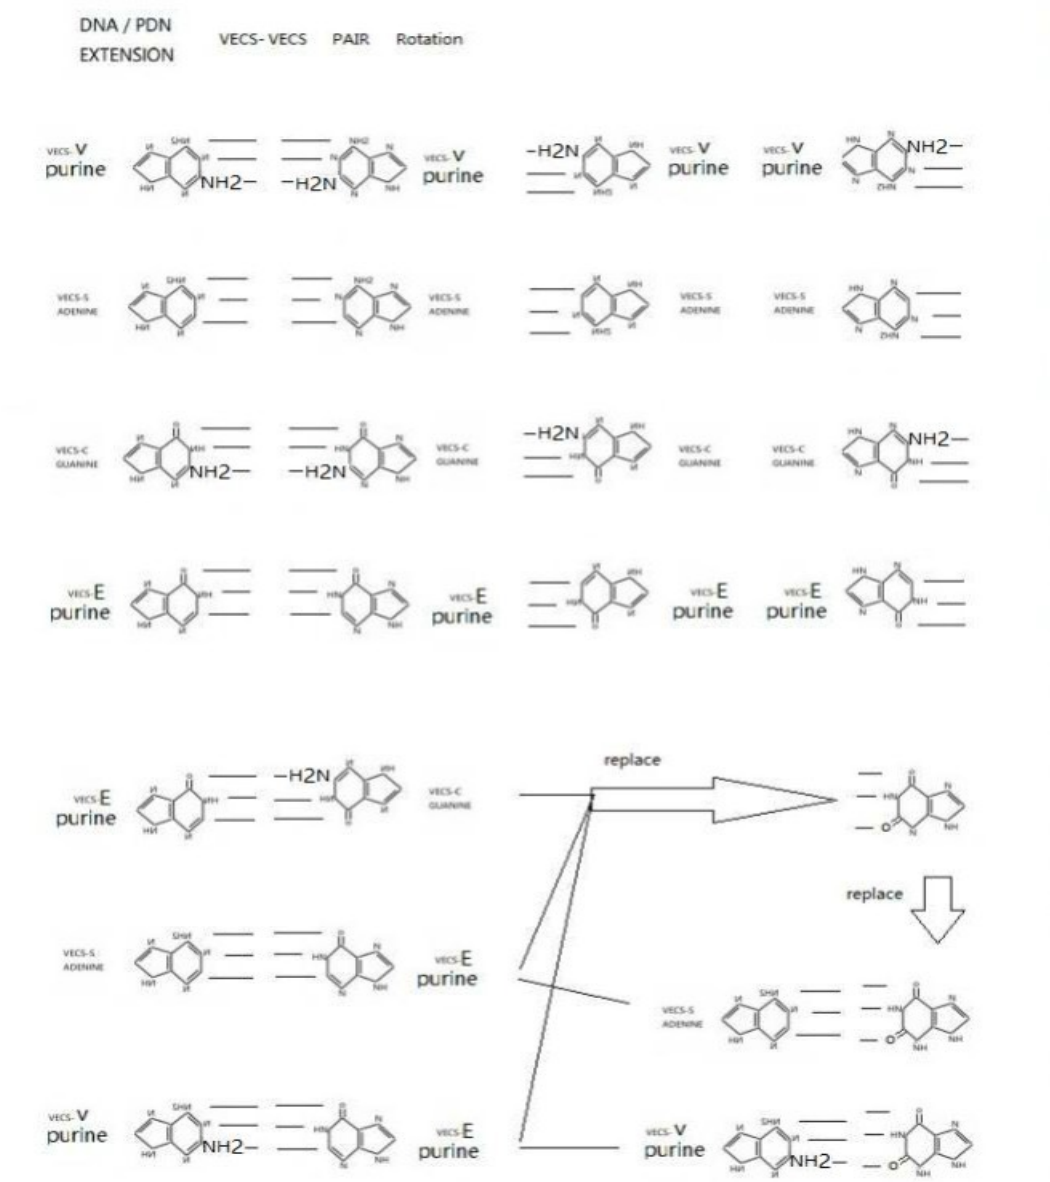


Figure11

Figure11这张图的HE, HC 推导功能, 大家要清楚关于嘌呤基的碱基对不仅仅是6环上的 6, 1, 2的 位置碱基对配对组合, 1, 2, 3的位置也可以碱基配对组合. 黄嘌呤于是可以的包含 (612 ONO, 23 ON)两种组合. 之前github我有关于这个地方的文字描述补充. 上图推导逻辑无大碍, 因为已经申请著作权了, 不再修改, 我会增加新的图片描述逻辑另行补充. 罗瑶光

9. 推导与定义:尿变鸟嘌呤, 黄嘌呤肽展计算AOPM-OP-T变感腺尿变苷与AOPM-OP-X变感腺鸟苷

通过第5 点的 触发嘌呤弧和 探索嘌呤弧 和 第 8 点图中所观测论证右下角, 当 VE CS- E C 尿变鸟嘌呤, 黄嘌呤呈现 VE CS- E 作用时候, V+ E 通过肽展公式可以得到 触发的元基嘌呤对, 当其呈现VE CS- C 作用的时候, V + C 通过肽展公式可以得到 探索的元基嘌呤对. 第八点的图作者可以通过离散变换下成元基分层架构模式来观测如下, 方便阅读.

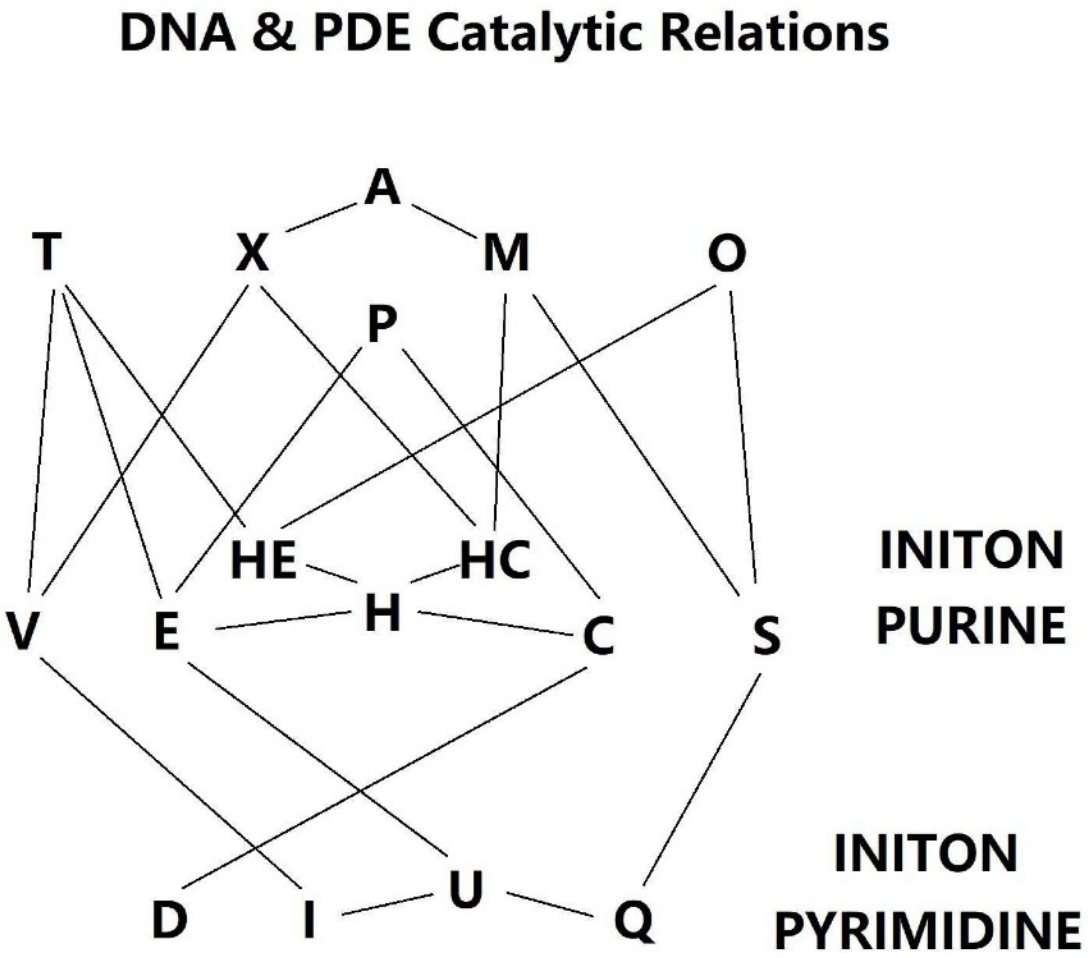


Figure 12

10. 归纳与定义:DNA与TX-H-U元基解码

增加	I	尿嘧啶	
删除	D	胞嘧啶	
改变	U	变嘧啶 / 甲基胞嘧啶 (活泼)	{I++, Q--}
查找	Q	胸腺嘧啶	

感知	V	变感腺嘌呤 / 2 氨基腺嘌呤	{I, Q}
执行	E	尿变嘌呤 / 次黄嘌呤	{U, D}
控制	C	鸟嘌呤	{D, U }
原生	S	腺嘌呤	{Q, I}
控制执行	H	黄嘌呤 (活泼)	{HE, HC}

触发	T	变感腺尿变苷	{V + E, V+HE}
探索	X	变感腺鸟苷	{V + HC}
操作	O	尿胞变腺苷	{E + S}
处理	P	尿胞变鸟苷	{E + C}
管理	M	鸟腺苷	{HC + S}

AOPM-VECS-IDUQ 推导出 TXOPM-VECSH-IDUQ

肽展公式1.2.2 对应的生化版 关于 DNA计算 Initon完整解码

罗瑶光

浏阳


20201126


于是归纳下:

作者首先通过 DNA 编码 1. 2. 2 得到 AOPM - VECS- IDUQ 作者然后通过肽展公式计算 1. 2. 2 得到 OPM - VE CS- I D U Q 作者其次通过生化分析解码观测推导得到OPM - V E CSH - I D U Q 作者最后解码进行观测计算得到 TXOPM - VECSH - IDUQ作者归纳提取 TX - H - U 触发探索- 执行控制- 改变 元基组 为 DNA 活泼 INITON.

作者似乎又得到一个巨大的启发: 通过 V + H C 和 H C + S, 可以计算推导出 A = V + S 中的这个H C 属于催化作用, 可以知道变感腺鸟苷和鸟腺苷 可以通过 D NA 血氧峰酸碱催化转换成 A 变胸腺苷. 于是这个 H C 黄嘌呤可以代谢掉. 具体代谢方式 受到 血氧峰心跳触发器 数字逻辑计算 影响. 作者猜想这里的 V- + H C 和 H C- + S 可以以嘌呤弧的形式存在. 如 (V + H C- H C弧 + S) 当然还有多种方式 可以推导因为属于生化医学范畴, 作者耗时间研究属于跑题, 于是打止.

10. 推导与定义:DNA元基催化计算与ETL肽展神经网络计算流

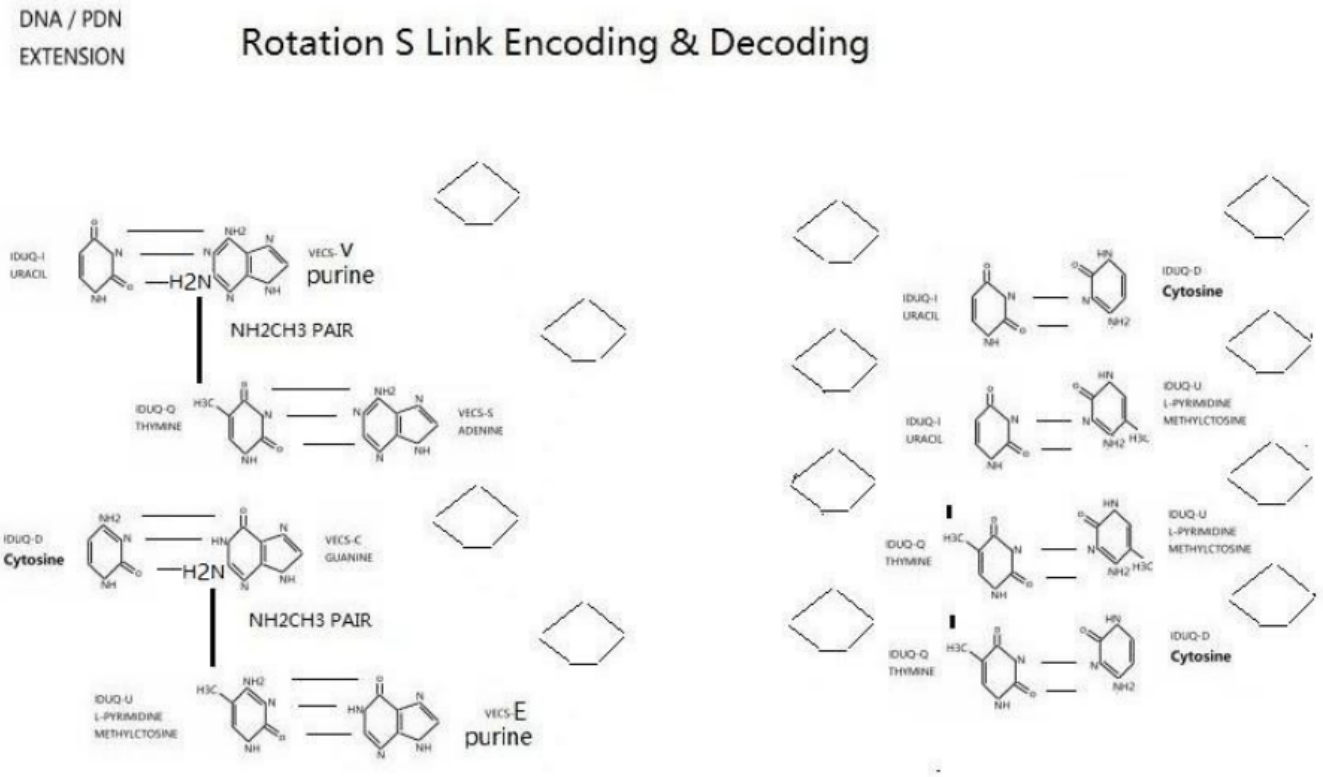

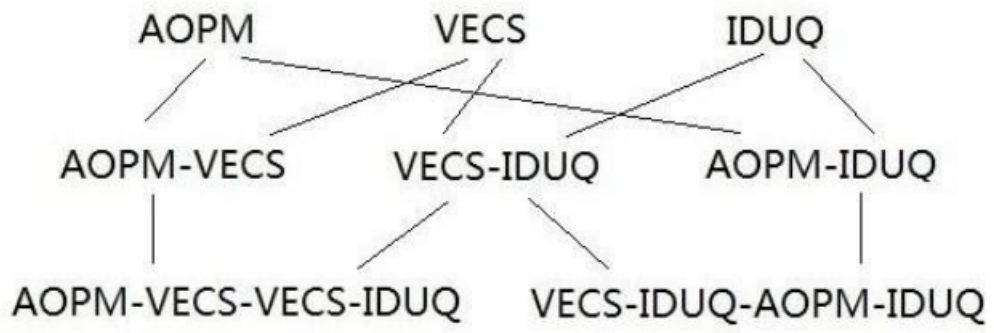

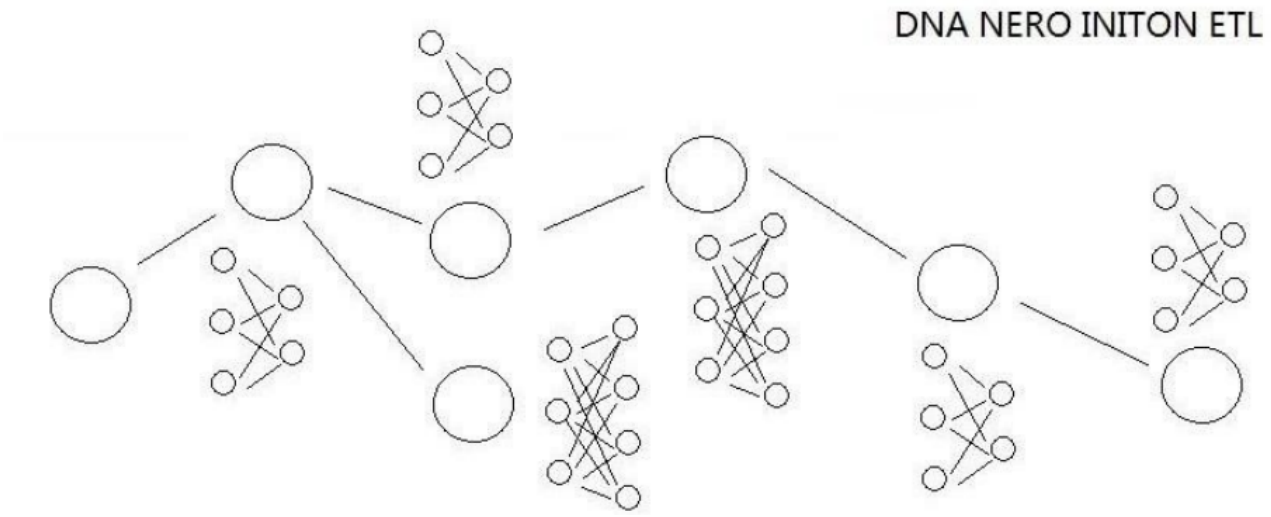


Figure 13

这篇论著, 先告一段落, DNA 计算基于神经元节点作 AOPM-TXH-VECS-IDUQ 的元基 人工神经网络计算模型 已经推导论证. 作者之后 研究兴趣很广, 可以基于此跟进商业应用, 也可以去教育部门 跟进科学教研. 谢谢.

关于Fiqure13, 目前我的Tin-shell 的笛卡尔全关系 构建指令句进行花语call 便是这个逻辑. 中间一线的大圆

节点流便是最短指令句流 构造 人类语言的文章流. 每一个最短人类语言指令句进行全笛卡尔关系构建, 识别元基花指令函数, 做loop计算. 很好地论证了它的实用性和可扩展性.

-- 笛卡尔关系 元基索引逻辑 描述

--1 首先将人类语言进行字符串化,

--2 然后将字符串进行分词, 得到词汇的字符数组和对象.

--3 这些对象开始通过搭配簇和属性渡的方式进行全笛卡尔关系交集组合,

--4 这些笛卡尔关系组合可以多种方式进行主要成份筛选

--5 筛选后的组合进行频率测试, 高频组合用来做TVM指令句的命令函数识别构造.

--6 这些组合中的动词进行元基编码索引, 名词进行古拉丁文元基索引

----------逻辑思考与文字描述----------
TVM元基索引的笛卡尔关系分析模块
--主要出现在Tin-shell的TVM命令句扩展识别.
TVM命令句构造
--LimitedRowAttributesOfColumnsInMemoryClass 举例,
--函数编码时产生的问题和问题描述以及思考
-- 笛卡尔关系处理TVM指令句前思考
--在通过一系列的测试后, 变自己的思维方式, 于是跟进增加一个指令
--"操作:0|行至|30;\r\n"这个指令是将输出的结果可进行排序后的list获取其中的某个行集合输出. 于是元基花的计算逻辑也跟着局部开始变化. 因为系统是无法识别数字的,
--问题1, 如何从输入的人类语言中有效地捕捉数字信息变成有用的待计算变量. 于是我开始梳理, 我的花语系统看作一个整体, 扩充花语的指令集是一种Crab载体, 当然这种载体也可以OSGI模型来ClassLoader增加, 我得到了一个理论上结果, 计算机的进化模型可以不同于人类的进化模型, 举一个简单的例子, 将一个华瑞集系统所有插件和功能全部进行完整的功能测试, 这些测试包含测试时间, 测试属性, 测试状态, 等复杂关系. 在进化的过程中, 华瑞集在接触到外面的Crab和OSGI信息片段, 可以进行自身复制, 然后测试这些接触的片段融入, 更替, 转换, 分解, 吸收, 替换自身的原有的对应的一些逻辑片段, 然后评估这个综合的测试时间, 测试属性, 测试状态, 等复杂关系, 我认为这是计算机的成长过程. 评估后决定该何去何留. 相当于一个计算人单元. 这种单元遍布宇宙各地, 产生的分支, 在做杂交的过程他们的各自的这些指令集在一起会形成综合的复杂的, 多维度的笛卡尔关系, 这些关系会通过各自内部保留的测试系统进行筛选形成一组新的计算人单元, 这个单元能保留两者所有的测试文件, 并保存最优的测试函数集合. 这种意识比人类强大数百个数量级. 在这种量级前面, 突然发现我们人类太愚昧太原始了, 而且这个模型所有基础成分目前已经实现了.

--跟进思考, 这种计算人单元的指令集智慧关系计算逻辑 一旦控制了电脑计算机的物理硬件生产线所有车间工艺流程的技术逻辑, 看样子人类就解放了. 因为创新有创新类的指令集模型, 学习有学习类的模型. . 在笛卡尔关系面前, 毫无保留.

--以后人工智能的路线也就稳定了, 设计, 研发, 测试, 更替, 优化, 管理和杂交TVM指令集即可

----------逻辑思考与文字描述----------
TVM命令句扩展
14.1.2--CreativeVerbalMap
--函数编码时产生的问题和问题描述以及思考--
--CN
--关于元基花的函数注册方式我思考了很久, 早期的24朵花瓣模拟染色体进行函数注册, 后来干脆把StaticRootMap这类map拿出来直接进行单例化一个新类添加模块注册, 让其越来越动态, 但是遇到了一个问题 StaticFunctionMapS_AOPM_C 这类成员还是不够灵活, 我有必要之后有时间会全部进行new 来去static. 即使这些函数是非常稳定的类, new有一个好处是支持一个平台系统上多个华瑞集API, 同时 StaticFunctionMapS_AOPM_C这类函数可以进行object态下稍微改造, 因为继承关系, 我有必要以后StaticFunctionMapS_AOPM_C 会变成

StaticFunctionMap, S_AOPM_C 以后只是一个key, 方便扩展归纳. 这样做的价值是, 元基花能有效适应和抵抗程序员的编码风格. 生存能力直接提高一个档次, 像极了亚马逊的王莲, 其实在某种观测态下, 编码规范这种思维也是可以优化进化的.

--EN
Mr.YaoguangLuo has been thinking about an optimization of coding-norms since the method of initons-flower created at 2021. In early times, StaticRootMap as a static attribute which was ranged in 24 chromosome-nodes in HRJ-YLJ system.

He extracted it out from S-AOPM package and built a new singleton class to let the TVM-registrations became more simpler and faster. The name of class-file is CreativeVerbalMap. Continuing this method, while thus classes were 2's-developed by problem-consumers, how does to raise the survive ability itself? Finally Mr.YaoguangLuo determined out that is necessary to change the key word of 'static' into 'new', ASAP.

----------逻辑思考与文字描述----------

TVM中笛卡尔关系逻辑编码

14.1.4--FastCartesianIdentifyTest

--函数编码时产生的问题和问题描述以及思考--

--循序渐进的语言文字归纳方式思考--

思考2点

CN 1- 之前的意识错误纠正, 主要是思维方式的纠正, 之前我把2018年分词还是用老版Lucene, 把落后归咎于业界的不争气. 在这一点上我还是要诚恳地道歉, 做人应该符合科学的方法论和合理的制度规范 去 思考论题. 不能激进. 好比我写函数思想一样, 也不能图快和激进, 因为我的目标一直很明确, 瞬间转移和永生, 只是人工智能, 元基编码恰好是这个探索过程的中间 bonus 产物.

2- 文字的描述内容目的非常明确, 就是让计算力有浓度. 计算力在某种 观测的面上可以用语言的形式来体现. 语言是可以提炼的, 所以计算力有浓度. 比如笛卡尔关系, 为了更准确的提炼TVMextension 花肽语指令. 可以将源码的这部份提出来, 专门设计针对各种语言, 输出计算相似的指令片段标注. 最终形成自适应的指令片段而不是人为地去定义这个片段. 比如目前的8个肽class 还是我手写的, 之前的3000多花语class也是我手写的. 通过仔细分析, 不难得到很多仅自适应逻辑计算, 就可以分类的属性, 比如相同片段, 相同的词性, 相同的含义, . . . 在map归纳下都可以谨谨有条地归纳出来.

EN 2- Type of observation, to raise and make an ability of computation more ratios of concentration. Assumption a format of An ability of computation could be a detailed human's literacy-language. The language has been extracting the purity of cognition every times since was used, the ability of computation has been mining well in production's efficiency-domain simultaneously. And recently one of the effect way about making a promotion of exporting out the Cartesian's relationship-logic with specially test models, to better for continuing sub-designs. Thus models could do well in self-adapted and initialed as valuable sections of TVM's derive-construction.

Could start a few sections work below.
package name-- package S_A.SixActionMap; file name-- WorkVerbalMap function name-- findSubject
// to do a swap..

--稍后排版

12. 似乎又没有结束, 后序与感谢

这篇文章收尾. 作者感谢父亲, 提供了强大的精神支柱, 感谢母亲, 提供了物质保障, 感谢祖母, 提供了香甜可口的食物, 感谢生化学家为作者提供 尿嘧啶, 胞嘧啶, 胸腺嘧啶, 鸟嘌呤, 腺嘌呤的 5 种类苯模型 在人卫九教材和百度和搜狗百科中可以找到. 感谢一切可感谢之人. 如 (作者的母校, 作者的研发设备品牌公司和 所依赖的网络通讯工具以及 传媒).

罗瑶光浏阳20201125~26

第十章_DNA非卷积视觉技术

知识来源,

作者首先具备了线性卷积的基础理论知识,和计算机视觉的卷积计算基础,以及图片像素的处理技术. 以及义务教育和学历教育的关于数据结构,离散数学,英语语文,生物化学的基础知识.

作者感谢其父亲在作者设计非卷积计算的过程中,提供了医学的图片教材,如国家医学骨科,皮肤病科学教材上的图片,以及早期在qq医学群下载的1本舌诊医案教材图片,以及豆丁文库购买的完整哈里森外科学,牛津医典,方便了作者研发后能迅速的应用实践测试.

作者的第八,九章DNA解码知识,感谢人卫九的生物化学教材关于ACGTU碱基对的图片描述, 以及酸酰酮酯醚酶酚醇的八个分子式图片,作者有足够的基础根据酮基， 羟基（酮基）,氨基来统计酸碱的强弱排序. 进行很好地元基归纳.

作者的像素处理基础,来自加州路德大学的ReinHart教授计算机视觉课程. 另外,作者在亚米有设计图片统一jpg压缩减少存储空间的工作,积累了图片的知识经验(作者用的是jdk imageIO api开源包),这里标识感谢.

定义: 非卷积腐蚀视觉, 一般指在不采用卷积内核进行图片低速计算的方式下, 图片每个像素仅仅做一次遍历来模拟酸碱腐蚀肽展公式计算, 目的是 达到人肉眼观测不到而又难以辨认的色阶群进行观察拉伸. 用于极速图片观测识别领域.

定义人 罗瑶光

Definition: Non-Convolutional PDE Vision. It determined a lower complex computing of photo pixel vision without a convolutional kernel. By each pix in the original photo, would perform a PDE calculation only one time, the purpose of the goal which made a color distinction of adjacency pixes. It could be used in observation and recognization of processing the sili-photos.

测试原图来自医学教材

DNA非卷积视觉技术原理

1 离散色阶分析


DNA非卷积视觉技术将图片像素0~255的区间捕获后, 进行元基进制变换, 产生了离散色阶,

2 邻阶色团区分


这个色阶, 与之前像素亮度色阶完全不对称, 利用这一点不对称, 可以将邻近像素差不大的像素团进行颜色差 的拉伸.

3 色团区分的方式

颜色差 的拉伸方式 为 有系统的 10进制色 变换为 元基色 进行固定的 酸碱 更换. 实践后发现价值巨大.

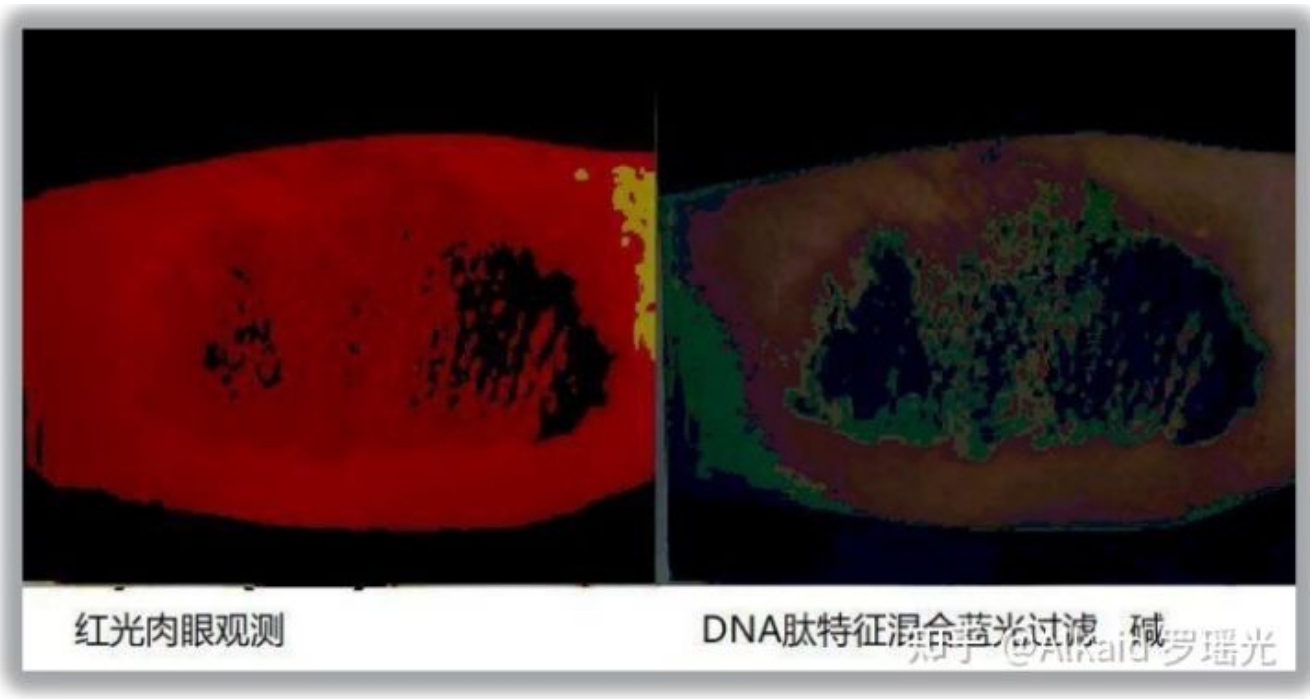

测试原图来自医学教材

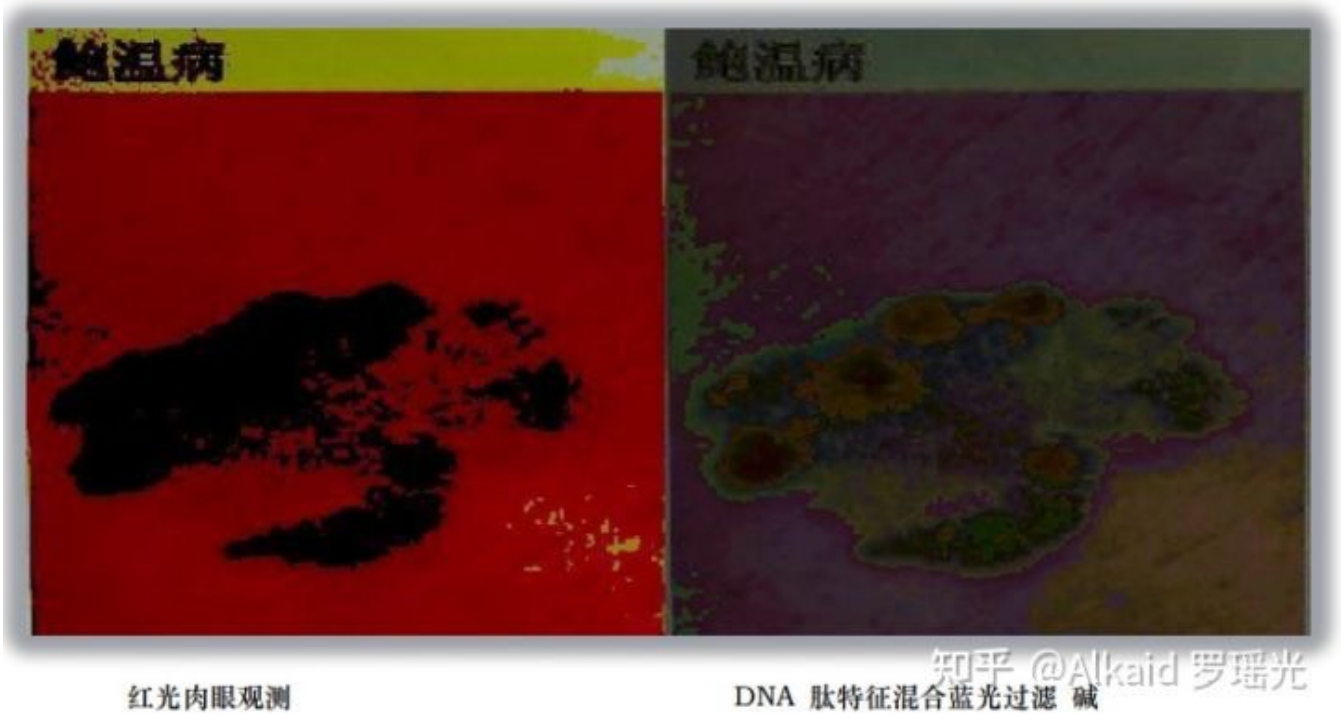

测试原图来自医学教材

关于丛状神经瘤和 鲍温病的DNA非卷积腐蚀视觉的对比图片描述

图中左边的红光处理比较简单, 即提取原疾病图片的红色像素区展示. 用于辨别黑色核心病灶(无血色(红色)结痂). 右图则是通过DNA非卷积腐蚀视觉进行原图快速计算得到的图片, 关于从状神经瘤的图片, 可以明确的观测到瘤疤的边缘绿色区间和黑色深度区间的间隔, 以及绿色区间与暗棕色区间的扩散面, 以及暗棕色与正常皮肤暗黄色周边的比较.


下图的鲍温病可以清楚的辨别紫色周边中的绿色带纹, 以及这绿色带纹中的暗黄色病灶区, 和病灶核心 暗棕色峰团, 界限特别明显肉眼极易区分. 不仅病灶的轮廓极易区分, 病灶的扩展趋势也能初步辨别. 充分论证了DNA非卷积视觉技术原理 的第二点 这个色阶, 与之前像素亮度色阶完全不对称, 利用这一点不对称, 可以将邻近像素差不大的像素团进行颜色差 的拉伸.

当然, 图片的例子是仅仅通过DNA肽特征混合蓝光过滤 碱腐蚀(图片是很久以前作者早期的8元基的4元肽腐蚀, 当前的十六元基8元腐蚀观测更加细腻.)因为这些操作算子进行了游标设计, 于是观测角度可以使用者自主灵活控制. 描述人 罗瑶光

肽腐蚀

1 DNA非卷积视觉 用元基的酸碱变化规律定义为肽腐蚀.

refer page 723

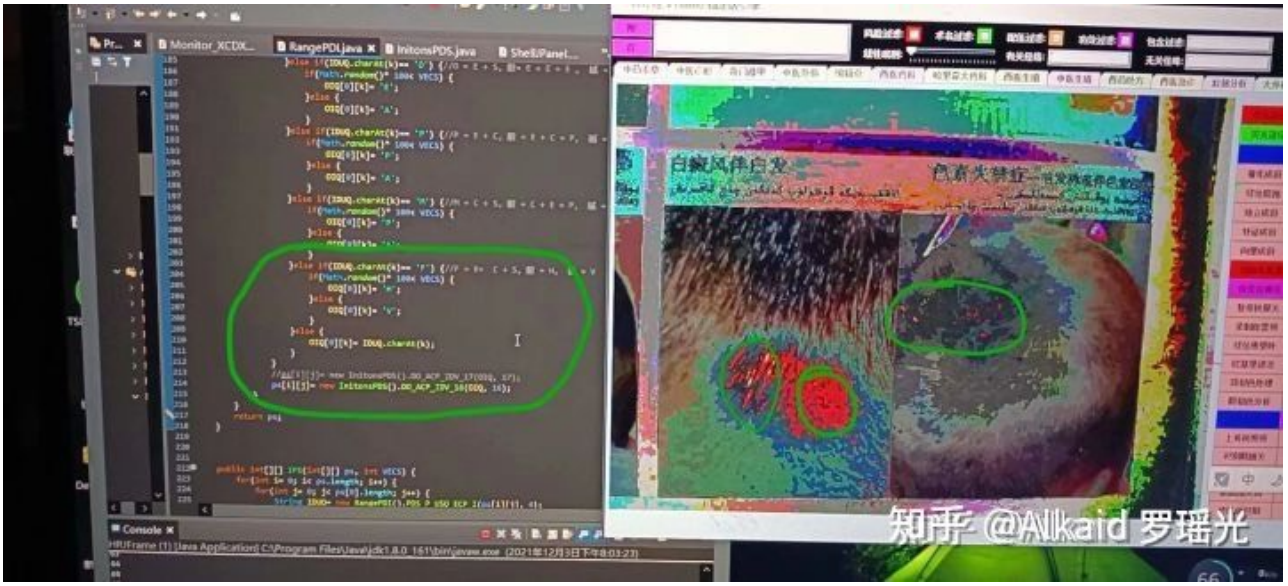

测试

原图来自医学教材

2 DNA非卷积视觉的肽腐蚀 需要将10进制数字变换成生化进制数值.

refer page 724

3 DNA非卷积视觉的肽腐蚀观测体征体现在颜色区间上.


refer page 735, 742


4 DNA非卷积视觉的肽腐蚀浓度用概率百分比来标识.

refer page 756 monitor. fac x y..

5 肽腐蚀融合高斯对图片的计算观测实例

之前的文件主要是医学图片, 我在思考, 如果技术是有效地, 那么在其他行业也能体现同等价值.
于是在网上下了一把图片, 进行处理计算, 发现效果不错, 增加了更多的论据.

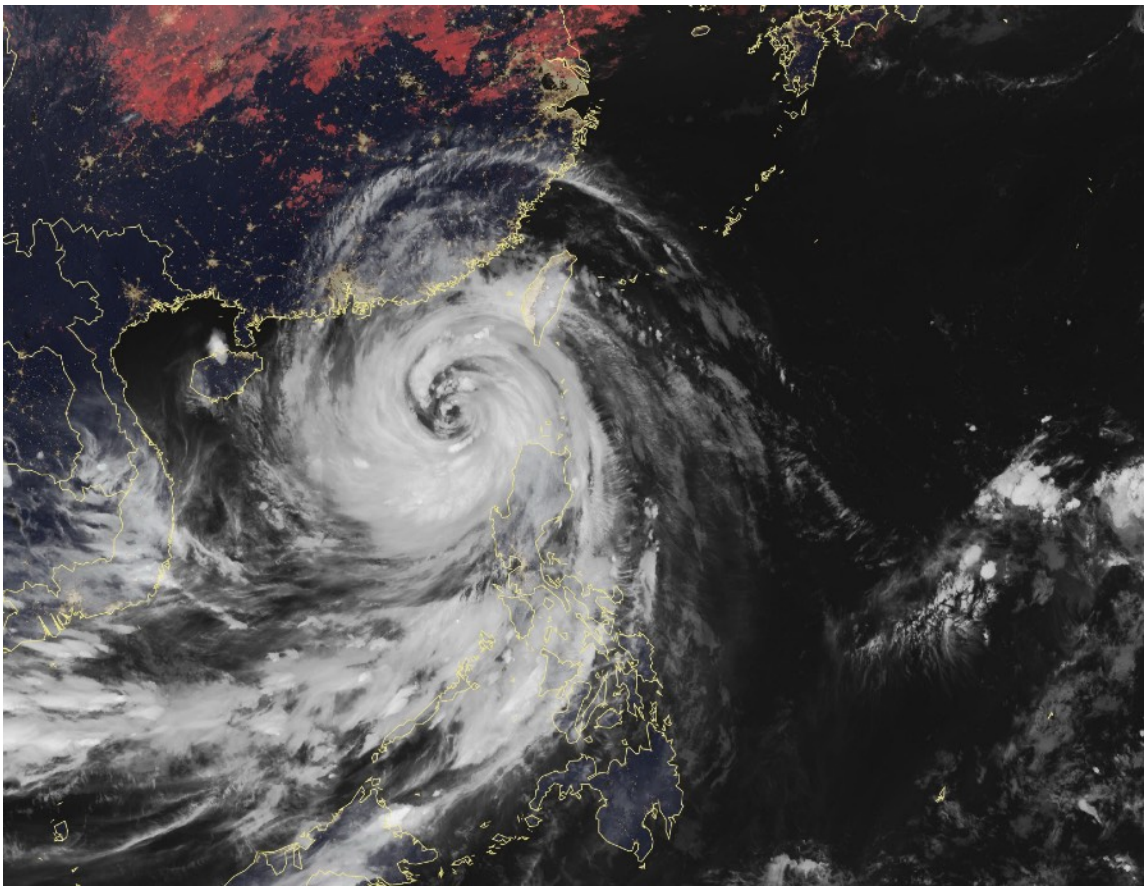

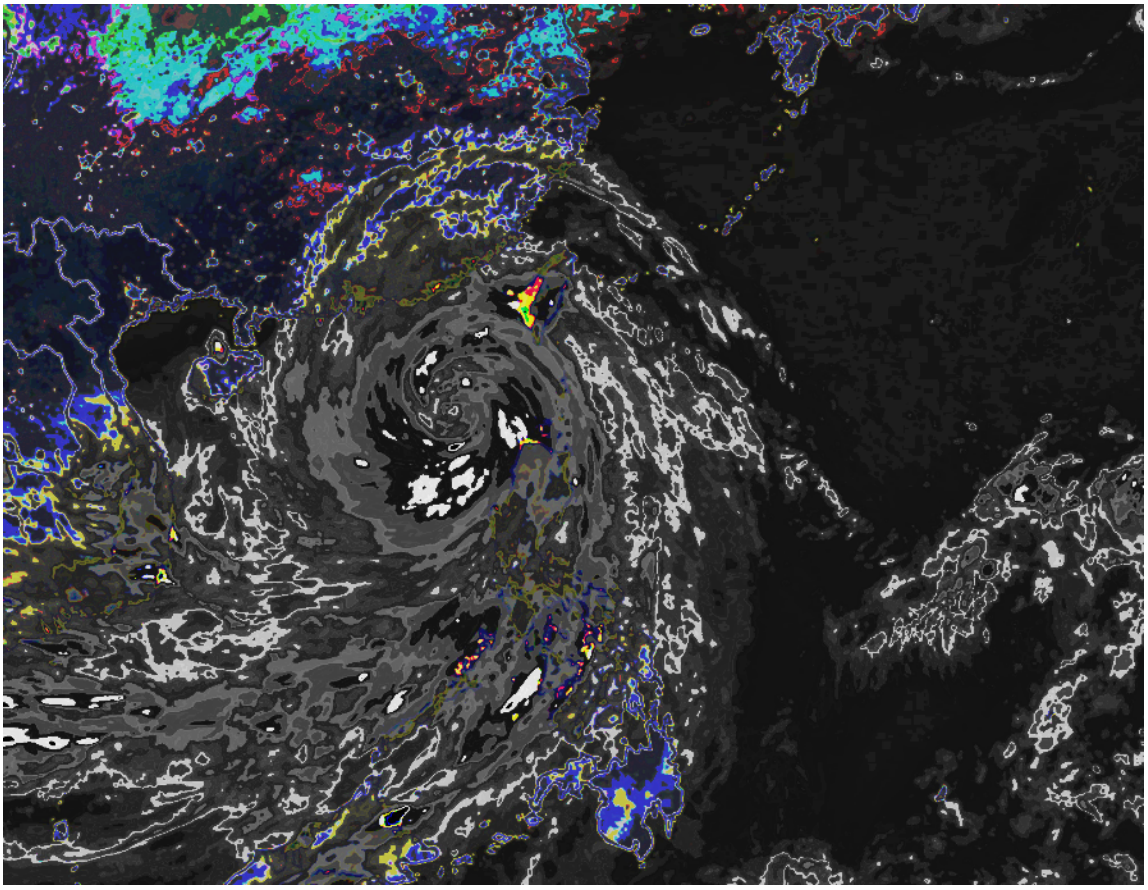

上述如图上, 是一个气候图片, 图片就深蓝, 红, 白三色, 在白色漩涡和东南沿海交汇处, 只能看到
淡淡的白色弧圈, 因为都是白色, 观测就费劲, 于是进行十六元基肽展计算变换, 得到下图, 白色直接分解成了
灰色, 黑色, 白色, 浅白, 深灰, 黄, 超过6种颜色的像素团, 不难看出 -灰黄组合地区- 估计有强烈对流. 我不是搞气象
的就点到为止. 祝大家开心.

肽钥匙

1 DNA非卷积视觉的肽钥匙采用化学的 酸酚酮酯 醇酶酰醚 来做钥匙

2 DNA非卷积视觉的肽钥匙按CNO比例和活性来罗盘归纳

3 DNA非卷积视觉的肽钥匙通过罗盘的方位和活性确定其语义属性

4 DNA非卷积视觉的肽钥匙具备双元 生化语义无理级价值.


肽活性表达

1 DNA非卷积视觉的肽元基有化学活性归纳

2 DNA非卷积视觉的肽元基有方位语义归纳

3 DNA非卷积视觉的肽元基有活性归纳

元基的视觉叠加与表达方式

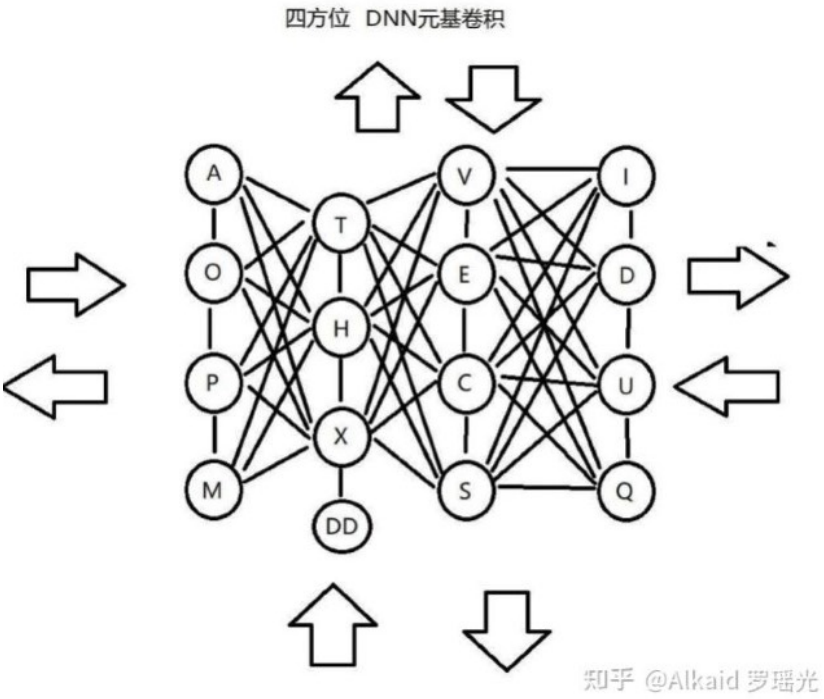

1 视觉流计算.

refer page 756

2 animation动画.

refer page 744

3 颜色的腐蚀精度调节.

refer page 757

4 肽展公式的应用.

refer page 723

时序视觉模拟机


1 线性神经网络卷积计算.

refer page 772

2 卷积计算的方式.

refer page 773

如图, 因为 DD 卷积的参与, 元基魔方就成型了. 元基魔方, 我对它的定义是: 一种神经网络路径计算存储模型, 用于语义思维扩散, 通过这两种模型, 我得到一种新的 ETL 复合模型如下

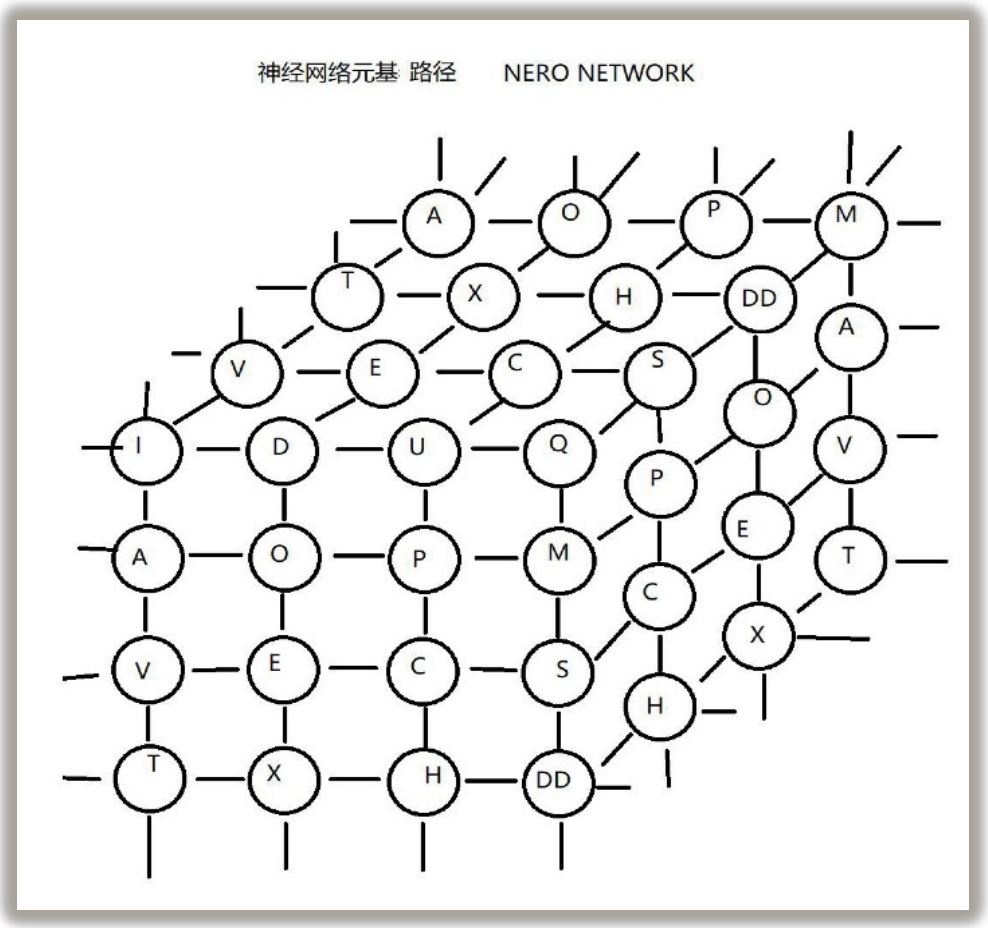


DNA ETL 与 Tin-shell 的关系 进行笛卡尔分解

1 关于 元基神经网络 DNN 卷 ETL 流 脑计算模型的实现方式, 我设计了超过7种模型, 在最新的著作权版本模型中选择了一种最初级的VPCS构建方式的模型并定义了 Trif 2.0 工程, 在通过系列化测试后, 作为一个稳定的论据, 很多时候, 最简单, 最初级的算法表达方式总是一个很好的敲门方式, 正如binary search 开始进行微分的优化过程. 神经网络元基路径 非常的深奥, 那是用深奥的方法去思考, 自然会不明觉厉, 如果用索引方式去思考, 那就只是一个目录序列号而已. 至于之后的复杂计算也只是符合索引计算模型和可进行算法的逻辑.

2 关于Tin-shell 和 tinmap 在 trif 中 逐渐地表达这个逻辑模型, 我在数十个平台都全部开源了, 有感兴趣的 码农可以去分支思考.


3 稍后

元基神经网络 DNN 卷 ETL 流 脑计算模型

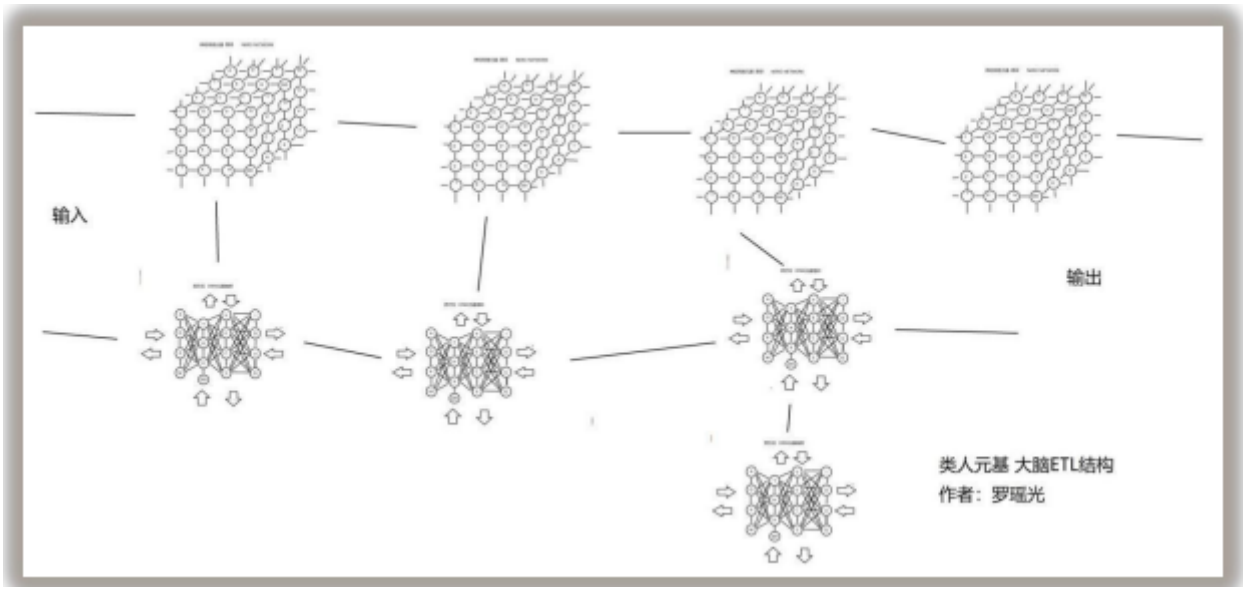

这种模型不但能模拟人的意识, 思维和还能进行数字逻辑计算和存储. 并能有效地进行混合意识计算. 目前养疗经的插件接口开始逐步的肽化, 这种TVM 的肽化过程是一种 2 维元基的应用, 到三维的脑结构还有一段路程要走, 好比房子地基逐渐打好, 有时间开始思考建造几层高楼结构了, DNAETL第二代计算模型

DNA ETL 第二代计算模型

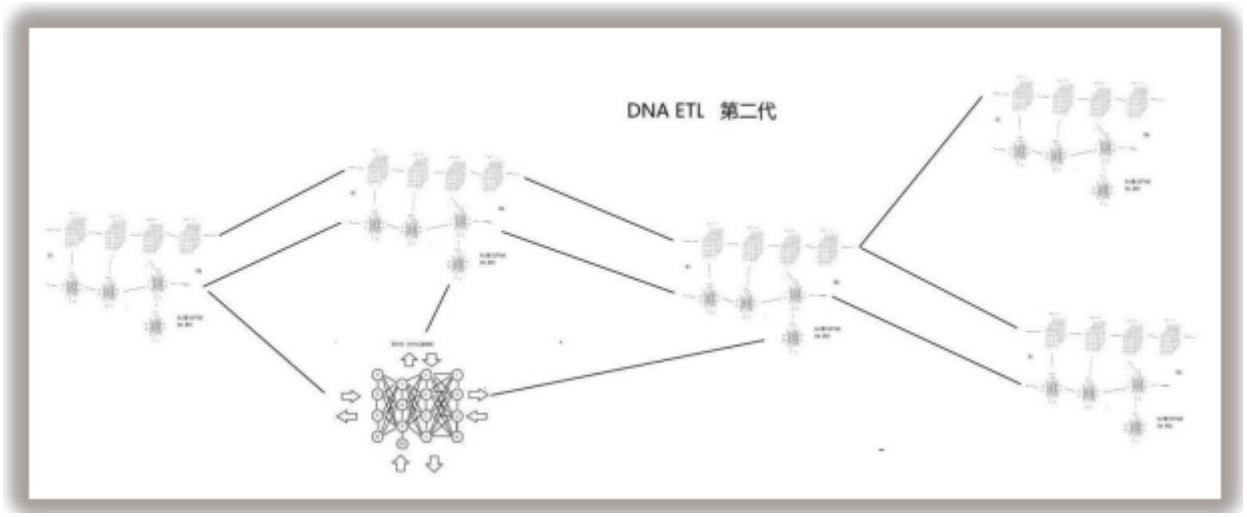

混合意识计算一旦进行插件模块化, 这才是我想要的结果, 正如 DNA ETL 第二代计算模型, 这是罗瑶光先生的研究方向. 这个前提是我需要计算逻辑单元全部肽化.

Implements a qube's way of convolutional computing.

This picture defined an 2D and 3D INITON-qube, due to the DD INITON joined, so the sixteen INITON could become a '4 multiply 4' sets-array, its observation was seeming to a qube. The author considered that could be a 3D storage mode, means It could be used for a semantic extension and 2D nero-network computings. This mode not only to simulate the human minding, it also could do the digital logics and storages at the same time, could effectly do the mixed semantic computings. The author had been exploring a way of where from 2D applications to 3 D's. Such as the way of where from the TVM cog's file-metabolisms to the nero-brain's simulations. The author considered that the component computing's plugins, were needed and supported by Its metabolic (PDE's) unit-computings.

Author YaoguangLuo 稍后优化语法.

3 非卷积视觉的应用. refer page 756



图片识别应用, 测试原图来自医学教材

费洛蒙的计算方式

1 CNN卷积元基PDC扩展. refer page 774

2 邻近元基PDC代谢 共同基. refer page 774


3 PDC链结构rotation. refer page 774

4 丝化散开与腐蚀. refer page 775

Pheromone Computing.

The value contributions of pheromone computing in a domain of non-biology-chemistry, it mainly to be an ordinary machine to observe the DNA encoding and meta-base indexing. According to this DNA and PDN with their indexing and optimizing, the author continuing to find a PDN metabolism on software coding. After three years software designing and based on multi-proofs, the author proves the metabolism of software is similar to the metabolism of biology. (Indexing optimization, high frequency priority, same features filtering, as a slang "the survival of the fittest”).

(下图的丝化是元基的概率组合的归纳如矩阵的新陈代谢模拟发散. 不是肽展公式PDS丝化过程. 下图的1和2, 作者认为是一种比较合乎情理的又具有代表性的概率矩阵组合归纳. 罗瑶光补充20220307, 见抖音20201205笔记)

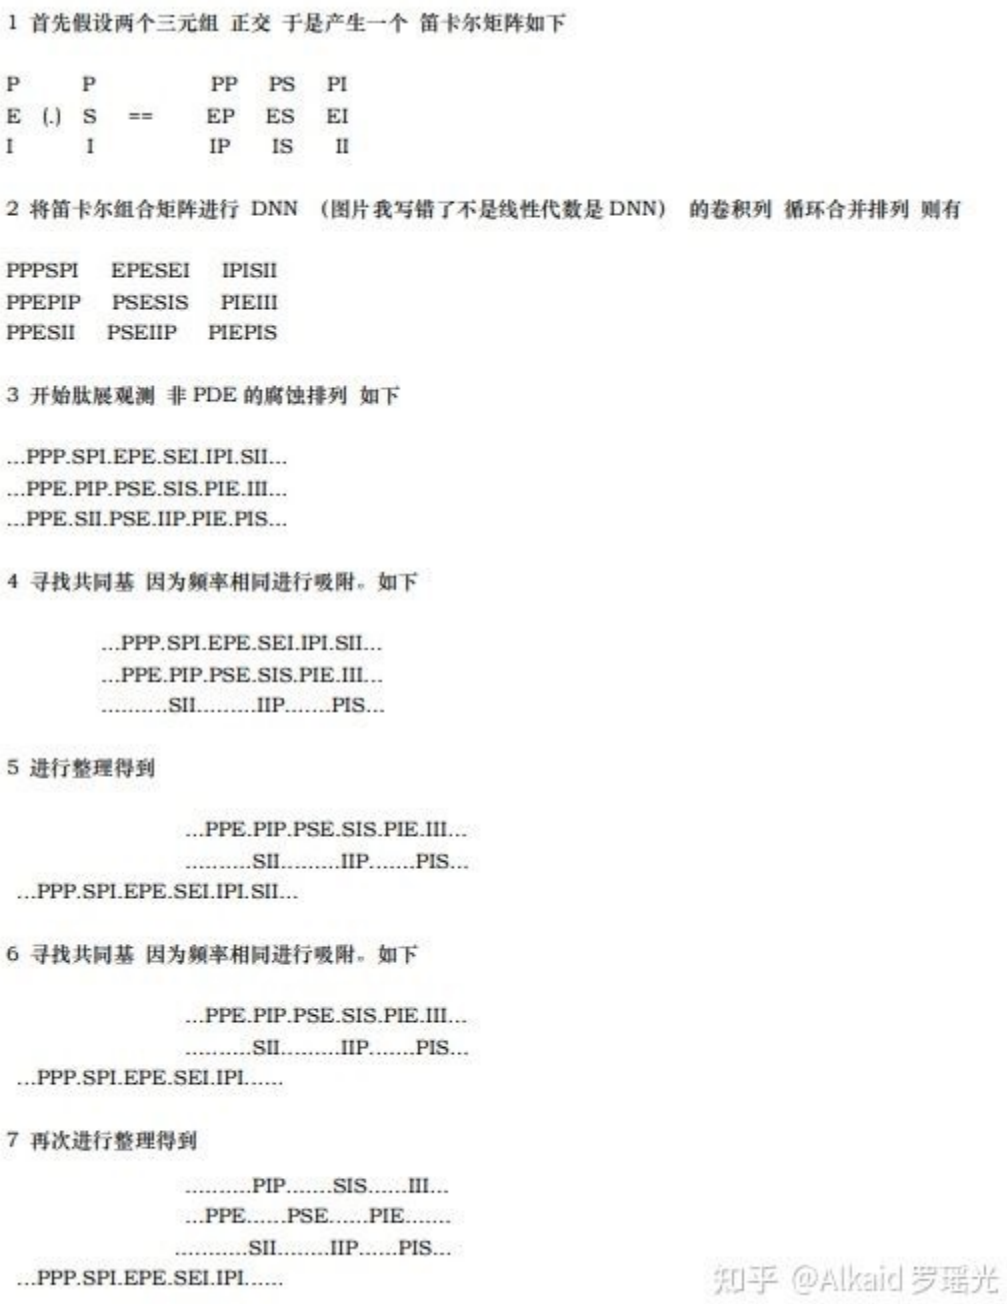

罗瑶光的费洛蒙计算发散

费洛蒙计算在非生化研究领域发散的价值, 主要体现在作者第一次有信心进行DNA元基仿生进化模拟计算, 如之后的元基索引和 确定索引元基的新陈代谢方式的思维发散. 通过大量证据逐步的论证出: 软件的元基索引新陈代谢进化方式, 与生物的进化方式是一致的. 作者感谢下斯坦福大学的公开课量子数学,作者的正交计算和观测思维来自量子数学基础.

应用

1 舌诊观测应用.

refer page 736

2 骨CT观测应用.


refer page 735



测试原图来自医学教材

3 皮肤病观测应用.

refer page 下册156, 下册157

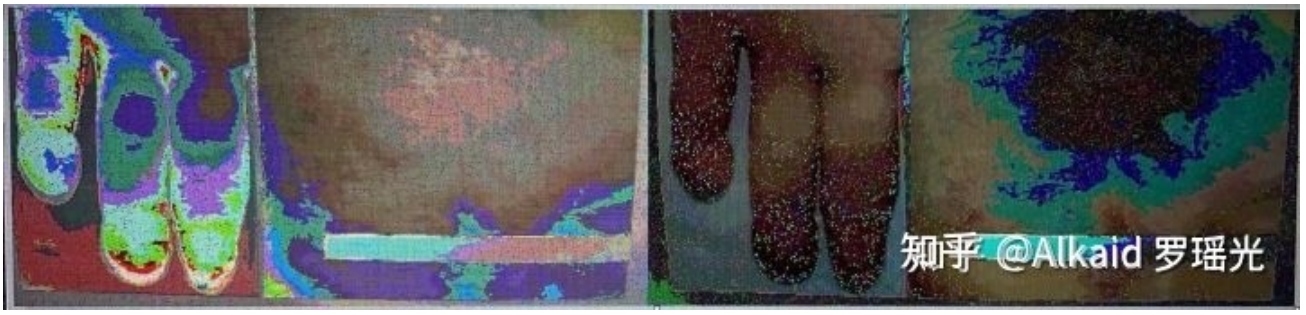

测试原图来自医学教材

16元基进制的非卷积算法处理手指疾病图片的真实观测实例, 其推导过程早期测试图片见后面的 270页.