


Module 3 Quiz

Quiz, 10 questions

1
point

1.

Based on the network below, what is the degree centrality of node D?

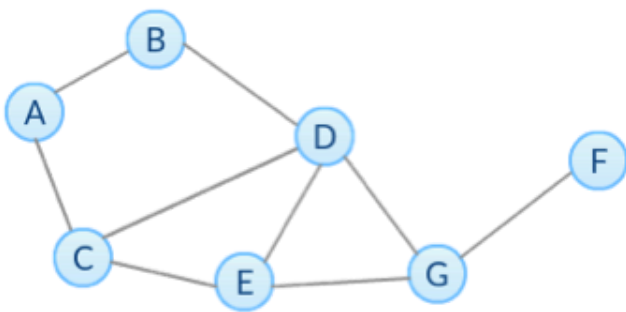

- ☐ 0.57
- ☐ 0.42
- ☐ 0.50
- ☐ 0.67


1
point

2.

Based on the network below, what is the closeness centrality of node G?

Module 3 Quiz

Quiz, 10 questions

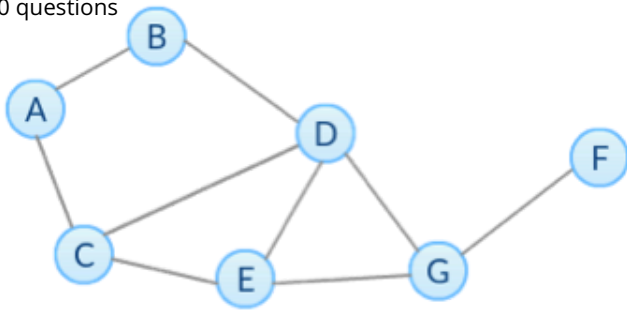


- ☐ 0.6
- ☐ 0.75
- ☐ 0.7
- ☐ 0.875

1
point

3.

Based on the network below, what is the normalized betweenness centrality (excluding endpoints) of node G?

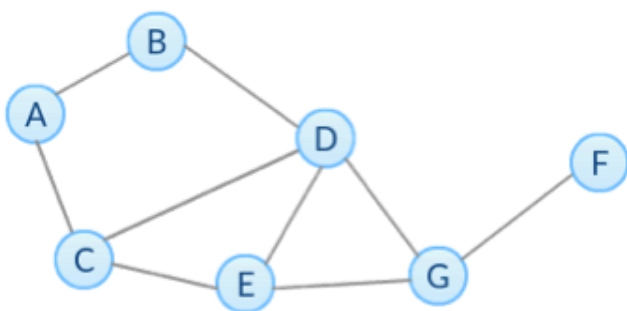

- ☐ 0.24
- ☐ 0.67
- ☐ 0.33
- ☐ 0.47


Module 3 Quiz

Quiz, 10 questions

1
point

4.

Based on the network below, what is the betweenness centrality without normalization of edge (G,F)?

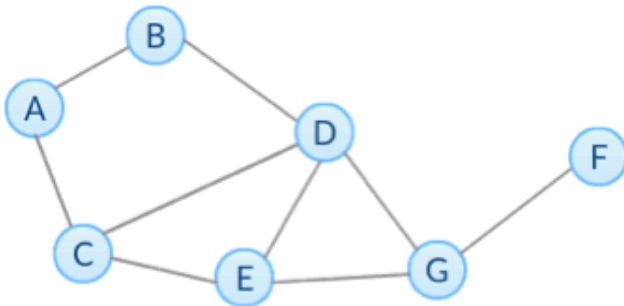

- ☐ 4
- ☐ 5
- ☐ 6
- ☐ 7

1
point

5.

Select all True statements.

- ☐ The node with highest betweenness centrality in a network also has the highest closeness centrality.
- ☐ In directed networks, in-degree and out-degree centrality of a node are always the same.
- ☐ The closeness centrality of a node describes how far the node is from others.
- ☐ We can use subsets of node-pairs to approximate betweenness centrality.
- ☐ The assumption of degree centrality is that important nodes have more connections.

Module 3 Quiz

Quiz, 10 questions

6.

Select all True statements about Page Rank (PR) and HITS in directed networks.

- ☐ Nodes with high in-degree centrality have higher PRs than nodes with low in-degree centrality.
 - ☐ Nodes that have outgoing edges to good hubs are good authorities, and nodes that have incoming edges from good authorities are good hubs.
 - ☐ Adding in-links of a node will never decrease its PR.
 - ☐ The authority and hub score of each node is obtained by computing multiple iterations of HITS algorithm and both scores of most networks are convergent.
 - ☐ Adding out-links of a node will always decrease its PR.
-

1
point

7.

Given the network below, which value of alpha (damping parameter) listed below in the NetworkX function pagerank maximizes the PageRank of node D?



- ☐ 0.8
 - ☐ 0.5
 - ☐ 0.95
 - ☐ 0.9
-


1
point

8.

Based on the network below, what is the basic PR of node C at step $k = 1$?

Module 3 Quiz

Quiz, 10 questions

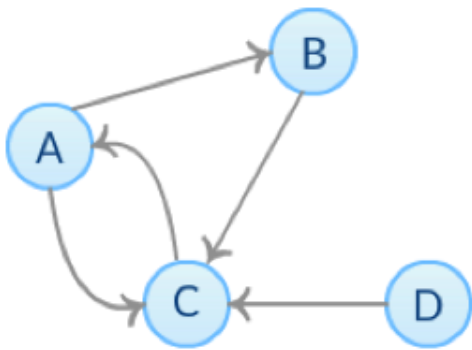


- ☐ 0.125
 - ☐ 0.375
 - ☐ 0.625
 - ☐ 0.5
 - ☐ 0.25
-

1
point

9.

Based on the network below, what are the corresponding normalized authority and hub scores of node C correspondingly after two iterations of HITS algorithm?

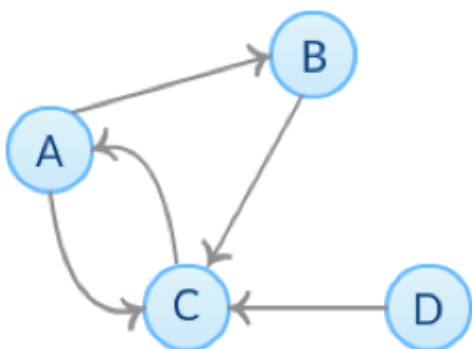

- ☐ 0.57, 0.09
- ☐ 0.4, 0.4

Module 3 Quiz


Quiz, 10 questions

0.33, 0.33

1
point

10.

Based on the network below, which of the following is NOT True? Check all that apply.

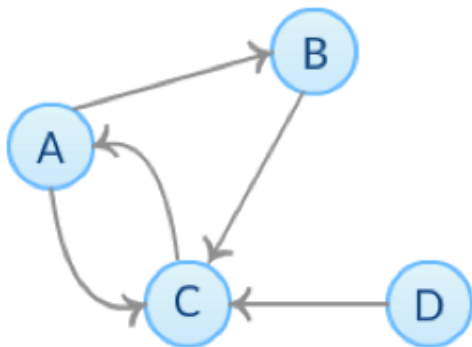

- ☐ At step k ($k \geq 1$), node A's basic PR is always the same as node C's basic PR at step $k-1$.
- ☐ At each step, the sum of all nodes' basic PR is always 1.
- ☐ Node D's basic PR at step k ($k \geq 1$) is always 0.
- ☐ Node D's authority and hub score after k iterations ($k \geq 1$) are always 0.

☐ I, **Yaohan Li**, understand that submitting work that isn't my own may result in permanent failure of this course or deactivation of my Coursera account.

[Learn more about Coursera's Honor Code](#)

Submit Quiz

