

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

1 of 61

Applicant

: Dongguan Yaoshun Technology Co., Ltd.

Address

: Room 701, Room 801, Building 1, No. 3, Weixing Road, Chashan Town, Dongguan City, Guangdong Province, China

Sample description

: fort building kit

Item no.

: LONDY-2569 ,LONDY-25100, LONDY-25130 ,LONDY-25228,
LONDY-25691,LONDY-251001, LONDY-251301 ,LONDY-252281,
69PCS,YG130OCS,130PCS,158PCS,YS-LD26168L ,YS-LD26168F

SKU

: LONDY-2569 ,LONDY-25100, LONDY-25130 ,LONDY-25228,
LONDY-25691,LONDY-251001, LONDY-251301 ,LONDY-252281,
69PCS,YG130OCS,130PCS,158PCS,YS-LD26168L ,YS-LD26168F

Manufacturer

: Dongguan Yaoshun Technology Co., Ltd.

Country of origin

: CHINA

Country of destination

: EU,UK,USA,CA

Sample received date

: May 15, 2026

Test Period

: May 15, 2026 To JUL 01, 2026

Photo of Submitted Sample



A

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

2 of 61



B



C



D

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 3 of 61



E



F




G

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 4 of 61



H

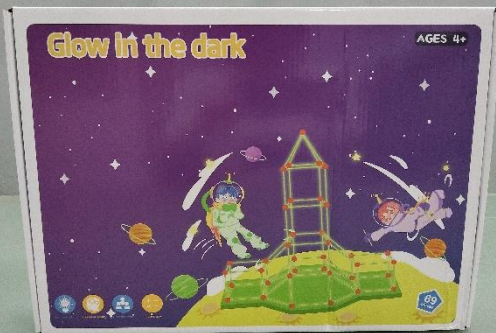

I



J


LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 5 of 61



LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 6 of 61

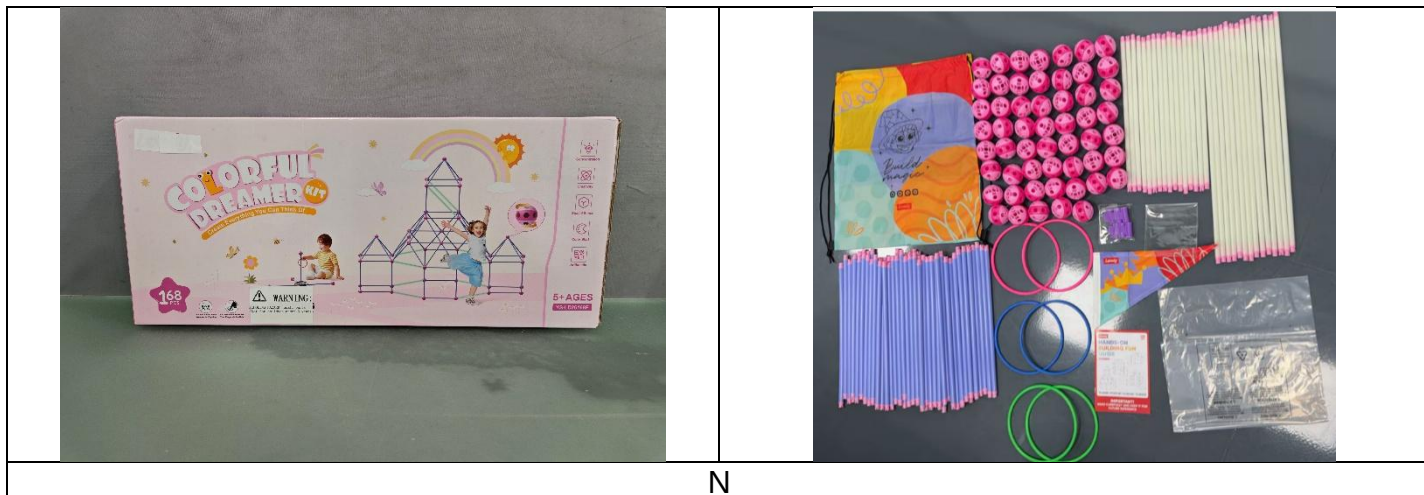

N

For and on behalf of
Eurofins MTS Consumer Product Testing
(Dongguan) Co. Ltd

Albert Chen

Albert Chen
Manager – Toys, Arts and Crafts Division

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 7 of 61

The following test item(s) was/were performed on submitted sample(s) and/or component(s) confirmed by applicant

TEST RESULT SUMMARY	
Test Requested	Results
ASTM F963-23 Standard Consumer Safety Specification for Toy Safety: Evaluation for Physical Safety Requirements, Labeling, Instructional Literature and Producer's Marking	PASS
Federal Hazardous Substances Act Regulations, 16 CFR 1500 Mechanical Hazards	PASS
Federal Hazardous Substances Act Regulations, 16 CFR 1500.3 (c)(6)(vi) Flammable Solid	PASS
Physical and Mechanical Hazards, Toys Regulations SOR/2011-17, Canada Consumer Product Safety Act	PASS
Physical and Mechanical Hazards, Canada Consumer Product Safety Act (S.C. 2010, c.21), Schedule 2	NOT APPLICABLE
Thermal Flammability Hazards, Toys Regulations SOR/2011-17	PASS
BS EN 71 Part 1: 2014+A1:2018, "Safety of toys – Part 1: Mechanical and physical properties"	PASS
General Labeling Requirement in 2011 No. 1881 the Toys (Safety) Regulations 2011	PASS
BS EN 71 Part 2:2020+A1:2025, "Safety of toys – Part 2: Flammability"	PASS
EN 71 Part 1: 2014+A1:2018, "Safety of toys – Part 1: Mechanical and physical properties"	PASS
General Labeling Requirement in Toy Safety Directive, 2009/48/EC	PASS
EN 71 Part 2:2020+A1:2025, "Safety of toys – Part 2: Flammability"	PASS
ASTM F963-23 Section 4.2 Annex A6. Flammability testing procedure for fabrics	PASS
Flammability of outer covering (SOR/2011-17 section 32)	PASS
Total Lead Content – U.S. Consumer Product Safety Improvement Act of 2008 (CPSIA), Title I, Section 101	PASS
Heavy Metals Content in Paint or Similar Surface Coating Materials and Substrate Materials – ASTM F963-23 Section 4.3.5.1 & 4.3.5.2	PASS
Phthalates Content – 16CFR part 1307, amended U.S. Consumer Product Safety Improvement Act of 2008 (CPSIA), Title I, Section 108	PASS
Phthalates Content in Toys (including pacifiers, rattles, and teethingers) – ASTM F963-23 Section 4.3.8	PASS
Heavy Metals Content – Canada Consumer Product Safety Act – Toys Regulations, SOR/2011-17 with Amendment SOR/2022-122, Item 23	NOT APPLICABLE
Total Lead Content – Canada Consumer Product Safety Act – Surface Coating Materials Regulation SOR/2016-193 with Amendment SOR/2022-122	NOT APPLICABLE
Total Lead Content – Canada Consumer Product Safety Act – Consumer Products Containing Lead Regulations (SOR/2018-83)	PASS
Phthalates Content – Canada Consumer Product Safety Act – Phthalates Regulations, SOR/2016-188	NOT APPLICABLE
Migration of Certain Elements – EN 71-3:2019 + A2:2024	PASS
Migration of Certain Elements – BS EN 71-3:2019 + A2:2024	PASS
Phthalates Content – Entry 51 & 52 of Annex XVII of European Regulation (EC) No. 1907/2006, No. 552/2009 and No.2018/2005 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) & The REACH etc. (Amendment etc.) (EU Exit) Regulations 2019 (S.I. 2019 No. 758) as amended	PASS

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant. Eurofins will not be liable for the authenticity of the information. This test report is valid for the tested sample only. Without permission of the test center this test report is not permitted to be duplicated in extracts. Unless otherwise required by the applicant or method/regulation, decision rule in this report did not consider the measurement uncertainty.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

8 of 61

TEST RESULTS:

1. ASTM F963-23 Standard Consumer Safety Specification for Toy Safety: Evaluation for Physical Safety Requirements, Labeling, Instructional Literature and Producer's Marking

Test sample: A~N

AGE GRADE EVALUATION:

Client requested age grade: Not Specified

Labeled age grade: YS-LD26168F, YS-LD26168L, YS LD-25100, YS-LD25130, YS-LD25228:5+
YS-LD25691, YS-LD2569, 158PCS:3+
Others:4+

Lab recommended age grade: Ages over 3 years

Age grade for testing: Ages over 3 years

Section	REQUIREMENT		RESULT
4	SAFETY REQUIREMENTS		
4.1	Material Quality		P
4.3.7	Stuffing Materials		NA
4.4	Electrical/Thermal Energy		NA
4.5	Sound-producing Toys		NA
4.6	Small Objects		P
4.7	Accessible Edges		P
4.8	Projections		NA
4.9	Accessible Points		P
4.10	Wires or Rods		NA
4.11	Nails and Fasteners		NA
4.12	Plastic Film		P
4.13	Folding Mechanisms and Hinges		NA
4.14	Cords, Straps, and Elastics		NA
	☐	4.14.6 Exemption for straps used for waist restraints on ride-on toys are exempt from the free length and loop requirements	
4.15	Stability and Over-load Requirements		NA
4.16	Confined Spaces		NA
4.17	Wheels, Tires, and Axles		NA
4.18	Holes, Clearance, and Accessibility of Mechanisms		NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

9 of 61

Section	REQUIREMENT	RESULT
4.19	Simulated Protective Devices	NA
4.20.1	Pacifiers with Rubber Nipples	NA
4.20.2	Toy Pacifiers	NA
4.21	Projectile Toys	NA
4.22	Teethers and Teething Toys	NA
4.23	Rattles	NA
4.24	Squeeze Toys	NA
4.25	Battery-operated Toys	NA
4.26	Toys Intended to be Attached to a Crib or Playpen	NA
4.27	Stuffed and Beanbag-type Toys	NA
4.28	Stroller and Carriage Toys	NA
4.29	Art Materials	NA
4.30	Toy Gun Marking	NA
4.31	Balloons	NA
4.32	Certain Toys with Nearly Spherical Ends	NA
4.33	Marbles	NA
4.34	Balls	NA
4.35	Pompoms	NA
4.36	Hemispheric-shaped Objects	NA
4.37	Yo Yo Elastic Tether Toys	NA
	☐ 4.37.2 Exemptions for paddle balls AND for sport balls with wrist or ankle straps longer than 70 cm (27.6 in) intended to be kicked or thrown and returned to the user	
4.38	Magnets	NA
	☐ 4.38.3 Exemption for magnetic/electrical experimental sets intended for children eight years of age and over that contain a loose as-received hazardous magnet or a loose as-received hazardous magnetic component, or both.	
4.39	Jaw Entrapment in Handles and Steering Wheels	NA
	☐ 4.39.2 Exemption for handles that are connected to the toy with a hinge and handles made from a pliable material.	
4.40	Expanding Materials	NA
4.41	Toy Chests	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

10 of 61

Section	REQUIREMENT	RESULT
5	LABELING REQUIREMENTS	
5.1.2	Tracking label	P
5.3	Safety labeling Requirements	P
5.4	Aquatic Toys	NA
5.5	Crib and Playpen Toys	NA
5.6	Mobiles	NA
5.7	Stroller and Carriage Toys	NA
5.8	Toys Intended to be Assembled by an Adult	NA
5.9	Simulated Protective Devices	NA
5.10	Toys with Functional Sharp Edges or Points	NA
5.11	Small Objects, Small Balls, Marbles, and Balloons	P
5.12	Art Materials	NA
5.14	Battery Operated Toys	NA
5.15	Promotional Materials	P
5.16	Magnets	NA
6	INSTRUCTIONAL LITERATURE	
6.1	Definition and Description	P
6.2	Crib and Playpen Toys	NA
6.3	Mobiles	NA
6.4	Toy intended to be Assembled by an Adult	NA
6.5	Battery Operated Toys	NA
6.6	Battery Operated Ride-on Toys	NA
6.7	Toys in Contact with Food	NA
6.8	Toy Chests	NA
6.9	Instructional Materials	NA
7	PRODUCER'S MARKINGS	
7.1	Producer's Markings	P
7.2	Battery-Powered Ride-On Toys	NA
7.3	Toy Chests	NA

Note: P = Pass

F = Fail

NA = Not applicable

NR = Not Requested

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 11 of 61

2. Federal Hazardous Substances Act Regulations, 16 CFR 1500 Mechanical Hazards

Test sample: A~N

AGE GRADE EVALUATION:

Client requested age grade: Not Specified
YS-LD26168F, YS-LD26168L, YS LD-25100, YS-LD25130, YS-LD25228:5+
Labeled age grade: YS-LD25691, YS-LD2569, 158PCS:3+
Others:4+
Appropriate age grade: Ages over 3 years
Age grade for testing: Ages over 3 years

<u>SUBCLAUSE</u>	<u>RESULT</u>
16 CFR 1500.47 & 1500.86(a)(6) Impulsive noise – Toy cap	NA
16 CFR 1501 Small Parts	NA
16 CFR 1500.48 Sharp points	P
16 CFR 1500.49 Sharp edges	P
16 CFR 1500.18(a)(17) Small balls	NA
16 CFR 1511 Pacifiers	NA
16 CFR 1510 Rattles	NA

16 CFR 1500.50 Abuse Tests

<u>Abuse Tests</u>	<u>Test conditions</u>	<u>Abuse Tests</u>	<u>Test conditions</u>
Impact test	4 X 3 ft	Tension test	15 lbs
Tip-over test	NA	Compression test	NA
Torque test	4 in-lbs / 180°	Flexure test	NA

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

3. Federal Hazardous Substances Act Regulations, 16 CFR 1500.3 (c)(6)(vi) Flammable Solid

Test sample: A~N

<u>TEST METHOD</u>	<u>REQUIREMENT</u>	<u>RESULT</u>
16 CFR 1500.44 Flammable solid ASTM F963-23 Annex A5	Burnt rate shall be ≤ 0.1 inch / sec	P

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 12 of 61

4. Physical and Mechanical Hazards, Toys Regulations SOR/2011-17, Canada Consumer Product Safety Act

Test sample: A~N

AGE GRADE EVALUATION:

Client requested age grade: Not Specified
Labeled age grade: YS-LD26168F, YS-LD26168L, YS LD-25100, YS-LD25130, YS-LD25228:5+
YS-LD25691, YS-LD2569, 158PCS:3+
Others:4+
Lab recommended age grade: Ages over 3 years
Age grade for testing: Ages over 3 years

ITEM	REQUIREMENTS	RESULT
General		
3	Official languages	P
Packaging		
4	Flexible film bags	P
Electrical Hazards		
5	Electrically operated toys	NA
6	Electrically heated toys	NA
Mechanical Hazards		
7	Small parts	NA
8	Metal edges	NA
9	Wire frames	NA
10	Plastic edges	P
11	Wood	NA
12	Glass	NA
13	Fasteners	NA
14	Safety stops or locking devices	NA
15	Spring-wound driving mechanisms	NA
16	Projectile components	NA
17	Enclosures	NA
18	Stability	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

13 of 61

ITEM	REQUIREMENTS	RESULT
Auditory Hazards		
19	Decibel limit	NA
Specific Products – Dolls, Plush Toys and Soft Toys		
28	Fastenings	NA
29	Stuffing	NA
30	Small parts	NA
31	Eyes and noses	NA
Specific Products – Plant Seeds		
35	Plant seeds – noise	NA
36	Plant seeds – stuffing material	NA
Specific Products –Pull and push toys		
37	Shaft-like handles	NA
Specific Products – Toy steam engines		
38	Boilers – safety valves	NA
Specific Products – Finger paints		
39	Water based paints	NA
Specific Products – Rattles		
40	Construction	NA
Specific Products – Elastic		
41	Length or extensibility	NA
Specific Products – Yo Yo Type Balls		
42 (1)	Stretchable cords	NA
42 (2)	Similar product	NA
Specific Products – Magnetic Toys		
43	Magnetic force	NA
44 (1)	Exceptions	NA
44 (2)	Warning — container and instructions for use	NA

Note: P = Pass

F = Fail

NA = Not applicable

NR = Not Requested

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 14 of 61

5. Physical and Mechanical Hazards, Canada Consumer Product Safety Act (S.C. 2010, c.21), Schedule 2

Test sample: A~N

ITEM	REQUIREMENTS	RESULT
1	Jequirity beans	NA
2	Spectacle frames contain cellulose nitrate	NA
3	Baby walkers	NA
5	Structural devices that position feeding bottles to allow babies to feed themselves from the bottle while unattended	NA
8 and 9	Kites and kite strings	NA
14	Lawn darts with elongated tips	NA

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

6. Thermal Flammability Hazards, Toys Regulations SOR/2011-17

Test sample: A~N

ITEM	REQUIREMENTS	RESULT
Thermal and Flammability Hazards		
20	Heated surfaces, parts or substances	NA
21	Celluloid or cellulose nitrate	P
Specific Products – Dolls, Plush Toys and Soft Toys		
32	Flammability of outer covering	P
33	Flammability of yarn	NA
34	Flammability of hair or mane	NA
Toys Intended to be Entered by a Child		
46	Requirements and testing	P
47 (1)	Warning	P
47 (2)	Alert symbol	P
47 (3)	Additional requirement	P

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 15 of 61

7. BS EN 71 Part 1: 2014+A1:2018, "Safety of toys – Part 1: Mechanical and physical properties"

Test sample: A~N

AGE GRADE EVALUATION:

Client requested age grade: Not Specified
Labeled age grade: YS-LD26168F, YS-LD26168L, YS LD-25100, YS-LD25130, YS-LD25228:5+
YS-LD25691, YS-LD2569, 158PCS:3+
Others:4+
Lab recommended age grade: Ages over 3 years
Age grade for testing: Ages over 3 years

SUBCLAUSE	REQUIREMENT	RESULT
4	<u>GENERAL REQUIREMENTS</u>	
4.1	Material cleanliness	P
4.2	Assembly	NA
4.3	Flexible plastic sheeting	NA
4.4	Toy Bags	NA
4.5	Glass	NA
4.6	Expanding materials	NA
4.7	Edges	P
4.8	Points and metallic wires	P
4.9	Protruding parts	NA
4.10	Parts moving against each other	NA
4.11	Mouth actuated toys and other toys intended to be put in the mouth	NA
4.12	Balloons	NA
4.13	Cords of toy kites and other flying toys	NA
4.14	Enclosures	NA
4.15	Toys intended to bear the mass of a child	NA
4.16	Heavy immobile toys	NA
4.17	Projectiles	NA
4.18	Aquatic toys and inflatable toys	NA
4.19	Percussion caps specifically designed for use in toys and toys using percussion caps	NA
4.20	Acoustics	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

16 of 61

SUBCLAUSE	REQUIREMENT	RESULT
4.21	Toys containing a non-electrical heat source	NA
4.22	Small balls	NA
4.23	Magnets	NA
4.24	Yo-yo balls	NA
4.25	Toys attached to food	NA
4.26	Toy disguise costumes –EN 14682	NA
4.27	Flying toys	NA
5	<u>TOYS INTENDED FOR CHILDREN UNDER 36 MONTHS</u>	
5.1	General requirements	NA
5.2	Soft-filled toys and soft-filled parts of a toy	NA
5.3	Plastic sheeting	NA
5.4	Cords, chains and electrical cables in toys	NA
5.5	Liquid-filled toys	NA
5.6	Speed limitation of electrically-driven ride-on toys	NA
5.7	Glass and porcelain	NA
5.8	Shape and size of certain toys	NA
5.9	Toys comprising monofilament fibres	NA
5.10	Small balls	NA
5.11	Play figures	NA
5.12	Hemispheric-shaped toys	NA
5.13	Suction cups	NA
5.14	Straps intended to be worn fully or partially around the neck	NA
5.15	Sledges with cords for pulling	NA
6	<u>PACKAGING</u>	P
7	<u>WARNING AND INSTRUCTION FOR USE</u>	
7.1	General	P
7.2	Toys not intended for children under 36 months	P
7.3	Latex balloons	NA
7.4	Aquatic toys	NA
7.5	Functional toys	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

17 of 61

SUBCLAUSE	REQUIREMENT	RESULT
7.6	Hazardous sharp functional edges and points	NA
7.7	Projectiles	NA
7.8	Imitation protective masks and helmets	NA
7.9	Toy kites	NA
7.10	Roller skates, inline skates, skateboards and certain other ride-on toys	NA
7.11	Toys intended to be attached to or strung across a cradle, cot, or perambulator	NA
7.12	Liquid-filled teethingers	NA
7.13	Percussion caps specifically designed for use in toys	NA
7.14	Acoustics	NA
7.15	Toy bicycles	NA
7.16	Toys intended to bear the mass of a child	NA
7.17	Toys comprising monofilament fibres	NA
7.18	Toy Scooters	NA
7.19	Rocking horse and similar toys	NA
7.20	Magnetic/electrical experimental sets	NA
7.21	Toys with electrical cables exceeding 300mm in length	NA
7.22	Toys with cords or chains intended for children of 18 months and over but under 36 months	NA
7.23	Toys intended to be attached to a cradle, cot or perambulator	NA
7.24	Sledges with cord for pulling	NA
7.25	Flying toys	NA
7.26	Improvised projectiles	NA

Note: P = Pass

F = Fail

NA = Not applicable

NR = Not Requested

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

18 of 61

8. General Labeling Requirement in 2011 No. 1881 the Toys (Safety) Regulations 2011

Test sample: A~N

REQUIREMENT	RESULT
UKCA Marking	See Note
Product Identification	P
Name and address of the Great British Manufacturer / Importer	P

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

Note: UKCA marking is not present on the packaging or product, but UK continues to accept toys with CE marking.

9. BS EN 71 Part 2:2020+A1:2025, "Safety of toys – Part 2: Flammability"

Test sample: A~N

SUBCLAUSE	REQUIREMENT	RESULT
4.1	General requirements	P
	Celluloid (cellulose nitrate)	P
	Highly flammable solids	P
	Surface flash	NA
	flammable gases, extremely flammable liquids, highly flammable liquids, flammable liquids and flammable gels	NA
4.2	Toys to be worn on the head	NA
4.2.2	Beards, moustaches, wigs, etc., made from pile or flowing elements which protrude 50 mm or more from the surface of the toy	NA
4.2.3	Beards, moustaches, wigs, etc., made from pile or flowing elements which protrude less than 50 mm from the surface of the toy	NA
4.2.4	Full or partial moulded head masks	NA
4.2.5	Toys to be worn on the head (except those covered by 4.2.2 and 4.2.3), hoods, headdresses including upward protruding items and masks not covered by 4.2.4 which partially or fully cover the head (e.g. fabric and paperboard masks, eye masks, face masks), but excluding those items covered by 4.3	NA
4.3	Toy disguise costumes and toys intended to be worn by a child in play	NA
4.4	Toys intended to be entered by a child	P
4.5	Soft-filled toys	NA

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 19 of 61

10. EN 71 Part 1: 2014+A1:2018, "Safety of toys – Part 1: Mechanical and physical properties"

Test sample: A~N

AGE GRADE EVALUATION:

Client requested age grade: Not Specified
Labeled age grade: YS-LD26168F, YS-LD26168L, YS LD-25100, YS-LD25130, YS-LD25228:5+
YS-LD25691, YS-LD2569, 158PCS:3+
Others:4+
Lab recommended age grade: Ages over 3 years
Age grade for testing: Ages over 3 years

SUBCLAUSE	REQUIREMENT	RESULT
4	<u>GENERAL REQUIREMENTS</u>	
4.1	Material cleanliness	P
4.2	Assembly	NA
4.3	Flexible plastic sheeting	NA
4.4	Toy Bags	NA
4.5	Glass	NA
4.6	Expanding materials	NA
4.7	Edges	P
4.8	Points and metallic wires	P
4.9	Protruding parts	NA
4.10	Parts moving against each other	NA
4.11	Mouth actuated toys and other toys intended to be put in the mouth	NA
4.12	Balloons	NA
4.13	Cords of toy kites and other flying toys	NA
4.14	Enclosures	NA
4.15	Toys intended to bear the mass of a child	NA
4.16	Heavy immobile toys	NA
4.17	Projectiles	NA
4.18	Aquatic toys and inflatable toys	NA
4.19	Percussion caps specifically designed for use in toys and toys using percussion caps	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

20 of 61

SUBCLAUSE	REQUIREMENT	RESULT
4.20	Acoustics	NA
4.21	Toys containing a non-electrical heat source	NA
4.22	Small balls	NA
4.23	Magnets	NA
4.24	Yo-yo balls	NA
4.25	Toys attached to food	NA
4.26	Toy disguise costumes –EN 14682	NA
4.27	Flying toys	NA
5	<u>TOYS INTENDED FOR CHILDREN UNDER 36 MONTHS</u>	
5.1	General requirements	NA
5.2	Soft-filled toys and soft-filled parts of a toy	NA
5.3	Plastic sheeting	NA
5.4	Cords, chains and electrical cables in toys	NA
5.5	Liquid-filled toys	NA
5.6	Speed limitation of electrically-driven ride-on toys	NA
5.7	Glass and porcelain	NA
5.8	Shape and size of certain toys	NA
5.9	Toys comprising monofilament fibres	NA
5.10	Small balls	NA
5.11	Play figures	NA
5.12	Hemispheric-shaped toys	NA
5.13	Suction cups	NA
5.14	Straps intended to be worn fully or partially around the neck	NA
5.15	Sledges with cords for pulling	NA
6	<u>PACKAGING</u>	P
7	<u>WARNING AND INSTRUCTION FOR USE</u>	
7.1	General	P
7.2	Toys not intended for children under 36 months	P
7.3	Latex balloons	NA
7.4	Aquatic toys	NA

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

21 of 61

SUBCLAUSE	REQUIREMENT	RESULT
7.5	Functional toys	NA
7.6	Hazardous sharp functional edges and points	NA
7.7	Projectiles	NA
7.8	Imitation protective masks and helmets	NA
7.9	Toy kites	NA
7.10	Roller skates, inline skates, skateboards and certain other ride-on toys	NA
7.11	Toys intended to be attached to or strung across a cradle, cot, or perambulator	NA
7.12	Liquid-filled teethingers	NA
7.13	Percussion caps specifically designed for use in toys	NA
7.14	Acoustics	NA
7.15	Toy bicycles	NA
7.16	Toys intended to bear the mass of a child	NA
7.17	Toys comprising monofilament fibres	NA
7.18	Toy Scooters	NA
7.19	Rocking horse and similar toys	NA
7.20	Magnetic/electrical experimental sets	NA
7.21	Toys with electrical cables exceeding 300mm in length	NA
7.22	Toys with cords or chains intended for children of 18 months and over but under 36 months	NA
7.23	Toys intended to be attached to a cradle, cot or perambulator	NA
7.24	Sledges with cord for pulling	NA
7.25	Flying toys	NA
7.26	Improvised projectiles	NA

Note: P = Pass

F = Fail

NA = Not applicable

NR = Not Requested

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

22 of 61

11. General Labeling Requirement in Toy Safety Directive, 2009/48/EC

Test sample: A~N

REQUIREMENT	RESULT
CE Marking	P
Product Identification	P
Name and address of the European Manufacturer / Importer	P
Care Instructions	NA

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

12. EN 71 Part 2:2020+A1:2025, "Safety of toys – Part 2: Flammability"

Test sample: A~N

SUBCLAUSE	REQUIREMENT	RESULT
4.1	General requirements	P
	Celluloid (cellulose nitrate)	P
	Highly flammable solids	P
	Surface flash	NA
	flammable gases, extremely flammable liquids, highly flammable liquids, flammable liquids and flammable gels	NA
4.2	Toys to be worn on the head	NA
4.2.2	Beards, moustaches, wigs, etc., made from pile or flowing elements which protrude 50 mm or more from the surface of the toy	NA
4.2.3	Beards, moustaches, wigs, etc., made from pile or flowing elements which protrude less than 50 mm from the surface of the toy	NA
4.2.4	Full or partial moulded head masks	NA
4.2.5	Toys to be worn on the head (except those covered by 4.2.2 and 4.2.3), hoods, headaddresses including upward protruding items and masks not covered by 4.2.4 which partially or fully cover the head (e.g. fabric and paperboard masks, eye masks, face masks), but excluding those items covered by 4.3	NA
4.3	Toy disguise costumes and toys intended to be worn by a child in play	NA
4.4	Toys intended to be entered by a child	P
4.5	Soft-filled toys	NA

Note: P = Pass F = Fail NA = Not applicable NR = Not Requested

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

23 of 61

ASTM F963-23 Section 4.2 Annex A6. Flammability testing procedure for fabrics
& Flammability of outer covering (SOR/2011-17 section 32)
Test sample photo:



AA



BB



CC



DD

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

24 of 61

13. ASTM F963-23 Section 4.2 Annex A6. Flammability testing procedure for fabrics

Fabric Description:			AA-Main Body		
☒ Plain surface ☐ Raised surface					
Original State			After Five Laundering		
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code
1.	10.3	/	1.	9.6	/
2.	10.7	/	2.	10.3	/
3.	9.8	/	3.	10.1	/
4.	10.1	/	4.	9.5	/
5.	9.7	/	5.	9.9	/
Avg: 10.1 sec. with 5 specimen(s)			Avg: 9.9 sec. with 5 specimen(s)		
6	/	/	6	/	/
7.	/	/	7.	/	/
8.	/	/	8.	/	/
9.	/	/	9.	/	/
10.	/	/	10.	/	/
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
PASS					

Requirements	
Plain Surface Fabrics	Raised Surface Fabrics
All specimens either did not ignite, ignited but self-extinguished, or any combination thereof.	
Average burn time is 3.5 s or greater.	Average burn time is 4 s or greater.
If only 1 of 5 specimens ignites and burns the stop cord with a time of 3.5 s or more, samples are acceptable.	Average burn time is less than 4 s and all specimens burn with a surface flash where the intensity of the surface flame is insufficient to ignite, char, or melt the base fabric.
If only 1 of 5 specimens ignites and burns the stop cord in less than 3.5 seconds, test another set of 5 specimens. Compute the average time of flame spread for all 10 specimens. If 2 or more of these specimens ignite and burn the stop cord, average the results from those specimens. If only 1 of the 10 specimens ignites and burns the stop cord, samples are acceptable.	Only 1 of 5 specimens ignites and burns in less than 4s and the base fabric does not ignite or fuse or, Only 1 of 5 specimens ignites or burns in more than 4 s, regardless of whether the base fabric ignites or fuses

Explanation of flammability results:

Plain Surface Fabrics

DNI	Did Not Ignite.
IBE	Ignited But Extinguished.
0.0 Second (BB)	Time In Seconds, Actual Burn Time Measured and Recorded By The Timing Device in 0.0 Seconds.

Raised Surface Fabrics

SF uc	Surface Flash, Under The Stop Thread, But Does Not Break The Stop Thread.
SF pw	Surface Flash, Part Way. No Time Shown Because The Surface Flash Did Not Reach The Stop Thread.
SF poi	Surface Flash, At Point Of Impingement Only (Equivalent To "Did Not Ignite" For Plain Surface).
0.0 Sec (BB)	Actual Burn Time Measured and Recorded By The Timing Device in 0.0 seconds
0.0 SF only	Time In Seconds, Surface Flash Only. No Damage To The Base Fabric.
0.0 SFBB	Time In Seconds, Surface Flash Base Burn Starting At Places Other Than The Point Of Impingement As A Result Of Surface Flash.
0.0 SFBB poi	Time In Seconds, Surface Flash Base Burn Starting At The Point Of Impingement.
0.0 SFBB poi*	Time In Seconds, Surface Flash Base Burn Possibly Starting At The Point Of Impingement. The Asterisk Is Accompanied By The Following Statement: "Unable To Make Absolute Determination As To Source Of Base Burn".

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

25 of 61

Fabric Description:			AA & BB-Black Mesh		
☒ Plain surface			☐ Raised surface		
Original State			After Five Laundering		
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code
1.	9.0	/	1.	9.4	/
2.	8.8	/	2.	8.0	/
3.	9.5	/	3.	8.7	/
4.	9.3	/	4.	8.6	/
5.	8.7	/	5.	9.2	/
Avg: 9.1 sec. with 5 specimen(s)			Avg: 8.8 sec. with 5 specimen(s)		
6	/	/	6	/	/
7.	/	/	7.	/	/
8.	/	/	8.	/	/
9.	/	/	9.	/	/
10.	/	/	10.	/	/
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
PASS					

Requirements

Plain Surface Fabrics

All specimens either did not ignite, ignited but self-extinguished, or any combination thereof.

Average burn time is 3.5 s or greater.

If only 1 of 5 specimens ignites and burns the stop cord with a time of 3.5 s or more, samples are acceptable.

If only 1 of 5 specimens ignites and burns the stop cord in less than 3.5 seconds, test another set of 5 specimens. Compute the average time of flame spread for all 10 specimens. If 2 or more of these specimens ignite and burn the stop cord, average the results from those specimens. If only 1 of the 10 specimens ignites and burns the stop cord, samples are acceptable.

Raised Surface Fabrics

Average burn time is 4 s or greater.

Average burn time is less than 4 s and all specimens burn with a surface flash where the intensity of the surface flame is insufficient to ignite, char, or melt the base fabric.

Only 1 of 5 specimens ignites and burns in less than 4s and the base fabric does not ignite or fuse or, Only 1 of 5 specimens ignites or burns in more than 4 s, regardless of whether the base fabric ignites or fuses

Explanation of flammability results:

Plain Surface Fabrics

DNI	Did Not Ignite.
IBE	Ignited But Extinguished.
0.0 Second (BB)	Time In Seconds, Actual Burn Time Measured and Recorded By The Timing Device in 0.0 Seconds.

Raised Surface Fabrics

SF uc	Surface Flash, Under The Stop Thread, But Does Not Break The Stop Thread.
SF pw	Surface Flash, Part Way. No Time Shown Because The Surface Flash Did Not Reach The Stop Thread.
SF poi	Surface Flash, At Point Of Impingement Only (Equivalent To "Did Not Ignite" For Plain Surface).
0.0 Sec (BB)	Actual Burn Time Measured and Recorded By The Timing Device in 0.0 seconds
0.0 SF only	Time In Seconds, Surface Flash Only. No Damage To The Base Fabric.
0.0 SFBB	Time In Seconds, Surface Flash Base Burn Starting At Places Other Than The Point Of Impingement As A Result Of Surface Flash.
0.0 SFBB poi	Time In Seconds, Surface Flash Base Burn Starting At The Point Of Impingement.
0.0 SFBB poi*	Time In Seconds, Surface Flash Base Burn Possibly Starting At The Point Of Impingement. The Asterisk Is Accompanied By The Following Statement: "Unable To Make Absolute Determination As To Source Of Base Burn".

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

26 of 61

Fabric Description:			BB-Main Body		
☒ Plain surface			☐ Raised surface		
Original State			After Five Laundering		
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code
1.	9.1	/	1.	9.1	/
2.	10.2	/	2.	9.3	/
3.	10.0	/	3.	8.9	/
4.	9.8	/	4.	9.5	/
5.	9.3	/	5.	10.0	/
Avg: 9.7 sec. with 5 specimen(s)			Avg: 9.4 sec. with 5 specimen(s)		
6	/	/	6	/	/
7.	/	/	7.	/	/
8.	/	/	8.	/	/
9.	/	/	9.	/	/
10.	/	/	10.	/	/
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
PASS					

Requirements

Plain Surface Fabrics

All specimens either did not ignite, ignited but self-extinguished, or any combination thereof.

Average burn time is 3.5 s or greater.

If only 1 of 5 specimens ignites and burns the stop cord with a time of 3.5 s or more, samples are acceptable.

If only 1 of 5 specimens ignites and burns the stop cord in less than 3.5 seconds, test another set of 5 specimens. Compute the average time of flame spread for all 10 specimens. If 2 or more of these specimens ignite and burn the stop cord, average the results from those specimens. If only 1 of the 10 specimens ignites and burns the stop cord, samples are acceptable.

Raised Surface Fabrics

Average burn time is 4 s or greater.

Average burn time is less than 4 s and all specimens burn with a surface flash where the intensity of the surface flame is insufficient to ignite, char, or melt the base fabric.

Only 1 of 5 specimens ignites and burns in less than 4s and the base fabric does not ignite or fuse or, Only 1 of 5 specimens ignites or burns in more than 4 s, regardless of whether the base fabric ignites or fuses

Explanation of flammability results:

Plain Surface Fabrics

DNI	Did Not Ignite.
IBE	Ignited But Extinguished.
0.0 Second (BB)	Time In Seconds, Actual Burn Time Measured and Recorded By The Timing Device in 0.0 Seconds.

Raised Surface Fabrics

SF uc	Surface Flash, Under The Stop Thread, But Does Not Break The Stop Thread.
SF pw	Surface Flash, Part Way. No Time Shown Because The Surface Flash Did Not Reach The Stop Thread.
SF poi	Surface Flash, At Point Of Impingement Only (Equivalent To "Did Not Ignite" For Plain Surface).
0.0 Sec (BB)	Actual Burn Time Measured and Recorded By The Timing Device in 0.0 seconds
0.0 SF only	Time In Seconds, Surface Flash Only. No Damage To The Base Fabric.
0.0 SFBB	Time In Seconds, Surface Flash Base Burn Starting At Places Other Than The Point Of Impingement As A Result Of Surface Flash.
0.0 SFBB poi	Time In Seconds, Surface Flash Base Burn Starting At The Point Of Impingement.
0.0 SFBB poi*	Time In Seconds, Surface Flash Base Burn Possibly Starting At The Point Of Impingement. The Asterisk Is Accompanied By The Following Statement: "Unable To Make Absolute Determination As To Source Of Base Burn".

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

27 of 61

Fabric Description:		CC-Main Body			
☒ Plain surface		☐ Raised surface			
Original State			After Five Laundering		
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code
1.	12.7	/	1.	13.0	/
2.	14.8	/	2.	12.9	/
3.	13.4	/	3.	13.5	/
4.	14.5	/	4.	13.1	/
5.	13.8	/	5.	12.7	/
Avg: 13.8 sec. with 5 specimen(s)			Avg: 13.0 sec. with 5 specimen(s)		
6	/	/	6	/	/
7.	/	/	7.	/	/
8.	/	/	8.	/	/
9.	/	/	9.	/	/
10.	/	/	10.	/	/
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
PASS					

Requirements

Plain Surface Fabrics

All specimens either did not ignite, ignited but self-extinguished, or any combination thereof.

Average burn time is 3.5 s or greater.

If only 1 of 5 specimens ignites and burns the stop cord with a time of 3.5 s or more, samples are acceptable.

If only 1 of 5 specimens ignites and burns the stop cord in less than 3.5 seconds, test another set of 5 specimens. Compute the average time of flame spread for all 10 specimens. If 2 or more of these specimens ignite and burn the stop cord, average the results from those specimens. If only 1 of the 10 specimens ignites and burns the stop cord, samples are acceptable.

Raised Surface Fabrics

Average burn time is 4 s or greater.

Average burn time is less than 4 s and all specimens burn with a surface flash where the intensity of the surface flame is insufficient to ignite, char, or melt the base fabric.

Only 1 of 5 specimens ignites and burns in less than 4s and the base fabric does not ignite or fuse or, Only 1 of 5 specimens ignites or burns in more than 4 s, regardless of whether the base fabric ignites or fuses

Explanation of flammability results:

Plain Surface Fabrics

DNI	Did Not Ignite.
IBE	Ignited But Extinguished.
0.0 Second (BB)	Time In Seconds, Actual Burn Time Measured and Recorded By The Timing Device in 0.0 Seconds.

Raised Surface Fabrics

SF uc	Surface Flash, Under The Stop Thread, But Does Not Break The Stop Thread.
SF pw	Surface Flash, Part Way. No Time Shown Because The Surface Flash Did Not Reach The Stop Thread.
SF poi	Surface Flash, At Point Of Impingement Only (Equivalent To "Did Not Ignite" For Plain Surface).
0.0 Sec (BB)	Actual Burn Time Measured and Recorded By The Timing Device in 0.0 seconds
0.0 SF only	Time In Seconds, Surface Flash Only. No Damage To The Base Fabric.
0.0 SFBB	Time In Seconds, Surface Flash Base Burn Starting At Places Other Than The Point Of Impingement As A Result Of Surface Flash.
0.0 SFBB poi	Time In Seconds, Surface Flash Base Burn Starting At The Point Of Impingement.
0.0 SFBB poi*	Time In Seconds, Surface Flash Base Burn Possibly Starting At The Point Of Impingement. The Asterisk Is Accompanied By The Following Statement: "Unable To Make Absolute Determination As To Source Of Base Burn".

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

28 of 61

Fabric Description:			DD-Main Body		
☒ Plain surface			☐ Raised surface		
Original State			After Five Laundering		
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code
1.	/	DNI	1.	/	DNI
2.	/	DNI	2.	/	DNI
3.	/	DNI	3.	/	DNI
4.	/	DNI	4.	/	DNI
5.	/	DNI	5.	/	DNI
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
6	/	/	6	/	/
7.	/	/	7.	/	/
8.	/	/	8.	/	/
9.	/	/	9.	/	/
10.	/	/	10.	/	/
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)		
PASS					

Requirements

Plain Surface Fabrics

All specimens either did not ignite, ignited but self-extinguished, or any combination thereof.

Average burn time is 3.5 s or greater.

If only 1 of 5 specimens ignites and burns the stop cord with a time of 3.5 s or more, samples are acceptable.

If only 1 of 5 specimens ignites and burns the stop cord in less than 3.5 seconds, test another set of 5 specimens. Compute the average time of flame spread for all 10 specimens. If 2 or more of these specimens ignite and burn the stop cord, average the results from those specimens. If only 1 of the 10 specimens ignites and burns the stop cord, samples are acceptable.

Raised Surface Fabrics

Average burn time is 4 s or greater.

Average burn time is less than 4 s and all specimens burn with a surface flash where the intensity of the surface flame is insufficient to ignite, char, or melt the base fabric.

Only 1 of 5 specimens ignites and burns in less than 4s and the base fabric does not ignite or fuse or, Only 1 of 5 specimens ignites or burns in more than 4 s, regardless of whether the base fabric ignites or fuses

Explanation of flammability results:

Plain Surface Fabrics

DNI	Did Not Ignite.
IBE	Ignited But Extinguished.
0.0 Second (BB)	Time In Seconds, Actual Burn Time Measured and Recorded By The Timing Device in 0.0 Seconds.

Raised Surface Fabrics

SF uc	Surface Flash, Under The Stop Thread, But Does Not Break The Stop Thread.
SF pw	Surface Flash, Part Way. No Time Shown Because The Surface Flash Did Not Reach The Stop Thread.
SF poi	Surface Flash, At Point Of Impingement Only (Equivalent To "Did Not Ignite" For Plain Surface).
0.0 Sec (BB)	Actual Burn Time Measured and Recorded By The Timing Device in 0.0 seconds
0.0 SF only	Time In Seconds, Surface Flash Only. No Damage To The Base Fabric.
0.0 SFBB	Time In Seconds, Surface Flash Base Burn Starting At Places Other Than The Point Of Impingement As A Result Of Surface Flash.
0.0 SFBB poi	Time In Seconds, Surface Flash Base Burn Starting At The Point Of Impingement.
0.0 SFBB poi*	Time In Seconds, Surface Flash Base Burn Possibly Starting At The Point Of Impingement. The Asterisk Is Accompanied By The Following Statement: "Unable To Make Absolute Determination As To Source Of Base Burn".

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 29 of 61

14. Flammability of outer covering (SOR/2011-17 section 32)

Sample Description:	AA-Main Body
---------------------	--------------

Plain surface

Original State			Refurbishment State (After One Laundering)			REQUIREMENT
Preliminary Trial			Preliminary Trail			(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test. (2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.
☒ Face ☐ Back	Burning Time (sec.)	Burn Code	☐ Face ☐ Back	Burning Time (sec.)	Burn Code	
Length:	10.5#	/	Length:	/	/	
Width:	12.7	/	Width:	/	/	
Sequence Test After Preliminary Trial			Sequence Test After Preliminary Trial			
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code	
1.	10.3	/	1.	/	/	
2.	10.7	/	2.	/	/	
3.	9.8	/	3.	/	/	
4.	10.1	/	4.	/	/	
5.	9.7	/	5.	/	/	
Avg: 10.1 sec. with 5 specimen(s)			Avg: -- sec. with -- specimen(s)			
6	/	/	6	/	/	
7.	/	/	7.	/	/	
8.	/	/	8.	/	/	
9.	/	/	9.	/	/	
10.	/	/	10.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			

Classification: ☒ PASS,
☐ FAIL

Explanation Of Flammability Results:

Code	Description
FST	Flame Spread Time
DNI	Did Not Ignite
IBE	Ignited But Extinguished

The burning direction in sequence test is reference to the fastest burning direction found in preliminary trial test.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

30 of 61

Sample Description:	AA & BB-Black Mesh
---------------------	--------------------

Plain surface

Original State			Refurbishment State (After One Laundering)			REQUIREMENT
Preliminary Trial			Preliminary Trail			(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test. (2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.
☒ Face ☐ Back	Burning Time (sec.)	Burn Code	☐ Face ☐ Back	Burning Time (sec.)	Burn Code	
Length:	8.9#	/	Length:	/	/	
Width:	10.7	/	Width:	/	/	
Sequence Test After Preliminary Trial			Sequence Test After Preliminary Trial			
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code	
1.	9.0	/	1.	/	/	
2.	8.8	/	2.	/	/	
3.	9.5	/	3.	/	/	
4.	9.3	/	4.	/	/	
5.	8.7	/	5.	/	/	
Avg: 9.1 sec. with 5 specimen(s)			Avg: -- sec. with -- specimen(s)			
6	/	/	6	/	/	
7.	/	/	7.	/	/	
8.	/	/	8.	/	/	
9.	/	/	9.	/	/	
10.	/	/	10.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			

Classification: ☒ PASS,
☐ FAIL

Explanation Of Flammability Results:

Code	Description
FST	Flame Spread Time
DNI	Did Not Ignite
IBE	Ignited But Extinguished

The burning direction in sequence test is reference to the fastest burning direction found in preliminary trial test.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

31 of 61

Sample Description:	BB-Main Body
---------------------	--------------

Plain surface

Original State			Refurbishment State (After One Laundering)			REQUIREMENT
Preliminary Trial			Preliminary Trail			
☒ Face ☐ Back	Burning Time (sec.)	Burn Code	☐ Face ☐ Back	Burning Time (sec.)	Burn Code	(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test. (2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.
Length:	9.4#	/	Length:	/	/	
Width:	12.0	/	Width:	/	/	
Sequence Test After Preliminary Trial			Sequence Test After Preliminary Trial			
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code	
1.	9.1	/	1.	/	/	
2.	10.2	/	2.	/	/	
3.	10.0	/	3.	/	/	
4.	9.8	/	4.	/	/	
5.	9.3	/	5.	/	/	
Avg: 9.7 sec. with 5 specimen(s)			Avg: -- sec. with -- specimen(s)			
6	/	/	6	/	/	
7.	/	/	7.	/	/	
8.	/	/	8.	/	/	
9.	/	/	9.	/	/	
10.	/	/	10.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			

Classification: ☒ PASS,
☐ FAIL

Explanation Of Flammability Results:

Code	Description
FST	Flame Spread Time
DNI	Did Not Ignite
IBE	Ignited But Extinguished

The burning direction in sequence test is reference to the fastest burning direction found in preliminary trial test.

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 32 of 61

Sample Description:	CC-Main Body
---------------------	--------------

Plain surface

Original State			Refurbishment State (After One Laundering)			REQUIREMENT
Preliminary Trial			Preliminary Trail			
☒ Face ☐ Back	Burning Time (sec.)	Burn Code	☐ Face ☐ Back	Burning Time (sec.)	Burn Code	
Length:	14.7#	/	Length:	/	/	
Width:	16.9	/	Width:	/	/	
Sequence Test After Preliminary Trial			Sequence Test After Preliminary Trial			
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code	
1.	12.7	/	1.	/	/	
2.	14.8	/	2.	/	/	
3.	13.4	/	3.	/	/	
4.	14.5	/	4.	/	/	
5.	13.8	/	5.	/	/	
Avg: 13.8 sec. with 5 specimen(s)			Avg: -- sec. with -- specimen(s)			
6	/	/	6	/	/	
7.	/	/	7.	/	/	
8.	/	/	8.	/	/	
9.	/	/	9.	/	/	
10.	/	/	10.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			

(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test.

(2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.

(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test.

(2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.

Classification: ☒ PASS,
☐ FAIL

Explanation Of Flammability Results:

Code	Description
FST	Flame Spread Time
DNI	Did Not Ignite
IBE	Ignited But Extinguished

The burning direction in sequence test is reference to the fastest burning direction found in preliminary trial test.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

33 of 61

Sample Description:	DD-Main Body
---------------------	--------------

Plain surface

Original State			Refurbishment State (After One Laundering)			REQUIREMENT
Preliminary Trial			Preliminary Trail			
☒ Face ☐ Back	Burning Time (sec.)	Burn Code	☐ Face ☐ Back	Burning Time (sec.)	Burn Code	
Length:	/	DNI #	Length:	/	/	
Width:	/	DNI	Width:	/	/	
Sequence Test After Preliminary Trial			Sequence Test After Preliminary Trial			
No.	Burning Time (sec.)	Burn Code	No.	Burning Time (sec.)	Burn Code	
1.	/	DNI	1.	/	/	
2.	/	DNI	2.	/	/	
3.	/	DNI	3.	/	/	
4.	/	DNI	4.	/	/	
5.	/	DNI	5.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			
6	/	/	6	/	/	
7.	/	/	7.	/	/	
8.	/	/	8.	/	/	
9.	/	/	9.	/	/	
10.	/	/	10.	/	/	
Avg: -- sec. with -- specimen(s)			Avg: -- sec. with -- specimen(s)			

(1) A specimen that exhibits either base burning or surface burning of sufficient intensity to sever the stop cord in 7 seconds or less is considered to have failed the test.

(2) Test five additional specimens if one of the five specimens fail. If two out of 10 specimens fail, the doll, plush toy or soft toy does not meet the test requirement.

Classification: ☒ PASS,
☐ FAIL

Explanation Of Flammability Results:

Code	Description
FST	Flame Spread Time
DNI	Did Not Ignite
IBE	Ignited But Extinguished

The burning direction in sequence test is reference to the fastest burning direction found in preliminary trial test.

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 34 of 61

COMPONENT BREAKDOWN LIST :

Test Item	Component Description
A	YS-LD2569
A1	Red plastic (Hollow sphere)
A2	Orange plastic (Hollow sphere) (B/D/I/K)
A3	Yellow plastic (Hollow sphere) (B/D)
A4	Blue plastic (Hollow sphere)
A5	Purple plastic (Hollow sphere)
A6	Purple plastic (Connector clamp) (E/M)
A7	Blue plastic (Tube) (E/H)
A8	White fabric with multicolor printing (Blanket) (E)
A9	Silvery fabric with black printing (Blanket label) (E)
A10	Multicolor printing with multicolor printing (Bag) (B/C/D/E/G/H/M/N)
A11	Black fabric (Bag rope) (B/C/D/E/F/G/H/I/K/L/M/N)
A12	Black fabric (Bag ribbon) (B/C/D/E/F/G/H/I/J/K/L/M/N)
A13	Black net fabric (Bag) (B/C/D/E/F/G/H/J/M/N)
B	YS-LD25100
B1	Dark blue plastic (Tube) (F/L)
B2	Yellow plastic (Tube) (F)
B3	Green plastic (Tube) (D/F/H)
B4	Purple plastic (Tube) (F)
B5	Pink plastic (Tube) (F)
B6	White fabric with multicolor printing (Triangle flag) (C/D/F/G/H)
C	YS-LD25130
C1	Black plastic (Hollow sphere)
C2	Translucent white plastic (Tube) (G/J)
D	YS-LD25228
E	YS-LD25691
E1	Red plastic (Square hollow ball) (H)
E2	Orange plastic (Square hollow ball) (F/L)
E3	Yellow plastic (Square hollow ball) (F/H/L)
E4	Blue plastic (Square hollow ball)
E5	Purple plastic (Square hollow ball)
F	YS-LD251001
G	YS-LD251301
G1	Black plastic (Square hollow ball)
H	YS-LD252281
I	YAOSHUN69PCS
I1	Fluorescent green plastic (Tube) (K)
I2	White fabric with multicolor printing (Bag) (J/K/L)
J	YG130PCS
J1	Pale green plastic (Hollow sphere)
K	YAOSHUN130PCS
L	158PCS
M	YS-LD26168L
M1	Blue plastic (Ball)
M2	Dark blue plastic (Ball)
M3	Blue plastic (Top of the pole)
M4	Dark blue plastic (Top of the pole)
M5	Cream white plastic (Pole) (N)

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 35 of 61

Test Item	Component Description
M6	Pink plastic (Ring Toss)
M7	Blue plastic (Ring Toss)
M8	Green plastic (Ring Toss)
N	YS-LD26168F
N1	Pink plastic (Ball)
N2	Dark -pink plastic (Ball)
N3	Pink plastic (Top of the pole)
N4	Purple plastic (Pole)

TEST RESULT:

15. Total Lead Content – U.S. Consumer Product Safety Improvement Act of 2008 (CPSIA), Title I, Section 101

Test Item	Accessibility (Remark 1)	Classification	Total Lead (Pb) (ppm)		Conclusion
			Result	Limit	
A1+A2+A3	Accessible as received	Accessible substrate	ND	100	PASS
A4+A5+A6	Accessible as received	Accessible substrate	ND	100	PASS
A7+B1+B2	Accessible as received	Accessible substrate	ND	100	PASS
A8+A9+A10	Accessible as received	Accessible substrate	ND	100	PASS
B3+B4+B5	Accessible as received	Accessible substrate	ND	100	PASS
B6+I2	Accessible as received	Accessible substrate	ND	100	PASS
C1+C2+E1	Accessible as received	Accessible substrate	ND	100	PASS
E2+E3+E4	Accessible as received	Accessible substrate	ND	100	PASS
E5+G1+I1	Accessible as received	Accessible substrate	ND	100	PASS
J1+M1+M2	Accessible as received	Accessible substrate	ND	100	PASS
M3+M4+M5	Accessible as received	Accessible substrate	ND	100	PASS
M6+M7	Accessible as received	Accessible substrate	ND	100	PASS
M8	Accessible as received	Accessible substrate	ND	100	PASS
N1+N2	Accessible as received	Accessible substrate	ND	100	PASS
N3+N4	Accessible as received	Accessible substrate	ND	100	PASS

ND = Not Detected (Laboratory Reporting Limit = 10 ppm)

Method:

1) Lead in paint and other similar surface coatings:

The test is conducted according to the US CPSC Standard Operating Procedure for Determining Lead (Pb) in Paint and Other Similar Surface Coatings, February 25, 2011 (CPSC-CH-E1003-09.1)

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

36 of 61

2) Lead in metals:

The test is conducted according to the US CPSC Standard Operating Procedure for Determining Total Lead (Pb) in Children's Metal Products (Including Children's Metal Jewelry), November 15, 2012 (CPSC-CH-E1001-08.3)

3) Lead in other non-metal materials including plastics, glass and leather material:

The test is conducted according to the US CPSC Standard Operating Procedure for Determining Total Lead (Pb) in Non-Metal Children's Products, November 15, 2012 (CPSC-CH-E1002-08.3)

Remark:

1. The accessibility of the submitted sample is verified according to 16 CFR 1500.87 (e) before and after abuse.

Note: ppm = part per million = mg/kg (milligram per kilogram)

"<" = less than

16. Heavy Metals Content in Paint or Similar Surface Coating Materials and Substrate Materials – ASTM F963-23 Section 4.3.5.1 & 4.3.5.2

A.Total Lead Content

Test Item	Classification	Result (mg/kg)	Limit (mg/kg)	Conclusion
A1+A2+A3	Accessible substrate	ND	100	PASS
A4+A5+A6	Accessible substrate	ND	100	PASS
A7+B1+B2	Accessible substrate	ND	100	PASS
A8+A9+A10	Accessible substrate	ND	100	PASS
B3+B4+B5	Accessible substrate	ND	100	PASS
B6+I2	Accessible substrate	ND	100	PASS
C1+C2+E1	Accessible substrate	ND	100	PASS
E2+E3+E4	Accessible substrate	ND	100	PASS
E5+G1+I1	Accessible substrate	ND	100	PASS
J1+M1+M2	Accessible substrate	ND	100	PASS
M3+M4+M5	Accessible substrate	ND	100	PASS
M6+M7	Accessible substrate	ND	100	PASS
M8	Accessible substrate	ND	100	PASS
N1+N2	Accessible substrate	ND	100	PASS
N3+N4	Accessible substrate	ND	100	PASS

ND = Not Detected (Laboratory Reporting Limit = 10 mg/kg)

Method:

- 1) Lead in paint and other similar surface coatings: The test is conducted according to CPSC-CH-E1003-09.1
- 2) Lead in metals: The test is conducted according to CPSC-CH-E1001-08.3
- 3) Lead in other non-metal materials including plastics, glass and leather material: The test is conducted according to CPSC-CH-E1002-08.3

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

37 of 61

B. Soluble Heavy Metals Content

Test Item	Mass of Trace Amount (mg)	Result – Soluble Heavy Metals (mg/kg) (Remark 1)								Conclusion
		Sb	As	Ba	Cd	Cr	Pb	Hg	Se	
A1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A3	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A4	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A5	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A6	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A7	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A8	NA	6	ND	ND	ND	ND	ND	ND	ND	PASS
A9	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A10	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A11	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A12	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A13	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B3	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B4	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B5	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B6	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
C1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
C2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E3	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E4	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E5	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
G1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
I1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
I2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
J1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M3	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M4	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M5	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

38 of 61

Test Item	Mass of Trace Amount (mg)	Result – Soluble Heavy Metals (mg/kg) (Remark 1)								Conclusion
		Sb	As	Ba	Cd	Cr	Pb	Hg	Se	
M6	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M7	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M8	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N1	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N2	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N3	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N4	NA	ND	ND	ND	ND	ND	ND	ND	ND	PASS
Limit for Surface Coatings and Substrates Other Than Modeling Clay		60	25	1000	75	60	90	60	500	-
Limit for Modeling Clays		60	25	250	50	25	90	25	500	-

Sb = Antimony, As = Arsenic, Ba = Barium, Cd = Cadmium, Cr = Chromium, Pb = Lead, Hg = Mercury, Se = Selenium

ND = Not Detected (Laboratory Reporting Limit = 5 mg/kg)

Method: ASTM F963-23 Section 8.3.2 – 8.3.5. The heavy metals content was determined by Inductively Coupled Argon Plasma Spectrometer.

Remark: 1. All the reported results are adjusted analytical results with the analytical correction shown in the following table.

Element	Sb	As	Ba	Cd	Cr	Pb	Hg	Se
Analytical correction (%)	60	60	30	30	30	30	50	60

2. The accessibility of the submitted sample is verified according to ASTM F963-23 before and after abuse.

Note: mg/kg = milligram per kilogram
mg = milligram
“<” = less than

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

39 of 61

17. Phthalates Content – 16CFR part 1307, amended U.S. Consumer Product Safety Improvement Act of 2008 (CPSIA), Title I, Section 108

Test Item	Result – Phthalates Content (%)								Conclusion
	DBP	BBP	DEHP	DIBP	DCHP	DINP	DnHP/DHEXP	DPP/DPENP	
A1+A2+A3	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A4+A5+A6	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A7+B1+B2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B3+B4+B5	ND	ND	ND	ND	ND	ND	ND	ND	PASS
C1+C2+E1	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E2+E3+E4	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E5+G1+I1	ND	ND	ND	ND	ND	ND	ND	ND	PASS
J1+M1+M2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M3+M4+M5	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M6+M7	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M8	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N1+N2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N3+N4	ND	ND	ND	ND	ND	ND	ND	ND	PASS
Limit	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	-

ND = Not Detected (Laboratory Reporting Limit = 0.005%)

List of Phthalates:

Chemical Name	CAS No.	Chemical Name	CAS No.
Dibutyl phthalate (DBP)	84-74-2	Dicyclohexyl phthalate (DCHP)	84-61-7
Butyl benzyl phthalate (BBP)	85-68-7	Di-iso-nonyl phthalate (DINP)	28553-12-0/ 68515-48-0
Di-2-ethylhexyl phthalate (DEHP)	117-81-7	Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3
Di-iso-butyl phthalate (DIBP)	84-69-5	Dipentyl phthalate (DPP/DPENP)	131-18-0

Method: The test is conducted according to the US CPSC Standard Operation Procedure for Determination of Phthalates, January 17, 2018 (CPSC-CH-C1001-09.4)

Note: % = percentage
 “<” = less than
 “>” = more than

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

40 of 61

18. Phthalates Content in Toys (including pacifiers, rattles, and teethingers) – ASTM F963-23 Section 4.3.8

Test Item	Result – Phthalates Content (%)								Conclusion
	DBP	BBP	DEHP	DIBP	DCHP	DINP	DnHP/DHEXP	DPP/DPENP	
A1+A2+A3	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A4+A5+A6	ND	ND	ND	ND	ND	ND	ND	ND	PASS
A7+B1+B2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
B3+B4+B5	ND	ND	ND	ND	ND	ND	ND	ND	PASS
C1+C2+E1	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E2+E3+E4	ND	ND	ND	ND	ND	ND	ND	ND	PASS
E5+G1+I1	ND	ND	ND	ND	ND	ND	ND	ND	PASS
J1+M1+M2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M3+M4+M5	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M6+M7	ND	ND	ND	ND	ND	ND	ND	ND	PASS
M8	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N1+N2	ND	ND	ND	ND	ND	ND	ND	ND	PASS
N3+N4	ND	ND	ND	ND	ND	ND	ND	ND	PASS
Limit	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	-

ND = Not Detected (Laboratory Reporting Limit = 0.005%)

List of Phthalates:

Chemical Name	CAS No.	Chemical Name	CAS No.
Dibutyl phthalate (DBP)	84-74-2	Dicyclohexyl phthalate (DCHP)	84-61-7
Butyl benzyl phthalate (BBP)	85-68-7	Di-iso-nonyl phthalate (DINP)	28553-12-0/ 68515-48-0
Di-2-ethylhexyl phthalate (DEHP)	117-81-7	Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3
Di-iso-butyl phthalate (DIBP)	84-69-5	Dipentyl phthalate (DPP/DPENP)	131-18-0

Method: The test is conducted according to the US CPSC Standard Operation Procedure for Determination of Phthalates, January 17, 2018 (CPSC-CH-C1001-09.4)

Note: % = percentage
“<” = less than
“>” = more than

19. Heavy Metals Content – Canada Consumer Product Safety Act – Toys Regulations, SOR/2011-17 with Amendment SOR/2022-122, Item 23

Remark: Not applicable for the submitted sample.

LAB LOCATION: Dong Guan
REPORT NUMBER: EFW726054129-T-01

ISSUE DATE: JUL 01, 2026
PAGE: 41 of 61

20. Total Lead Content – Canada Consumer Product Safety Act – Surface Coating Materials Regulation SOR/2016-193 with Amendment SOR/2022-122

Remark: Not applicable for the submitted sample.

21. Total Lead Content – Canada Consumer Product Safety Act – Consumer Products Containing Lead Regulations (SOR/2018-83)

Test Item	Total Lead (Pb) (mg/kg)		Conclusion
	Result	Limit	
A1+A2+A3	ND	90	PASS
A4+A5+A6	ND	90	PASS
A7+B1+B2	ND	90	PASS
A8+A9+A10	ND	90	PASS
B3+B4+B5	ND	90	PASS
B6+I2	ND	90	PASS
C1+C2+E1	ND	90	PASS
E2+E3+E4	ND	90	PASS
E5+G1+I1	ND	90	PASS
J1+M1+M2	ND	90	PASS
M3+M4+M5	ND	90	PASS
M6+M7	ND	90	PASS
M8	ND	90	PASS
N1+N2	ND	90	PASS
N3+N4	ND	90	PASS

ND = Not detected (Laboratory Reporting Limit = 10 mg/kg)

Method: Sample was digested with nitric acid and analyzed by Atomic Absorption Spectrophotometer / Inductively Coupled Plasma Mass Spectrometer.

Note: mg/kg = milligram per kilogram
“<” = less than

22. Phthalates Content – Canada Consumer Product Safety Act – Phthalates Regulations, SOR/2016-188

Remark: Not applicable for the submitted sample. No PVC was found on the submitted sample.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

42 of 61

23. Migration of Certain Elements – EN 71-3:2019 + A2:2024

Category III: Scraped-off materials

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A1	A2	A3	A4	A5	A6	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

43 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A7	A8	A9	A10	A11	A12	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	14	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

44 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A13	B1	B2	B3	B4	B5	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

45 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	B6	C1	C2	E1	E2	E3	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	122	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

46 of 61

Extractable Elements	Result (mg/kg)					Migration Limit (mg/kg)
Test Item	E4	E5	G1	I1	I2	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	113	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	191	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

47 of 61

Extractable Elements	Result (mg/kg)					Migration Limit (mg/kg)
Test Item	J1	M1	M2	M3	M4	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	-
Aluminum (Al)	104	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	460
Strontium (Sr)	170	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

48 of 61

Extractable Elements	Result (mg/kg)				Migration Limit (mg/kg)
Test Item	M5	M6	M7	M8	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	-
Aluminum (Al)	176	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	460
Strontium (Sr)	293	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

49 of 61

Extractable Elements	Result (mg/kg)				Migration Limit (mg/kg)
Test Item	N1	N2	N3	N4	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	-

Method: With reference to EN 71-3:2019 + A2-2024. The heavy metals content was determined by Inductively Coupled Plasma Mass Spectrophotometer (ICP-MS) or Inductively Coupled Plasma Optical Emission Spectrometry (ICP-OES).

For samples of migrated chromium content lower than migration limit of Chromium (VI), no speciation test for Chromium (III) and chromium (VI) were conducted. The results were derived from that of total chromium.

For samples of migrated tin content calculated as tributyl tin lower than migration limit of organic tin, no organic tin test was conducted. The results were derived from that of Tin.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

50 of 61

Remark: 1. The material categories of tested item(s) are classified as below per clause 4.1 of this standard.

Category I: Dry, brittle, power like or pliable materials
Compressed paint tablets, materials intended to leave a trace or similar materials in solid form appearing as such in the toy (e.g. the cores of colouring pencils, chalk, crayons)
Pliable modelling materials, including modelling clays and plaster
Category II: Liquid or sticky materials
Liquid paints, including finger paints, varnishes, lacquers, liquid ink in pens and similar materials in liquid form appearing as such in the toy (e.g. slimes, bubble solution)
Glue sticks
Category III: Scraped-off materials
Coatings of paints, varnishes, lacquers, printing inks, polymers, foams and similar coatings
Polymeric and similar materials, including laminates, whether textile reinforced or not, but excluding other textiles
Paper and paper board
Textiles, whether natural or synthetic
Glass, ceramic, metallic materials
Other materials whether mass coloured or not (e.g. wood, fibre board, hard board, bone and leather)

- Result(s) of organic tin reported was / were the sum of Methyltin (MeT), Butyltin (BuT), Dibutyltin (DBT), Tributyltin (TBT), Tetrabutyltin (TeBT), Monooctyltin (MOT), Di-n-octyltin (DOT), Di-n-propyltin (DProT), Diphenyltin (DPHT), Triphenyltin (TPhT) and Dimethyltin (DMT) expressed as TBT.
- The accessibility of the submitted sample is verified according to EN71-1 before and after abuse.

Note: mg/kg = milligram per kilogram
mg = milligram
“<” = less than

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

51 of 61

24. Migration of Certain Elements – BS EN 71-3:2019 + A2:2024

Category III: Scraped-off materials

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A1	A2	A3	A4	A5	A6	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

52 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A7	A8	A9	A10	A11	A12	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	14	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

53 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	A13	B1	B2	B3	B4	B5	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

54 of 61

Extractable Elements	Result (mg/kg)						Migration Limit (mg/kg)
Test Item	B6	C1	C2	E1	E2	E3	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	122	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

55 of 61

Extractable Elements	Result (mg/kg)					Migration Limit (mg/kg)
Test Item	E4	E5	G1	I1	I2	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	113	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	191	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

56 of 61

Extractable Elements	Result (mg/kg)					Migration Limit (mg/kg)
Test Item	J1	M1	M2	M3	M4	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	-
Aluminum (Al)	104	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	460
Strontium (Sr)	170	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

57 of 61

Extractable Elements	Result (mg/kg)					Migration Limit (mg/kg)
Test Item	M5	M6	M7	M8	N1	-
Mass of Trace Amount (mg)	NA	NA	NA	NA	NA	-
Aluminum (Al)	176	<100	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	<10	<10	18750
Boron (B)	<100	<100	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	<10	<10	460
Strontium (Sr)	293	<100	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	PASS	PASS	-

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

58 of 61

Extractable Elements	Result (mg/kg)			Migration Limit (mg/kg)
Test Item	N2	N3	N4	-
Mass of Trace Amount (mg)	NA	NA	NA	-
Aluminum (Al)	<100	<100	<100	28130
Antimony (Sb)	<10	<10	<10	560
Arsenic (As)	<10	<10	<10	47
Barium (Ba)	<10	<10	<10	18750
Boron (B)	<100	<100	<100	15000
Cadmium (Cd)	<5	<5	<5	17
Chromium (III) (Cr III)	<10	<10	<10	460
Chromium (VI) (Cr VI)	<0.025	<0.025	<0.025	0.053
Cobalt (Co)	<10	<10	<10	130
Copper (Cu)	<10	<10	<10	7700
Lead (Pb)	<10	<10	<10	23
Manganese (Mn)	<10	<10	<10	15000
Mercury (Hg)	<10	<10	<10	94
Nickel (Ni)	<10	<10	<10	930
Selenium (Se)	<10	<10	<10	460
Strontium (Sr)	<100	<100	<100	56000
Tin (Sn)	<2.5	<2.5	<2.5	180000
Organic Tin	<2.5	<2.5	<2.5	12
Zinc (Zn)	<100	<100	<100	46000
Conclusion	PASS	PASS	PASS	-

Method: With reference to BS EN 71-3:2019 + A2-2024. The heavy metals content was determined by Inductively Coupled Plasma Mass Spectrophotometer (ICP-MS) or Inductively Coupled Plasma Optical Emission Spectrometry(ICP-OES).

For samples of migrated chromium content lower than migration limit of Chromium (VI), no speciation test for Chromium (III) and chromium (VI) were conducted. The results were derived from that of total chromium.

For samples of migrated tin content calculated as tributyl tin lower than migration limit of organic tin, no organic tin test was conducted. The results were derived from that of Tin.

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

59 of 61

Remark: 1. The material categories of tested item(s) are classified as below per clause 4.1 of this standard.

Category I: Dry, brittle, power like or pliable materials
Compressed paint tablets, materials intended to leave a trace or similar materials in solid form appearing as such in the toy (e.g. the cores of colouring pencils, chalk, crayons)
Pliable modelling materials, including modelling clays and plaster
Category II: Liquid or sticky materials
Liquid paints, including finger paints, varnishes, lacquers, liquid ink in pens and similar materials in liquid form appearing as such in the toy (e.g. slimes, bubble solution)
Glue sticks
Category III: Scraped-off materials
Coatings of paints, varnishes, lacquers, printing inks, polymers, foams and similar coatings
Polymeric and similar materials, including laminates, whether textile reinforced or not, but excluding other textiles
Paper and paper board
Textiles, whether natural or synthetic
Glass, ceramic, metallic materials
Other materials whether mass coloured or not (e.g. wood, fibre board, hard board, bone and leather)

- Result(s) of organic tin reported was / were the sum of Methyltin (MeT), Butyltin (BuT), Dibutyltin (DBT), Tributyltin (TBT), Tetrabutyltin (TeBT), Monooctyltin (MOT), Di-n-octyltin (DOT), Di-n-propyltin (DProT), Diphenyltin (DPHT), Triphenyltin (TPHT) and Dimethyltin (DMT) expressed as TBT.
- The accessibility of the submitted sample is verified according to EN71-1 before and after abuse.

Note: mg/kg = milligram per kilogram
mg = milligram
“<” = less than

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

60 of 61

25. Phthalates Content – Entry 51 & 52 of Annex XVII of European Regulation (EC) No. 1907/2006, No. 552/2009 and No.2018/2005 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) & The REACH etc. (Amendment etc.) (EU Exit) Regulations 2019 (S.I. 2019 No. 758) as amended

Test Item	Result (%)									Conclusion
	Part A					Part B				
	DBP	BBP	DEHP	DIBP	Total	DNOP	DIDP	DINP	Total	
A1+A2+A3	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
A4+A5+A6	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
A7+B1+B2	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
B3+B4+B5	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
C1+C2+E1	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
E2+E3+E4	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
E5+G1+I1	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
J1+M1+M2	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
M3+M4+M5	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
M6+M7	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
M8	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
N1+N2	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
N3+N4	ND	ND	ND	ND	<0.020	ND	ND	ND	<0.015	PASS
Limit	-	-	-	-	0.1	-	-	-	0.1	-

ND = Not Detected (Laboratory Reporting Limit = 0.005%)

List of Phthalates:

Chemical Name	CAS No.	Chemical Name	CAS No.
Dibutyl phthalate (DBP)	84-74-2	Di-n-octyl phthalate (DNOP)	117-84-0
Butyl benzyl phthalate (BBP)	85-68-7	Di-iso-decyl phthalate (DIDP)	26761-40-0/ 68515-49-1
Di-2-ethylhexyl phthalate (DEHP)	117-81-7	Di-iso-nonyl phthalate (DINP)	28553-12-0/ 68515-48-0
Di-iso-butyl phthalate (DIBP)	84-69-5	-	-

Method: 1) For plasticized or softened material on textile:
With reference to ISO 14389:2022.
2) For other polymeric material:
With reference to EN 14372:2004 Section 6.3.2.

Note: % = percentage
“<” = less than
“>” = more than

LAB LOCATION:

Dong Guan

ISSUE DATE:

JUL 01, 2026

REPORT NUMBER:

EFW726054129-T-01

PAGE:

61 of 61

****End of Test Report****

NOTE:

If there is question or concern regarding the above results, please contact the appropriate lab person below:

Technical question & concern:

Eve Luo
CS
Eve.Luo@cpt.eurofinscn.com

General question & concern:

dginfo@cpt.eurofinscn.com

This test report is governed by the Terms and Conditions, available on request or attached to the end of this test report. Attention is especially drawn to the limitations of liability, indemnification and jurisdictional provisions defined therein. This report is issued strictly based on the testing of the samples submitted by you. The test results in this report refer only to the sample(s) actually tested and do not refer or be deemed to refer to any bulk production from which such sample(s) may be said to have been obtained. In the event that Eurofins MTS Consumer Product Testing (Dongguan) Co. Ltd ("ERF") was requested to survey and test any bulk production quantity of samples, ERF, in the absence of any contrary written instructions, performed random sampling of bulk production for testing purposes. Variations in the conditions under which samples are stored, transported, etc., may lead to variations in the test results. ERF cannot anticipate and shall not be held responsible for variations in test results that may be due to factors beyond ERF's control, such as, sample cross-contamination, evaporation of volatile substances due to storage temperature, humidity, etc. This report does not constitute a recommendation, actual or implied, for any specific course of action. Other than the expressed warranties made in the Terms and Conditions of the ERF Test Request Form, ERF makes no warranties or representations either express or implied with respect to this report. In no circumstances whatsoever shall ERF be liable for any consequential, special or incidental damages arising out of, or in connection with this report.