

PRACTICAL - 2

Implementation and Time Analysis of Linear and Binary Search

Aim of the Practical:


To implement Linear Search and Binary Search in C++ and derive their time and space complexities.

2.1 Linear Search

Program:

```
#include <iostream>
using namespace std;
int linearSearch(int a[], int n, int key) {
    for (int i = 0; i < n; i++)
        if (a[i] == key) return i;
    return -1;
}
int main() {
    int a[] = {10, 25, 7, 40, 15, 30};
    int n = sizeof(a) / sizeof(a[0]);
    int key = 40;
    cout << linearSearch(a, n, key);
}
```

Output:

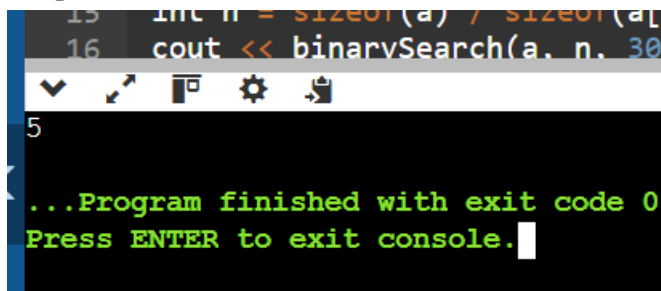

Time Analysis:

Derivation of Time Complexity:

Let n be the number of elements.

Best case: the key is the first element, so only one comparison is required.

$$T_{\text{best}}(n) = c = \Theta(1)$$

Worst case: the key is the last element or absent, so n comparisons are performed.

$$T_{\text{worst}}(n) = c_1 \cdot n + c_2 = \Theta(n)$$

Average case: assuming the key is equally likely to be at any position, expected comparisons are:

$$C_{\text{avg}}(n) = (1 + 2 + \dots + n) / n$$

$$C_{\text{avg}}(n) = [n(n + 1)/2] / n = (n + 1)/2$$

$$T_{\text{avg}}(n) = \Theta(n)$$

Final Time Analysis:

- Best Case: $\Theta(1)$.
- Average Case: $\Theta(n)$.
- Worst Case: $\Theta(n)$.
- Auxiliary Space: $\Theta(1)$.

Result:

Linear Search was implemented successfully and its comparison count was derived for best, average and worst cases.


2.1 Binary Search

Program:

```
#include <iostream>
using namespace std;
int binarySearch(int a[], int n, int key) {
    int low = 0, high = n - 1;
    while (low <= high) {
        int mid = low + (high - low) / 2;

        if (a[mid] == key) return mid;
        if (a[mid] < key) low = mid + 1;
        else high = mid - 1;
    }
    return -1;
}
int main() {
    int a[] = {5, 10, 15, 20, 25, 30, 35, 40};
    int n = sizeof(a) / sizeof(a[0]);
    cout << binarySearch(a, n, 30);
}
```

Output:

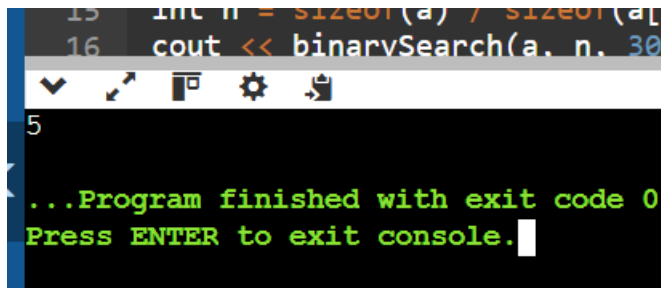

```
15 int n = sizeof(a) / sizeof(a[0]);
16 cout << binarySearch(a, n, 30);

5

...Program finished with exit code 0
Press ENTER to exit console.
```

Time Analysis:

Derivation using Recurrence / Master Method:

The algorithm discards half of the remaining elements at each step, forming the recurrence $T(n) = T(n/2) + c$.

This halves the array k times until $k = \log_2 n$.

This results in an Average and Worst-case time complexity of $\Theta(\log n)$, while the Best case is $\Theta(1)$.

Final Time Analysis:

- Best Case: $\Theta(1)$.
- Average Case: $\Theta(\log n)$.
- Worst Case: $\Theta(\log n)$.
- Auxiliary Space (iterative): $\Theta(1)$.

Result:

Binary Search was implemented successfully, and its logarithmic complexity follows directly from repeated halving.