


1.1.5 Student Pass or Fail

Algorithm

1. Start
2. Read the marks obtained by the student.
3. Check whether the marks are greater than or equal to 40.
4. If marks ≥ 40 , then display "Pass".
5. Otherwise, display "Fail".
6. Stop

FLOWCHART

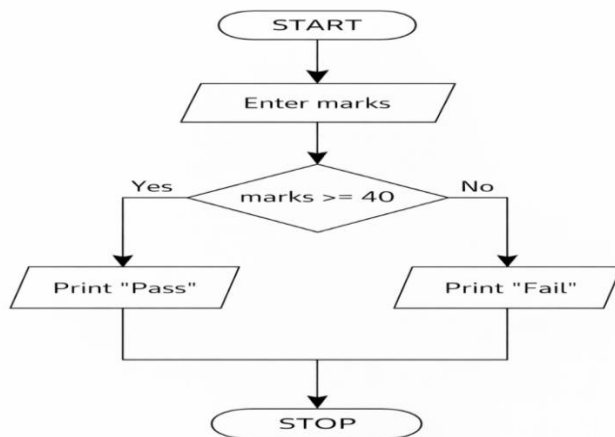

PROGRAM

The screenshot shows the CodeTANTRA IDE interface. On the left, the problem description for '1.1.5. Student Pass or Fail Status' is visible, including the criteria for passing (marks ≥ 40) and failing (marks < 40), and the input/output formats. The main editor displays the following Python code:

```
1 marks = int(input())
2 if marks >= 40:
3     print("Pass")
4 else:
5     print("Fail")
6
```

Below the code editor, the test results are shown. The average time is 0.003 s and the maximum time is 0.003 s. The results indicate that 3 out of 3 shown test cases passed and 4 out of 4 hidden test cases passed. The test cases are listed as follows:

Test Case	Expected output	Actual output
Test case 1	45	Pass
Test case 2	45	Pass
Test case 3	45	Pass

The interface also includes a 'Terminal' tab and a 'Test cases' button at the bottom.

