In [1]:
```
import numpy as np
```

In [2]:
```
import matplotlib.pyplot as plt
```

In [3]:
```
pt=[20,25,28,30,36,40,43]
pt2=[21,32,36,35,39,41,45]
pt3=[20,23,25,28,32,33]
```

In [4]:
```
plt.plot(pt)
plt.plot(pt2)
plt.plot(pt3)
plt.show()
```

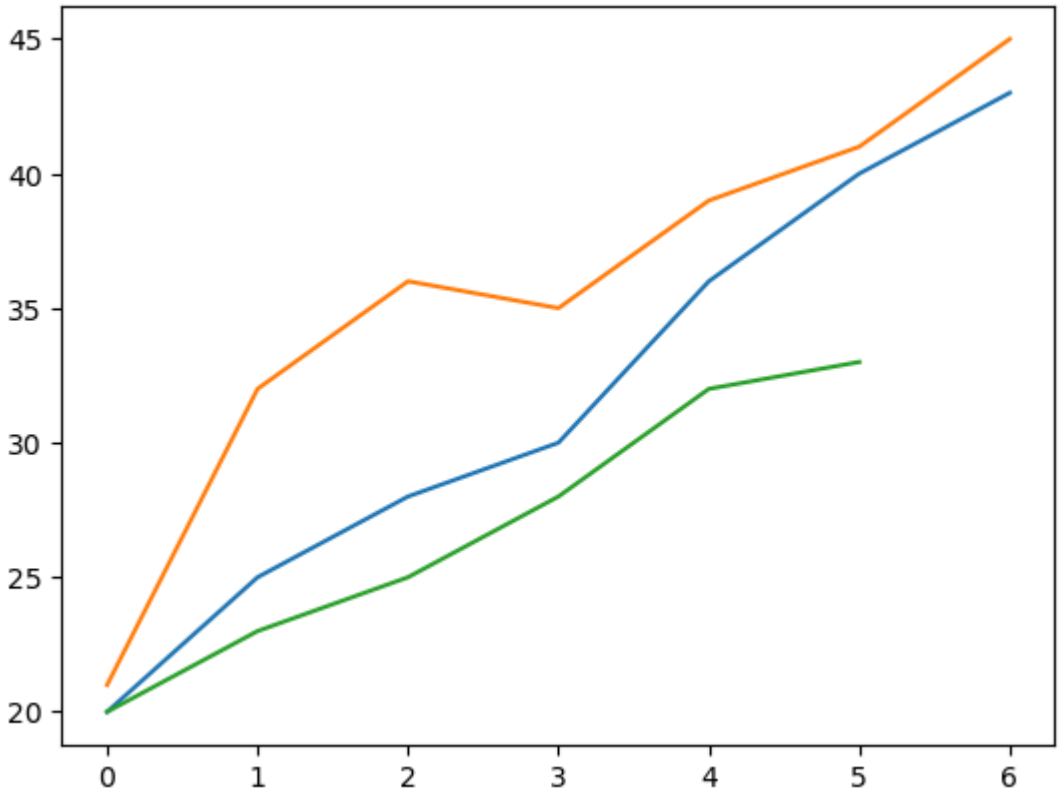

In [5]:
```
plt.plot(pt, c='r', marker='o', mec='g', mfc='y')
plt.plot(pt2, c='b', marker='X', mec='g', mfc='y')
plt.xlabel('sample point')
plt.ylabel('value')
plt.title('sample vs value')
plt.legend(['DBMS','CN'])
plt.show()
```

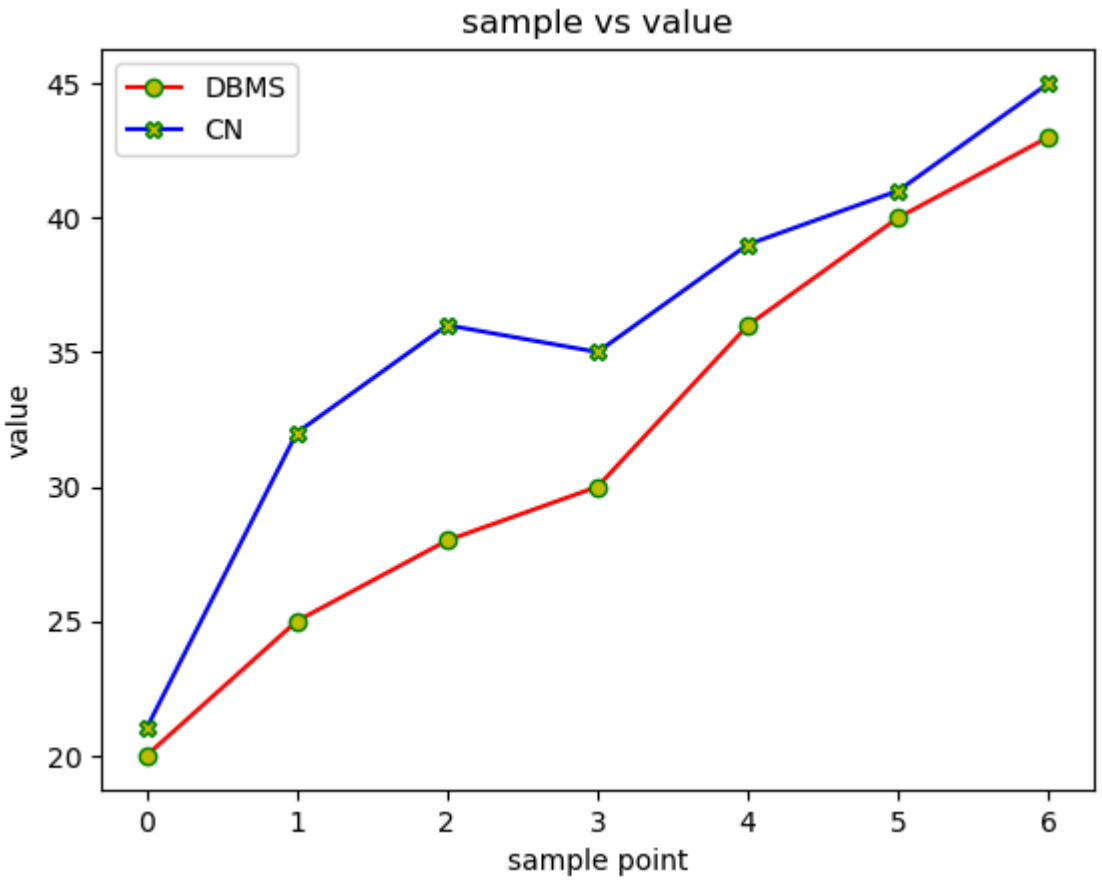

In [6]:
```
plt.plot(pt, c='r', marker='o', ls='--', mec='g', mfc='y')
plt.plot(pt2, c='b', marker='X', ls=':', mec='k', mfc='C6')
plt.plot(pt3, c='k', marker='s', ls="-.", mec='c', mfc='m')
plt.xlabel('sample point')
plt.ylabel('value')
plt.title('sample vs value')
plt.legend(['DBMS','CN','DSA'])
plt.show()
```

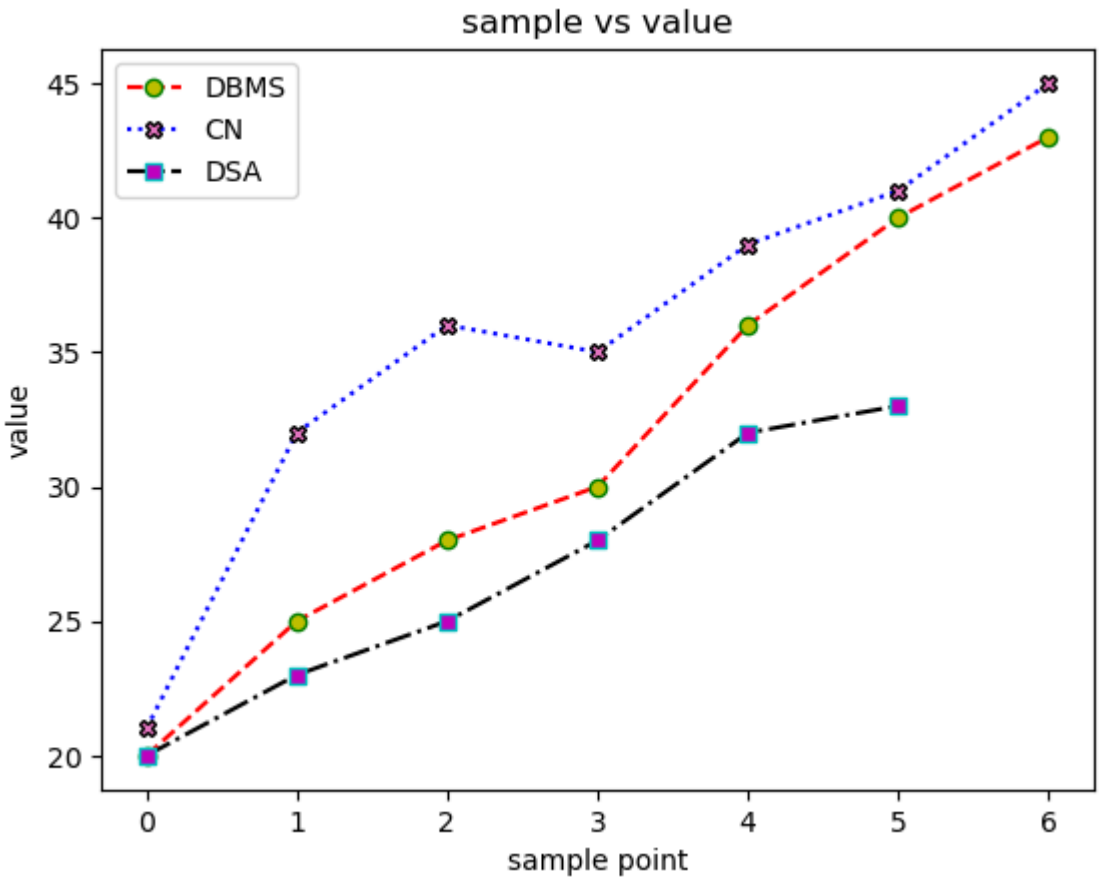

In [7]:
```
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

In [8]:
```
dataset = sns.load_dataset("titanic")
```

In [9]:
```
dataset.head()
```

Out[9]:

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who
0	0	3	male	22.0	1	0	7.2500	S	Third	man
1	1	1	female	38.0	1	0	71.2833	C	First	woman
2	1	3	female	26.0	0	0	7.9250	S	Third	woman
3	1	1	female	35.0	1	0	53.1000	S	First	woman
4	0	3	male	35.0	0	0	8.0500	S	Third	man

In [10]:
```
sns.distplot(x = dataset['age'], bins = 10)
```

```
C:\Users\userp\AppData\Local\Temp\ipykernel_21660\3269609002.py:1: UserWar
ning:

`distplot` is a deprecated function and will be removed in seaborn v0.14.
0.

Please adapt your code to use either `displot` (a figure-level function wi
th
similar flexibility) or `histplot` (an axes-level function for histogram
s).

For a guide to updating your code to use the new functions, please see
https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751

  sns.distplot(x = dataset['age'], bins = 10)
```

Out[10]: <Axes: ylabel='Density'>

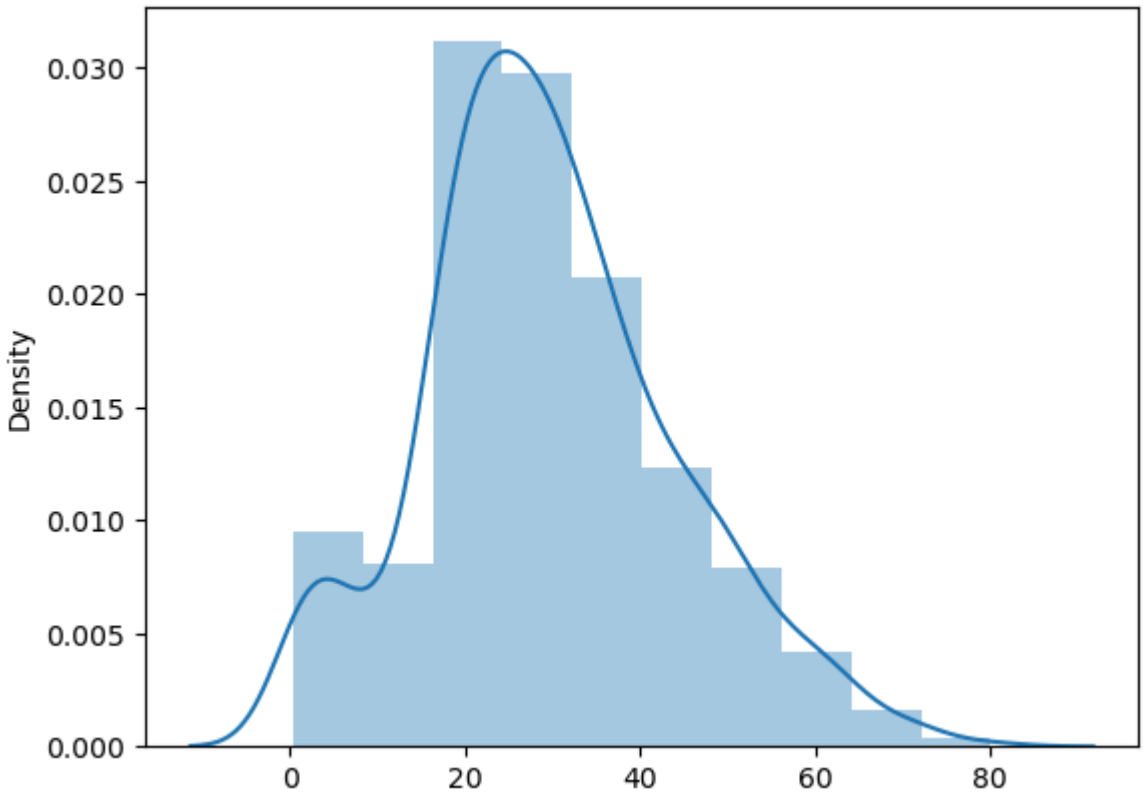

In [11]:
```
sns.distplot(dataset['age'], bins = 10,kde=False)
```

```
C:\Users\userp\AppData\Local\Temp\ipykernel_21660\2142932053.py:1: UserWar
ning:

`distplot` is a deprecated function and will be removed in seaborn v0.14.
0.

Please adapt your code to use either `displot` (a figure-level function wi
th
similar flexibility) or `histplot` (an axes-level function for histogram
s).

For a guide to updating your code to use the new functions, please see
https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751

  sns.distplot(dataset['age'], bins = 10,kde=False)
```

Out[11]: <Axes: xlabel='age'>

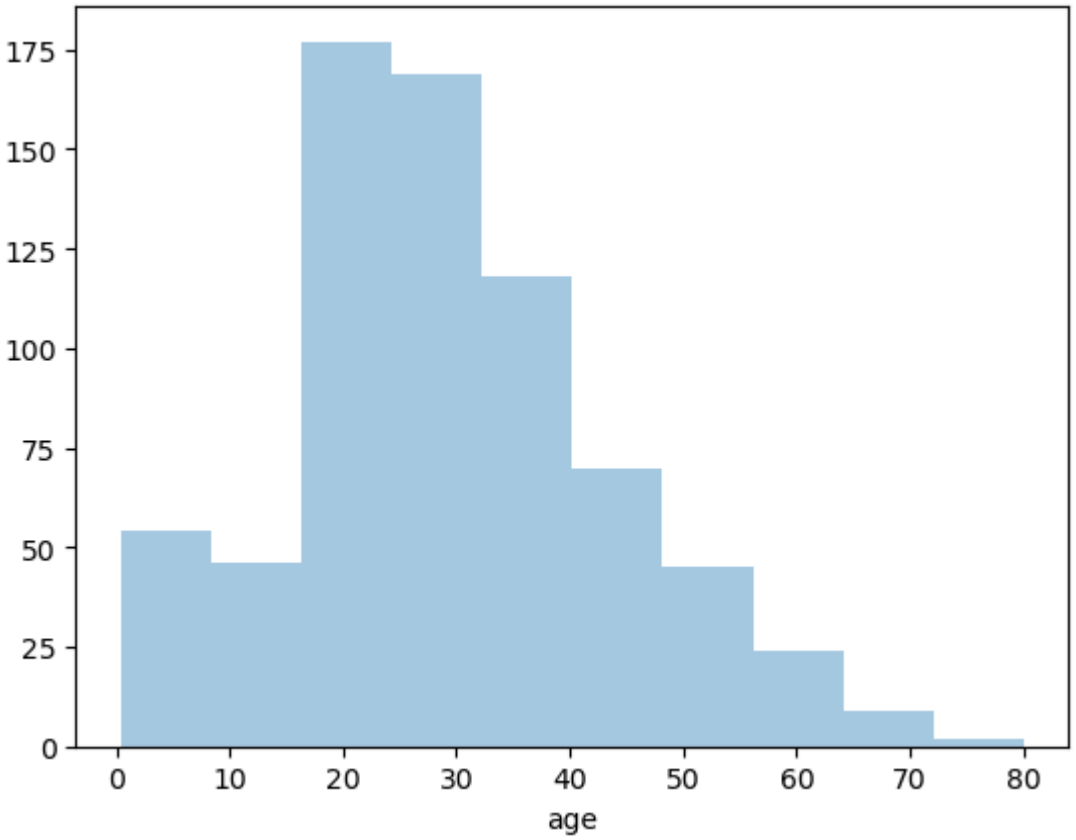

In [12]:
```
sns.jointplot(x = dataset['age'], y = dataset['fare'], kind = 'scatter')
```

Out[12]: <seaborn.axisgrid.JointGrid at 0x1f6b28ecd70>

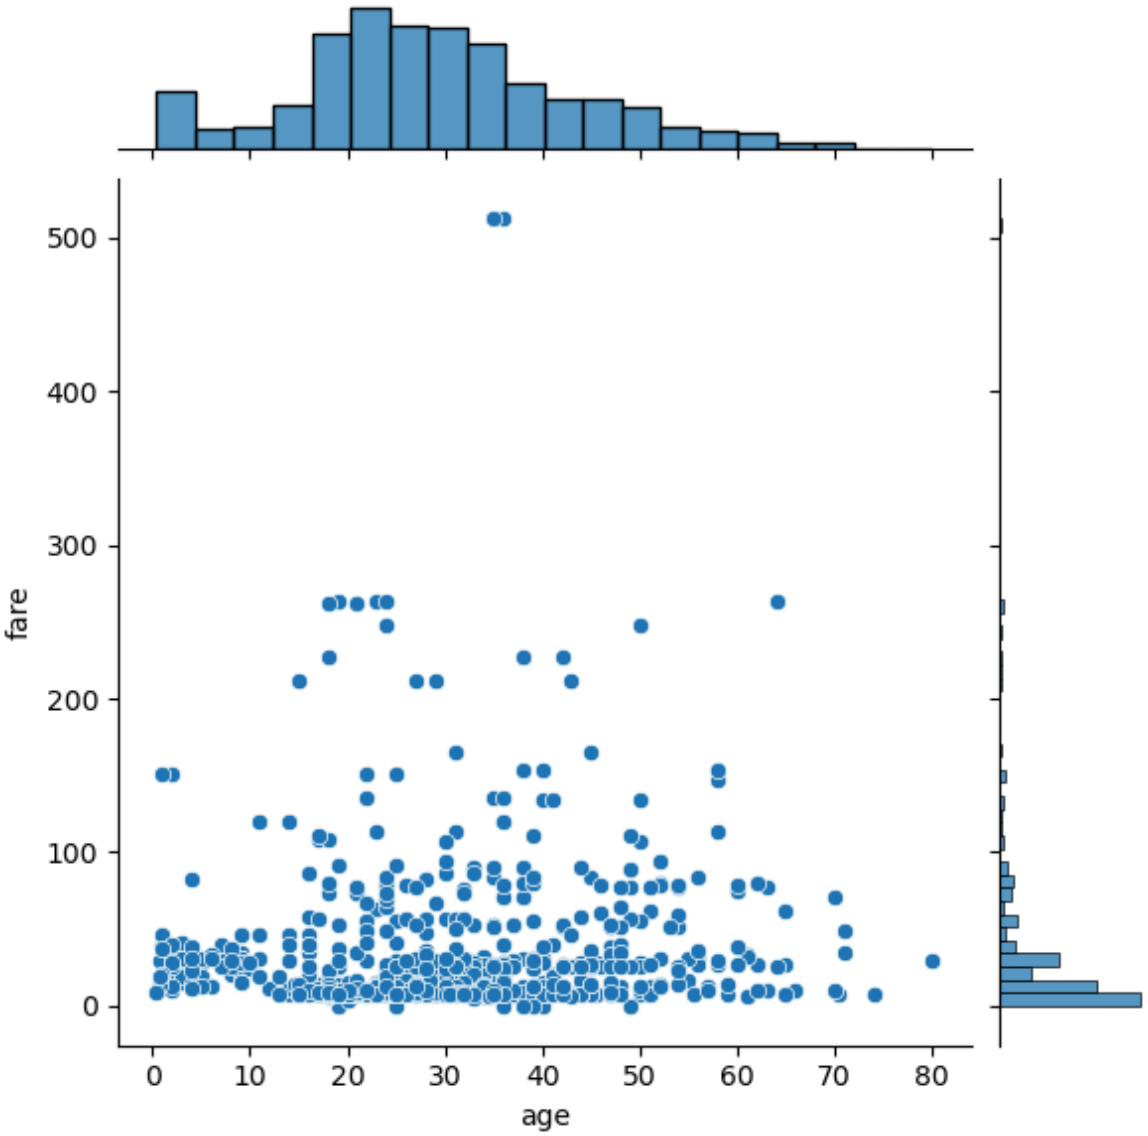

In [13]:
```
sns.jointplot(x = dataset['age'], y = dataset['fare'], kind = 'hex')
```

Out[13]:
```
<seaborn.axisgrid.JointGrid at 0x1f6b5d50a50>
```

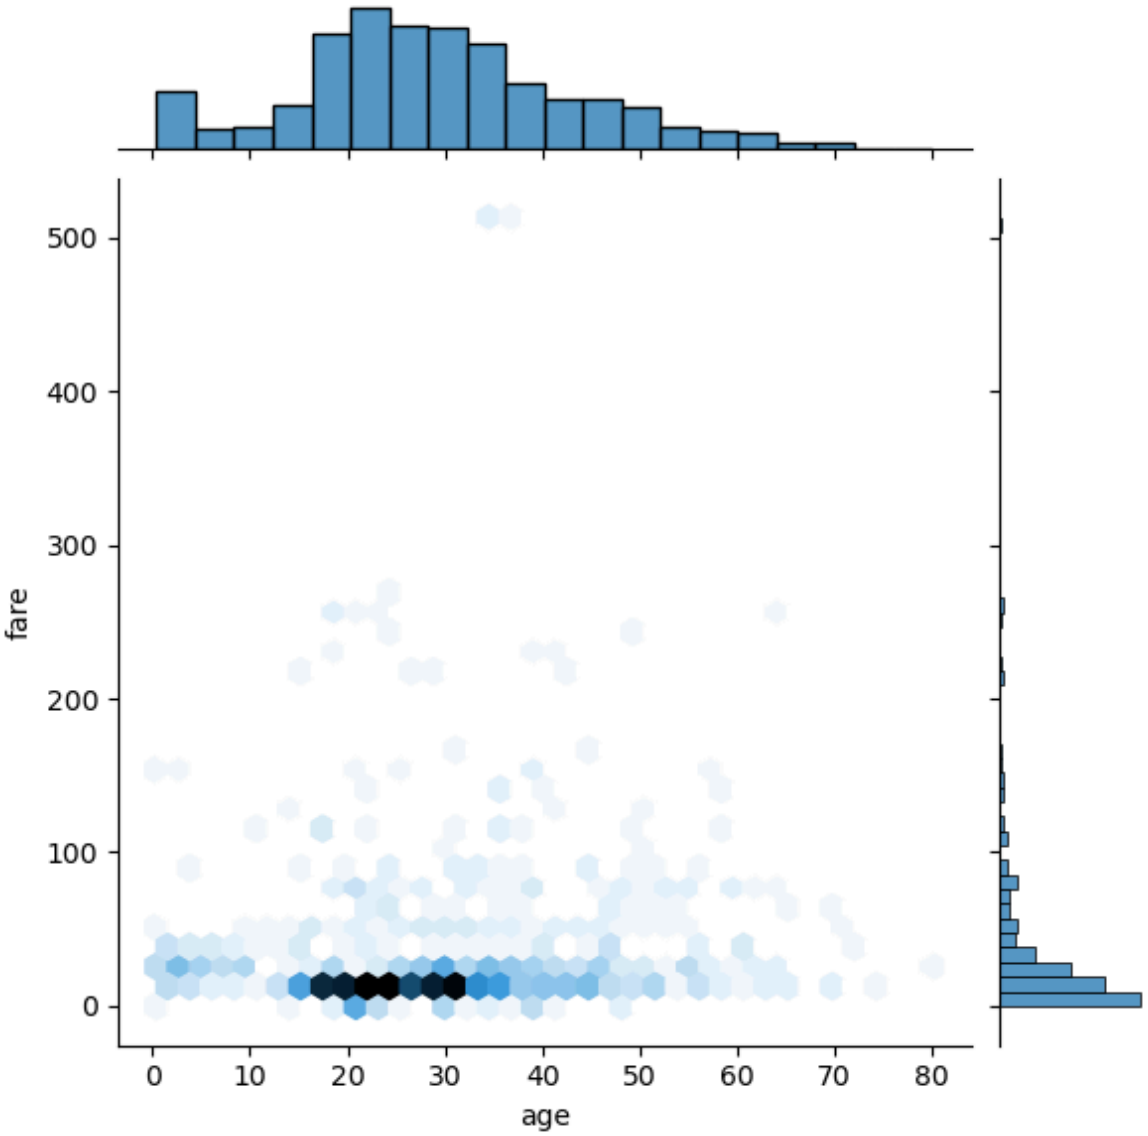

In [14]:
```
sns.rugplot(dataset['fare'])
```

Out[14]:
```
<Axes: xlabel='fare'>
```

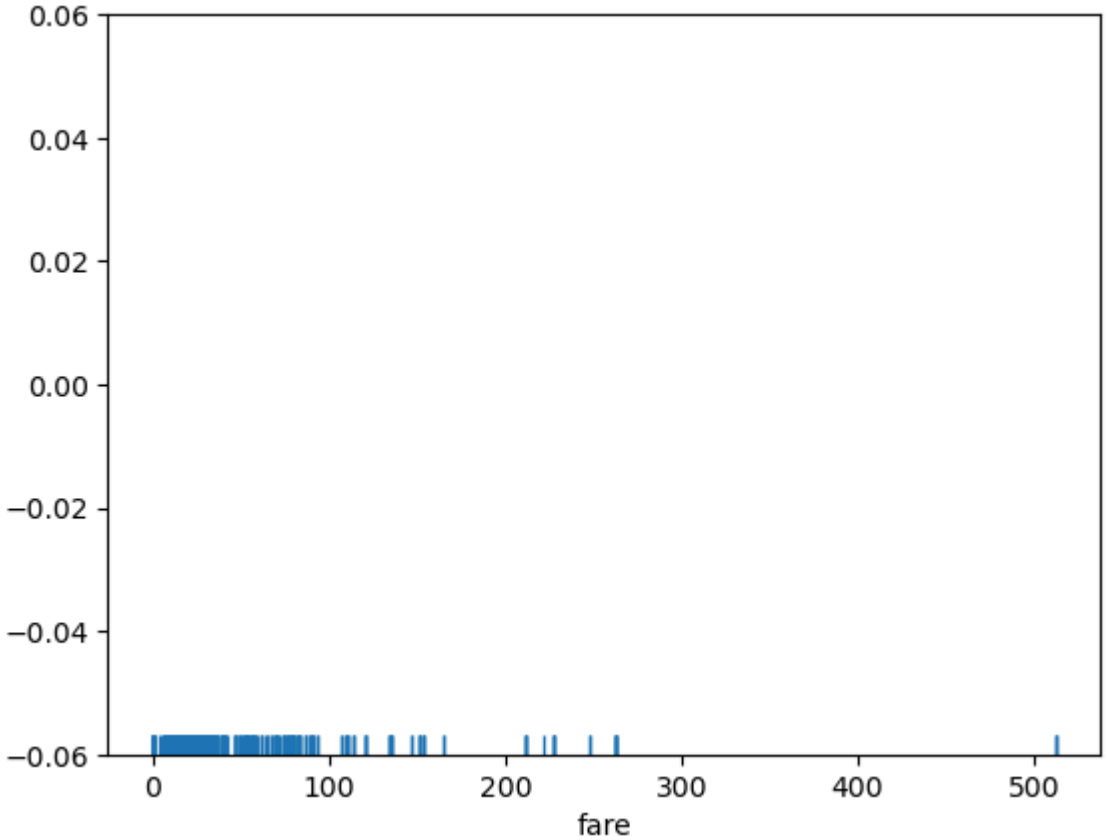

In [15]:
```
sns.barplot(x='sex', y='age', data=dataset, hue='sex')
```

Out[15]: <Axes: xlabel='sex', ylabel='age'>

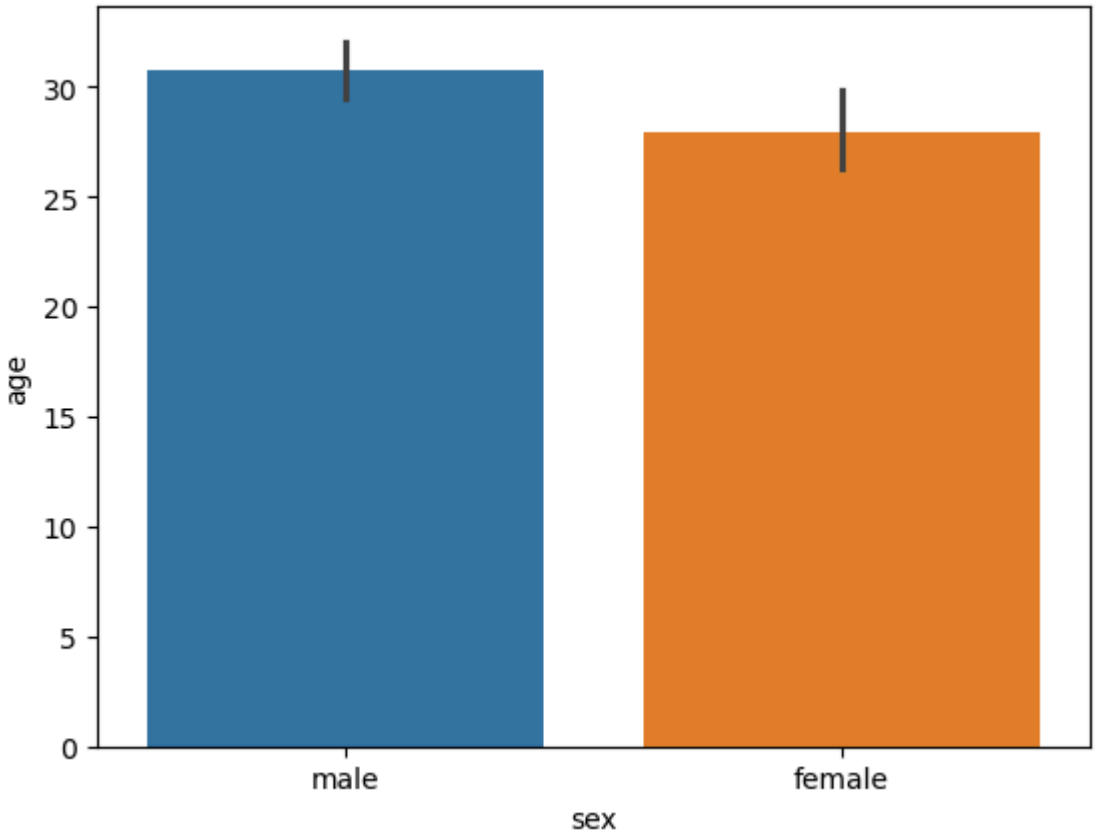

In [16]:
```
sns.barplot(x='sex', y='age', data=dataset, estimator=np.std,hue='sex')
```

Out[16]: <Axes: xlabel='sex', ylabel='age'>

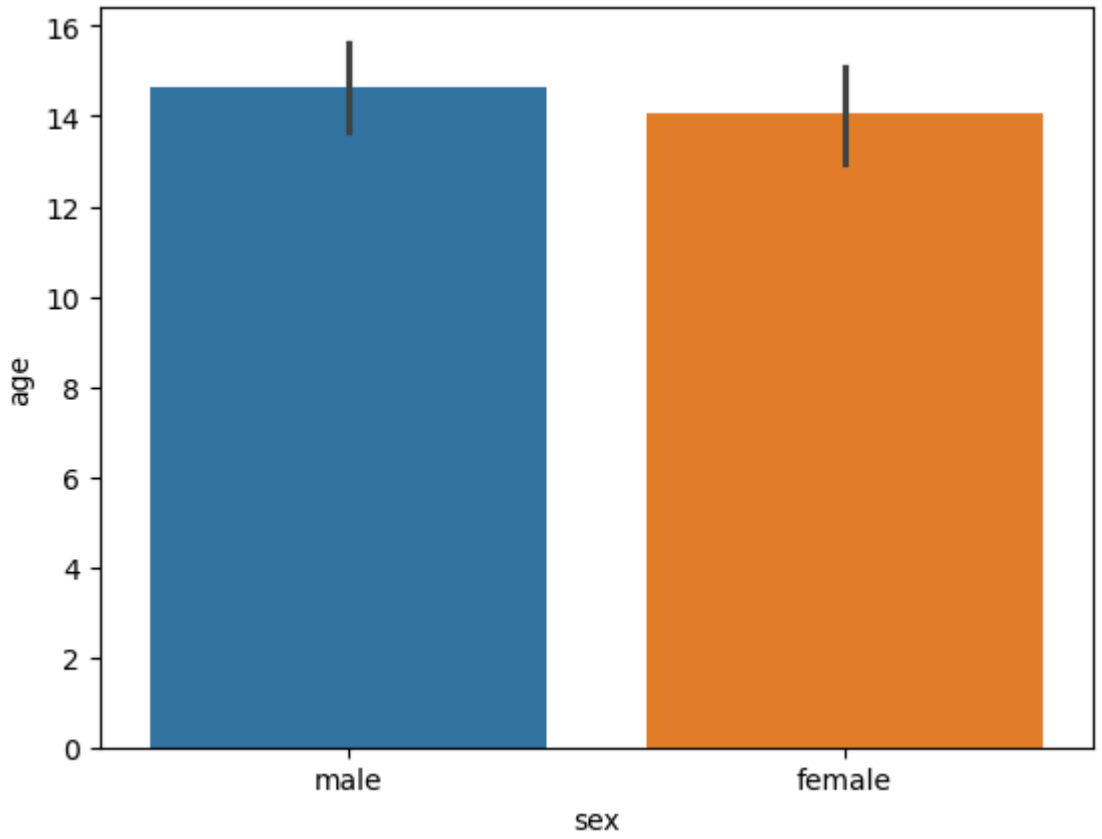

In [17]:
```
sns.countplot(x='sex', data=dataset,hue='sex')
```

Out[17]: <Axes: xlabel='sex', ylabel='count'>

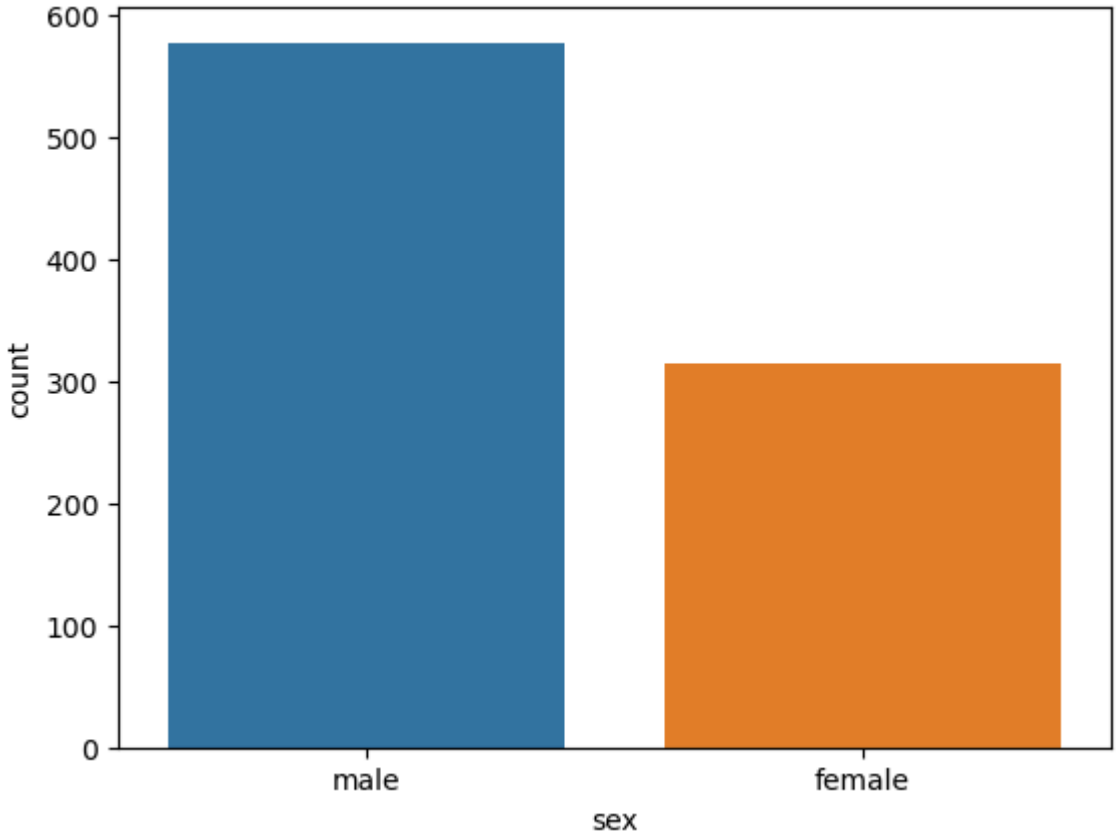

In [18]:
```
sns.boxplot(x='sex', y='age', data=dataset,hue='sex')
```

Out[18]: <Axes: xlabel='sex', ylabel='age'>

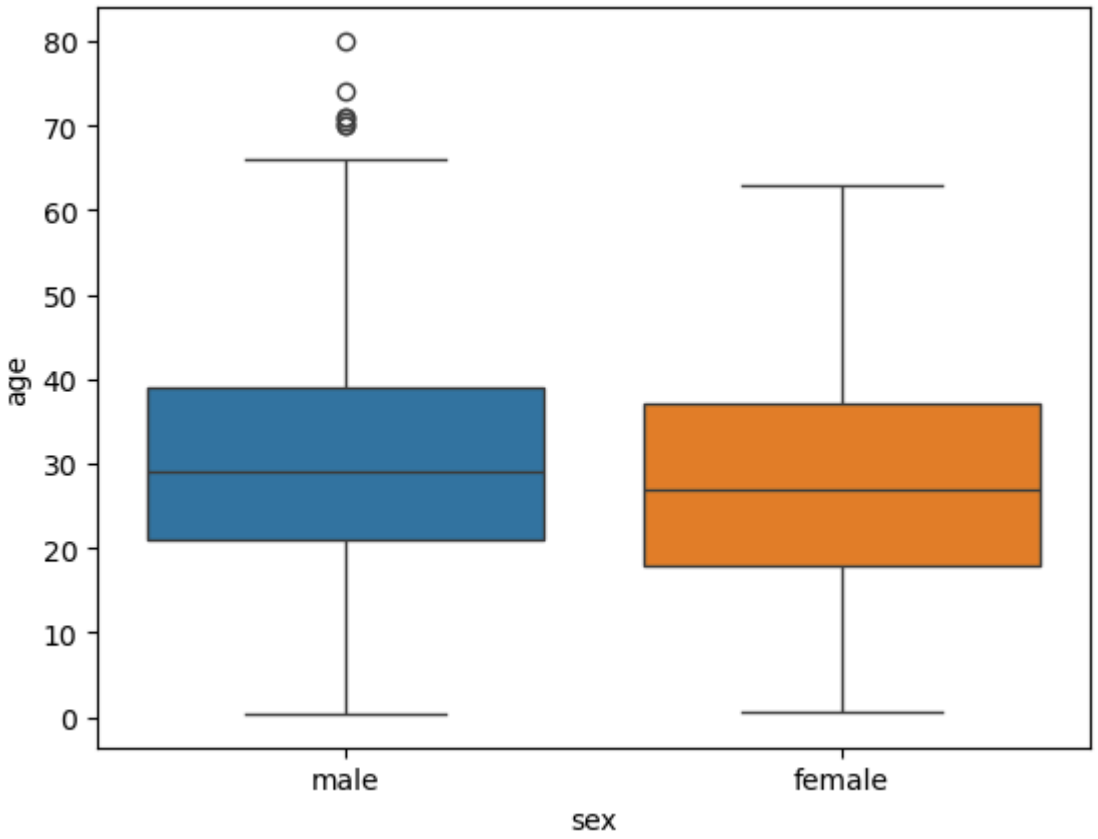

In [19]:
```
sns.boxplot(x='sex', y='age', data=dataset, hue="survived")
```

Out[19]: <Axes: xlabel='sex', ylabel='age'>

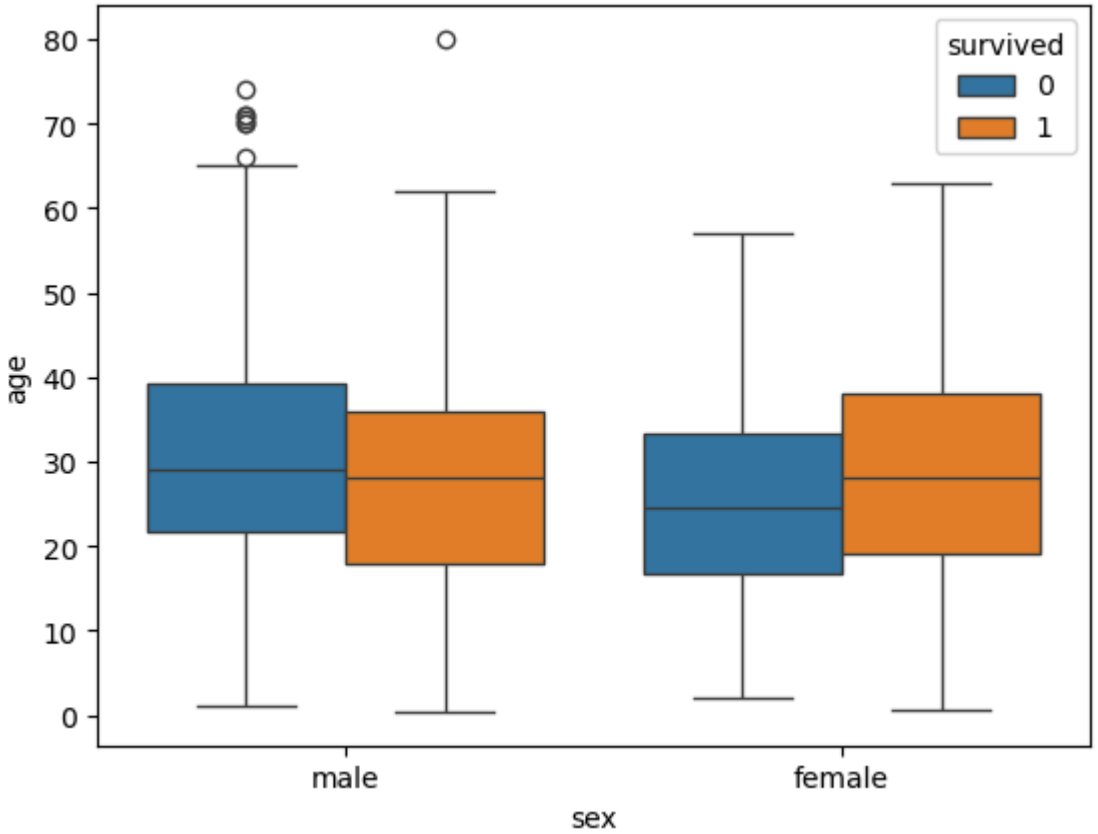

In [20]:
```
sns.violinplot(x='sex', y='age', data=dataset,hue='sex')
```

Out[20]: <Axes: xlabel='sex', ylabel='age'>

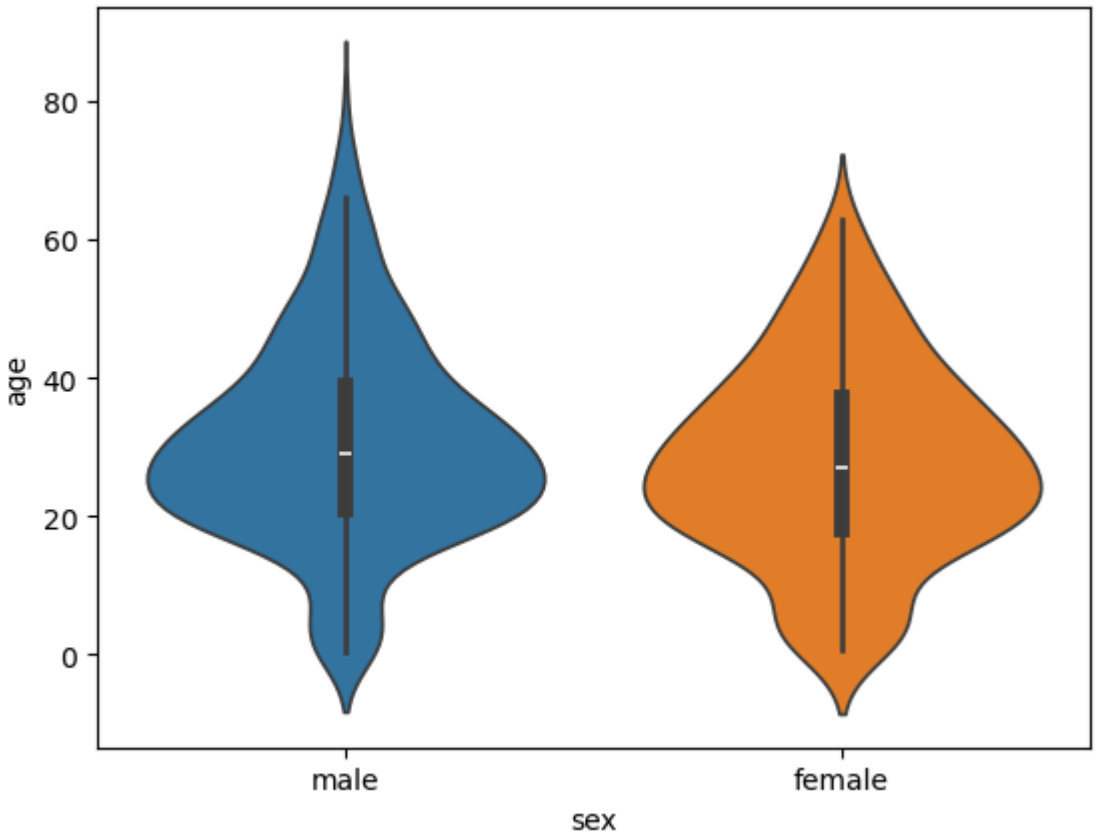

In [21]:
```
sns.violinplot(x='sex', y='age', data=dataset, hue='survived')
```

Out[21]: <Axes: xlabel='sex', ylabel='age'>

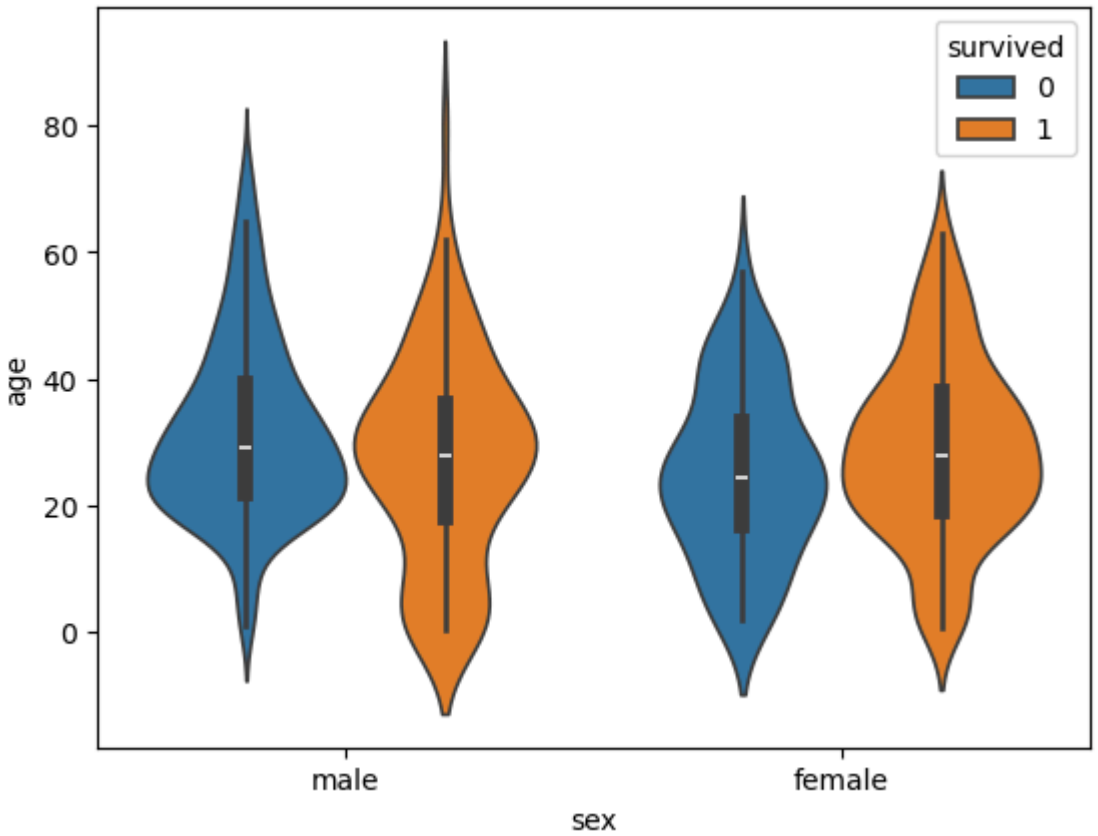

In [22]:
```
sns.stripplot(x='sex', y='age', data=dataset, jitter=False)
```

Out[22]: <Axes: xlabel='sex', ylabel='age'>

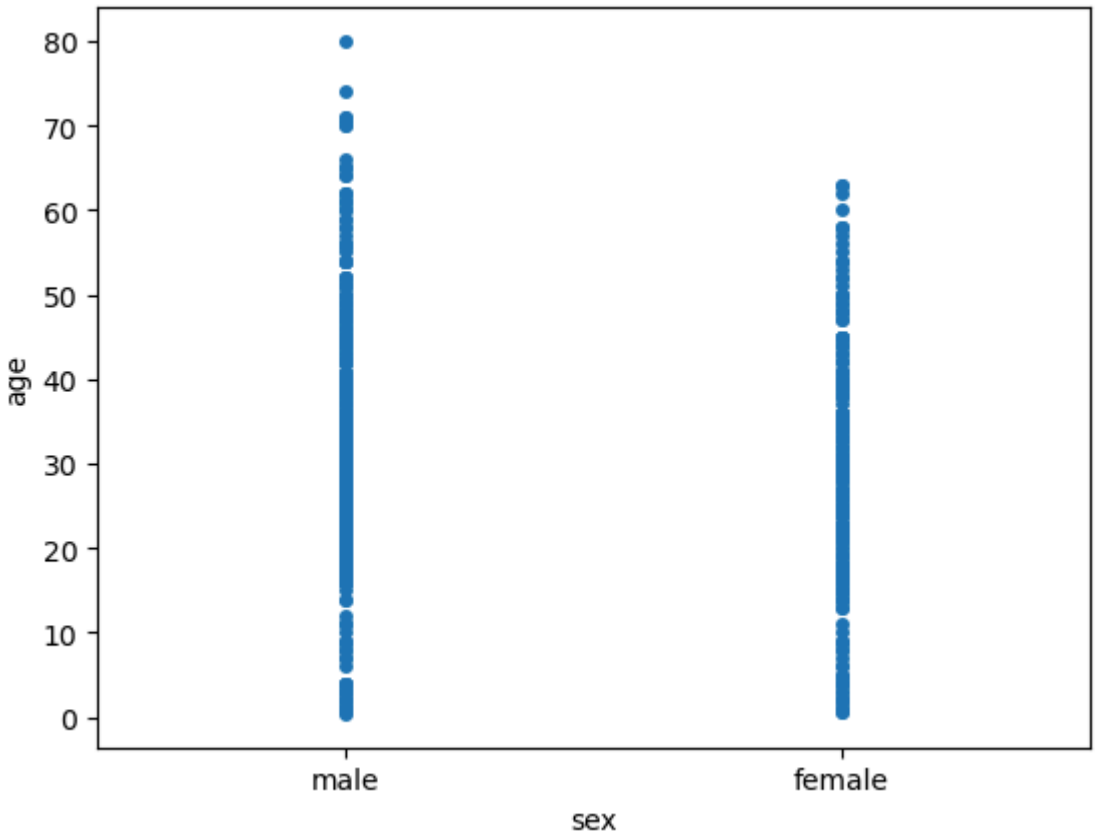

In [23]:
```
sns.stripplot(x='sex', y='age', data=dataset, jitter=True,hue='sex')
```

Out[23]: <Axes: xlabel='sex', ylabel='age'>

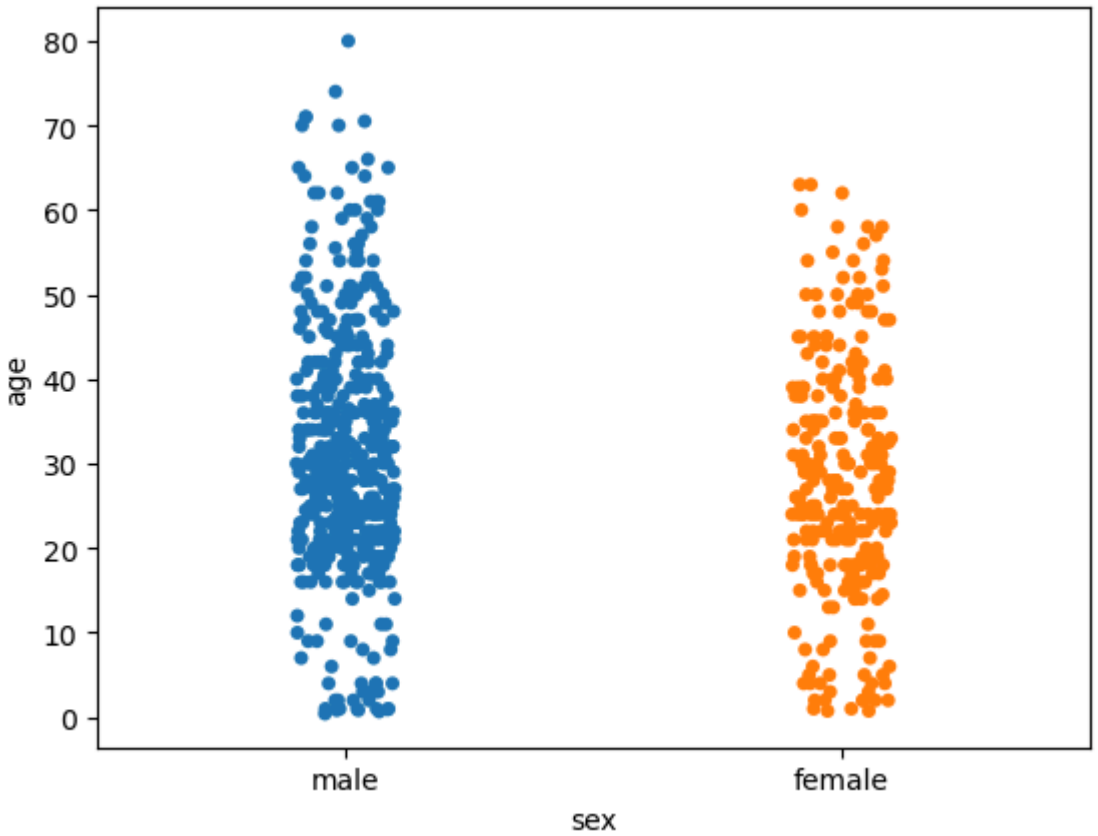

In [24]:
```
sns.stripplot(x='sex', y='age', data=dataset, jitter=True, hue='survived'
```

Out[24]: <Axes: xlabel='sex', ylabel='age'>

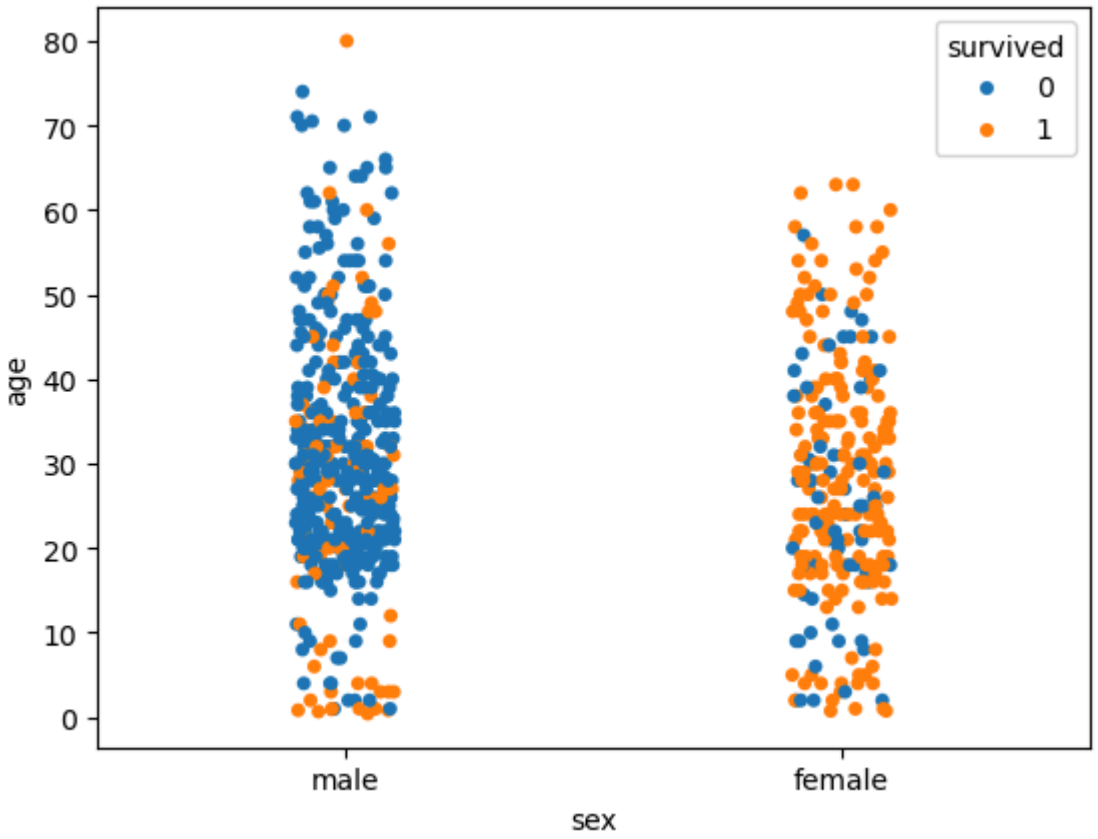

In [25]:
```
sns.swarmplot(x='sex', y='age', data=dataset,hue='sex')
```

Out[25]: <Axes: xlabel='sex', ylabel='age'>

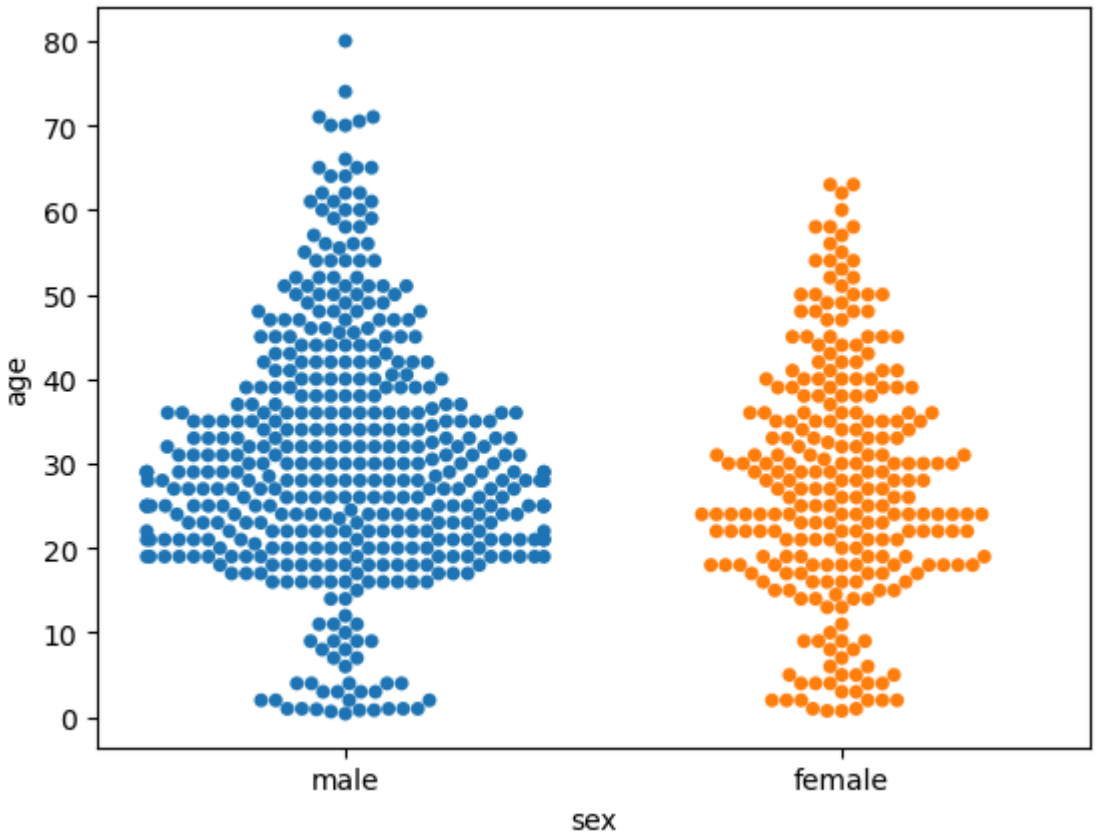

In [26]:
```
sns.swarmplot(x='sex', y='age', data=dataset, hue='survived')
```

Out[26]: <Axes: xlabel='sex', ylabel='age'>

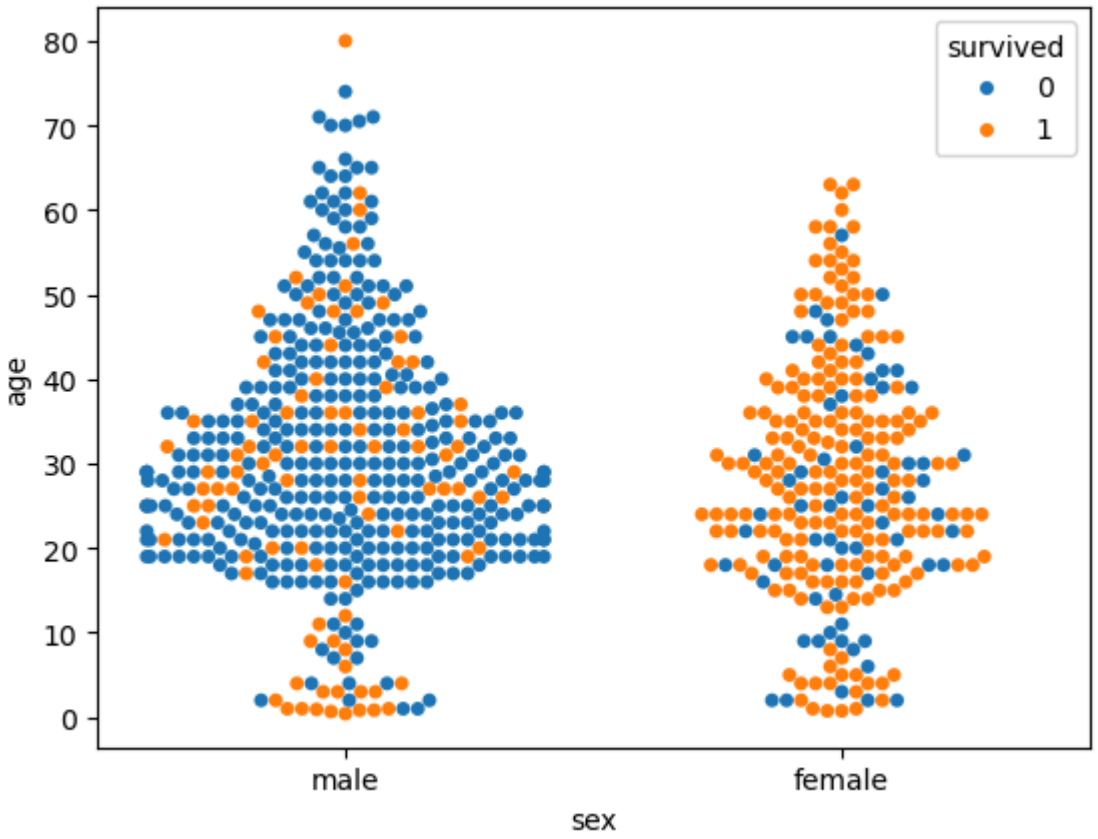

In [29]:
```
dataset.head()
```

Out[29]:

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who
0	0	3	male	22.0	1	0	7.2500	S	Third	man
1	1	1	female	38.0	1	0	71.2833	C	First	woman
2	1	3	female	26.0	0	0	7.9250	S	Third	woman
3	1	1	female	35.0	1	0	53.1000	S	First	woman
4	0	3	male	35.0	0	0	8.0500	S	Third	man

In [30]:
```
corr = dataset.corr(numeric_only = True)
sns.heatmap(corr)
```

Out[30]:
```
<Axes: >
```

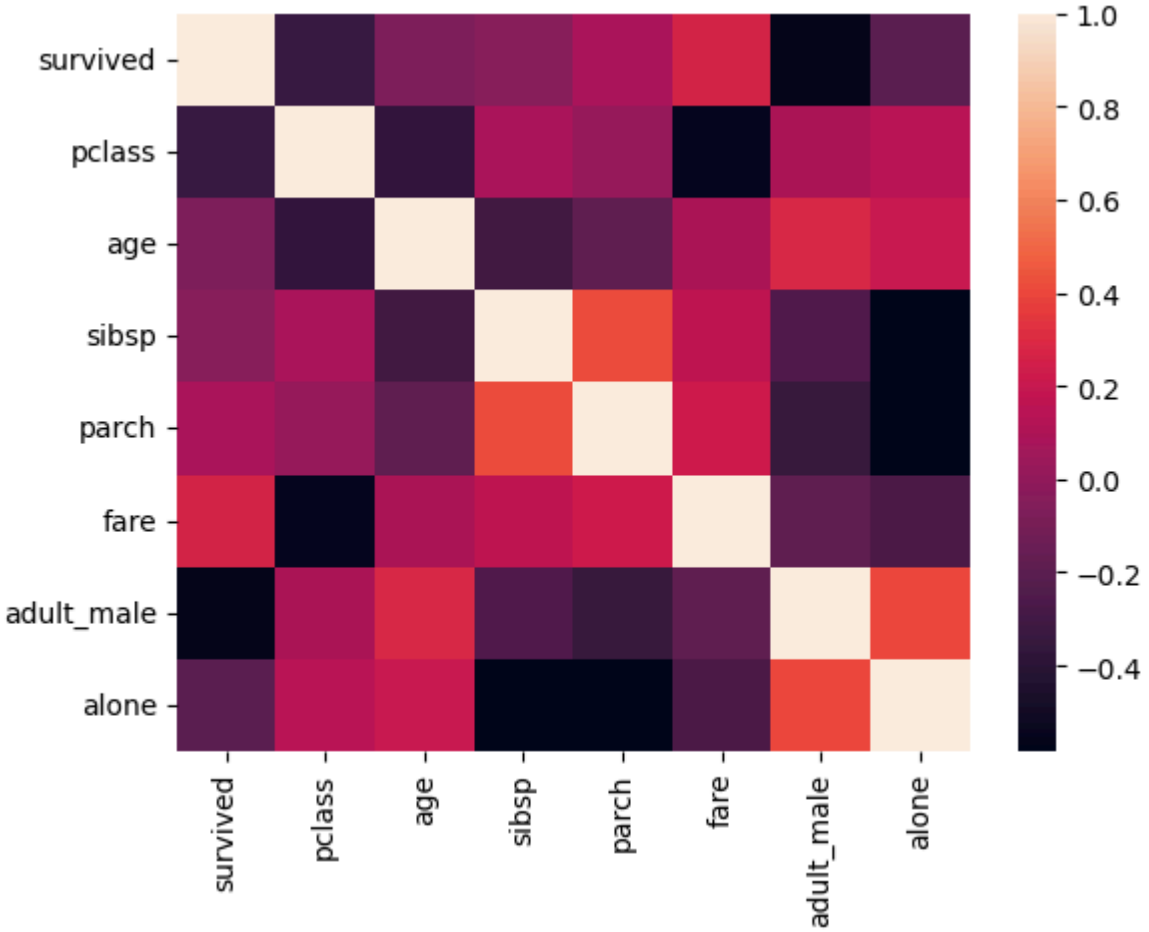

In [31]:
```
corr = dataset.corr(numeric_only=True)
sns.heatmap(corr, annot=True)
```

Out[31]: <Axes: >

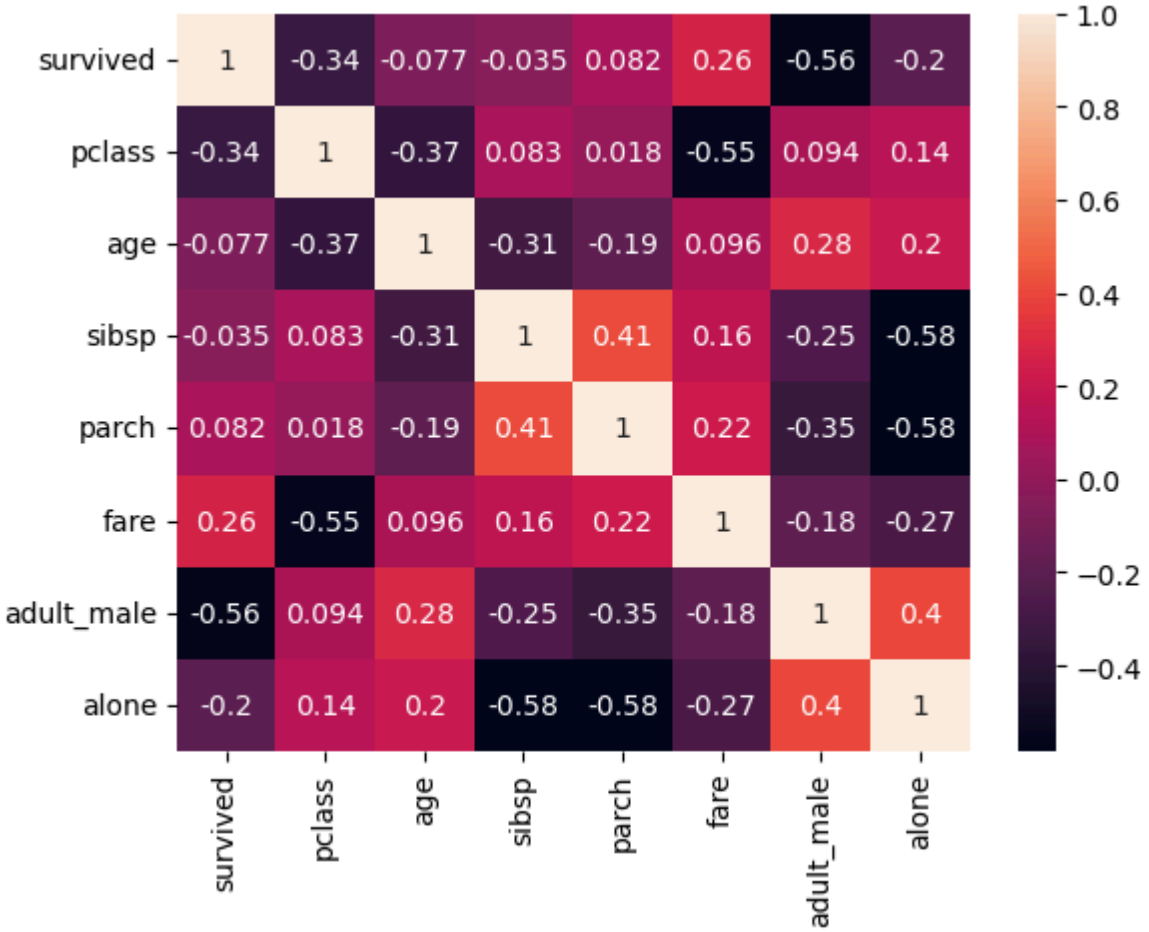

In [32]:
```
corr = dataset.corr(numeric_only=True)
sns.heatmap(corr,cmap='coolwarm')
```

Out[32]: <Axes: >

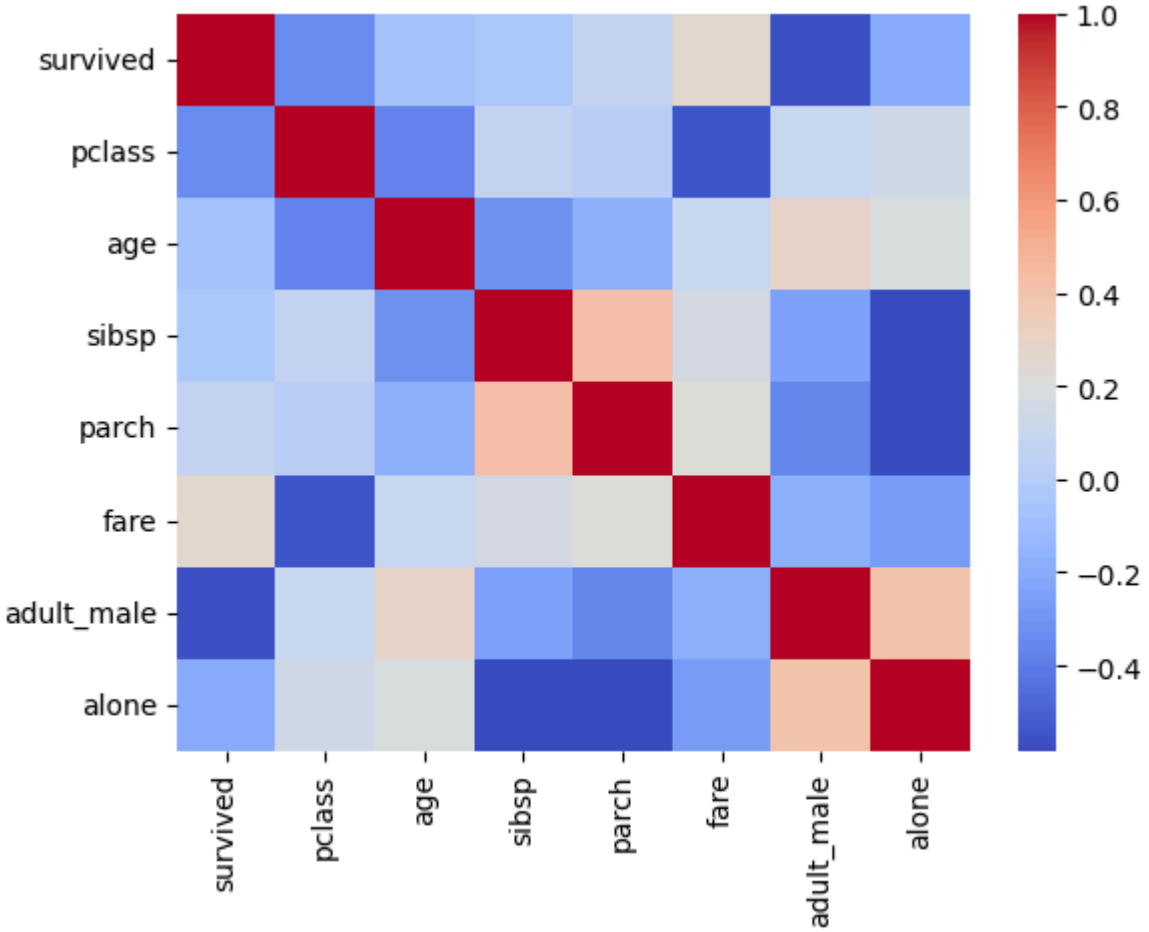

In [34]:
```
import seaborn as sns
dataset = sns.load_dataset('titanic')
sns.histplot(dataset['fare'], kde=False, bins=10)
```

Out[34]: <Axes: xlabel='fare', ylabel='Count'>

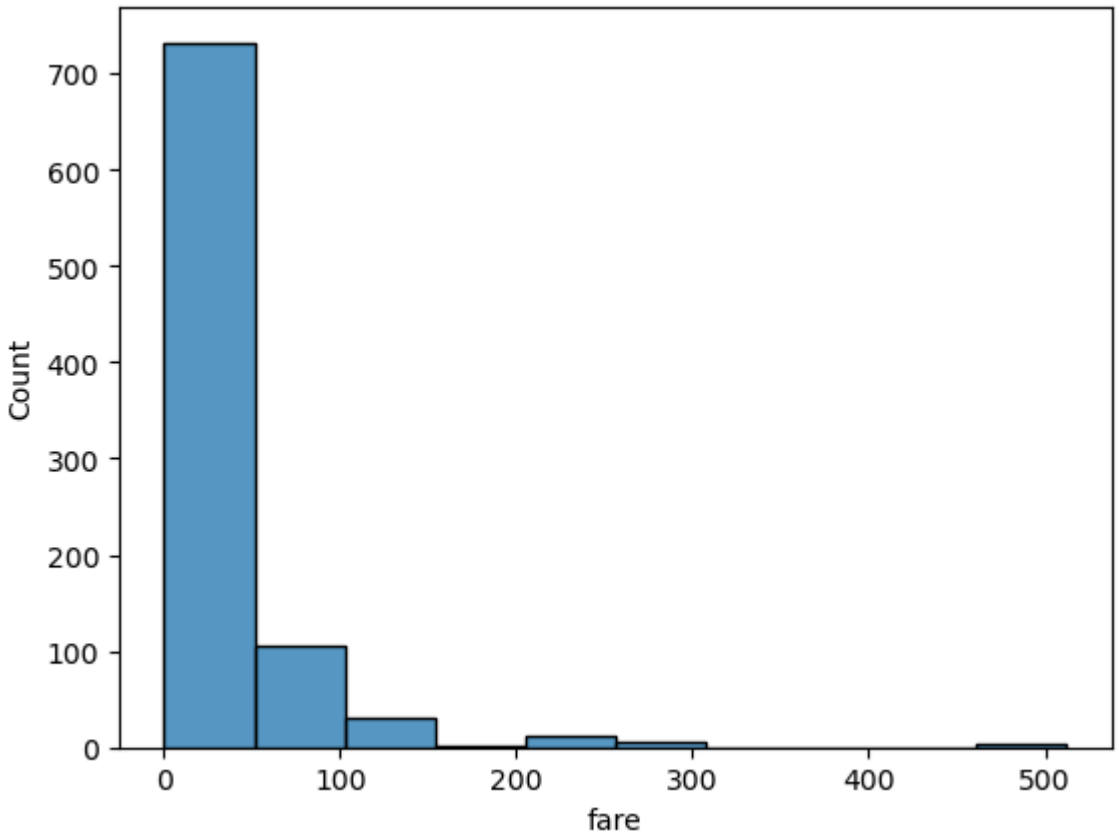

In [ ]: