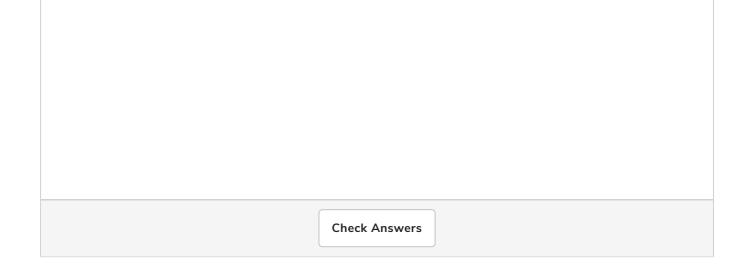# Quiz

Test your knowledge about loops in Reason with this quiz!

1

What are values printed by this loop?

```
for (i in 10 to 16) {
    Js.log(i * 2);
};
```

2 To iterate a `for` loop backwards, we need to use the _____ keyword.

3 A `while` loop runs based on what criteria?

The following lessons contain coding challenges related to loops in ReasonML. Be sure to check them out.

In the next section, we'll be introduced to the most powerful feature of Reason: **the variant data structure**.