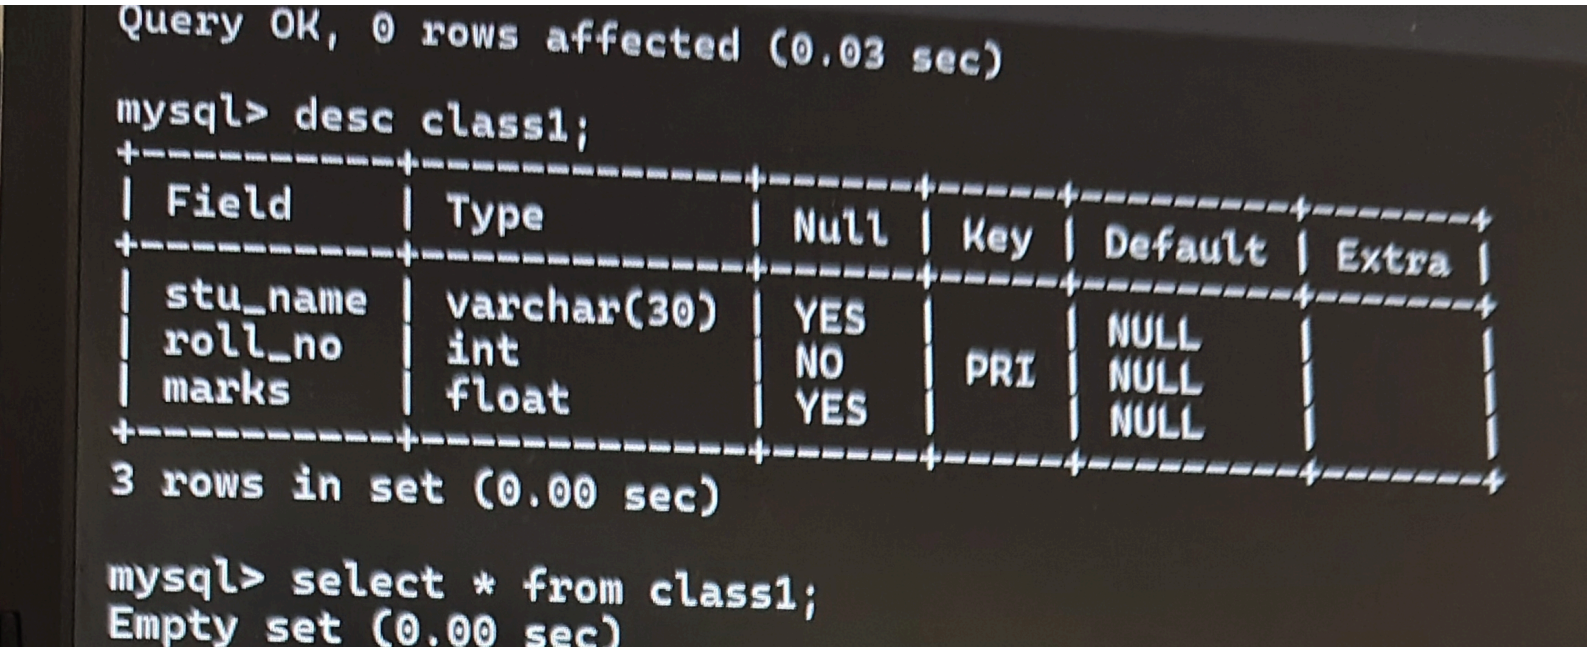
```
mysql> update class1 set stu_name="raj" where marks=450;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> select * from class1
    -> select * from class1;
ERROR 1064 (42000): You have an error in your SQL syntax; check t
elect * from class1' at line 2
mysql> select * from class1 ;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| mohan    |     102 | 439.5 |
| raj      |     103 |   450 |
| daisy    |     104 | 490.5 |
+----------+---------+-------+
4 rows in set (0.00 sec)

mysql> update class1 set marks=450.2 where roll_no =103;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> select * from class1 ;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| mohan    |     102 | 439.5 |
| raj      |     103 | 450.2 |
| daisy    |     104 | 490.5 |
+----------+---------+-------+
4 rows in set (0.00 sec)
```


Query OK, 0 rows affected (0.03 sec)
mysql> desc class1;
Field	Type	Null	Key	Default	Extra
stu_name	varchar(30)	YES		NULL	
roll_no	int	NO	PRI	NULL	
marks	float	YES		NULL	
3 rows in set (0.00 sec)
mysql> select * from class1;
Empty set (0.00 sec)


```
mysql> insert into class1 values("shreya",101,460.2,"mohan",10
ERROR 1136 (21S01): Column count doesn't match value count at
mysql> insert into class1 values("shreya",101,460.2);
Query OK, 1 row affected (0.02 sec)

mysql> insert into class1 values("mohan",102,439.5);
Query OK, 1 row affected (0.01 sec)

mysql> insert into class1 values("prateek",103,450);
Query OK, 1 row affected (0.01 sec)

mysql> insert into class1 values("daisy",104,490.5);
Query OK, 1 row affected (0.00 sec)

mysql> select * from class1;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| mohan    |     102 | 439.5 |
| prateek  |     103 |   450 |
| daisy    |     104 | 490.5 |
+----------+---------+-------+
4 rows in set (0.00 sec)
```

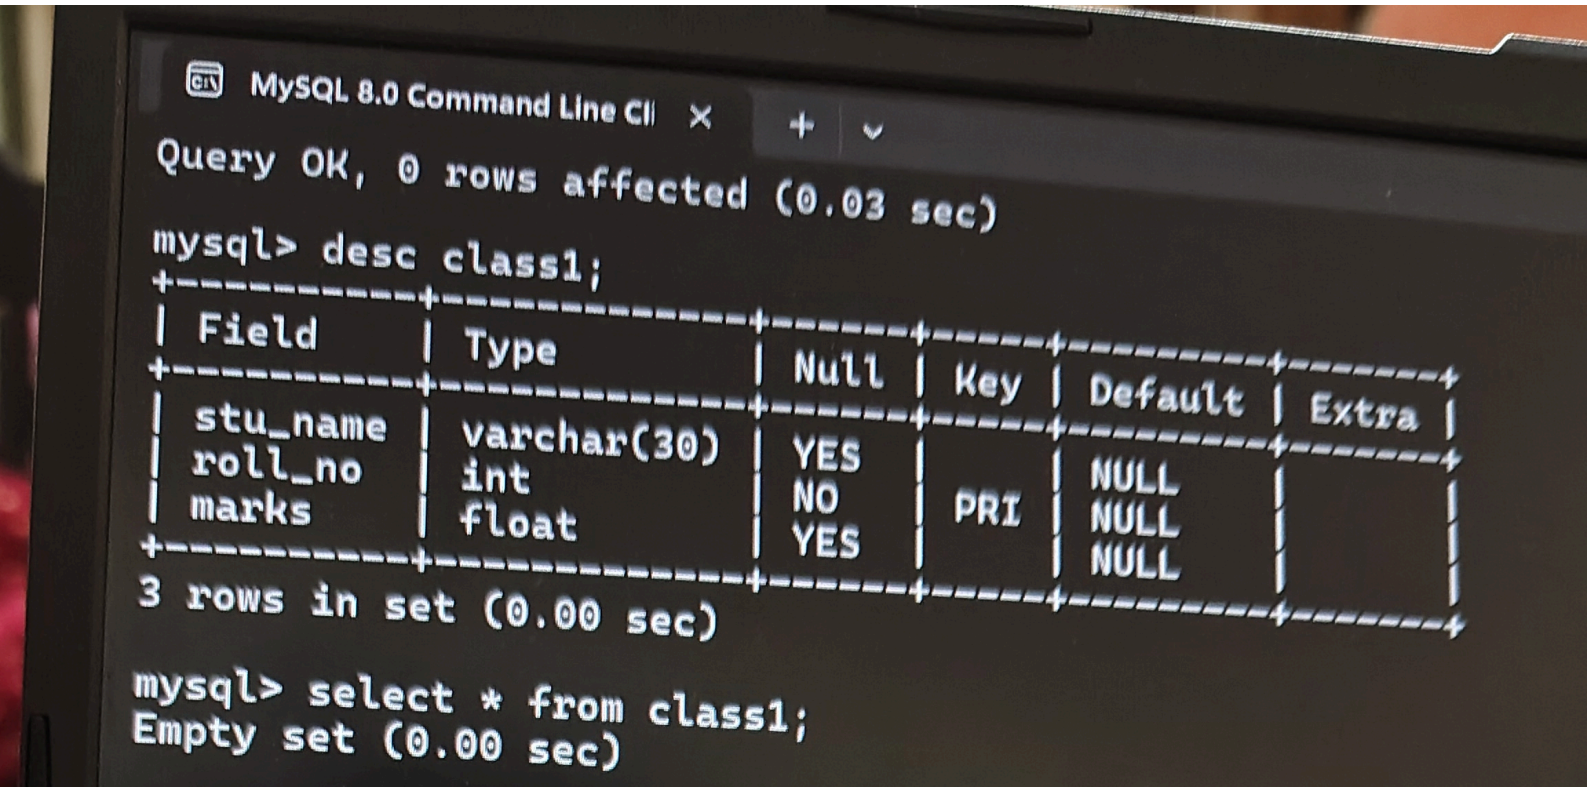
MySQL 8.0 Command Line Cl
Query OK, 0 rows affected (0.03 sec)
mysql> desc class1;
Field	Type	Null	Key	Default	Extra
stu_name	varchar(30)	YES		NULL	
roll_no	int	NO	PRI	NULL	
marks	float	YES		NULL	
3 rows in set (0.00 sec)
mysql> select * from class1;
Empty set (0.00 sec)

```
mysql> desc class1;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| stu_name | varchar(30) | YES  |     | NULL    |       |
| roll_no  | int         | NO   | PRI | NULL    |       |
| marks    | float       | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
3 rows in set (0.01 sec)

mysql> truncate table class1;
Query OK, 0 rows affected (0.03 sec)

mysql> desc class1;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| stu_name | varchar(30) | YES  |     | NULL    |       |
| roll_no  | int         | NO   | PRI | NULL    |       |
| marks    | float       | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
3 rows in set (0.00 sec)

mysql> select * from class1;
Empty set (0.00 sec)
```

```
mysql> use school ;
Database changed
mysql> create table class1(stu_name varchar(30),roll_no int primary key,DOB int,marks int);
Query OK, 0 rows affected (0.03 sec)

mysql> desc class1;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| stu_name | varchar(30) | YES  |     | NULL    |       |
| roll_no  | int         | NO   | PRI | NULL    |       |
| DOB      | int         | YES  |     | NULL    |       |
| marks    | int         | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
4 rows in set (0.00 sec)
```

```
mysql> select * from class1 ;
+----------+----------+-------+
| stu_name | roll_no  | marks |
+----------+----------+-------+
| shreya   |      101 | 460.2 |
| mohan    |      102 | 439.5 |
| raj      |      103 | 450.2 |
| daisy    |      104 | 490.5 |
+----------+----------+-------+
4 rows in set (0.00 sec)

mysql> delete from class1 where stu_name="mohan";
Query OK, 1 row affected (0.01 sec)

mysql> select * from class1 ;
+----------+----------+-------+
| stu_name | roll_no  | marks |
+----------+----------+-------+
| shreya   |      101 | 460.2 |
| raj      |      103 | 450.2 |
| daisy    |      104 | 490.5 |
+----------+----------+-------+
3 rows in set (0.00 sec)
```

```
mysql> select * from class1 ;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| jessy    |     102 | 470.3 |
| raj      |     103 | 450.2 |
| daisy    |     104 | 490.5 |
| suresh   |     105 | 420.2 |
| mohan    |     106 |   480 |
+----------+---------+-------+
6 rows in set (0.01 sec)

mysql> select user();
+----------------+
| user()         |
+----------------+
| root@localhost |
+----------------+
1 row in set (0.00 sec)

mysql> grant select,insert on class1 to "root"@"localhost";
Query OK, 0 rows affected (0.02 sec)
```

```
mysql> use EMP;
Database changed
mysql> create table employee(emp_id int primary key,name varchar (40),department varchar(20),salary int) ;
Query OK, 0 rows affected (0.03 sec)

mysql> desc employee ;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| emp_id     | int         | NO   | PRI | NULL    |       |
| name       | varchar(40) | YES  |     | NULL    |       |
| department | varchar(20) | YES  |     | NULL    |       |
| salary     | int         | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
4 rows in set (0.02 sec)
```

```
mysql> select * from class1 ;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| raj      |     103 | 450.2 |
| daisy    |     104 | 490.5 |
+----------+---------+-------+
3 rows in set (0.01 sec)

mysql> insert into class1 values("jessy",102,470.3)
    -> ("suresh",105,420.1)
    -> insert into class1 values("jessy",102,470.3);
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near '(
"suresh",105,420.1)
insert into class1 values("jessy",102,470.3)' at line 2
mysql> insert into class1 values("jessy",102,470.3);
Query OK, 1 row affected (0.02 sec)

mysql> insert into class1 values("suresh",105,420.2);
Query OK, 1 row affected (0.01 sec)

mysql> insert into class1 values("mohan",106,480.o);
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'o
)' at line 1
mysql> insert into class1 values("mohan",106,480.0);
Query OK, 1 row affected (0.01 sec)

mysql> select * from class1 ;
+----------+---------+-------+
| stu_name | roll_no | marks |
+----------+---------+-------+
| shreya   |     101 | 460.2 |
| jessy    |     102 | 470.3 |
| raj      |     103 | 450.2 |
| daisy    |     104 | 490.5 |
| suresh   |     105 | 420.2 |
| mohan    |     106 |   480 |
+----------+---------+-------+
```

```
mysql> select * from employee ;
+--------+--------------+------------+--------+
| emp_id | name         | department | salary |
+--------+--------------+------------+--------+
|    101 | Amit sharma | IT         |  72000 |
|    102 | Priya nair  | HR         |  55000 |
|    103 | Rohan das   | Finance    |  70000 |
+--------+--------------+------------+--------+
3 rows in set (0.00 sec)

mysql> SAVEPOINT Update_SP;
Query OK, 0 rows affected (0.00 sec)
```

```
mysql> select AVG(salary) from employee;
+-------------+
| AVG(salary) |
+-------------+
|  70500.0000 |
+-------------+
1 row in set (0.01 sec)

mysql> select SUM(salary) from employee where department ="design";
+-------------+
| SUM(salary) |
+-------------+
|      146000 |
+-------------+
1 row in set (0.00 sec)
```

```
mysql> select * from employee ;
+--------+-------------+----------------+--------+
| emp_id | name        | department     | salary |
+--------+-------------+----------------+--------+
|    101 | Amit sharma | IT             |  72000 |
|    102 | Aryan       | design         |  75000 |
|    103 | Rohan das   | Finance        |  70000 |
|    104 | Shreya      | CSE            |  65000 |
|    105 | Mohit       | Cyber_security |  80000 |
|    106 | Dhanya      | design         |  71000 |
|    107 | Sham        | IT             |  69000 |
|    108 | Riya        | Finance        |  62000 |
+--------+-------------+----------------+--------+
8 rows in set (0.00 sec)

mysql> select * from employee where department = "IT";
+--------+-------------+------------+--------+
| emp_id | name        | department | salary |
+--------+-------------+------------+--------+
|    101 | Amit sharma | IT         |  72000 |
|    107 | Sham        | IT         |  69000 |
+--------+-------------+------------+--------+
2 rows in set (0.00 sec)
```

```
mysql> select * from employee where  name like 'A%';
+--------+-------------+------------+--------+
| emp_id | name        | department | salary |
+--------+-------------+------------+--------+
|    101 | Amit sharma | IT         |  72000 |
|    102 | Aryan       | design     |  75000 |
+--------+-------------+------------+--------+
2 rows in set (0.01 sec)

mysql> select * from employee where  name like 'd%';
+--------+--------+------------+--------+
| emp_id | name   | department | salary |
+--------+--------+------------+--------+
|    106 | Dhanya | design     |  71000 |
+--------+--------+------------+--------+
1 row in set (0.00 sec)
```

```
+--------+-------------+------------+--------+
| emp_id | name        | department | salary |
+--------+-------------+------------+--------+
|    101 | Amit sharma | IT         |  65000 |
|    102 | Priya nair  | HR         |  55000 |
|    103 | Rohan das   | Finance    |  70000 |
+--------+-------------+------------+--------+
3 rows in set (0.00 sec)

mysql> update employee set salary = 72000 where emp_id = 101 ;
Query OK, 1 row affected (0.04 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> select * from employee ;
+--------+-------------+------------+--------+
| emp_id | name        | department | salary |
+--------+-------------+------------+--------+
|    101 | Amit sharma | IT         |  72000 |
|    102 | Priya nair  | HR         |  55000 |
|    103 | Rohan das   | Finance    |  70000 |
+--------+-------------+------------+--------+
3 rows in set (0.00 sec)
```