

“Capture the Flag 5: Make the System Interactive”

Goal: Transform your Student Directory into an interactive application where administrators can favorite students, edit information, and remove records using Flutter interactions and state management.

Instructor Note

These activities require your own problem-solving and research skills.

DO NOT use AI to generate the code for you.

You may use AI to:

- Research what a Dart/Flutter feature does
- Understand syntax
- Explain an error (not fix your error)
- Clarify documentation

You may NOT ask AI to generate the solution/code for a flag.

🚩 Flag 0 — Create Your Feature Branch

Objective: Create a new feature branch before adding interactions.

Create:

`feature/student-interactions`

Screenshot:

- Terminal showing your current branch

```
student@PC-06 MINGW64 ~/IT314AB_KONG/IT314AB_KONG5/IT314AB_KONG (main)
$ git checkout -b feature/student-interactions
Switched to a new branch 'feature/student-interactions'
```

🚩 Flag 1 — Wake Up the Buttons

Add at least two buttons inside each Student Card.

Example actions:

- Favorite
- Edit

Objective: Make your Student Card respond to button presses using `onPressed`.

Right now your buttons are only decorations.

Research how Flutter's `onPressed` works.


The buttons do not need to perform their final behavior yet. They simply need to respond when pressed.

Test

When a button is pressed, your app should visibly react in some way (such as printing a message or showing a temporary notification).

Screenshot:

- Student Card with buttons
- `onPressed` inside your code
- Button reacting or terminal message

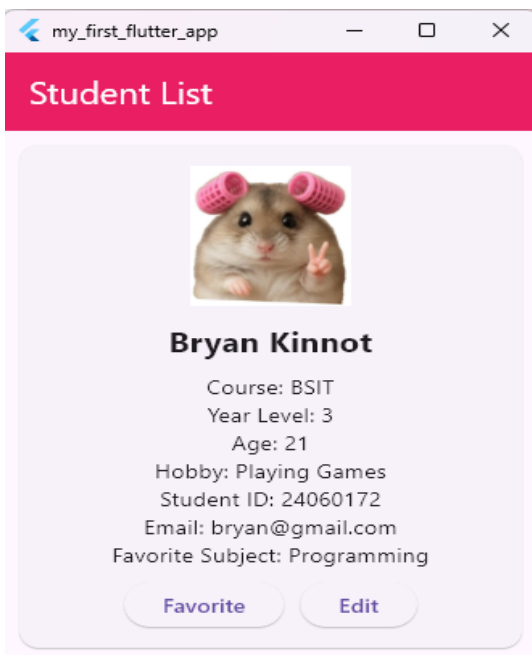

```

235
236 ElevatedButton(
237   onPressed: () {
238     ScaffoldMessenger.of(context).showSnackBar(
239       SnackBar(
240         content: Text(
241           "${student["name"]} added to favorites!",
242         ), // Text
243         duration:
244           const Duration(seconds: 2),
245       ), // SnackBar
246     );
247   },
248   child: const Text("Favorite"),
249 ), // ElevatedButton
250
251 const SizedBox(width: 10),
252
253 ElevatedButton(
254   onPressed: () {
255     ScaffoldMessenger.of(context).showSnackBar(
256       SnackBar(
257         content: Text(
258           "Edit button pressed for "
259           "${student["name"]}",
260         ), // Text
261         duration:
262           const Duration(seconds: 2),
263       ), // SnackBar
264     );
265   },
266   child: const Text("Edit"),
267 ), // ElevatedButton

```

🚩 Flag 2 — Touch Anywhere

Objective: Make the entire Student Card tappable using `onTap`.

Buttons aren't the only interactive elements.

Research Flutter's `onTap`.

Wrap your Student Card so tapping anywhere on the card triggers an interaction.

Test

The user should be able to:

- Tap the Favorite button
- Tap the Edit button
- Tap anywhere else on the Student Card

Each interaction should be recognized separately. (One function for the 2 buttons, another for the Student Card)

Screenshot:

- onTap in your code
- Student Card being tapped

```
Favorite button pressed for Bryan Kinnot
Edit button pressed for Bryan Kinnot
Favorite button pressed for Emji Silento
Edit button pressed for Emji Silento
Favorite button pressed for Julia Yashika Kong
Edit button pressed for Julia Yashika Kong
Favorite button pressed for Karryle Racaza
Edit button pressed for Karryle Racaza
Favorite button pressed for Leachim Dela Cerna
Edit button pressed for Leachim Dela Cerna
```

```
152         return GestureDetector(  
153             onTap: () {  
154                 debugPrint(  
155                     "Student Card Tapped: ${student["name"]}",  
156                 );  
157             },  
158         );  
159     },  
160 );  
161  
162 // Add a new student  
163 void addStudent() {  
164     // Create a new student object  
165     Student student = Student(  
166         name: "John Doe",  
167         email: "john.doe@example.com",  
168         phone: "123-456-7890",  
169         address: "123 Main St, New York, NY 10001",  
170     );  
171     // Add the student to the list  
172     _students.add(student);  
173     // Update the UI  
174     setState(() {});  
175 }  
176  
177 // Main function to run the app  
178 void main() {  
179     runApp(MyApp());  
180 }
```

🚩 Flag 3 — Discover `setState`

Objective: Update the screen immediately using `setState`.

So far your app reacts. But does the UI actually change?

Research Flutter's `setState`.

Use it so pressing a button immediately updates something visible on the screen.

Examples include:

- Changing text
- Changing an icon
- Updating a counter



The important part is understanding that `setState` tells Flutter to rebuild the UI.

Test

The screen should visibly change immediately after pressing the button.

Screenshot:

- `setState` in your code
- Before and after interaction

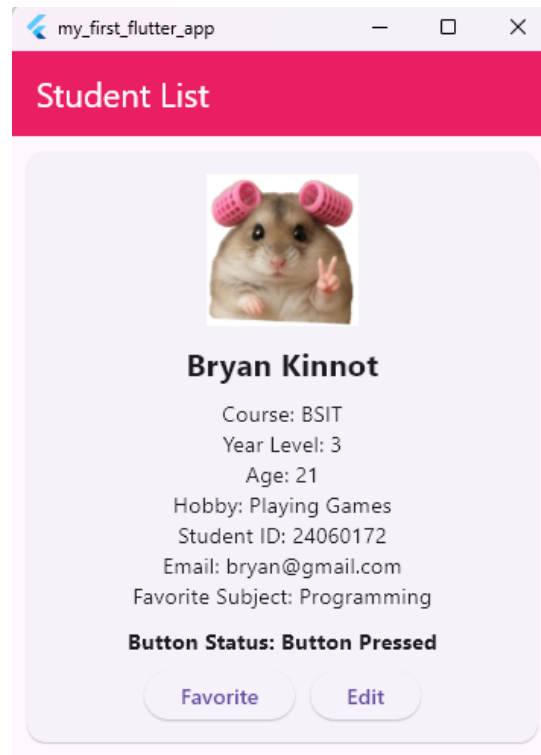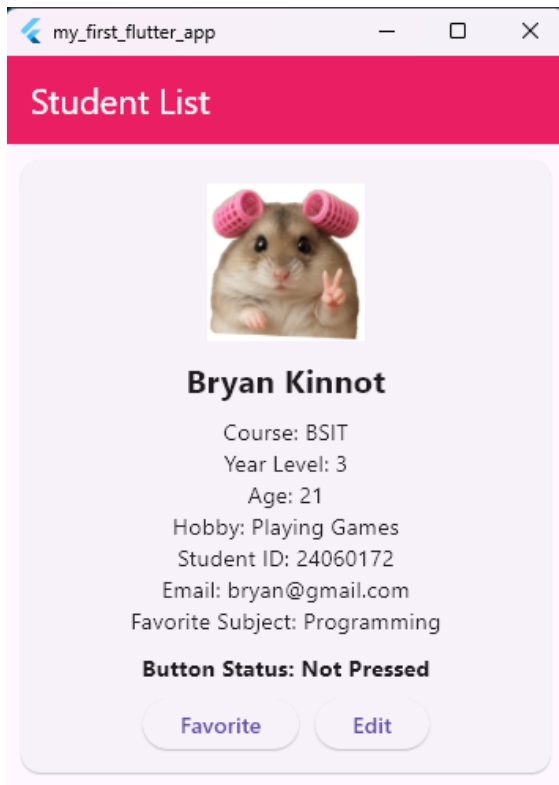

```
285 |
286 |
287 |         ElevatedButton(
288 |             onPressed: () {
289 |                 setState(() {
290 |                     buttonPressed[index] = true;
291 |                 });
292 |
293 |                 debugPrint(
294 |                     "Favorite button pressed for "
```

```
314 |
315 |         ElevatedButton(
316 |             onPressed: () {
317 |                 setState(() {
318 |                     buttonPressed[index] = true;
319 |                 });
320 |
321 |                 debugPrint(
322 |                     "Edit button pressed for "
323 |                     "${student["name"]}",
```

Flag 4 — Favorite Students

Objective: Let administrators mark students as favorites.

Schools often need to highlight important records.

Add a favorite feature that changes a student's appearance when marked.

Possible visual changes include:

- Filled heart/star
- Different card color
- Favorite label

Each student's favorite status should work independently.




Test

- Favorite one student.
- Other students should remain unchanged.
- Favorite another student.

Both should keep their own state.

Screenshot:

- Favorited student
- Non-favorited student
- Favorite icon changing

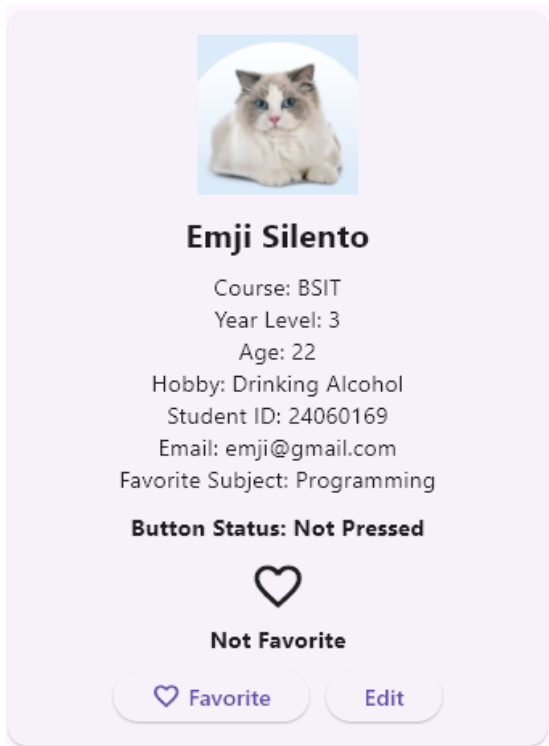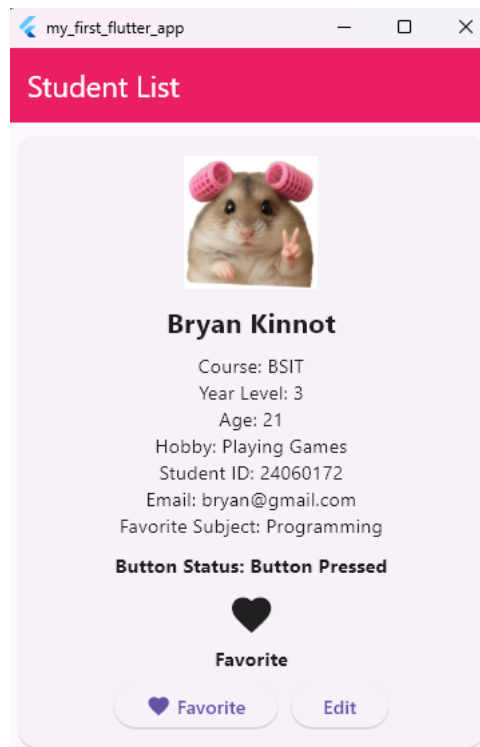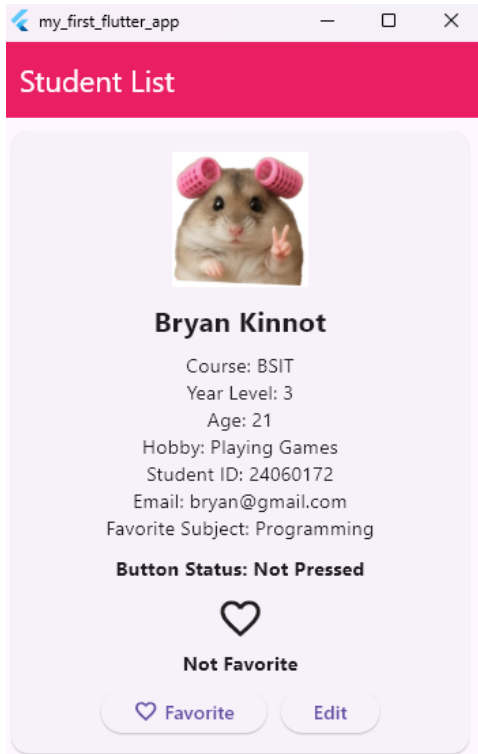

Flag 5 — Remove a Student

Objective: Delete a student from the directory.

Research how to remove an item from a Dart [List](#).

Add a Delete action that removes a student from your list.

The UI should immediately update after deletion.

Test

Before:

- Student A
- Student B
- Student C


After deleting Student B:

- Student A
- Student C

No empty spaces should remain.

Screenshot:

- Student before deletion
- Student after deletion

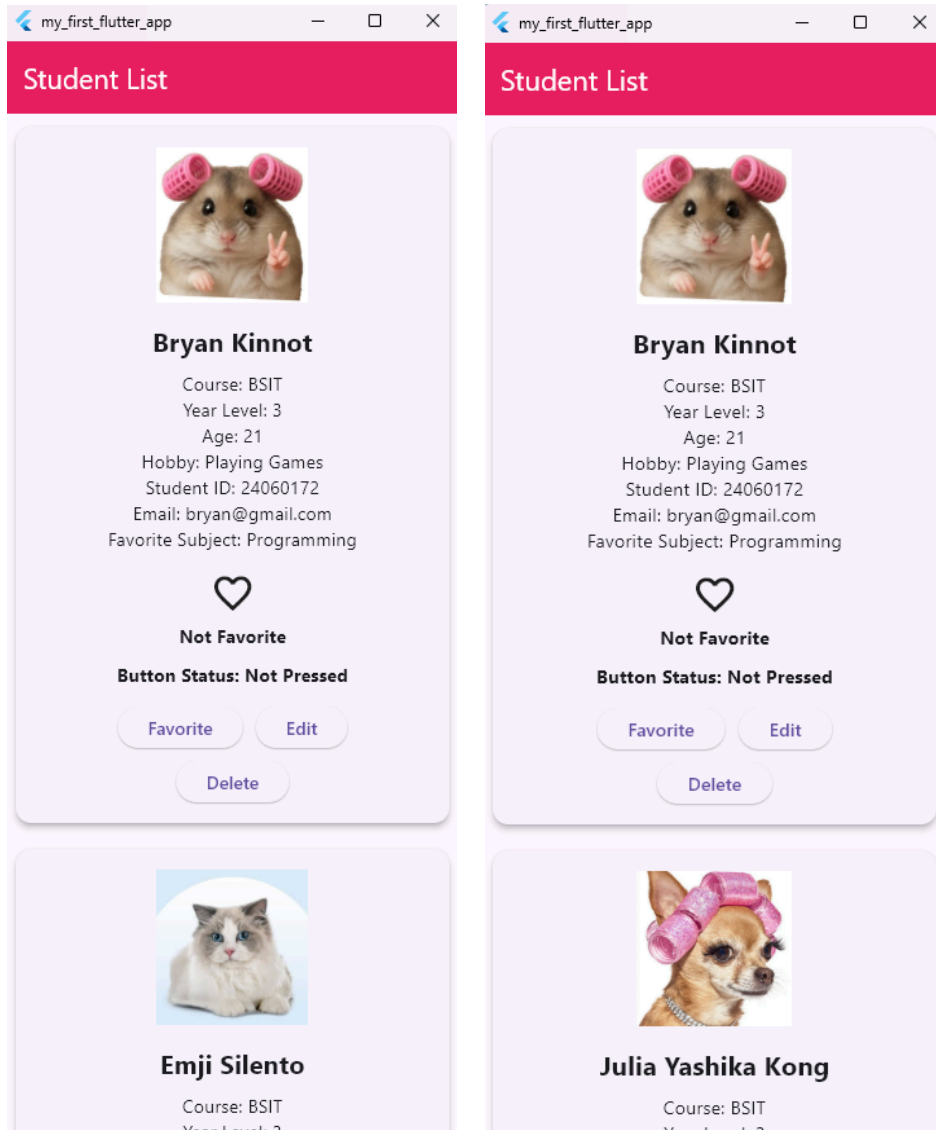

🚩 Flag 6 — Edit Trigger

Objective: Prepare your app for editing student information.

In the next CTF you'll build a full Edit Screen.

For now, create an Edit trigger.

Research simple ways Flutter can display temporary editing interfaces.

Examples include:

- [AlertDialog](#)
- [SnackBar](#)

- Bottom Sheet


The goal is simply to launch an edit action, not build the complete editor yet.

Test

Pressing Edit should open your chosen interface.

Screenshot:

- Edit button
- Opened dialog, snackbar, or bottom sheet

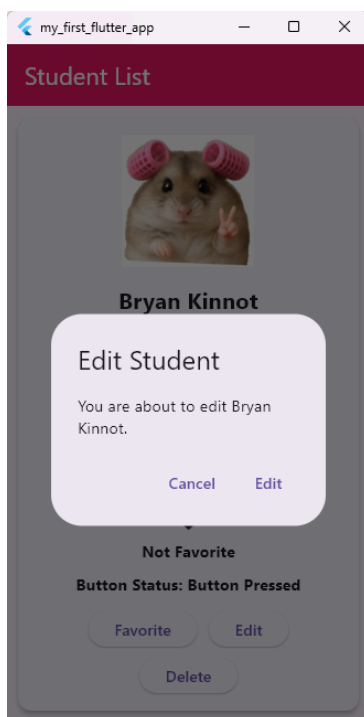

```
showDialog(
  context: context,
  builder: (BuildContext context) {
    return AlertDialog(
      title: const Text(
        "Edit Student",
      ), // Text
      content: Text(
        "You are about to edit ${student["name"]}.",
      ), // Text
      actions: [
        TextButton(
          onPressed: () {
            Navigator.of(context).pop();
          },
          child: const Text(
            "Cancel",
          ), // Text
        ), // TextButton
      ],
    );
  },
);
```

🚩 Flag 7 — Multiple Actions, Independent State

Objective: Make every Student Card manage interactions correctly.

This is your final interaction challenge.

Verify that every student behaves independently.

Example scenario:

- Favorite Student A.
- Delete Student C.

- Open Edit for Student B.


Your application should continue functioning correctly without affecting unrelated students.

Test Checklist

- Favorite works independently.
- Delete updates the list immediately.
- Edit still opens correctly.
- Remaining students keep their own states.

Screenshot:

- Multiple interactions working together
- Application still functioning normally

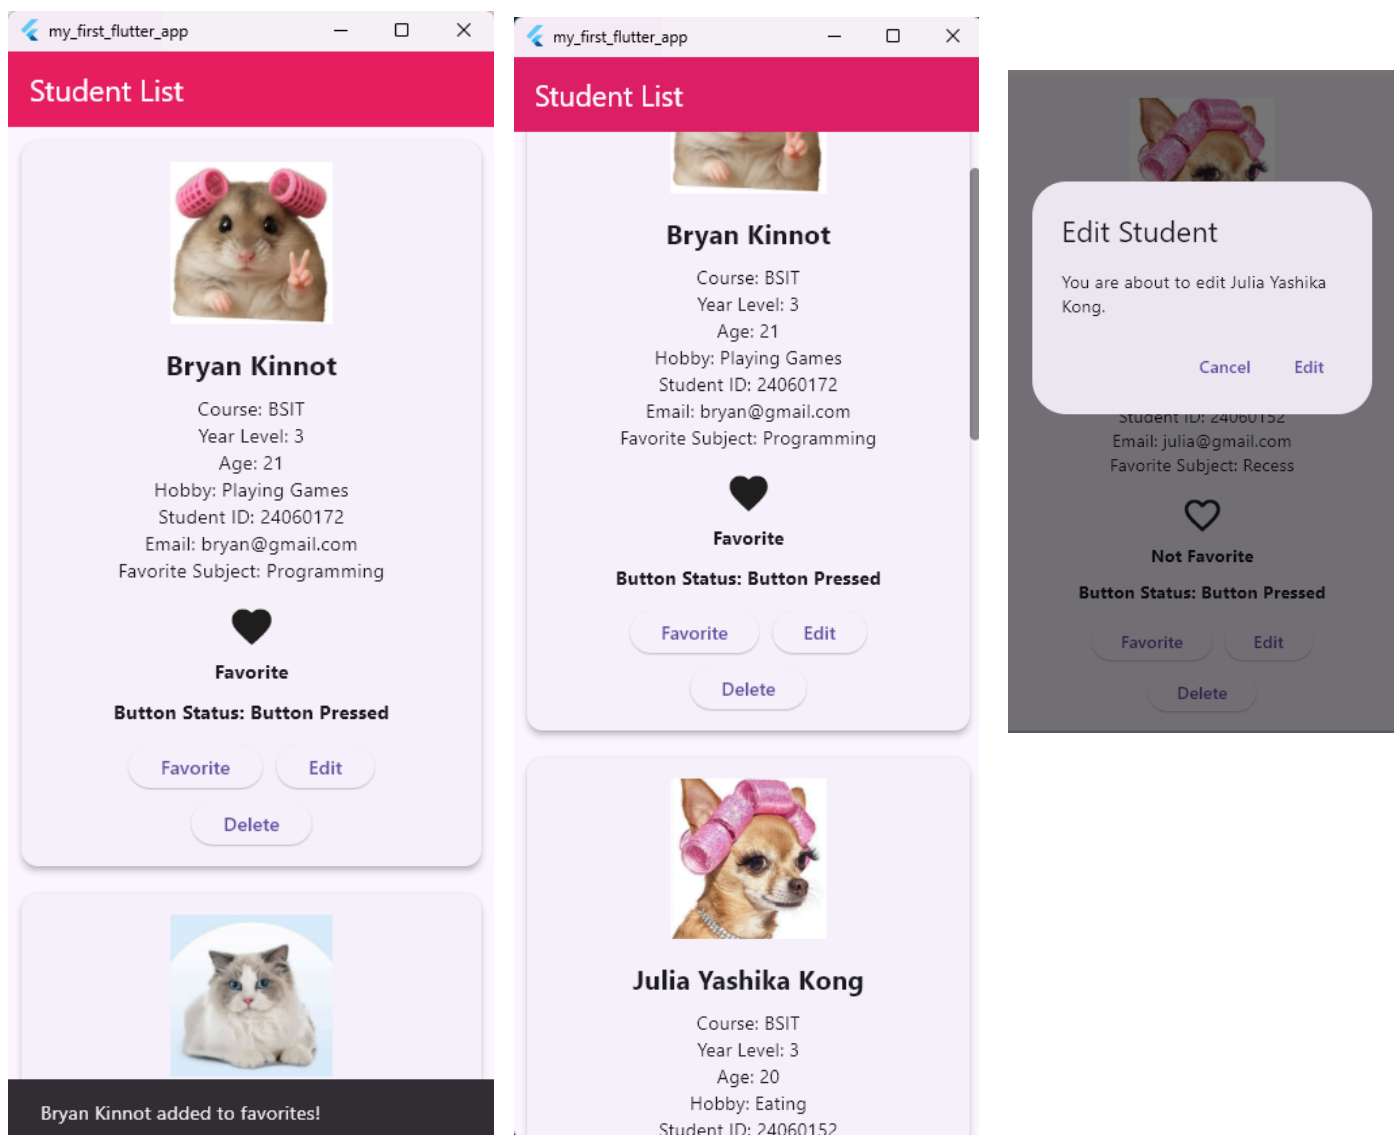

Flag 8 — Save Your Progress

Objective: Commit and push your completed Interactive Student Directory.

Use a proper Git commit message.

Branch:

`feature/student-interactions`

Screenshot:

- Successful commit
- Current branch
- Terminal showing the commit

```
PS C:\Users\student\IT314AB_KONG\UI_Exam\IT314AB_KONG\my_first_flutter_app> git add .
PS C:\Users\student\IT314AB_KONG\UI_Exam\IT314AB_KONG\my_first_flutter_app> git commit -m "feat: submit activity 5: feature/student-interactions"
On branch feature/student-interactions
nothing to commit, working tree clean
PS C:\Users\student\IT314AB_KONG\UI_Exam\IT314AB_KONG\my_first_flutter_app> git push origin feature/student-interactions
Enumerating objects: 19, done.
Counting objects: 100% (19/19), done.
Delta compression using up to 12 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (12/12), 280.64 KiB | 140.32 MiB/s, done.
```