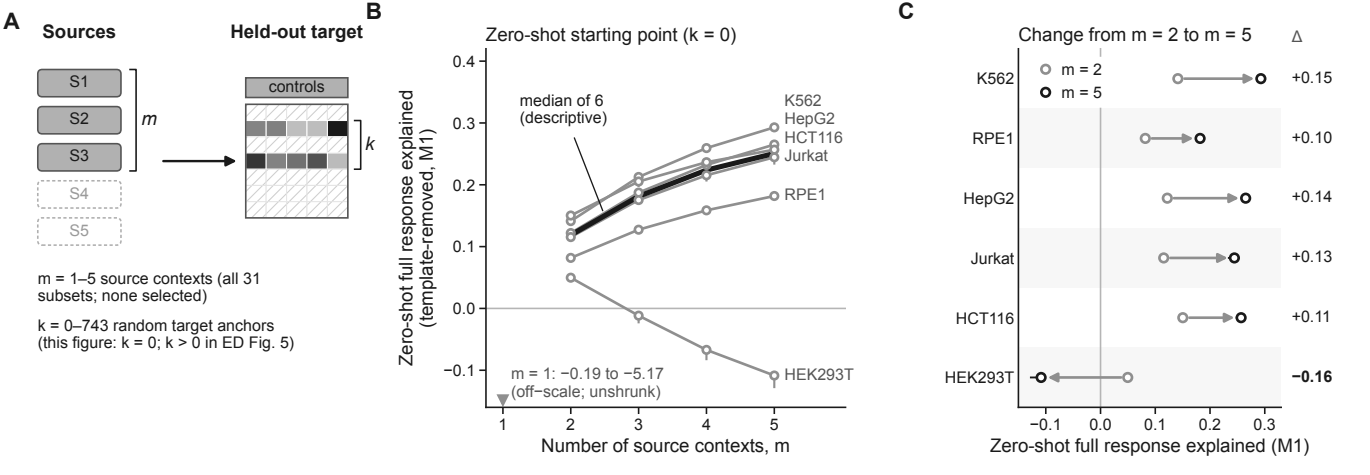

A
Sources
Held-out target
S1
S2
S3
S4
S5
m
controls
k
m = 1–5 source contexts (all 31 subsets; none selected)
k = 0–743 random target anchors (this figure: k = 0; k > 0 in ED Fig. 5)
B
Zero-shot starting point (k = 0)
Zero-shot full response explained (template-removed, M1)
median of 6 (descriptive)
K562
HepG2
HCT116
Jurkat
RPE1
HEK293T
m = 1: −0.19 to −5.17 (off−scale; unshrunk)
Number of source contexts, m
C
Change from m = 2 to m = 5
Δ
m = 2
m = 5
K562 +0.15
RPE1 +0.10
HepG2 +0.14
Jurkat +0.13
HCT116 +0.11
HEK293T −0.16
Zero-shot full response explained (M1)