॥वसुधैव कुटुम्बकम्॥

SYMBIOSIS INSTITUTE OF TECHNOLOGY, PUNE

Symbiosis International (Deemed University)

(Established under section 3 of the UGC Act, 1956)

Re-accredited by NAAC with 'A' grade (3.58/4) | Awarded Category – I by UGC

Founder: Prof. Dr. S. B. Mujumdar, M. Sc., Ph. D. (Awarded Padma Bhushan and Padma Shri by President of India)

Assignment No. 15

Subject:	DevOps Lab
TCODE:	TE7950
Name of Student	**Yash Patel**
PRN No.	**23070122235**
Branch	CSE, Batch (2023-27), L4
Academic Year & Semester	25 – 26, Sem VII
Date of Performance	23rd July, 2026
Title of Assignment:	Basic Infrastructure as Code (IaC) with Terraform
Theory:	Infrastructure as Code (IaC) is the practice of managing and provisioning infrastructure using configuration files instead of manual processes. Terraform is an open-source IaC tool developed by HashiCorp that enables users to define, provision, modify, and destroy infrastructure resources in a consistent and automated manner. In this experiment, Terraform was used with the Local provider to create, update, and destroy a local text file. The commands terraform init, terraform plan, terraform apply, and terraform destroy demonstrated Terraform's workflow of initializing the working directory, previewing infrastructure changes, applying the desired configuration, and safely removing managed resources. This approach ensures repeatable deployments, version control of infrastructure, and simplified infrastructure management. **Commands Used** • terraform --version – Checks whether Terraform is installed correctly and displays the installed version. • mkdir my-terraform-iac – Creates a new directory for storing the Terraform project files. • cd my-terraform-iac – Navigates to the Terraform project directory. • terraform init – Initializes the Terraform working directory by downloading the required providers and preparing the project. • terraform plan – Generates an execution plan to preview the infrastructure changes before applying them. • terraform apply – Applies the Terraform configuration and creates or

	updates the resources defined in the configuration file. • terraform destroy – Removes all resources managed by the current Terraform configuration.
Implementation:	**Step 1: Install Terraform** Installed Terraform — Successfully installed Terraform on the Windows system and verified the installation using the terraform --version command. **Step 2: Create the Project Directory** Created Terraform Project Directory — Created a new project directory named my-terraform-iac and navigated into it to store the Terraform configuration files. **Step 3: Create the Terraform Configuration File (main.tf)** Created Terraform Configuration File — Created the main.tf configuration file and defined the local provider along with a local_file resource to create a text file using Terraform. **Step 4: Initialize Terraform** Initialized Terraform — Initialized the Terraform working directory using the terraform init command, which downloaded the required provider plugins and prepared the project for execution. **Step 5: Plan the Changes** Generated Terraform Execution Plan — Generated an execution plan using the terraform plan command to preview the changes Terraform would make. The plan indicated that one new resource (local_file.my_example_file) would be created with no modifications or deletions. **Step 6: Apply the Changes** Applied Terraform Configuration — Applied the Terraform configuration using the terraform apply command, which successfully created the example.txt file as defined in the main.tf configuration. The generated file was verified in the project directory. **Step 7: Modify the Content and Re-apply** Command: terraform plan Generated Updated Execution Plan — Modified the main.tf configuration and generated an updated execution plan using the terraform plan command. Terraform detected that the existing local_file resource would be replaced to apply the updated content. Command: terraform apply

Applied Updated Terraform Configuration — Applied the modified Terraform configuration using the terraform apply command. Terraform successfully recreated the local_file resource with the updated content.


Verified Updated File Content — Verified that the example.txt file was successfully updated with the new content after applying the modified Terraform configuration.


Step 8: Destroy the Resource


Command: terraform destroy


Destroyed Terraform Resource — Executed the terraform destroy command, confirmed the destruction by entering yes, and successfully removed the Terraform-managed local_file resource from the local system.

Verified Resource Deletion — Verified that the example.txt file was successfully removed from the project directory after the Terraform-managed resource was destroyed.

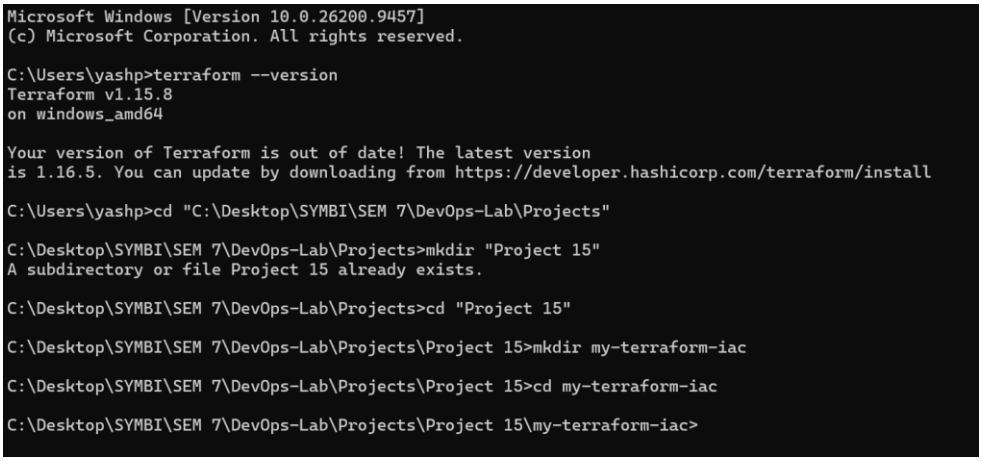

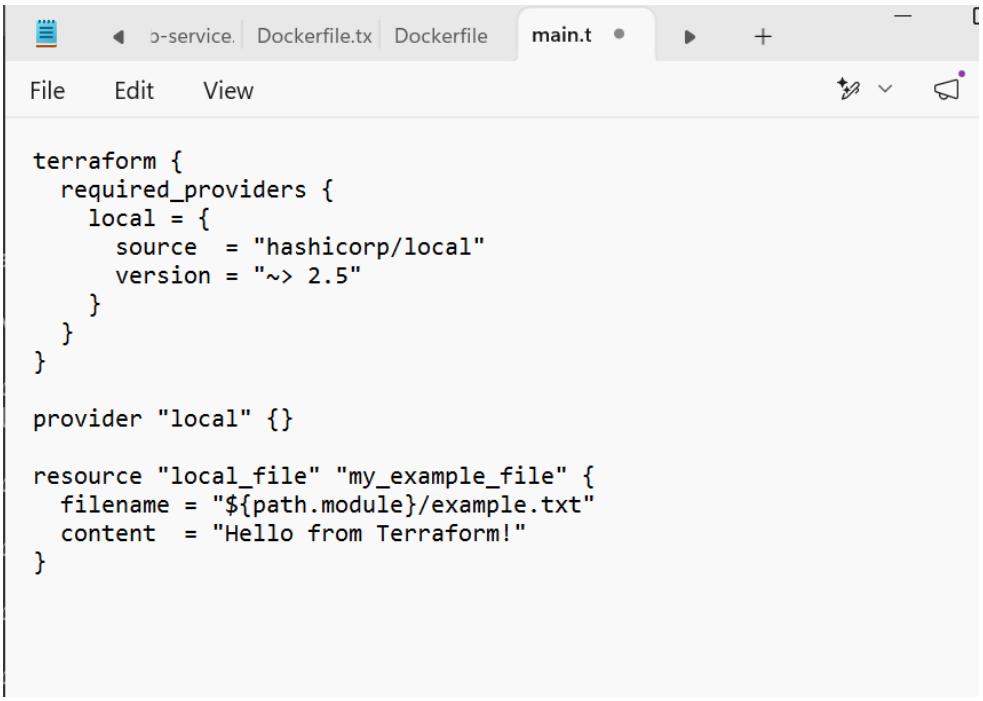
o-service.
Dockerfile.tx
Dockerfile
main.t
File
Edit
View
terraform {
required_providers {
local = {
source = "hashicorp/local"
version = "~> 2.5"
}
}
}
provider "local" {}
resource "local_file" "my_example_file" {
filename = "${path.module}/example.txt"
content = "Hello from Terraform!"
}

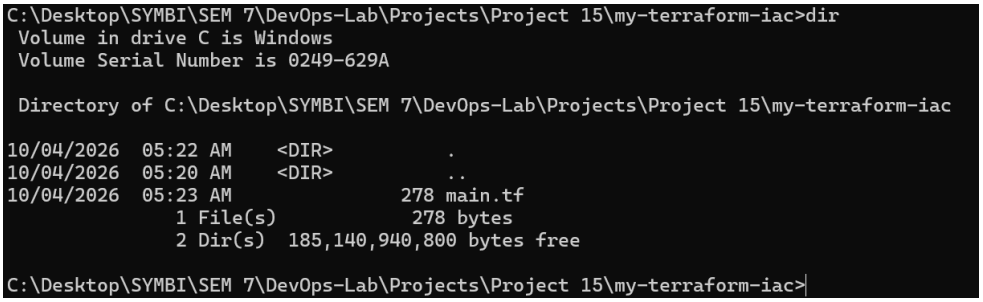
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>dir
Volume in drive C is Windows
Volume Serial Number is 0249-629A
Directory of C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac
10/04/2026 05:22 AM <DIR> .
10/04/2026 05:20 AM <DIR> ..
10/04/2026 05:23 AM 278 main.tf
1 File(s) 278 bytes
2 Dir(s) 185,140,940,800 bytes free
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>

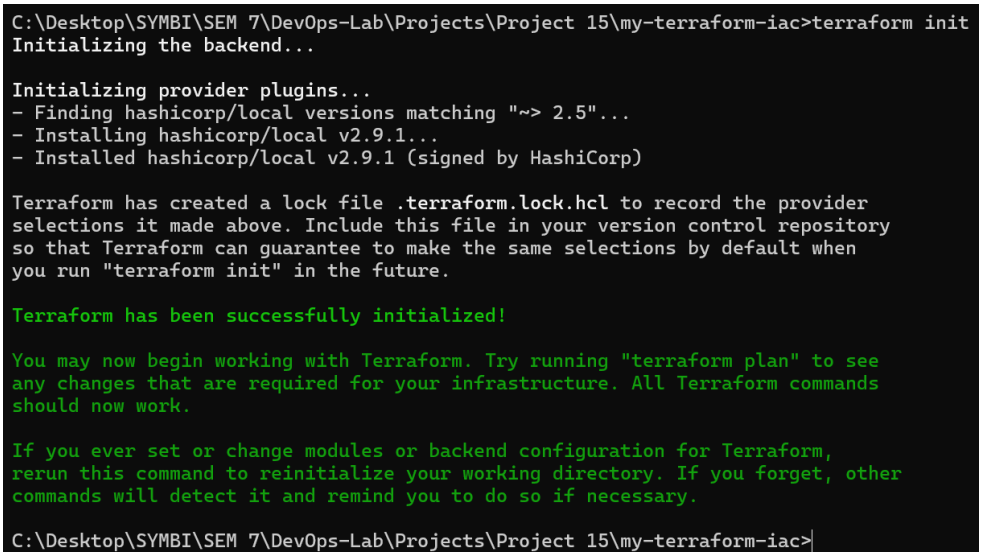
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>terraform init
Initializing the backend...
Initializing provider plugins...
- Finding hashicorp/local versions matching "~> 2.5"...
- Installing hashicorp/local v2.9.1...
- Installed hashicorp/local v2.9.1 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.
Terraform has been successfully initialized!
You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.
If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>

```
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the
following symbols:
  + create

Terraform will perform the following actions:

  # local_file.my_example_file will be created
  + resource "local_file" "my_example_file" {
      + content              = "Hello from Terraform!"
      + content_base64sha256 = (known after apply)
      + content_base64sha512 = (known after apply)
      + content_md5          = (known after apply)
      + content_sha1         = (known after apply)
      + content_sha256       = (known after apply)
      + content_sha512       = (known after apply)
      + directory_permission = "0777"
      + file_permission      = "0777"
      + filename             = "./example.txt"
      + id                   = (known after apply)
    }

Plan: 1 to add, 0 to change, 0 to destroy.

Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if
you run "terraform apply" now.

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>terraform apply

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the
following symbols:
  + create

Terraform will perform the following actions:

  # local_file.my_example_file will be created
  + resource "local_file" "my_example_file" {
      + content              = "Hello from Terraform!"
      + content_base64sha256 = (known after apply)
      + content_base64sha512 = (known after apply)
      + content_md5          = (known after apply)
      + content_sha1         = (known after apply)
      + content_sha256       = (known after apply)
      + content_sha512       = (known after apply)
      + directory_permission = "0777"
      + file_permission      = "0777"
      + filename             = "./example.txt"
      + id                   = (known after apply)
    }

Plan: 1 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?
  Terraform will perform the actions described above.
  Only 'yes' will be accepted to approve.

  Enter a value: yes
```

```
  Enter a value: yes

local_file.my_example_file: Creating...
local_file.my_example_file: Creation complete after 0s [id=cadbafd9572a72dc7769c97730552f5955e135fd]

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>dir
 Volume in drive C is Windows
 Volume Serial Number is 0249-629A

 Directory of C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac

10/04/2026  05:25 AM    <DIR>          .
10/04/2026  05:20 AM    <DIR>          ..
10/04/2026  05:23 AM    <DIR>          .terraform
10/04/2026  05:23 AM             1,257 .terraform.lock.hcl
10/04/2026  05:25 AM                21 example.txt
10/04/2026  05:23 AM               278 main.tf
10/04/2026  05:25 AM             1,646 terraform.tfstate
               4 File(s)          3,202 bytes
               3 Dir(s)  185,104,986,112 bytes free

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>type example.txt
Hello from Terraform!
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
resource "local_file" "my_example_file" {
  filename = "${path.module}/example.txt"
  content  = "Hello from updated Terraform!"
}
```

```
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the
following symbols:
-/+ destroy and then create replacement

Terraform will perform the following actions:

  # local_file.my_example_file must be replaced
-/+ resource "local_file" "my_example_file" {
      ~ content              = "Hello from Terraform!" -> "Hello from updated Terraform!" # forces replacement
      ~ content_base64sha256 = "D0B4Mp1pOK6ytRPyiYLJ9nr9oF3/26j0e9EtakkSB7w=" -> (known after apply)
      ~ content_base64sha512 = "0s3qy1AYa5sysJgKAg7pCrjDAej6ithc/wDBRPdkjzbxVCZPml4XxS93uEByWd7+Os+iUihdgIQ+PzeechPMZQ==
" -> (known after apply)
      ~ content_md5          = "c57fe0cccf9e1237ea80aa663c90637b" -> (known after apply)
      ~ content_sha1         = "cadbafd9572a72dc7769c97730552f5955e135fd" -> (known after apply)
      ~ content_sha256       = "0f4078329d6938aeb2b513f28982c9f67afda05dffdba8f47bd12d6a491207bc" -> (known after apply)
      ~ content_sha512       = "d2cdeacb50186b9b32b0980a020ee90ab8c301e8fa8ad85cff00c144f7648f36f154264f9a5e17c52f77b840
7259defe3acfa252285d80843e3f379e7213cc65" -> (known after apply)
      ~ id                   = "cadbafd9572a72dc7769c97730552f5955e135fd" -> (known after apply)
        # (3 unchanged attributes hidden)
    }

Plan: 1 to add, 0 to change, 1 to destroy.

Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if
you run "terraform apply" now.

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
Do you want to perform these actions?
  Terraform will perform the actions described above.
  Only 'yes' will be accepted to approve.

  Enter a value: yes

local_file.my_example_file: Destroying... [id=cadbafd9572a72dc7769c97730552f5955e135fd]
local_file.my_example_file: Destruction complete after 0s
local_file.my_example_file: Creating...
local_file.my_example_file: Creation complete after 0s [id=aaa13cc3e84f63fd519f6cc19fa7eef6660add33]

Apply complete! Resources: 1 added, 0 changed, 1 destroyed.

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>type example.txt
Hello from updated Terraform!
C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

```
Plan: 0 to add, 0 to change, 1 to destroy.


Do you really want to destroy all resources?
  Terraform will destroy all your managed infrastructure, as shown above.
  There is no undo. Only 'yes' will be accepted to confirm.


  Enter a value: yes

local_file.my_example_file: Destroying... [id=aaa13cc3e84f63fd519f6cc19fa7eef6660add33]
local_file.my_example_file: Destruction complete after 0s

Destroy complete! Resources: 1 destroyed.

C:\Desktop\SYMBI\SEM 7\DevOps-Lab\Projects\Project 15\my-terraform-iac>
```

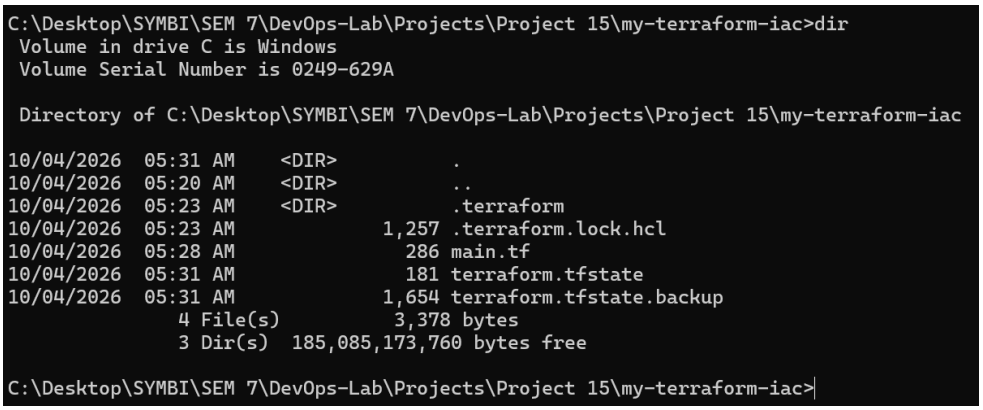



Subject Faculty Name: Prof. Arijit Dutta