Experiment 8

AIM: Use Postman to test a sample API

→Test API

GET: `https://jsonplaceholder.typicode.com/posts`

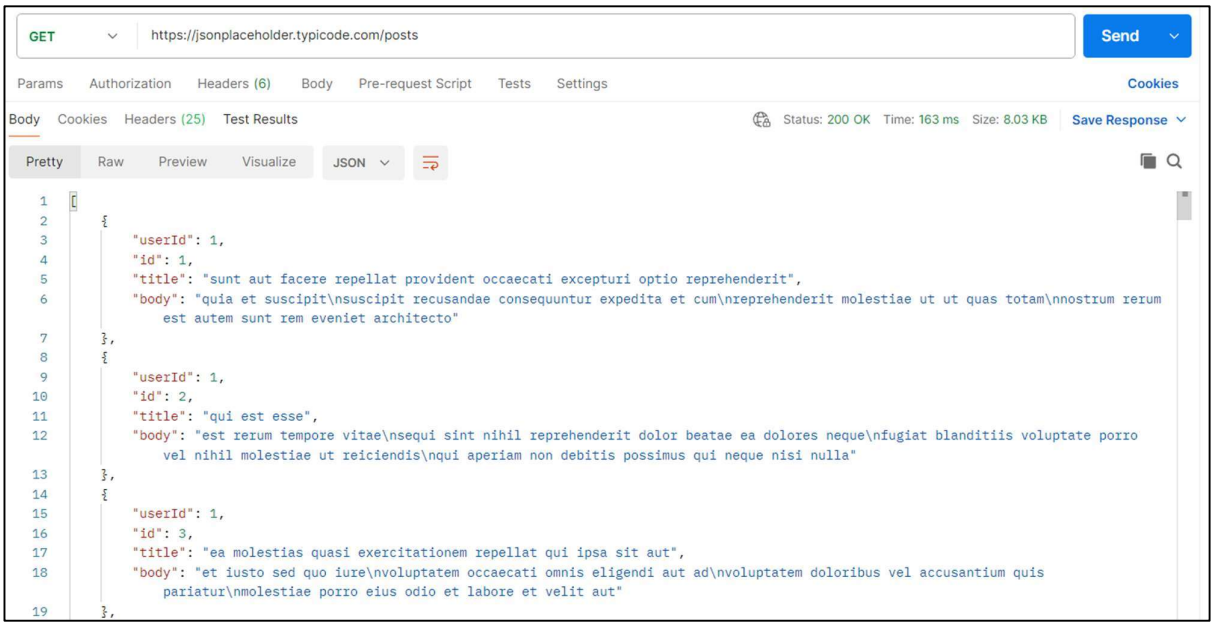

POST: `https://jsonplaceholder.typicode.com/posts`

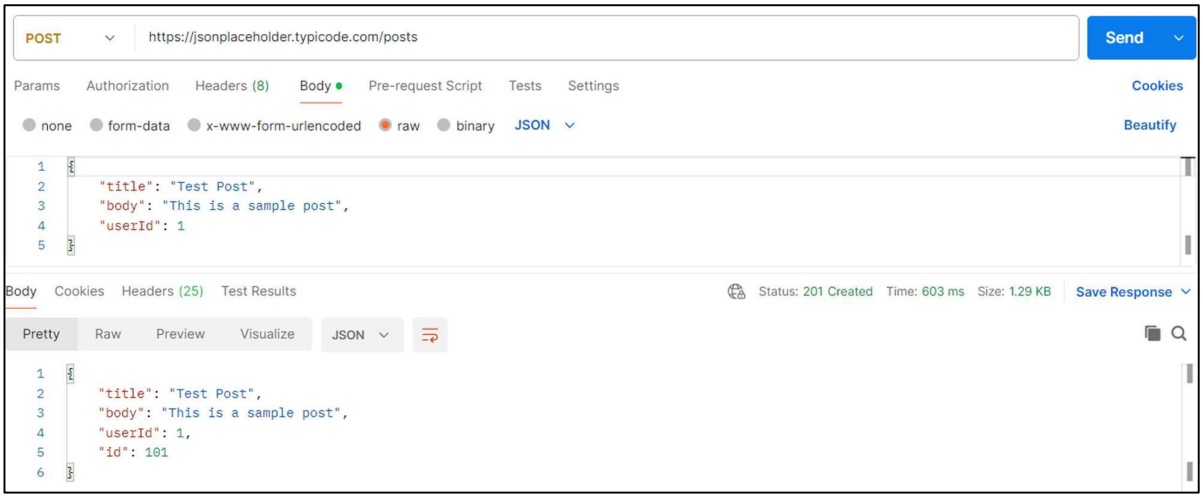

POST: `https://jsonplaceholder.typicode.com/posts/1`

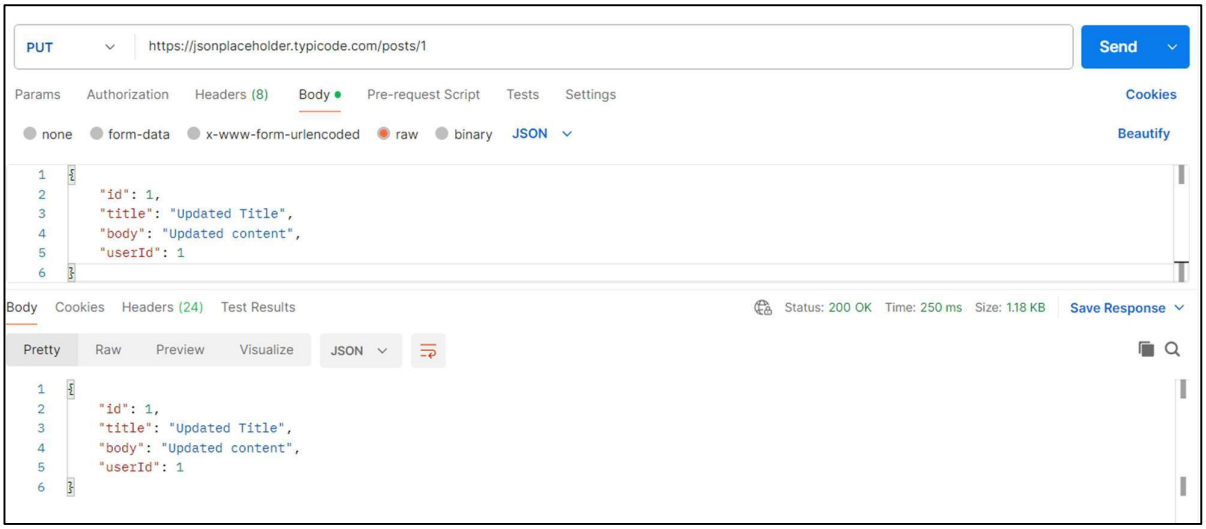

DELETE: `https://jsonplaceholder.typicode.com/posts/1`

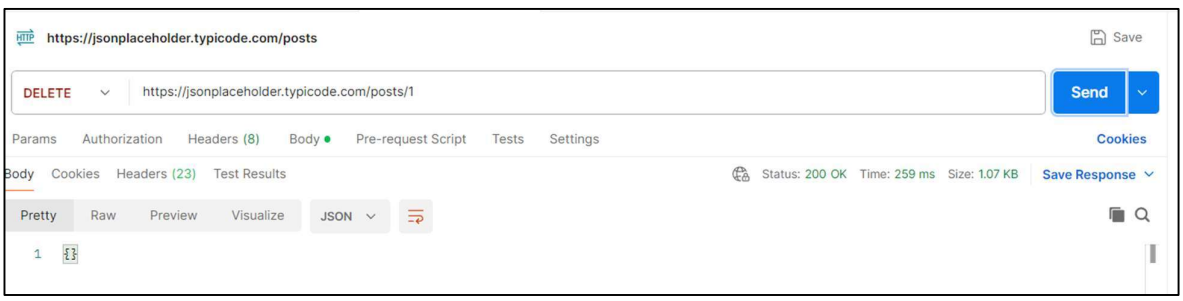

→Create node.js API

```
C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB>mkdir simple-api

C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB>cd simple-api

C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB\simple-api>npm init -y
Wrote to C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB\simple-api\package.json:
{
  "name": "simple-api",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs"
}
```

```
C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB\simple-api>npm install express
added 65 packages, and audited 66 packages in 3s
22 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities

C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB\simple-api>notepad server.js
```

server.js

```
const express = require('express');
const app = express();
app.use(express.json());

let students = [
 { id: 1, name: "Viraj", branch: "CE" },
 { id: 2, name: "Ravi", branch: "CE" }
];
app.get('/students', (req, res) => {
 res.json(students);
});
app.get('/students/:id', (req, res) => {
 const student = students.find(s => s.id == req.params.id);
 res.json(student);
});
app.post('/students', (req, res) => {
 const newStudent = {
 id: students.length + 1,
 name: req.body.name,
 branch: req.body.branch
 };
 students.push(newStudent);
 res.status(201).json(newStudent);
});
app.put('/students/:id', (req, res) => {
 const student = students.find(s => s.id == req.params.id);
 if (student) {
 student.name = req.body.name;
 student.branch = req.body.branch;
 res.json(student);
 } else {
 res.status(404).json({ message: "Student not found" });
 }
});
app.delete('/students/:id', (req, res) => {
 students = students.filter(s => s.id != req.params.id);
 res.json({ message: "Student deleted" });
});
app.listen(3000, () => {
 console.log("Server running on http://localhost:3000");
});
```

```
C:\Users\ADMIN\OneDrive\Desktop\SEM 6\OSTLAB\simple-api>node server.js
Server running on http://localhost:3000
```

→ **POSTMAN**

GET : `http://localhost:3000/students`

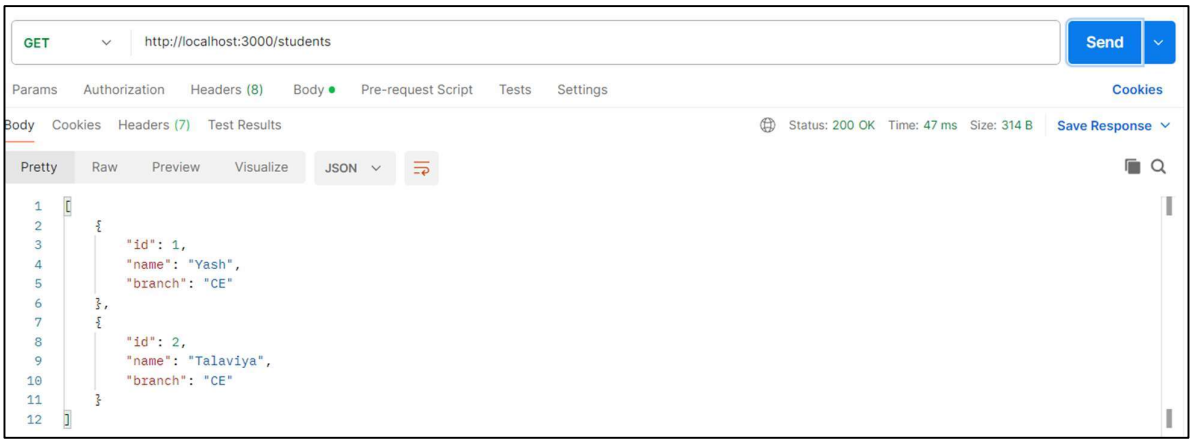

POST : `http://localhost:3000/students`

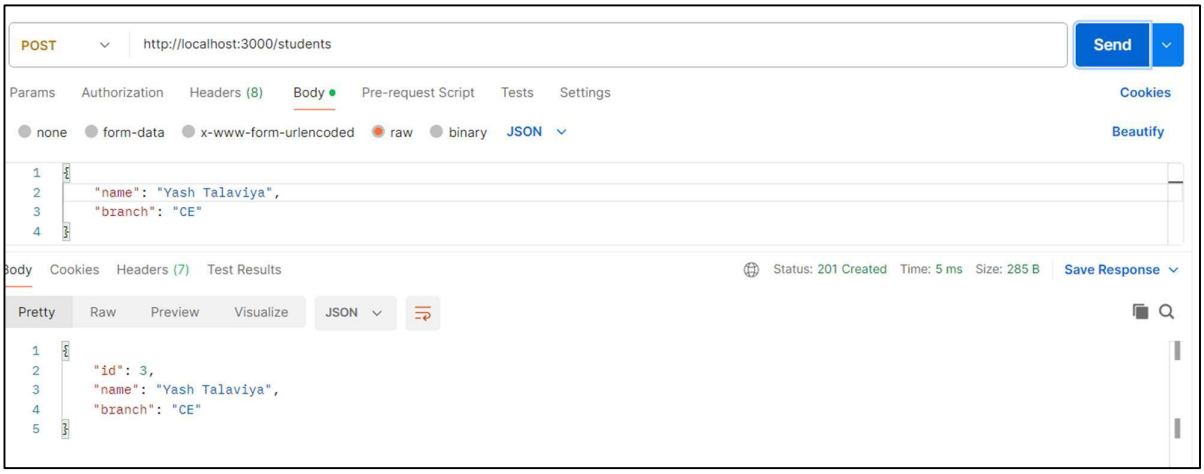

DELETE : `http://localhost:3000/students`

PUT: `http://localhost:3000/students`

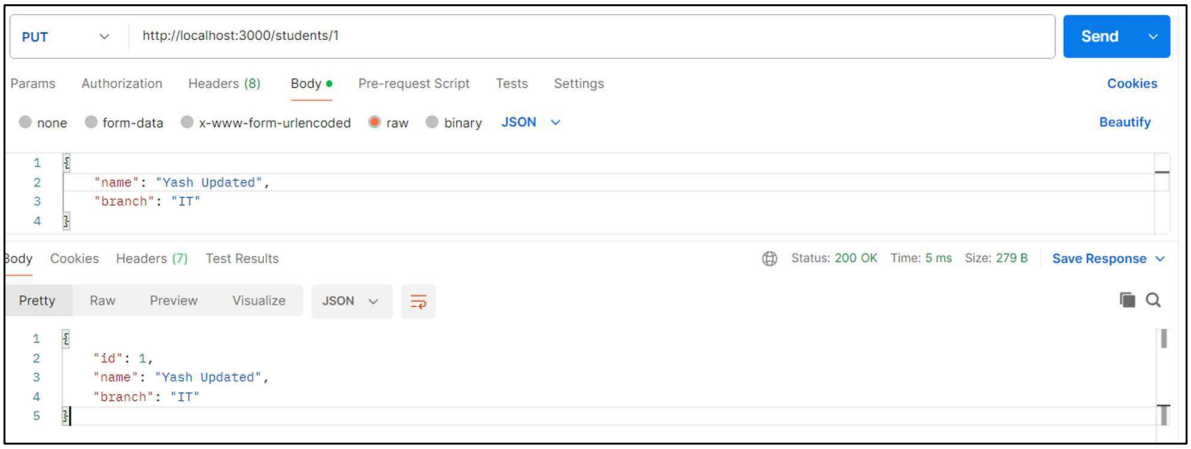

All changes are done!

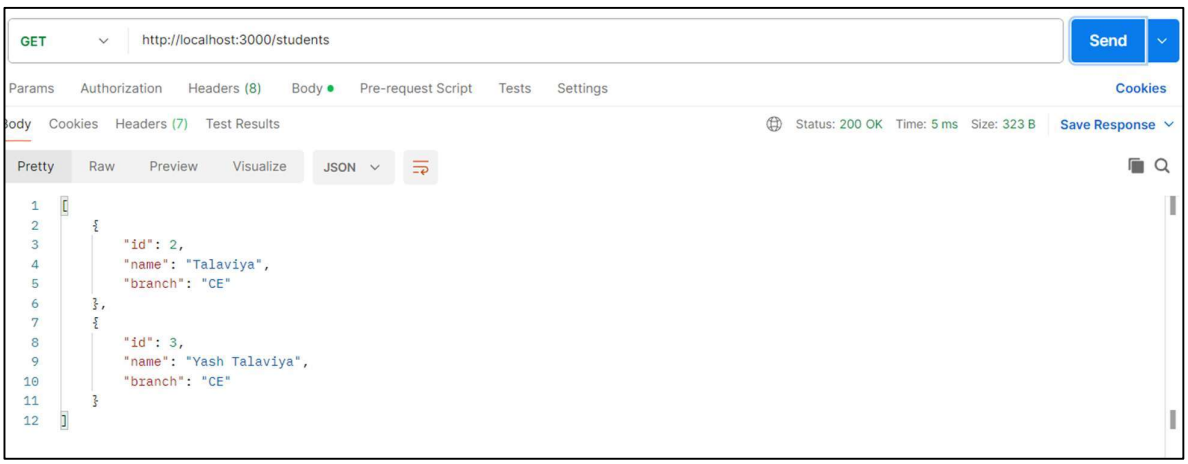

→To push OST EX8.pdf to GitHub:

```
ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments
$ git init
Initialized empty Git repository in C:/Users/ADMIN/OneDrive/Desktop/SEM 6/OSTLAB/Experiments/.git/

ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments (master)
$ git add .

ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments (master)
$ git commit -m "EX8 and EX9 Pushedd!"
[master (root-commit) 0f289da] EX8 and EX9 Pushedd!
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 OST EX8.pdf
 create mode 100644 OST EX9.pdf

ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments (master)
$ git remote add origin https://github.com/yashtalaviya5/OST-YashTalaviya105.git

ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments (master)
```
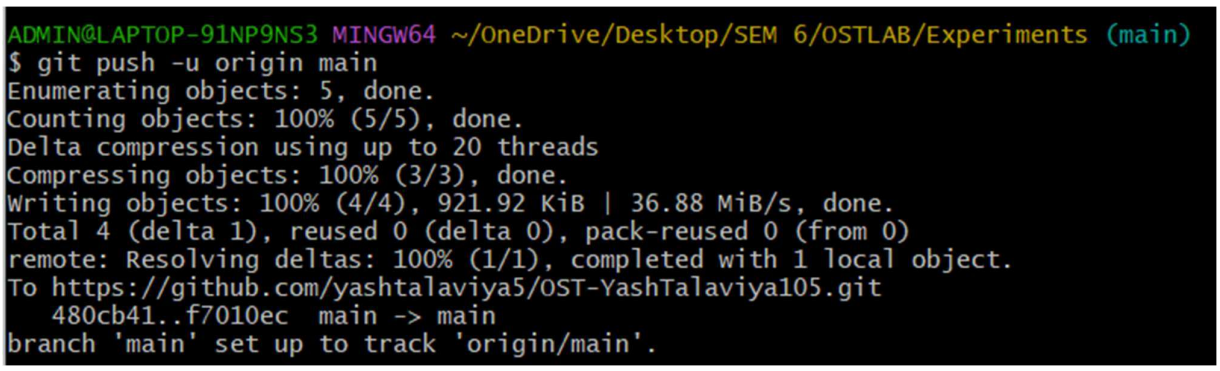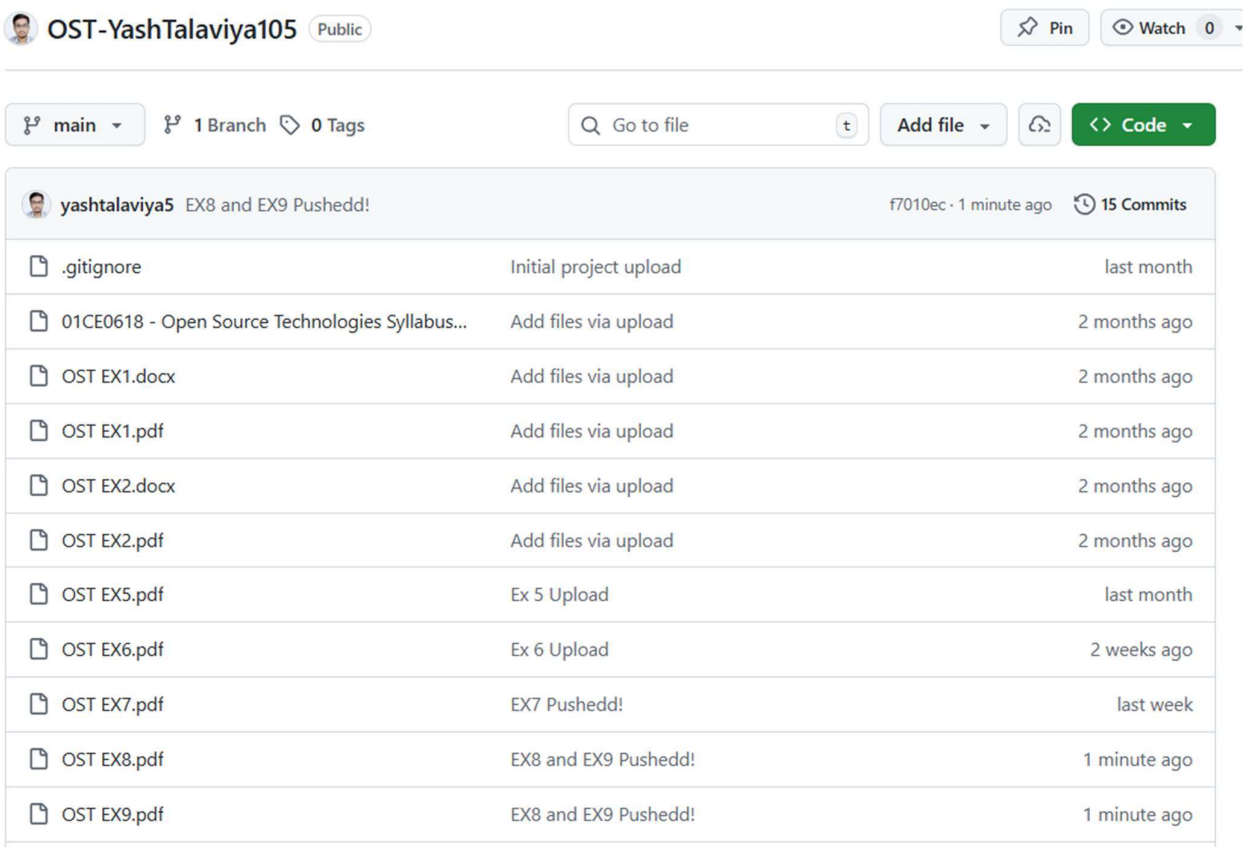
```
$ git branch -M main
ADMIN@LAPTOP-91NP9NS3 MINGW64 ~/OneDrive/Desktop/SEM 6/OSTLAB/Experiments (main)
$ git push -u origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 20 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 921.92 KiB | 36.88 MiB/s, done.
Total 4 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/yashtalaviya5/OST-YashTalaviya105.git
   480cb41..f7010ec  main -> main
branch 'main' set up to track 'origin/main'.
```