UNIT - 2

Write a program to print “ hello world” .
Write a program that takes 2 values from user and perform all arithmetic operators .
Write a program that takes 3 values for principle amount, rate of interest and no. of years and find out simple interest .
Write a program that input value from user and find out area of circle .
Write a program that input two values from user and find out area of rectangle .
Write a program that input 3 values from user and find out its average.
Write a program to Calculate the Square and Cube of a number.
Write a program Interchange the value of two numbers using third variable.
Write a program Interchange the value of two numbers without using third variable.
Write a program that input quantity, price, discount and display final amount.

UNIT - 2

Question 1)

```
#include<stdio.h>
#include<conio.h>
Void main()
 {
        Printf("hello world");
         Getch();
 }
```

Output 1) :




Question 2)

```
#include<stdio.h>
#include<conio.h>
```

```
Void main
{
      Int a,b;
      a=10;
      b=20;
       printf(“ \n %d addition : “);
       printf(“ \n %d multiplication :”);
       printf(“ \n %d division :”);
       printf(“\n %d substraction:”);
       getch();
}
```

Output 2) :

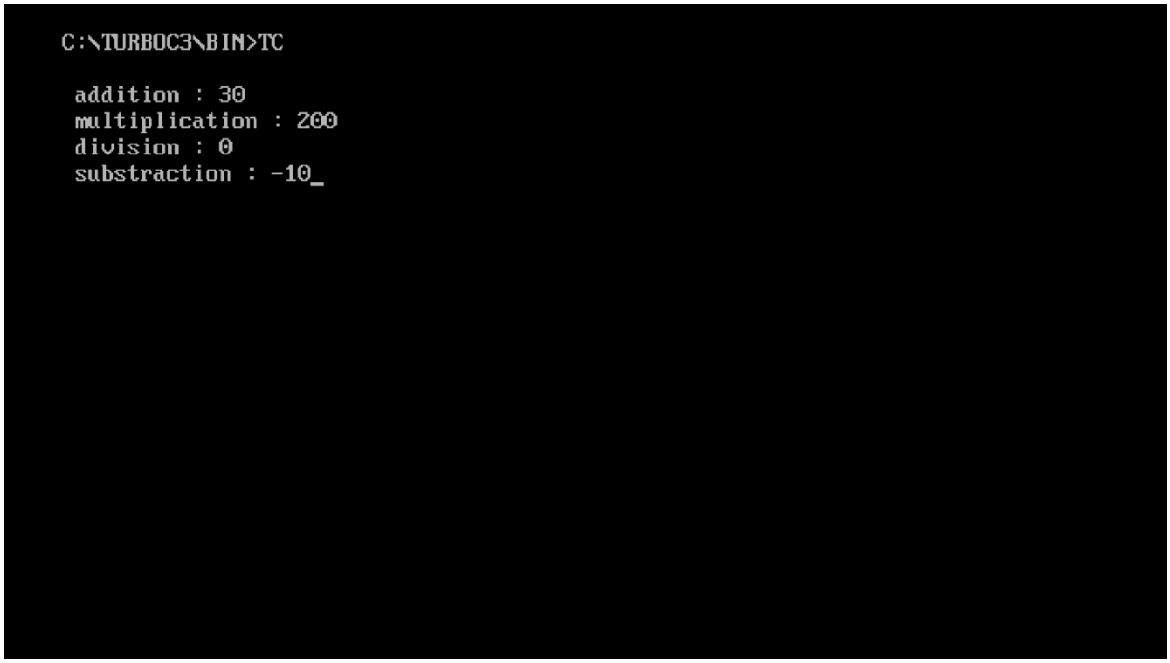

Question 3)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    float p,r,t,s;
    printf("enter principle amount:");
    scanf("%f",&p);
    printf("enter rate of interest:");
    scanf("%f"&r);
    printf("number of years:");
    scanf("%f",&t);
    s=(p*r*t)/100;
    printf("simple interest =%.2f",s);
    getch();
 }
```

Output 3) :



Question 4)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    float r,s;
    printf("enter a number:");
    scanf("%f",r);
    s=3.14*r*r;
    printf(" area of a circle:",s);
    getch();
 }
```


Output 4) :



Question 5)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    float a,s,b;
    printf("enter a :");
    scanf("%f",a);
    printf("enter b:");
    scanf("%f",b);
    s=a*b;
    printf(" area of rectangle:",s);
    getch();
 }
```

Output 5) :

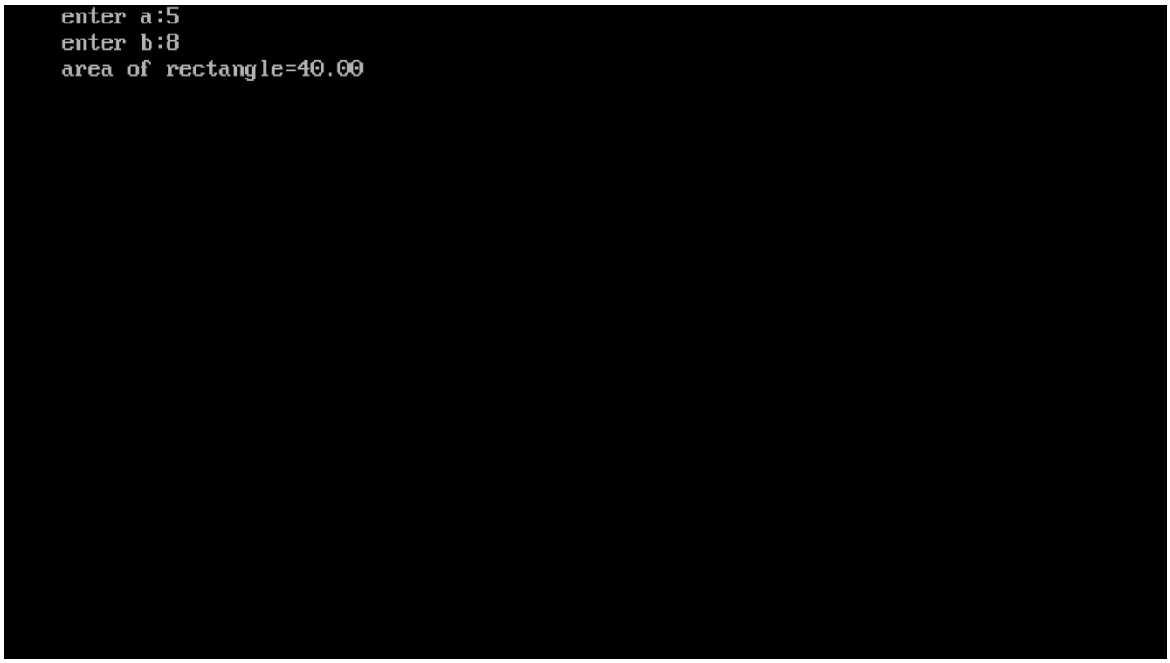

Question 6)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    float a,b,c,d;
    printf("enter three values:");
    scanf("%f%f%f",&a,&b,&c);
    d=(a+b+c)/3;
    printf("d=%.2f",d);
    getch();
  }
```

Output 6) :



Question 7)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int a,b,c;
    Printf(“enter a number:”);
    Scanf(“%d”,&a);
    b=a*a;
    c=a*a*a;
    printf(“b=5d\n”,b);
    printf(“c=%d”,c);
    getch();
  }
```

Output 7) :




Question 8)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int a,b,c;
    Clrscr();
```

```
        Printf(“ enter two numbers:”);
        scanf(“%d%d” ,&a,&b);
        C=a;
        A=b;
        B=c;
        Printf(“ after interchange:\n”);
        Printf(“a=%d\n”,a);
        Printf(“ b=%d”,b);
        Getch();
    }
```


Answer 8) :

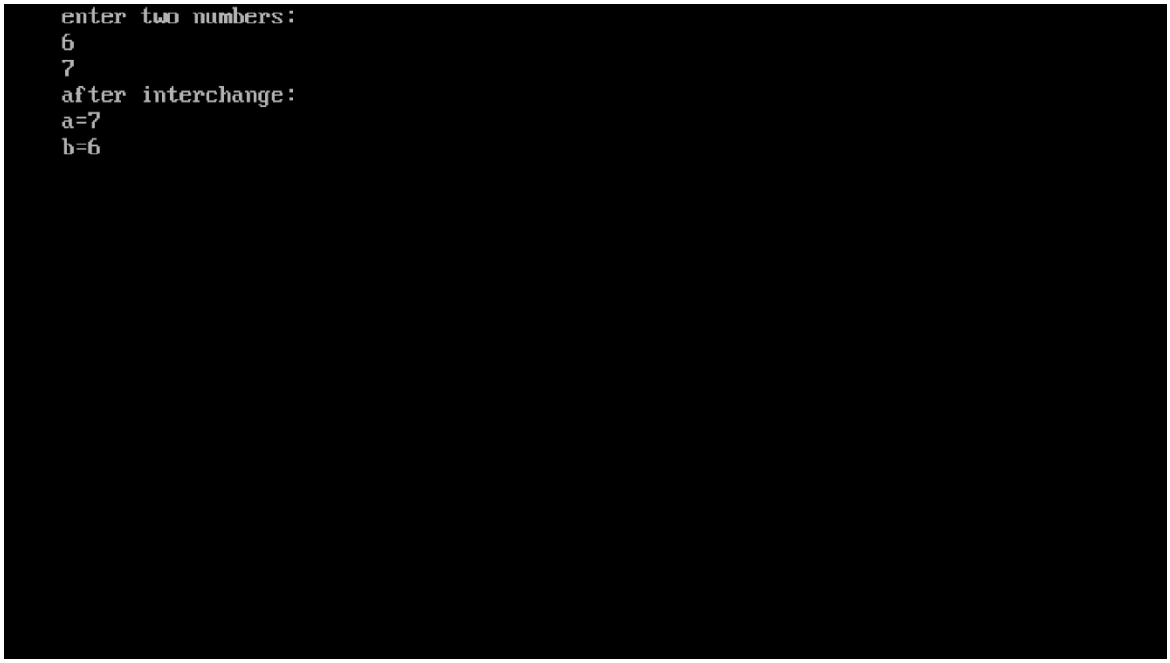

Question 9)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int a,b;
    Clrscr();
    Printf(“ enter two numbers:”);
    scanf(“%d%d” ,&a,&b);
    A=a+b;
    B=a-b;
    a=a-b;
    Printf(“ after interchange:\n”);
    Printf(“a=%d\n”,a);
    Printf(“ b=%d”,b);
    Getch();
}
```

Answer 9) :

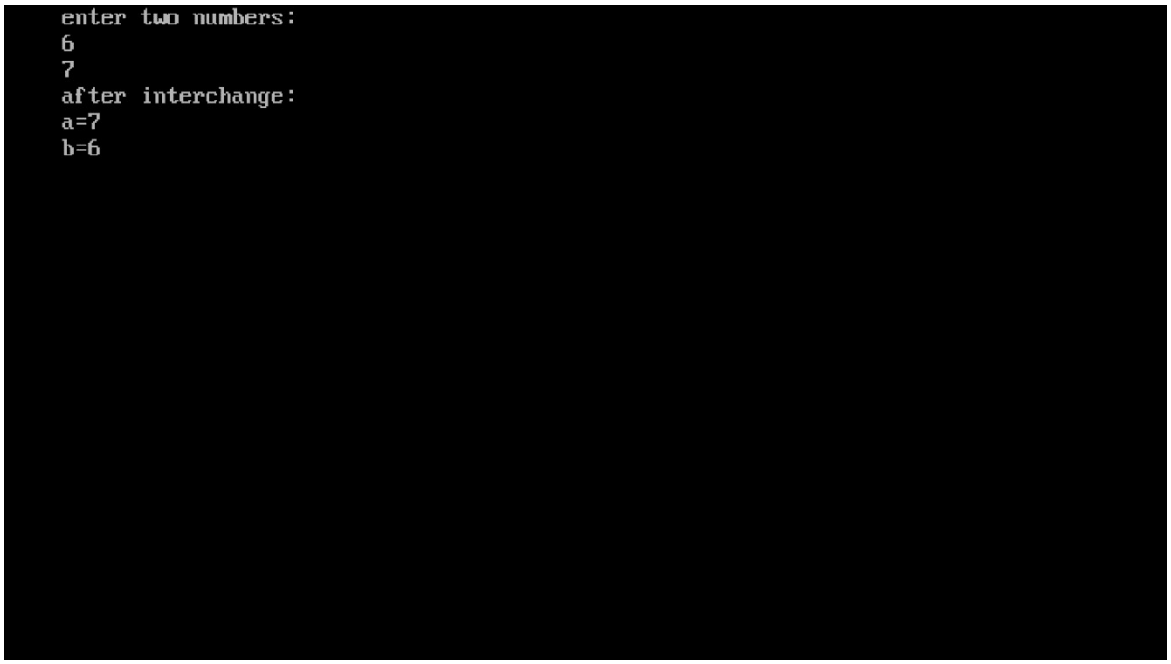

Question 10)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int quantity;
    Float price,discount,amount,finalamount;
    Clrscr();
    Printf("enter quantity:");
    Scanf("%d",&quantity);
    Printf("enter price:");
    Scanf("%d",&price);
    Printf("enter discount percentage:");
    Scanf(%f",discount);
    Amount=quantity * price;
    Finalamount = amount-(amount*discount/100);
    Printf("final amount=%.2f",finalamount);
    Getch();
}
```

Answer 10) :

