	UNIT - 3
1.	Write a program that input 2 values from user and find out Maximum.
2.	Write a program that input 2 values from user and find out Minimum.
3.	Write a program that input age from user if age>=18 then print person is eligible for vote else person is not eligible for vote.
4.	Write a program that input value from user and find out number is even or odd.
5.	Write a program that input 2 number from user and find out number is equal or not.
6.	Write a program that Input Salary From the user if salary Greater than or equal to 5000 then hr=5% of basic salary, ta=6% of basic salary, da=4% of basic salary and pf=5% of basic salary. but if salary is less than 5000 then hra=4%,ta=5%,da=3% and pf=4%.find out gross salary. printhra,ta,da,pf and gross salary(Hint : take all variable as float. formula for gross salary=salary+hra+ta+da- pf).
7.	Write a C Program to input price quantity of an item from user and display final payment according to following condition. If total purchase(price*quantity) is greater than Rs.1000 then calculate discount 15% otherwise calculate discount 10% of total rupees.
8.	Write a program to input year and find whether year is leap year or not.(Hint Use % Sign)
9.	Write a program to input two values from user and check whether the first number is divisible by second or not. (Hint Use % Sign)
10.	Write a program to Input a character, if it is capital convert into small else convert into capital.
11.	Write a program that input one character from user and find out that character is vowel or not.(aeiou is called vowel).
12.	Write programs that find out character is in uppercase or lowercase. Using If...Else..If or Switch.. Case

13.	Input Three Values from user and Find Maximum.
14.	Input Three Values from user and Find Minimum.
15.	Input RollNumber, Marks of 5 Subjects and find out Total, Percentage, Result and Grade.
16.	Input day in number and print in text(for Example input 1 then Output Monday)
17.	Input Month in number and print in text(for example input 1 then output January)
18.	Input number and check whether the number is positive, negative or zero.

UNIT - 3

Question 1)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int a,b;
    Clrscr();
    Printf("enter two values:");
    Scanf("%d%d",&a,&b);
    If(a>b)
    {
        Printf("max=%d",a);
    }
    Else
    {
        Printf("max=%d",b);
    }
```

```
Getch();
}
```

Answer 1) :



Question 2)

```
#include<stdio.h>
#include<conio.h>
Void main
    {
    Int a,b;
    Clrscr();
    Printf("enter two values:");
    Scanf("%d%d",&a,&b);
    If(a<b)
    {
        Printf("min=%d",a);
    }
    Else
    {
        Printf("min=%d",b);
    }
    Getch();
    }
```


Answer 2) :


enter two values:60
80
min=60_

Question 3)

```
#include<stdio.h>
#include<conio.h>
Void main
    {
    Int age;
    Clrscr();
    Printf("enter your age:");
    Scanf("%d",&age);
    If(age>=18)
    {
        Printf("person is eligible to vote");
    }
    Else
    {
        Printf("person is not eligible to vote");
    }
    Getch();
    }
```

Answer 3) :

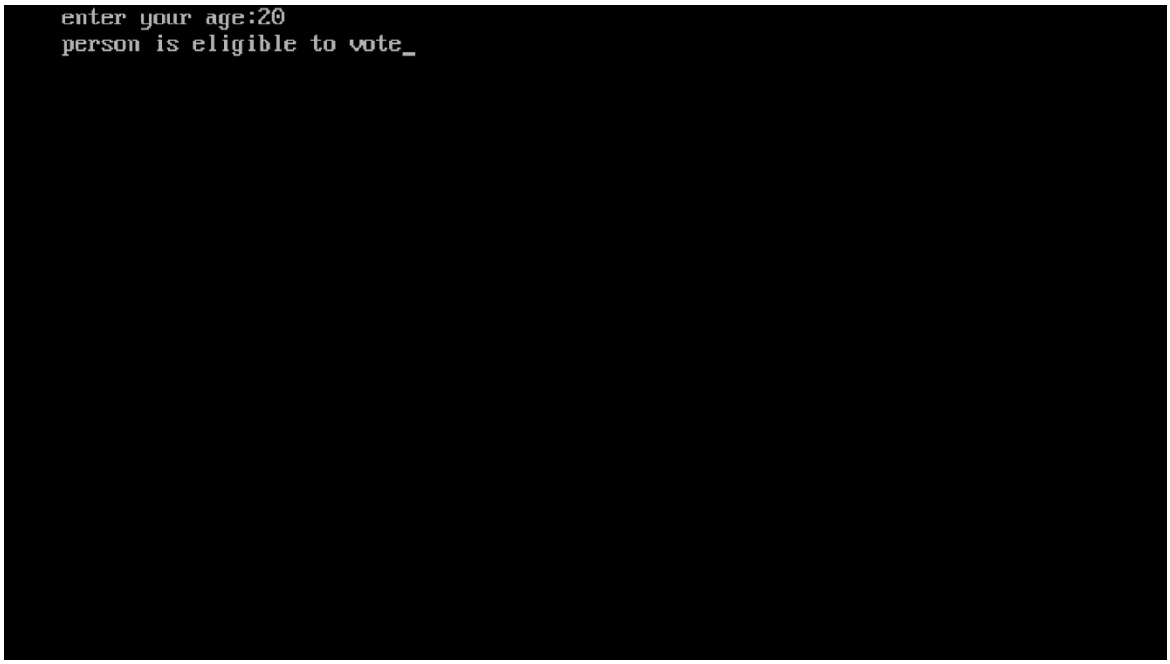

Question 4) #include<stdio.h>
#include<conio.h>
Void main
{
Int n;
Clrscr();
Printf(“enter a number:”);
Scanf(“%d”,&n);
If(n%2==0)
{
Printf(“number is even”);
}
Else
{
Printf(“number is odd”);
}
Getch();
}

Answer 4) :



Question 5)

```
#include<stdio.h>
#include<conio.h>
Void main
    {
    Int a,b;
    Clrscr();
    Printf("enter two numbers:");
    Scanf("%d%d",&a,&b);
    If(a==b)
    {
        Printf("both numbers are equal");
    }
    Else
    {
        Printf("both numbers are not eual");
    }
    Getch();
    }
```

Answer 5) :



Question 6)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Float salary,hra,ta,da,pf,gross;
    Scanf("%f",&salary);
    If(salary>=5000)
    {
        Hra=salary*5/100;
        Ta=salary*6/100;
        Da=salary*4/100;
        Pf=salary*5/100;
    }
    Else
    {
        Hra=salry*4/100;
        Ta=salary*5/100;
        Da=salary*3/100;
        Pf=salary*4/100;
    }
    Gross=salary+hra+ta+da-pf;
    Printf("/nhra=%.2f",hra);
    Printf("/nta=%.2f",ta);
    Printf("/nda=%.2f",da);
    Printf("/npf=%.2f",pf);
    Printf("/ngross salary=%.2f",gross);
    Getch();
    }
```

Answer 6) :




Question 7)

```
#include<stdio.h>
#include<conio.h>
Void main
{
  float price, quantity, total, discount, payment;
 printf("Enter price of item: ");
  scanf("%f", &price);
 printf("Enter quantity: ");
  scanf("%f", &quantity);

  total = price * quantity;
        if (total > 1000)
  {
    discount = total * 15 / 100;
  }
  else
  {
    discount = total * 10 / 100;
  }
```

```
    payment = total - discount;
    printf("Total Purchase = %.2f\n", total);
    printf("Discount = %.2f\n", discount);
    printf("Final Payment = %.2f\n", payment);
    getch();
}
```

Answer 7) :

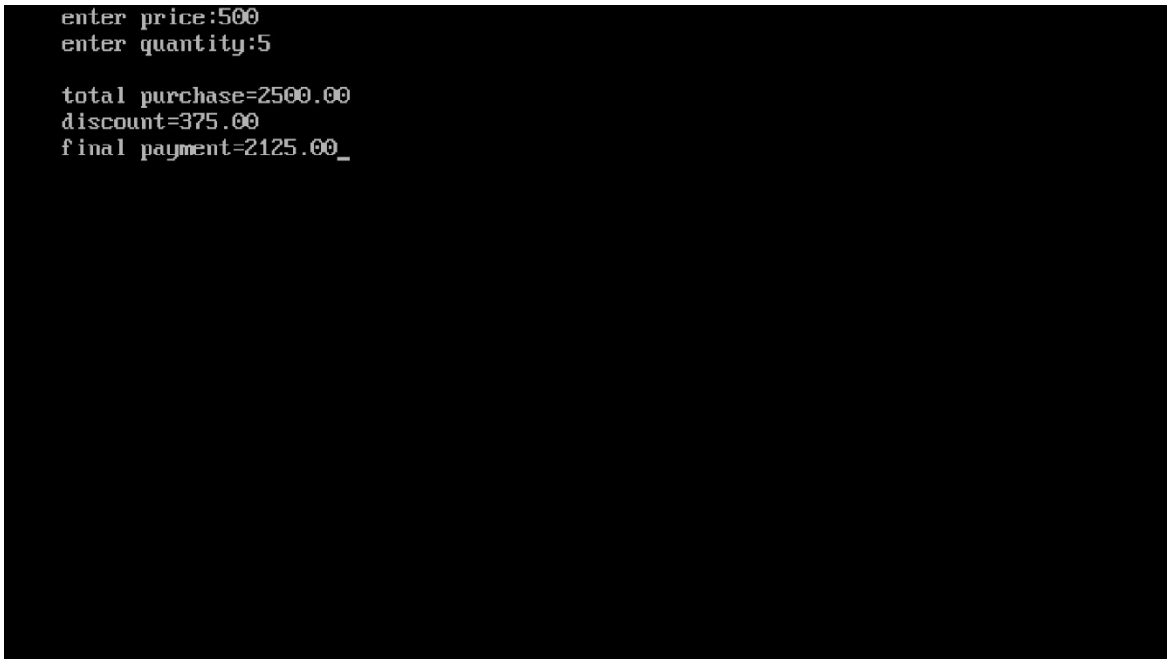

Question 8)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int year;
    Clrscr();
    Printf("enter year:");
    Scanf("%d",&year);
    If(year%400==0)
    {
        Printf("leap year");
    }
    Else
    {
        Printf("not a leap year");
    }
    Getch();
    }
```

Answer 8) :



Question 9)

```
#include<stdio.h>
#include<conio.h>
Void main
{
    Int a,b;
    Clrscr();
    Printf("enter first number:");
    Scanf("%d",&a);
    Printf("enter second number:");
    Scanf("%d",&b);
    If(b!=0&&b==0)
    [
        Printf("first number is divisible by second");
    }
    Else
    {
        Printf("first number is not divisible by second ");
    }
    Getch();
    }
```

Answer 9) :


enter first number:4
enter second number:9
first number is not divisible by second

Question 10)

```
#include<stdio.h>
#include<conio.h>
Void main
{

    int main()
    {
       char ch;

       printf("Enter a character: ");
       scanf("%c", &ch);

       if(ch >= 'A' && ch <= 'Z')
       {
          ch = ch + 32;
       }
       else
       {
          ch = ch - 32;
       }

       printf("Converted character = %c", ch);

       getch();
    }
```

Answer 10) :



Question 11)#includ<stdio.h>

```
#include<conio.h>
Void main()
    {
      Int main();
      char ch;
      printf("Enter a character: ");
      scanf("%c", &ch);
      if(ch == 'a' || ch == 'e' || ch == 'i' || ch == 'o' || ch == 'u' ||
        ch == 'A' || ch == 'E' || ch == 'I' || ch == 'O' || ch == 'U')
      {
        printf("Character is Vowel");
      }
      else
      {
        printf("Character is not Vowel");
      }
```

```
    Getch();
}
```

Answer 11) :



Question 12)

```
# includ<stdio.h>
#include<conio.h>
Void main()
{
    int main()
      Char ch;
      printf("Enter a character: ");
      scanf("%c", &ch);
      if(ch >= 'A' && ch <= 'Z')
      {
        printf("Character is Uppercase");
      }
      else if(ch >= 'a' && ch <= 'z')
      {
        printf("Character is Lowercase");
      }
      else
      {
        printf("Character is not Alphabet");
      }
     Getch();
    }
```

Answer 12) :



Question 13) # includ<stdio.h>

```
#include<conio.h>
Void main()
{
    int a, b, c;
     printf("Enter three values: ");
    scanf("%d %d %d", &a, &b, &c);
    if(a > b && a > c)
    {
       printf("Maximum = %d", a);
    }
    else if(b > a && b > c)
    {
       printf("Maximum = %d", b);
    }
    else
    {
```

```
        printf("Maximum = %d", c);
    }
    Getch();
}
```

Answer 13) :



Question 14) # includ<stdio.h>

```
#include<conio.h>
Void main()
{
        int a, b, c;
         printf("Enter three values: ");
        scanf("%d %d %d", &a, &b, &c);
        if(a < b && a < c)
        {
           printf("Minimum= %d", a);
        }
        else if(b > a && b > c)
        {
                printf("Minimum = %d", b);
        }
        else
        {
           printf("Minimum = %d", c);
        }
         Getch();
    }
```

Answer 14) :



Question 15) # includ<stdio.h>

#include<conio.h>

Void main()

{

int rollno;

int m1, m2, m3, m4, m5;

int total;

float percentage;

printf("Enter Roll Number: ");

scanf("%d", &rollno);

printf("Enter Marks of 5 Subjects: ");

scanf("%d%d%d%d%d", &m1, &m2, &m3, &m4, &m5);

total = m1 + m2 + m3 + m4 + m5;

percentage = total / 5.0;

printf("\nRoll Number = %d", rollno);


printf("\nTotal = %d", total);

printf("\nPercentage = %.2f", percentage);

if(m1 >= 35 && m2 >= 35 && m3 >= 35 && m4 >= 35 && m5 >= 35)

```
    {
        printf("\nResult = PASS");
        if(percentage >= 80)
            printf("\nGrade = A");
        else if(percentage >= 60)
            printf("\nGrade = B");
        else if(percentage >= 45)
            printf("\nGrade = C");
        else
            printf("\nGrad e = D");
    }
    else
    {
        printf("\nResult = FAIL");
        printf("\nGrade = F");
    }
Getch();
}
```

Answer 15) :

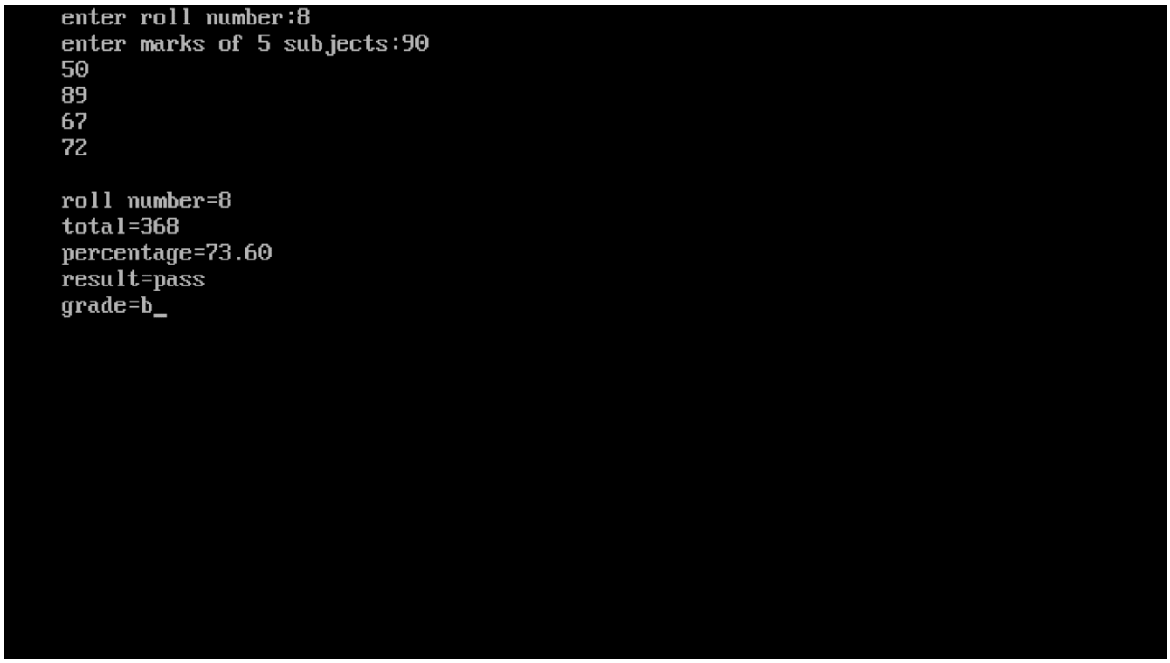

Question 16) # includ<stdio.h>

#include<conio.h>

Void main()

```
{
   int day;
   printf("Enter Day Number (1-7): ");
   scanf("%d", &day);
   switch(day)
   {
      case 1:
         printf("Monday");
         break;
      case 2:
         printf("Tuesday");
         break;
      case 3:
```

```
            printf("Wednesday");
            break;
        case 4:
            printf("Thursday");
            break;
        case 5:
            printf("Friday");
            break;
        case 6:
            printf("Saturday");
            break;

        case 7:
            printf("Sunday");
            break;
        default:
            printf("Invalid Day Number");
    }
 Getch();
}
```

Answer 16) :



Question 17) # includ<stdio.h>

#include<conio.h>

Void main()

```
{
   int month;
   printf("Enter Month Number (1-12): ");
   scanf("%d", &month);
   switch(month)
   {
      case 1:
         printf("January");
         break;
      case 2:
         printf("February");
         break;
      case 3:
         printf("March");
         break;
```

```
    case 4;
        printf("April");
        break;
    case 5:
        printf("May");
        break;
  case 6:
        printf("June");
        break;
    case 7:
        printf("July");
        break;
case 8:
        printf("August");
        break;
   case 9:
        printf("September");
        break;
    case 10:
        printf("October");
        break;
    case 11:
        printf("November");
        break;
    case 12:
        printf("December");
        break;
    default:
        printf("Invalid Month Number");
}
Getch();
```

}

Answer 17) :



Question 18) # includ<stdio.h>

#include<conio.h>

Void main()

```
{
    int num;
   printf("Enter a Number: ");
    scanf("%d", &num);

    if(num > 0)
    {
        printf("Number is Positive");
    }
    else if(num < 0)
    {
        printf("Number is Negative");
    }
    else
    {
        printf("Number is Zero");
    }
    Getch();
}
```

Answer 18) :

