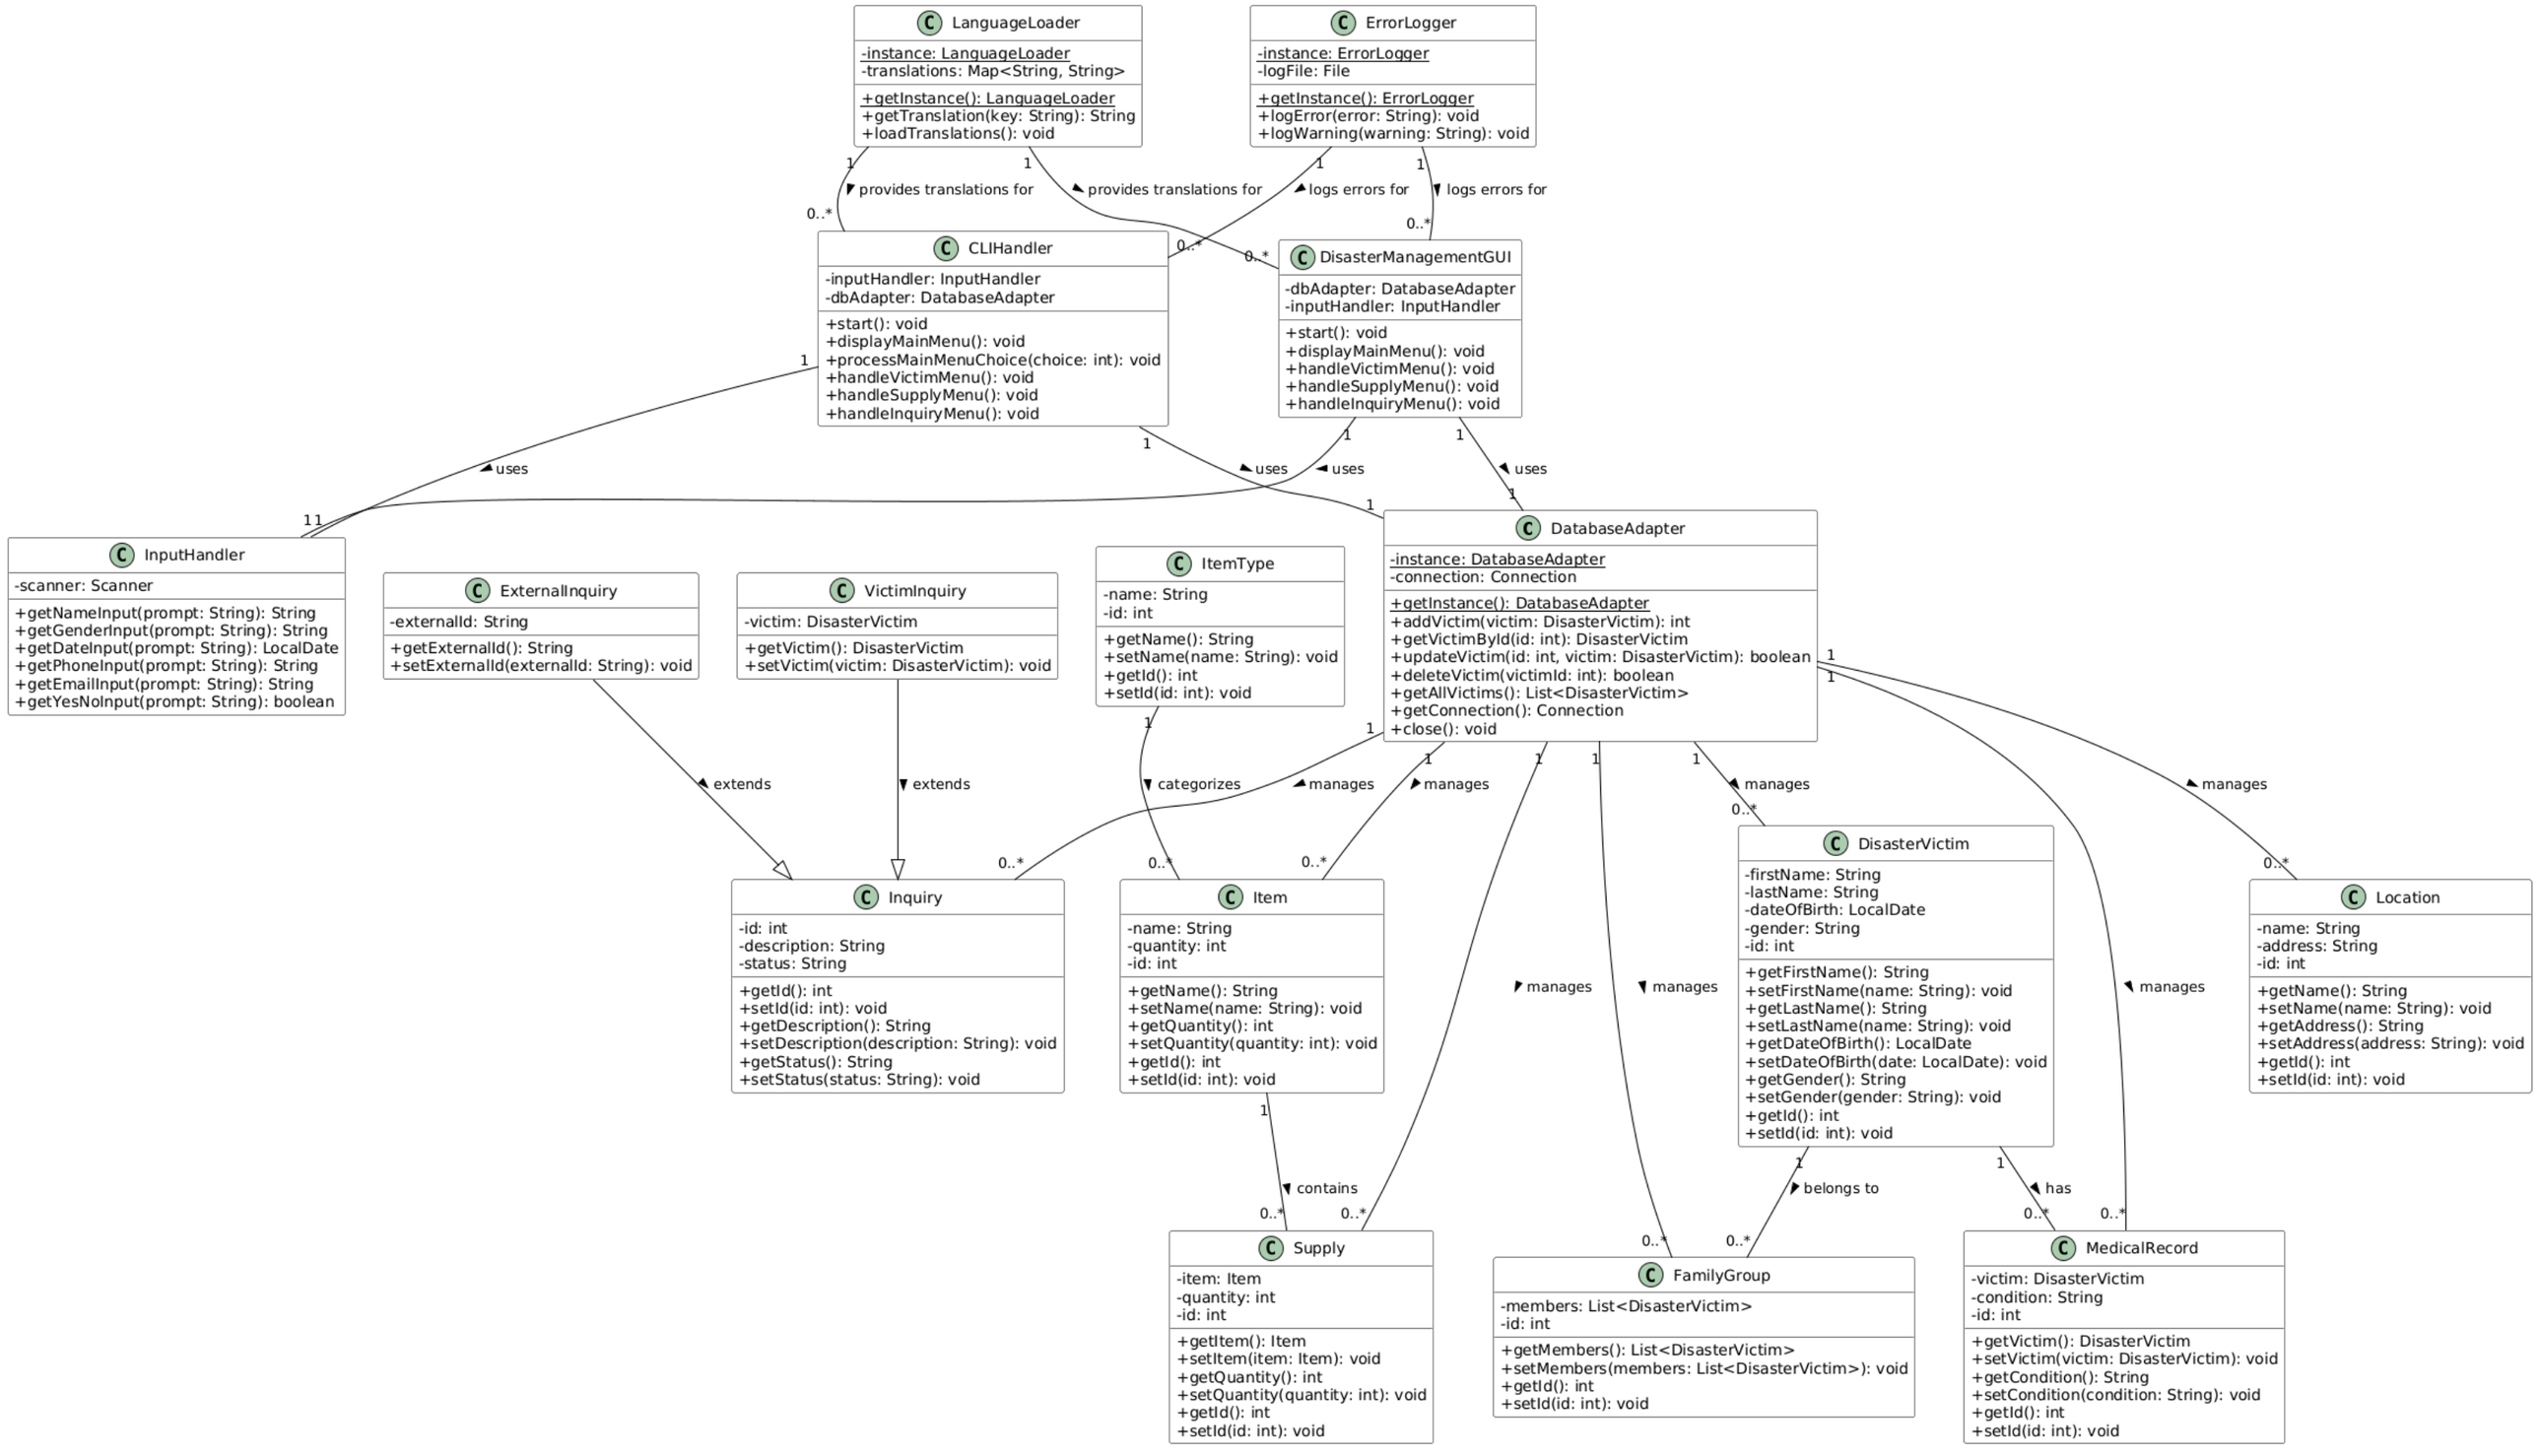

LanguageLoader
-instance: LanguageLoader
-translations: Map<String, String>
+getInstance(): LanguageLoader
+getTranslation(key: String): String
+loadTranslations(): void
ErrorLogger
-instance: ErrorLogger
-logFile: File
+getInstance(): ErrorLogger
+logError(error: String): void
+logWarning(warning: String): void
provides translations for
provides translations for
logs errors for
logs errors for
CLIHandler
-inputHandler: InputHandler
-dbAdapter: DatabaseAdapter
+start(): void
+displayMainMenu(): void
+processMainMenuChoice(choice: int): void
+handleVictimMenu(): void
+handleSupplyMenu(): void
+handleInquiryMenu(): void
DisasterManagementGUI
-dbAdapter: DatabaseAdapter
-inputHandler: InputHandler
+start(): void
+displayMainMenu(): void
+handleVictimMenu(): void
+handleSupplyMenu(): void
+handleInquiryMenu(): void
uses
uses
uses
uses
InputHandler
-scanner: Scanner
+getNameInput(prompt: String): String
+getGenderInput(prompt: String): String
+getDateInput(prompt: String): LocalDate
+getPhoneInput(prompt: String): String
+getEmailInput(prompt: String): String
+getYesNoInput(prompt: String): boolean
ExternalInquiry
-externalId: String
+getExternalId(): String
+setExternalId(externalId: String): void
VictimInquiry
-victim: DisasterVictim
+getVictim(): DisasterVictim
+setVictim(victim: DisasterVictim): void
ItemType
-name: String
-id: int
+getName(): String
+setName(name: String): void
+getId(): int
+setId(id: int): void
DatabaseAdapter
-instance: DatabaseAdapter
-connection: Connection
+getInstance(): DatabaseAdapter
+addVictim(victim: DisasterVictim): int
+getVictimById(id: int): DisasterVictim
+updateVictim(id: int, victim: DisasterVictim): boolean
+deleteVictim(victimId: int): boolean
+getAllVictims(): List<DisasterVictim>
+getConnection(): Connection
+close(): void
extends
extends
categorizes
manages
manages
manages
manages
manages
manages
Inquiry
-id: int
-description: String
-status: String
+getId(): int
+setId(id: int): void
+getDescription(): String
+setDescription(description: String): void
+getStatus(): String
+setStatus(status: String): void
Item
-name: String
-quantity: int
-id: int
+getName(): String
+setName(name: String): void
+getQuantity(): int
+setQuantity(quantity: int): void
+getId(): int
+setId(id: int): void
DisasterVictim
-firstName: String
-lastName: String
-dateOfBirth: LocalDate
-gender: String
-id: int
+getFirstName(): String
+setFirstName(name: String): void
+getLastName(): String
+setLastName(name: String): void
+getDateOfBirth(): LocalDate
+setDateOfBirth(date: LocalDate): void
+getGender(): String
+setGender(gender: String): void
+getId(): int
+setId(id: int): void
Location
-name: String
-address: String
-id: int
+getName(): String
+setName(name: String): void
+getAddress(): String
+setAddress(address: String): void
+getId(): int
+setId(id: int): void
contains
belongs to
has
Supply
-item: Item
-quantity: int
-id: int
+getItem(): Item
+setItem(item: Item): void
+getQuantity(): int
+setQuantity(quantity: int): void
+getId(): int
+setId(id: int): void
FamilyGroup
-members: List<DisasterVictim>
-id: int
+getMembers(): List<DisasterVictim>
+setMembers(members: List<DisasterVictim>): void
+getId(): int
+setId(id: int): void
MedicalRecord
-victim: DisasterVictim
-condition: String
-id: int
+getVictim(): DisasterVictim
+setVictim(victim: DisasterVictim): void
+getCondition(): String
+setCondition(condition: String): void
+getId(): int
+setId(id: int): void