

Exp no :06 Use Sleuth Kit to Analyze Digital Evidence

Date :

Description

The Sleuth Kit (TSK) is a suite of command-line tools for analyzing disk images and recovering digital evidence. This guide outlines the steps to use TSK on a Windows machine for digital forensics.

Step 1: Install Sleuth Kit

1. Download Sleuth Kit:

Visit the official Sleuth Kit website or the provided Google Drive link(https://drive.google.com/drive/u/1/folders/1ilSFY7Tqn2L7AjQGhq8yJ8kixc_xT_U-v) and download the latest Windows version.

2. Install Sleuth Kit:

Run the installer and follow the instructions to install Sleuth Kit on your Windows machine.

Step 2: Acquire the Disk Image

Before analysis, a **bit-by-bit copy** (disk image) of the storage device evidence is required.

1. Create Disk Image:

- Use a forensic tool like **FTK Imager** or **dd** to create a bit-by-bit copy.
- Ensure the image is in a TSK-supported format, such as **.dd**, **.raw**, **.img**, or **.E01**.

2. Download Files (for this exercise):

- Download the following files from the Google Drive:

□ 4Dell Latitude CPi.E01

□ 4Dell Latitude CPi.E02

```
C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>fsstat -o 63 "C:\Users\yaswanth\Downloads\forensic_lab\Copy of 4Dell Latitude CPi.E01"
FILE SYSTEM INFORMATION
-----
File System Type: NTFS
Volume Serial Number: B26CB1CE6CB18D9B
OEM Name: NTFS
Version: Windows XP

METADATA INFORMATION
-----
First Cluster of MFT: 2097152
First Cluster of MFT Mirror: 4755208
Size of MFT Entries: 1024 bytes
Size of Index Records: 4096 bytes
Range: 0 - 12305
Root Directory: 5

CONTENT INFORMATION
-----
Sector Size: 512
Cluster Size: 512
Total Cluster Range: 0 - 9510415
Total Sector Range: 0 - 9510415

$AttrDef Attribute Values:
$STANDARD_INFORMATION (16) Size: 48-72 Flags: Resident
$ATTRIBUTE_LIST (32) Size: No Limit Flags: Non-resident
$FILE_NAME (48) Size: 68-578 Flags: Resident,Index
$OBJECT_ID (64) Size: 0-256 Flags: Resident
$SECURITY_DESCRIPTOR (80) Size: No Limit Flags: Non-resident
$VOLUME_NAME (96) Size: 2-256 Flags: Resident
$VOLUME_INFORMATION (112) Size: 12-12 Flags: Resident
$DATA (128) Size: No Limit Flags: Resident
$INDEX_ROOT (144) Size: No Limit Flags: Resident
$INDEX_ALLOCATION (160) Size: No Limit Flags: Non-resident
$BITMAP (176) Size: No Limit Flags: Non-resident
$REPARSE_POINT (192) Size: 0-16384 Flags: Non-resident
$EA_INFORMATION (208) Size: 8-8 Flags: Resident
$EA (224) Size: 0-65536 Flags: 0-65536 Flags: Non-resident
$LOGGED_UTILITY_STREAM (256) Size: 0-65536 Flags: Resident
```

Step 3: Mount the Disk Image (Optional)

Mounting the disk image simplifies the navigation and analysis of the file system.

1. Mount the Image:

- Use a tool like OSFMount to mount the image as a virtual drive on your Windows system.
- Note: This step is optional but can aid in easy file system navigation.

Step 4: Analyze the File System

Use the Sleuth Kit command-line tools to examine the file system structure and locate evidence.

1. Navigate to the Sleuth Kit Directory:

- Open the Command Prompt (cmd) and use the cd command to navigate to the directory where Sleuth Kit is installed (e.g., C:\Program Files\SleuthKit\bin).

2. Identify File System Type with fsstat:

- **Command:**
- fsstat [image file] > filesystem_info.txt

```
C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>fls -o 63 -r "C:\Users\yaswanth\Downloads\forensic_lab\Copy of 4Dell Latitude CP1.E01"
+ /d 3671-144-7: Documents and Settings
+ /d 344-144-6: Mr. Evil
+ /l 345-128-4: NTUSER.DAT
- /d 346-144-6: Templates
+++ e/r 9760-128-4: amipro.sam
+++ e/r 9759-128-4: excel.xls
+++ e/r 9758-128-4: excel4.xls
+++ e/r 9757-128-4: lotus.wk4
+++ e/r 9756-128-4: powerpoint.ppt
+++ e/r 9755-128-3: presenta.shw
+++ e/r 9754-128-4: quattro.wb2
+++ e/r 9753-128-3: sndrec.wav
+++ e/r 9752-128-4: winword.doc
+++ e/r 9750-128-4: winword2.doc
+++ e/r 9751-128-3: wordpfct.wpd
+++ e/r 9749-128-3: wordpfct.wpg
+++ -/d 3665-144-1: Start Menu
+++ e/r 9778-128-3: desktop.ini
+++ -/d 4156-144-5: Programs
++++ -/d 4186-144-1: Startup
++++ -/r 9762-128-3: desktop.ini
++++ -/d 4746-144-6: Accessories
++++ -/d 5602-144-1: Entertainment
++++ e/r 9770-128-3: desktop.ini
++++ -/d 5712-144-6: Accessibility
++++ -/r 9773-128-4: Utility Manager.lnk
++++ -/r 9774-128-4: On-Screen Keyboard.lnk
++++ -/r 9775-128-4: Narrator.lnk
++++ -/r 9776-128-4: Magnifier.lnk
++++ -/r 9777-128-3: desktop.ini
++++ -/r 9765-128-4: Windows Explorer.lnk
++++ -/r 9766-128-4: Tour Windows XP.lnk
++++ -/r 9767-128-4: Synchronize.lnk
++++ -/r 9768-128-3: Program Compatibility Wizard.lnk
++++ -/r 9769-128-4: Notepad.lnk
++++ -/r 9771-128-3: desktop.ini
++++ -/r 9772-128-4: Command Prompt.lnk
++++ -/r 9845-128-4: Address Book.lnk
```

1. List Partitions with mmls: ○

Command:

- mmls [image file] > partitions.txt ○ **Purpose:** This command lists the partitions present within the image file.

2. Analyze File System with fls: o

Command:

- o fls -r [image file] > file_list.txt o **Purpose:** The -r flag recursively lists files and directories in the file system, along with their metadata (inode numbers).

3. Recover Deleted Files with icat: o

Command:

icat [image file] [inode number] > [output file]

Purpose: To extract a specific file, replace [inode number] with the inode found from the fls output.

```
C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>istat -o 63 "C:\Users\yaswanth\Downloads\forensic_lab\Cop of #Dell Latitude CPe.E01" 5678
MFT Entry Header Values:
Entry: 5678      Sequence: 2
$LogFile Sequence Number: 14736678
Allocated File
Links: 1

$STANDARD_INFORMATION Attribute Values:
Flags: Archive
Owner ID: 0
Security ID: 0 ( )
Created:      2004-08-20 03:59:38.195971200 (India Standard Time)
File Modified: 2001-08-23 23:30:00.000000000 (India Standard Time)
MFT Modified: 2004-08-20 03:59:38.216000000 (India Standard Time)
Accessed:     2004-08-20 03:59:38.195971200 (India Standard Time)

$FILE_NAME Attribute Values:
Flags: Archive
Name: dog.bmp
Parent MFT Entry: 5664 Sequence: 1
Allocated Size: 7168 Actual Size: 6968
Created:      2004-08-20 03:59:38.195971200 (India Standard Time)
File Modified: 2001-08-23 23:30:30.000000000 (India Standard Time)
MFT Modified: 2004-08-20 03:59:38.195971200 (India Standard Time)
Accessed:     2004-08-20 03:59:38.195971200 (India Standard Time)

Attributes:
Type: $STANDARD_INFORMATION (16-0) Name: N/A Resident size: 72
Type: $FILE_NAME (48-5) Name: N/A Resident size: 80
Type: $SECURITY_DESCRIPTOR (80-3) Name: N/A Resident size: 168
Type: $DATA (128-4) Name: N/A Non-Resident Resident size: 6968 init_size: 6968
1817172 1817173 1817174 1817175 1817176 1817177 1817178 1817179
1817180 1817181 1817182 1817183 1817184 1817185
```

Step 5: Analyze Metadata

Extract file metadata to gain insight into a file's history, creation, and usage.

• View Metadata with istat:

Command:

- istat [image file] [inode number] > metadata_info.txt

Purpose: Provides detailed information about a file, including timestamps (MAC times), size, and allocation status.

```

Microsoft Windows [Version 10.0.26200.9457]
(c) Microsoft Corporation. All rights reserved.

C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>mmfs
"C:\Users\yaswanth\Downloads\forensic_Lab\Cop of 4Dell Latitude CPi.E01"
DOS Partition Table
Offset Sector: 0
Units are in 512-byte sectors

    Slot      Start      End      Length    Description
000:  Meta      0000000000  0000000000  0000000001  Primary Table (#0)
001:  -----  0000000000  0000000062  0000000063  Unallocated
002:  000:000  0000000063  0009510479  0009510417  NTFS / exFAT (0x07)
003:  -----  0009510480  0009514259  0000003780  Unallocated

```

Step 6: Timeline Analysis

Creating a timeline of file activity is vital for reconstructing events

1. Generate a Body File using fls:

- Command:

```
fls -m / -r [image file] > body.txt
```

- Purpose: Generates a body file (body.txt) containing the essential metadata (MAC times, file paths) needed for timeline analysis.

```

C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>istat -o 63 "C:\Users\yaswanth\
Downloads\forensic_lab\Cop of 4Dell Latitude CPi.E01" 5678 > "C:\Users\yaswanth\Downloads\forensic_lab\meta
data_info.txt"

C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>fls -o 63 -m / -r "C:\Users\
yaswanth\Downloads\forensic_lab\Cop of 4Dell Latitude CPi.E01" > "C:\Users\yaswanth\Downloads\forensic_lab\
dy.txt"

C:\Users\yaswanth\Downloads\sleuthkit-4.14.0-win32\sleuthkit-4.14.0-win32\bin>mactime -b "C:\Users\yaswanth\Do
wnloads\forensic_lab\body.txt" > "C:\Users\yaswanth\Downloads\forensic_lab\timeline.txt"
mactime: is not recognized as an internal or external command,
operable program or batch file.

```

2. Create Timeline with mactime:

- Command:

```
mactime -b body.txt > timeline.txt
```

- Purpose: Processes the body file to create a timeline (timeline.txt) sorted by the Modified, Accessed, and Changed (MAC) times of the files.

Step 7: Generate a Report


Document the findings by compiling all the collected data into a comprehensive report.

1. Compile the Data:

- Gather all the output files (e.g., filesystem_info.txt, partitions.txt, file_list.txt, metadata_info.txt, timeline.txt).

2. Analyze and Document:

Review the findings, highlight crucial evidence, and write a report summarizing the investigation's methodology and results

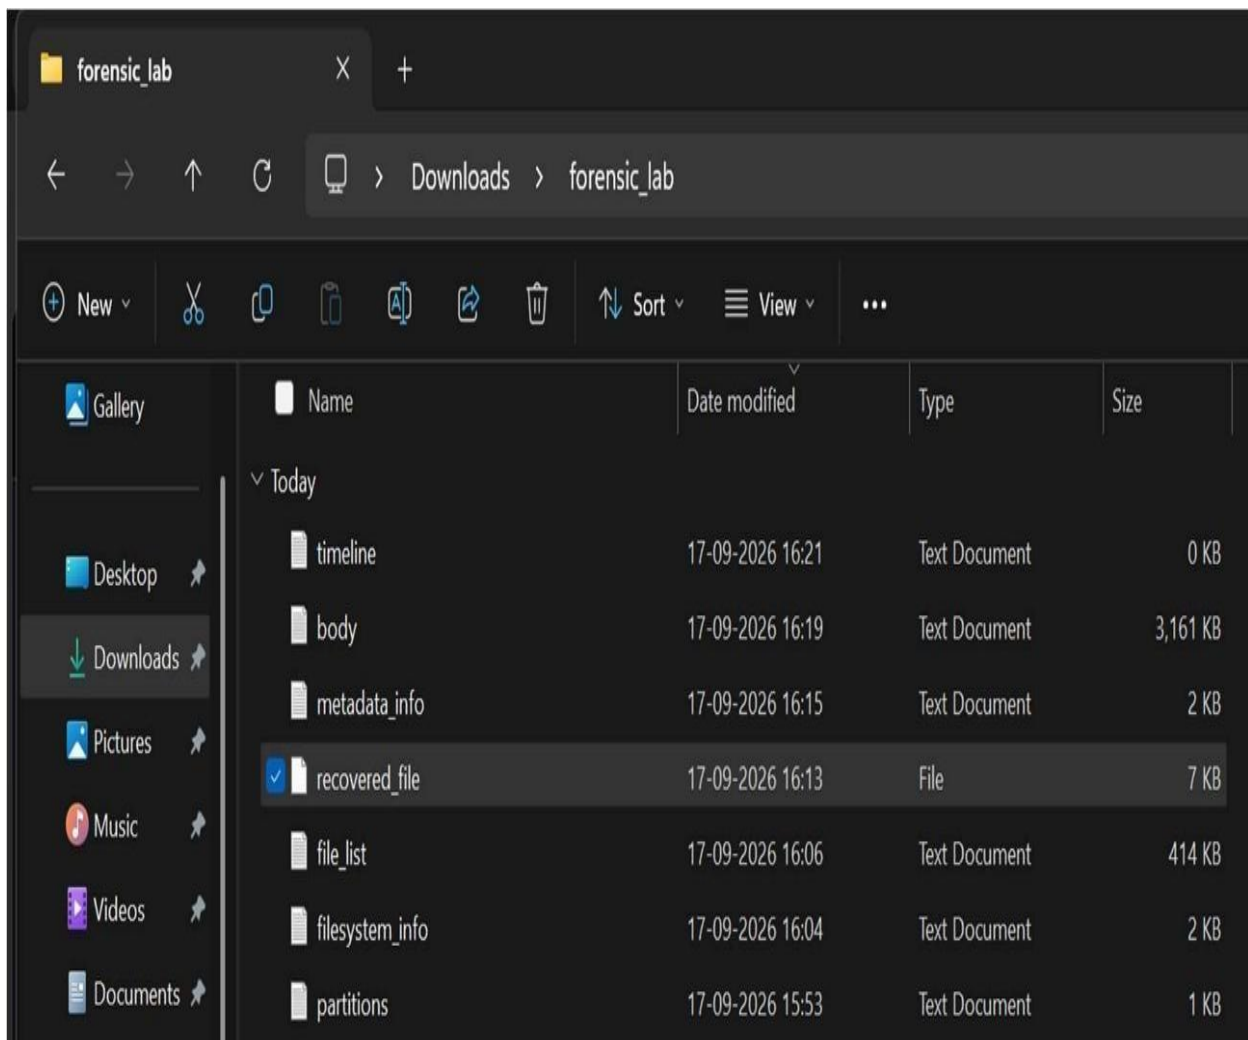

Step 8: Finalize and Store Evidence

Ensure all evidence and reports are securely managed to maintain integrity and follow the chain of custody.

1. Archive Evidence:

- Use a secure, verifiable method to archive the original disk image and the analysis results.

2. Store Securely:

- Store the archived data in a secure location, strictly adhering to the chain of custody procedures.

Rubrics:

Criteria & Marks Assigned	Mark Allotted	Mark Awarded
1. GitHub Activity & Submission Regularity	3	
2. Application of Forensic Tools & Practical Execution	3	
3. Documentation & Reporting	2	
4. Engagement, Problem-Solving & Team Collaboration	2	
Total	10	

Result

The Sleuth Kit experiment successfully analyzed the provided .E01 disk image — partitions and file system structure were identified, deleted files were recovered (using fls/icat), and detailed file metadata was extracted (fsstat/istat). A timeline was generated with mactime to reconstruct file activity, and all outputs were archived with hashes to preserve evidence integrity.