



CSCI 380.61E Web Programming and Interface Design

AWS EC2 Setup


1. Choose server location

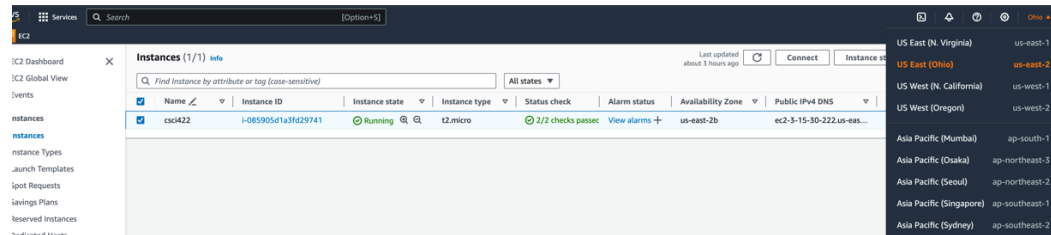

2. Choose “Services” > “Compute” > “EC2”

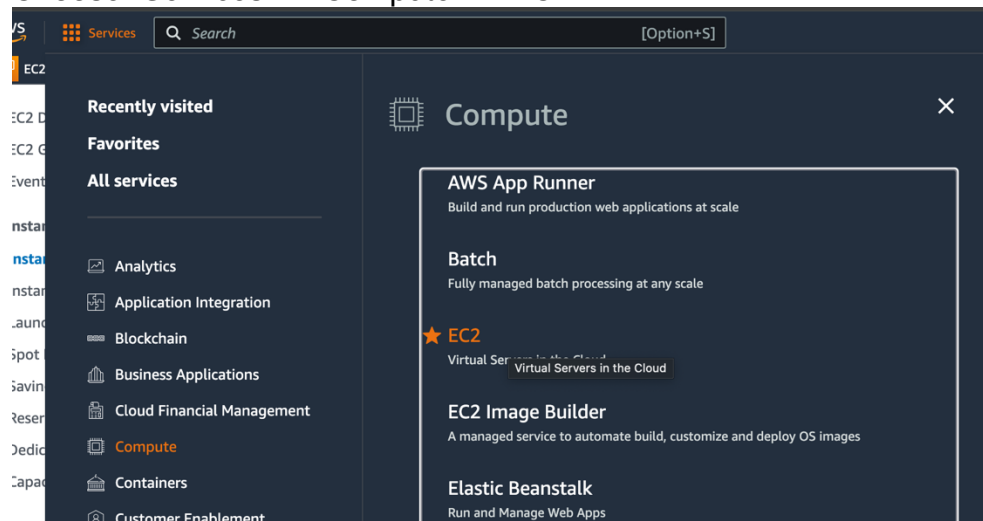

3. Click “Launch instance” button (Orange colour)

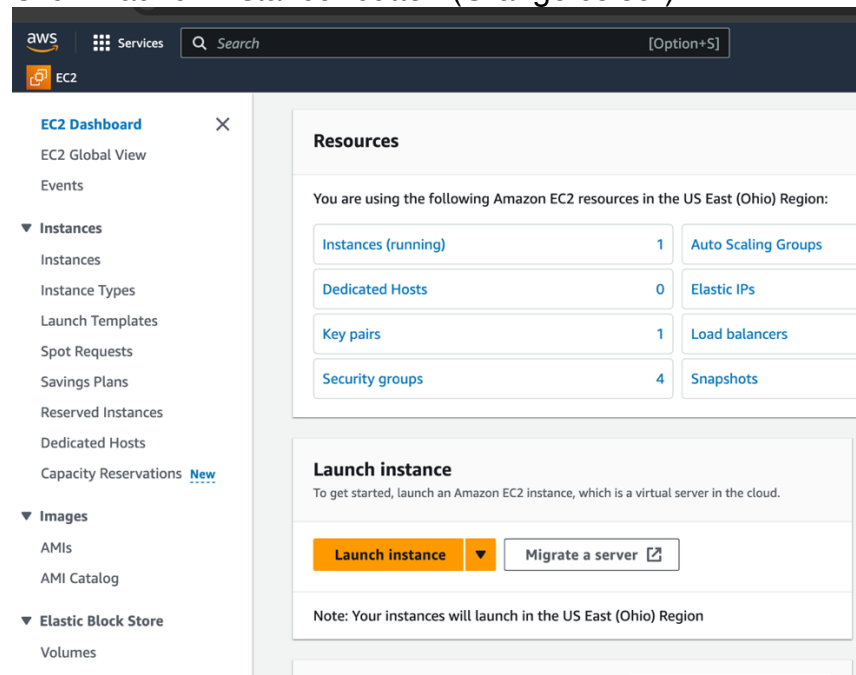

4. Enter server name and then choose “Ubuntu”

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name
 [Add additional tags](#)

▼ **Application and OS Images (Amazon Machine Image)** [Info](#)

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. Search or Browse for AMIs if you don't see what you are looking for below

Recents **Quick Start**

Amazon Linux macOS Ubuntu Windows Red Hat SUSE Linux

Amazon Machine Image (AMI)

Ubuntu Server 24.04 LTS (HVM), SSD Volume Type Free tier eligible

ami-085f9c64a9b75eed5 (64-bit (x86)) / ami-0b8e245d9e93c05fa (64-bit (Arm))
Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Ubuntu Server 24.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).

Architecture **AMI ID**

64-bit (x86) ami-085f9c64a9b75eed5 Verified provider

5. Extra: Check to allow HTTPS and HTTP

▼ **Network settings** [Info](#) [Edit](#)

Network [Info](#)

vpc-04464b76e24feaa49

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

[Additional charges apply](#) when outside of [free tier allowance](#)

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

We'll create a new security group called 'launch-wizard-4' with the following rules:

☒ Allow SSH traffic from
Helps you connect to your instance

☒ Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server

☒ Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server

⚠ Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only. ✕

6. Click “Launch instance”

▼ Summary

Number of instances [Info](#)
1

Software Image (AMI)
Canonical, Ubuntu, 24.04, amd64...[read more](#)
ami-085f9c64a9b75eed5

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Free tier: In your first year includes 750 hours of t2.micro (or t3.micro in the Regions in which t2.micro is unavailable) instance usage on free tier AMIs per month, 750 hours of public IPv4 address usage per month, 30 GiB of EBS storage, 2 million I/Os, 1 GiB of snapshots, and 100 GB of bandwidth to the internet.

Cancel **Launch instance** [Review commands](#)

7 Create new key pair, choose “RSA” and “.pem”

Select an existing key pair or create a key pair

We noticed that you didn't select a key pair. If you want to be able to connect to your instance it is recommended that you create one or select an existing one.

☐ Existing key pair ☒ Create new key pair

☐ Proceed without key pair

Key pair name
Key pairs allow you to connect to your instance securely.

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type
☒ RSA
RSA encrypted private and public key pair
☐ ED25519
ED25519 encrypted private and public key pair

Private key file format
☒ .pem
For use with OpenSSH
☐ .ppk
For use with PuTTY

When prompted, store the private key in a secure and accessible location on your computer. You will need it later to connect to your instance. [Learn more](#)

Cancel **Launch instance**

8. If created, choose “Existing key pair”

Select an existing key pair or create a key pair

We noticed that you didn't select a key pair. If you want to be able to connect to your instance it is recommended that you create one or select an existing one.

☒ Existing key pair ☐ Create new key pair

☐ Proceed without key pair


Key pair name

Type: rsa

Launch instance


9.

Click “Instance”

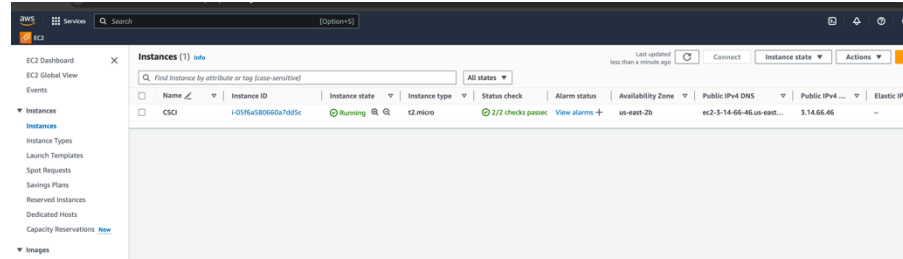


10.

Choose Instance state: Stop, Reboot, Terminate

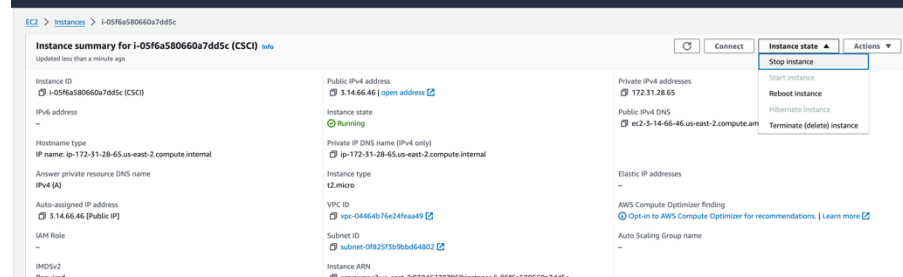

11.

Click “Connect” and then “SSH client”

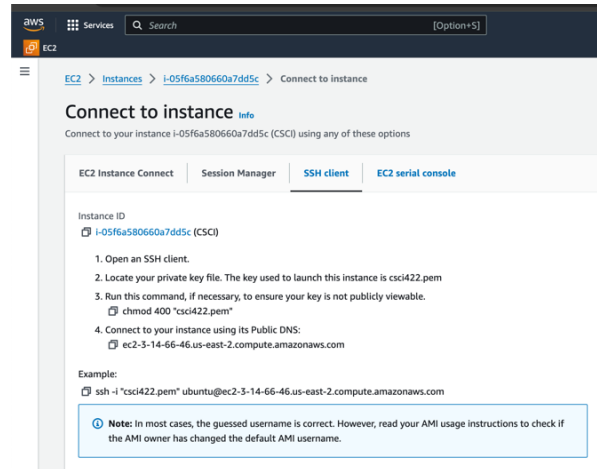

12.

Execute “chmod 400 [path/]name.pem”
ssh -I [path/]name.pem ubuntu@[server address]