Authentication

Log in

To log in:

```
POST /login
```
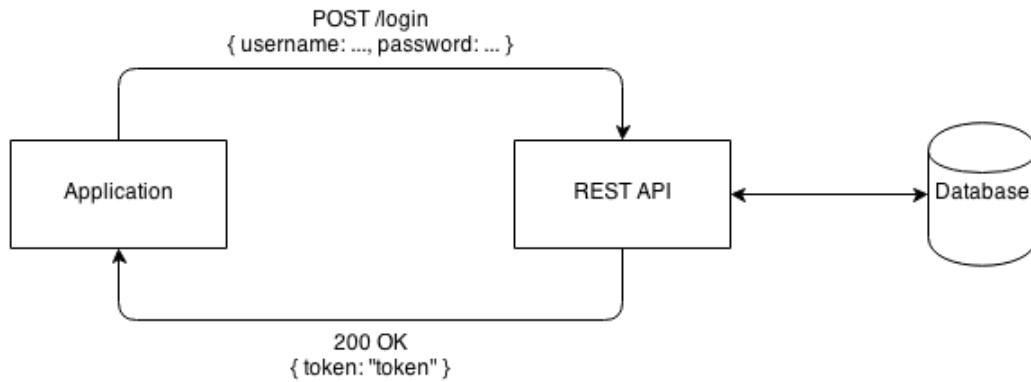
Parameters

- *username*: username
- *password*: password

Response

```
Status: 200 OK

{
    "id": 1,
    "email": "john@doe.com",
    "name": {
        "first": "John",
        "last": "Doe"
    },
    "token": "secretToken"
}
```
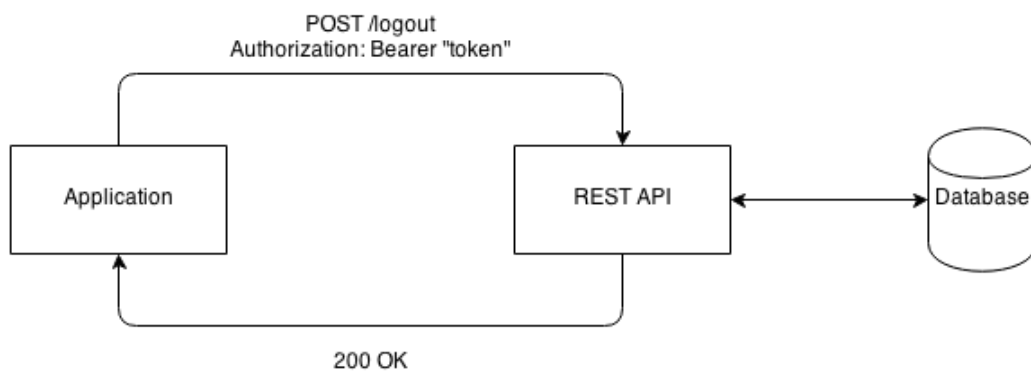
Diagram

Log out

To log out:
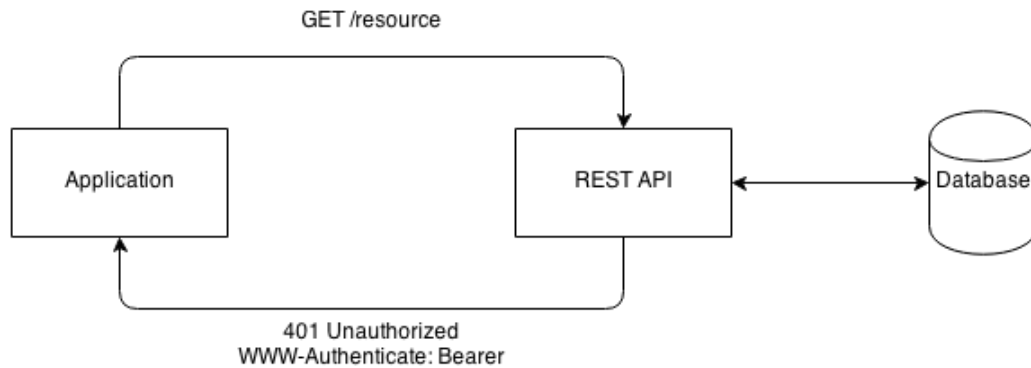
```
POST /logout
```

Response

```
Status: 200 OK
```

Diagram

Unauthorized requests

Unauthorized requests should be rejected by returning a `401 Unauthorized` response.

Diagram

GET /resource

Application

REST API

Database

401 Unauthorized
WWW-Authenticate: Bearer

Authorized requests

Authorized requests should send the bearer token along with the request.

Diagram

GET /resource
Authorization: Bearer "token"

Application

REST API

Database

200 OK
with data