


PhaseForge-ChemGate two-stage deployment sequence (implementation concept, not validated hardware)

Stage A — placement fluid (activator NOT freely available)

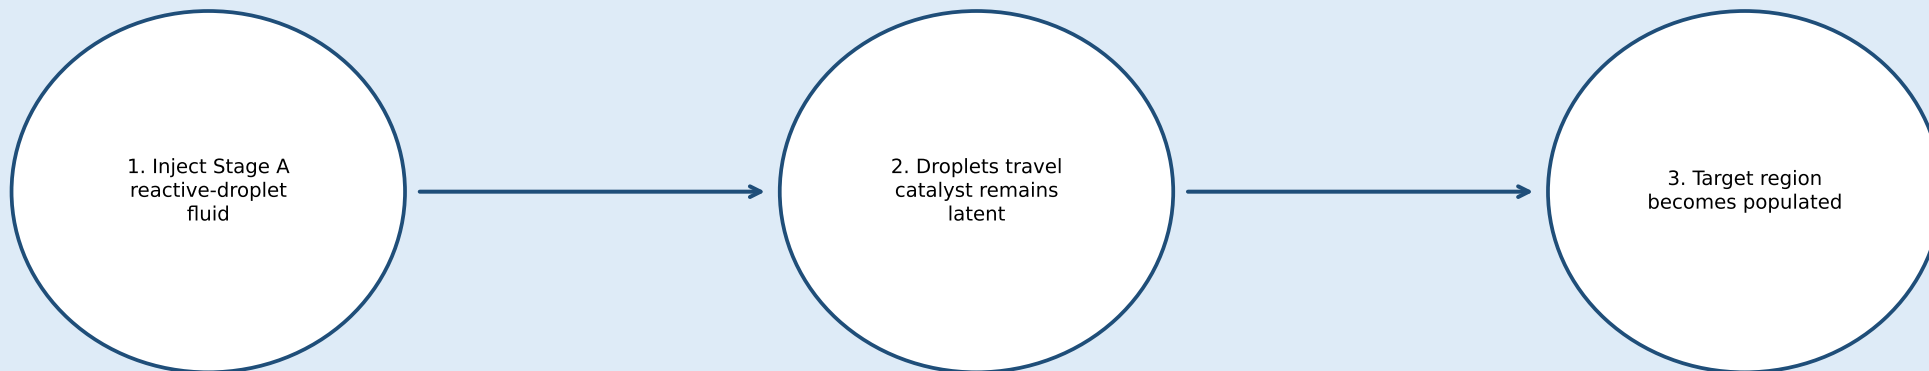

Activator withheld until chase arrives → $t_{\text{trigger_arrival}}$ is operational, not kinetics

Stage B — aqueous activator chase (trigger starts here)

