

W08-P1: show the section of #section-blogs-minmax with navbar-fixed css

The screenshot shows a browser window with developer tools open. On the left, the code editor displays `index.html` and `style_410650930.css`. The `index.html` file contains a navigation bar with links to "#section-blogs-breakpoints" and "#section-blogs-minmax". The `style_410650930.css` file defines a `.navbar-fixed` class with properties like `position: fixed;`, `top: 0;`, and `width: 100%;`. The browser's DOM tree on the right shows a `<nav>` element with the class `nav navbar-fixed`. A red box highlights this element in the DOM tree and its corresponding style definition in the CSS panel.

```
df3f5f2 su yung cheng Sun Nov 5 18:14:09 2023 +0800 W08-P1: show the section  
of #section-blogs-minmax with navbar-fixed css
```

W08-P2: use JavaScript to create a fixed navbar when mouse move down to some extent, remove when original nav appears

Class Demo: Yungcheng Su

Blogs-breakpoints Blogs-minmax

Latest Blogs Using Breakpoints

元素

```
<!DOCTYPE html>
<html lang="en">
  <head> ... </head>
  <body>
    <nav class="nav"> ... </nav> (flex) == $0
    <section class="blogs" id="section-blogs-breakpoints"> ...
      <div class="section-title"> ... </div>
      <div class="blogs-center"> grid
        <article class="blog"> ... </article>
        <article class="blog"> ... </article>
      </div>
    </section>
  </body>
</html>
```

樣式

```
element.style {
}
.nav {
  display: flex; 
  align-items: center;
  height: 3rem;
  background-color: #rgba(0, 0, 0, 0.01);
  border-bottom: 1px solid #rgba(0, 0, 0, 0.2);
}
* {
  margin: 0;
  padding: 0;
}
```

Class Demo: Yungcheng Su

Blogs-breakpoints Blogs-minmax

Latest Blogs Using Minmax

元素


```
<!DOCTYPE html>
<html lang="en">
  <head> ... </head>
  <body>
    <nav class="nav navbar-fixed"> (flex) == $0
      <div class="nav-center"> ... </div> (flex)
    </nav>
    <section class="blogs" id="section-blogs-breakpoints"> ... </section>
    <section class="blogs" id="section-blogs-minmax"> ... </section>
    <script src=". ./script_410650930.js"></script>
    <!-- Code injected by live-server -->
    <script> ... </script>
  </body>
</html>
```

樣式

```
element.style {
}
.navbar-fixed {
  position: fixed;
  top: 0;
  left: 0;
  width: 100%;
  z-index: 2;
  background-color: #fff;
  box-shadow: 0 5px 15px #rgba(0, 0, 0, 0.1);
}
.nav {
  ...
```

8423be0 su yung cheng Sun Nov 5 18:15:38 2023 +0800 W08-P2: use JavaScript to create a fixed navbar when mouse move down to some extent, remove when original nav appears

W08-P3: create index.html of my landing page

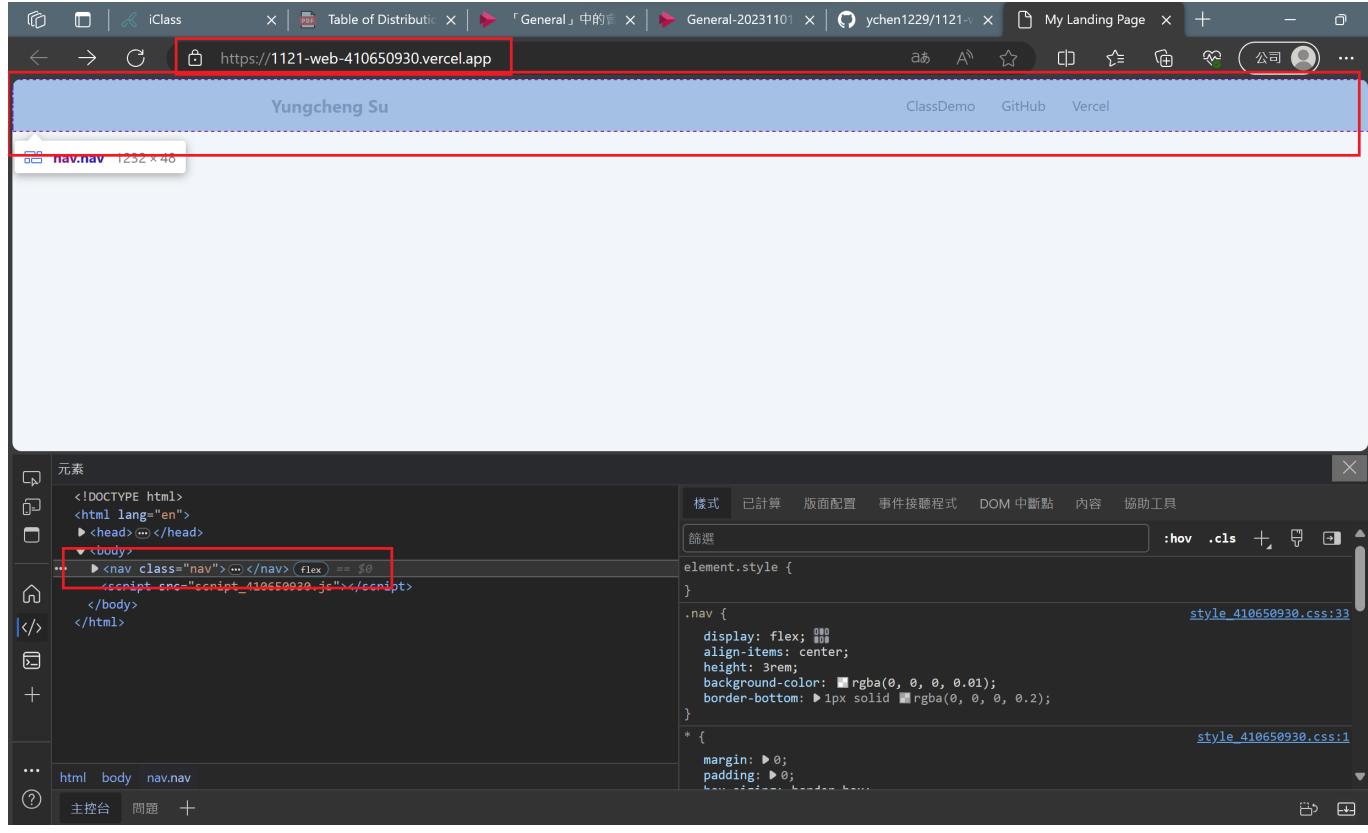

W08-P4: W8 git logs

Commits

main

-o- Commits on Nov 5, 2023

update W08-P3: create index.html of my landing page
su yung cheng committed 2 minutes ago ✓

W08-P3: create index.html of my landing page
su yung cheng committed 8 minutes ago ✓

W08-P2: use JavaScript to create a fixed navbar when mouse move down
su yung cheng committed 1 hour ago ✓

W08-P1: show the section of #section-blogs-minmax with navbar-fixed css
su yung cheng committed 1 hour ago ✓

```
87e857b su yung cheng Sun Nov 5 20:04:06 2023 +0800 W08-P4: W8 git logs
b262010 su yung cheng Sun Nov 5 19:59:04 2023 +0800 update W08-P3: create
index.html of my landing page
5008536 su yung cheng Sun Nov 5 19:53:02 2023 +0800 W08-P3: create index.html
of my landing page
8423be0 su yung cheng Sun Nov 5 18:15:38 2023 +0800 W08-P2: use JavaScript to
create a fixed navbar when mouse move down to some extent, remove when original
nav appears
df3f5f2 su yung cheng Sun Nov 5 18:14:09 2023 +0800 W08-P1: show the section
of #section-blogs-minmax with navbar-fixed css
```