

# CS420: Operating Systems

## Client/Server Communication

---

James Moscola

Department of Physical Sciences

York College of Pennsylvania



# Communications in Client-Server Systems

---

- **Three additional strategies for communicating between processes (local and/or remote processes)**
  - Sockets
  - Remote Procedure Calls
  - Pipes


# Sockets

---

- A **socket** is defined as an endpoint for communication
- A socket is a concatenation of IP address and a port
- The socket **161.25.19.8:1625** refers to port **1625** on host **161.25.19.8**
- Communication links exist between a pair of sockets
  - All connections must be unique

# Socket Communication

---

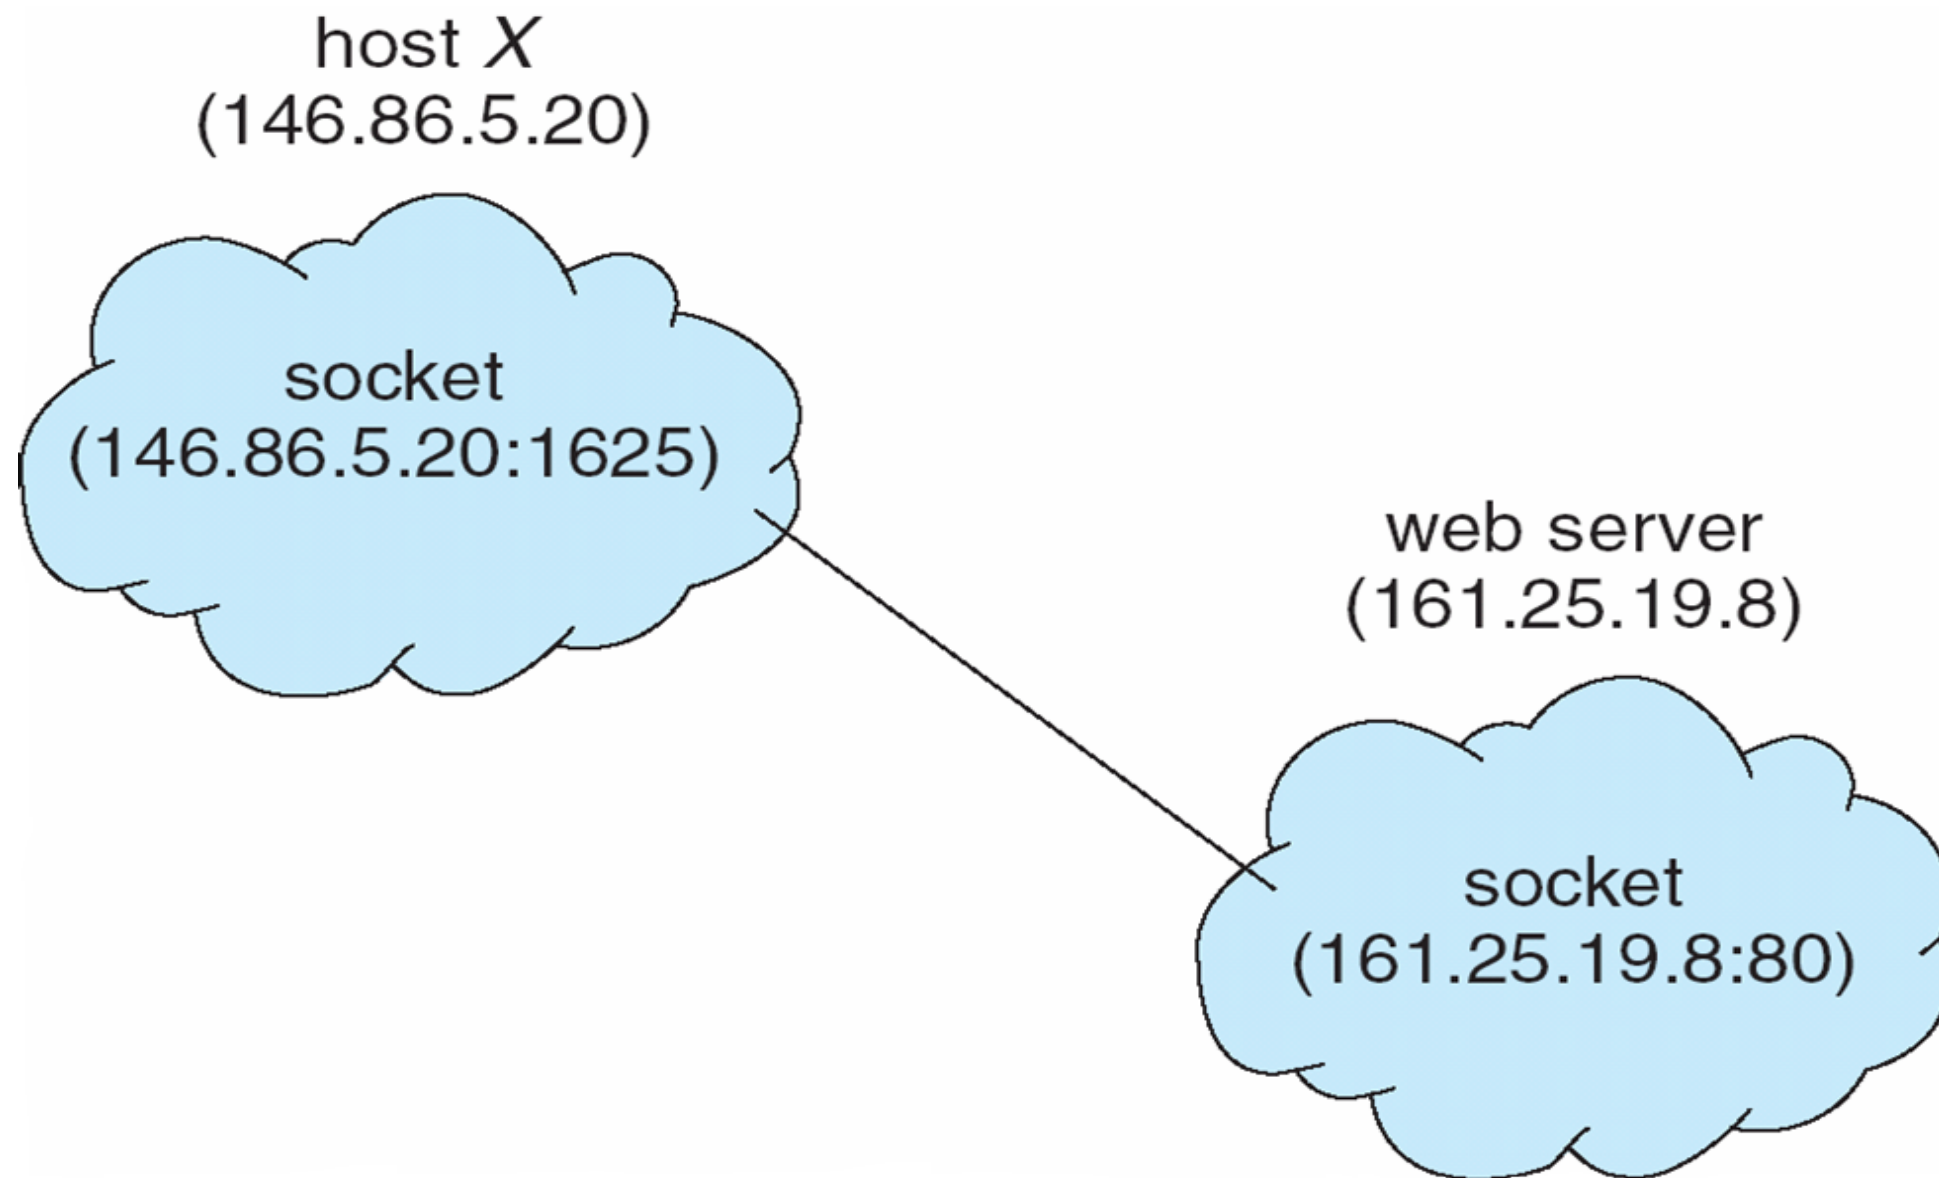


# Remote Procedure Calls

---

- **Remote procedure call (RPC) abstracts procedure calls between processes on networked systems**
  - Allows a client to invoke a procedure on a remote host the same as it would locally
- **Stubs – client-side proxy for the actual procedure on the server**
  - Typically, a separate stub exists for each unique remote procedure
- **The client-side stub locates the server and **marshalls** the parameters**
- **The server-side stub receives this message, unpacks the marshalled parameters, and performs the procedure on the server**

# Execution of RPC

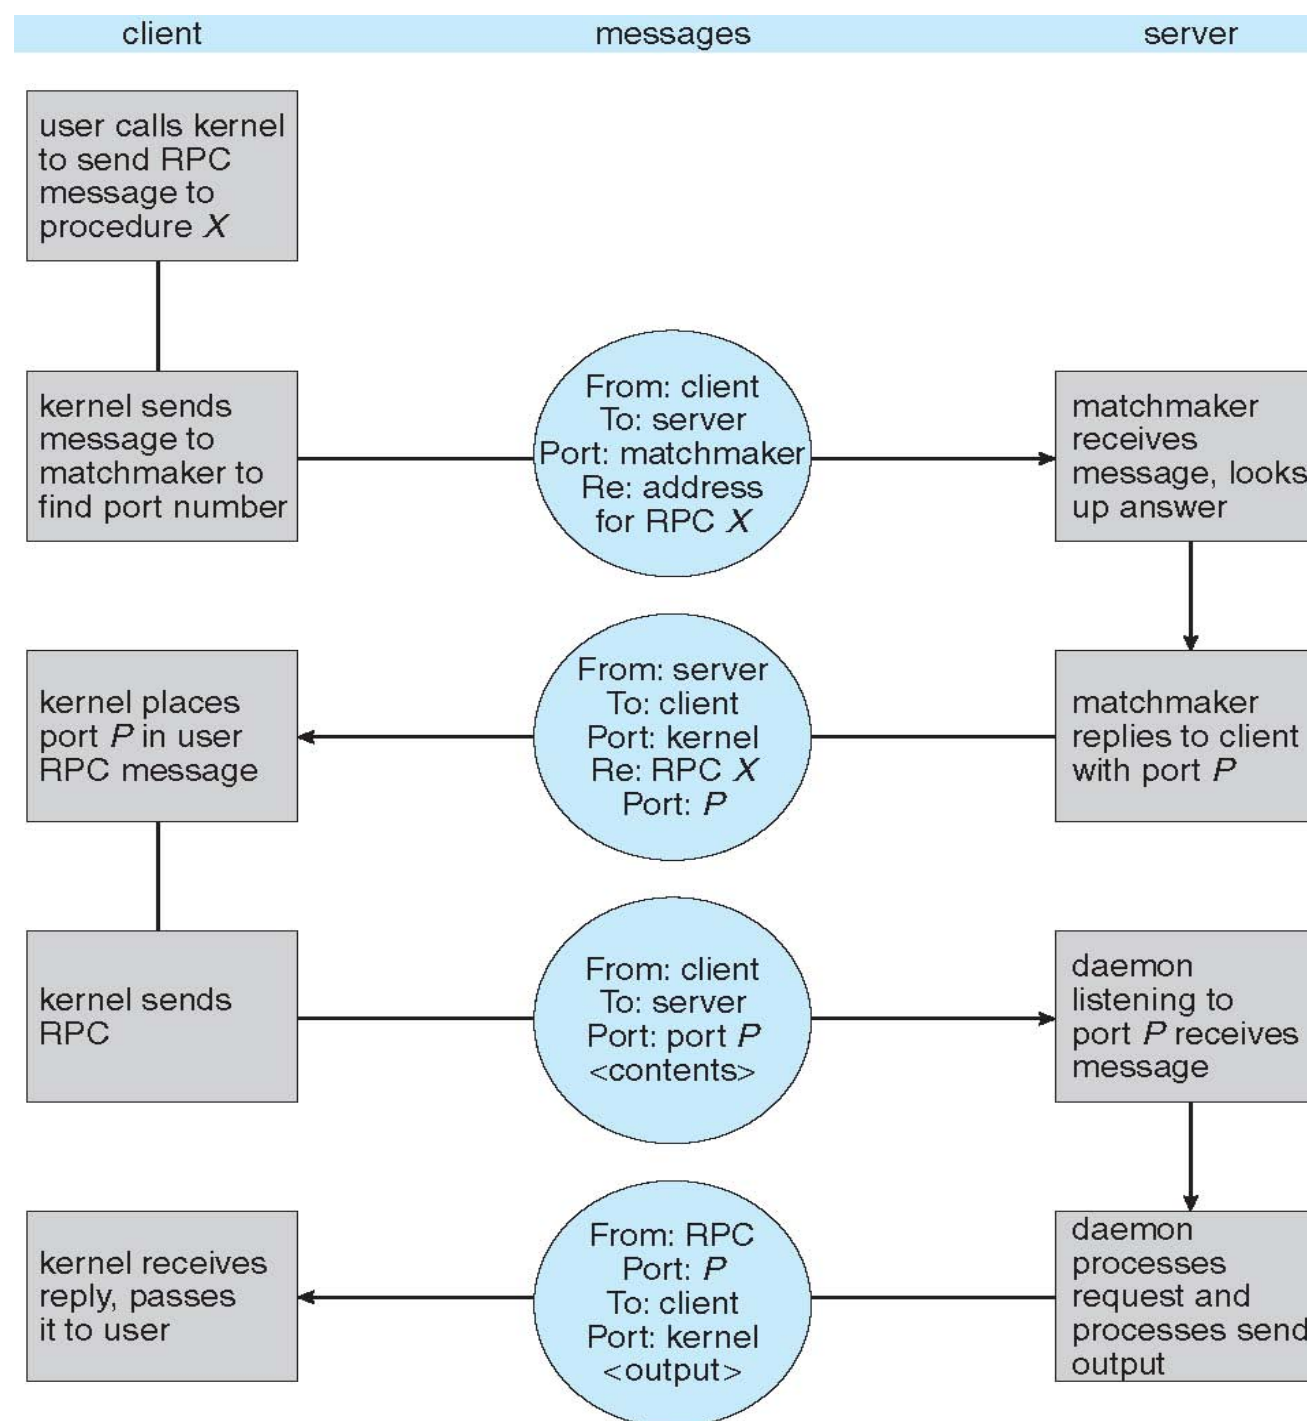

# Pipes

---

- **Pipes serve as a conduit allowing two processes to communicate**
- **Implementation Issues**
  - Is communication unidirectional or bidirectional?
  - In the case of two-way communication, is it half or full-duplex?
  - Must there exist a relationship (i.e. parent-child) between the communicating processes?
  - Can the pipes be used over a network?
- **Two common types of pipes, ordinary pipes and named pipes**

# Ordinary Pipes

---

- **Ordinary pipes** allow communication in standard producer-consumer style
  - Opened and treated similarly to a file
- **Producer writes to one end (the write-end of the pipe)**
- **Consumer reads from the other end (the read-end of the pipe)**
- **Ordinary pipes are unidirectional**
- **Ordinary pipe cannot be accessed from outside the process that creates it**
  - Requires parent-child relationship between communicating processes



# Named Pipes

---

- **Named pipes** are more powerful than ordinary pipes
- Communication is **bidirectional**
- No parent-child relationship is necessary between the communicating processes
- Several processes can use the named pipe for communication
- Provided on both **UNIX** and **Windows** systems