

Modern Unix

bat

A `cat` clone with syntax highlighting and Git integration.

exa

A modern replacement for `ls`.

```
[ben ~/C/e/exa:master]
$ bat
Cargo.lock  LICENCE  README.md  generate-testcases.sh  src
Cargo.toml  Makefile  contrib    screenshot.png         target

[ben ~/C/e/exa:master]
$ bat -l
.rw-r--r-- 11k ben 18 Nov 18:28 Cargo.lock
.rw-r--r-- 549 ben 15 Nov 18:38 Cargo.toml
.rw-r--r-- 1.1k ben 23 Nov 2014 LICENCE
.rw-r--r-- 775 ben 2 Aug 15:28 Makefile
.rw-r--r-- 2.7k ben 19 Nov 13:18 README.md
drwxr-xr-x - ben 7 Jun 16:45 contrib
.rwxr-xr-x 3.1k ben 3 Sep 13:26 generate-testcases.sh
.rw-r--r-- 382k ben 8 Jun 21:00 screenshot.png
drwxr-xr-x - ben 18 Nov 18:55 src
drwxr-xr-x - ben 3 Nov 0:48 target

[ben ~/C/e/exa:master]
$ bat -abghHlIS
inode Permissions Links Size Blocks User Group Date Modified Name
30030336 .rw-r--r-- 1 6.0Ki 16 ben staff 23 Nov 0:31 .DS_Store
1971258 drwxr-xr-x 15 - - ben staff 19 Nov 13:21 .git
30048390 .rw-r--r-- 1 20 8 ben staff 2 Nov 20:45 .gitignore
30163566 .rw-r--r-- 1 200 8 ben staff 4 Nov 16:55 .travis.yml
31959543 .rw-r--r-- 1 11Ki 24 ben staff 18 Nov 18:28 Cargo.lock
31959544 .rw-r--r-- 1 549 8 ben staff 15 Nov 18:38 Cargo.toml
1971322 .rw-r--r-- 1 1.1Ki 8 ben staff 23 Nov 2014 LICENCE
23377412 .rw-r--r-- 1 775 8 ben staff 2 Aug 15:28 Makefile
30163567 .rw-r--r-- 1 2.6Ki 8 ben staff 19 Nov 13:18 README.md
12375448 drwxr-xr-x 4 - - ben staff 7 Jun 16:45 contrib
24377288 .rwxr-xr-x 1 3.1Ki 8 ben staff 3 Sep 13:26 generate-testcases.sh
20087308 .rw-r--r-- 1 373Ki 752 ben staff 8 Jun 21:00 screenshot.png
1971325 drwxr-xr-x 11 - - ben staff 18 Nov 18:55 src
30063756 drwxr-xr-x 3 - - ben staff 3 Nov 0:48 target

[ben ~/C/e/exa:master]
$

[ben ~/C/e/exa:master]
$ exa --long --grid src/
.rw-r--r-- 4.8k ben 18 Nov 18:55 colours.rs .rw-r--r--@ 4.4k ben 15 Nov 18:38 main.rs
.rw-r--r-- 2.9k ben 4 Nov 11:59 dir.rs .rw-r--r--@ 29k ben 19 Nov 12:45 options.rs
drwxr-xr-x - ben 4 Nov 16:55 feature drwxr-xr-x - ben 18 Nov 18:28 output
.rw-r--r-- 19k ben 15 Nov 18:37 file.rs .rw-r--r--@ 1.7k ben 4 Sep 11:30 term.rs
.rw-r--r-- 4.5k ben 2 Sep 16:13 filetype.rs

[ben ~/C/e/exa:master]
$ exa --long --tree src
drwxr-xr-x - ben 18 Nov 18:55 src
.rw-r--r-- 4.8k ben 18 Nov 18:55 colours.rs
.rw-r--r-- 2.9k ben 4 Nov 11:59 dir.rs
.rw-r--r-- 3.3k ben 4 Nov 11:59 feature
.rw-r--r-- 604 ben 26 Aug 12:19 git.rs
.rw-r--r-- 7.2k ben 4 Nov 16:55 mod.rs
.rw-r--r-- 19k ben 15 Nov 18:37 file.rs
.rw-r--r-- 4.5k ben 2 Sep 16:13 filetype.rs
.rw-r--r-- 4.4k ben 15 Nov 18:38 main.rs
.rw-r--r-- 29k ben 19 Nov 12:45 options.rs
drwxr-xr-x - ben 18 Nov 18:28 output
.rw-r--r-- 5.6k ben 18 Nov 19:02 column.rs
.rw-r--r-- 35k ben 16 Nov 3:05 details.rs
.rw-r--r-- 1.2k ben 3 Nov 11:12 grid.rs
.rw-r--r-- 4.1k ben 15 Nov 18:37 grid_details.rs
.rw-r--r-- 384 ben 29 Jun 14:50 lines.rs
.rw-r--r-- 1.3k ben 18 Nov 16:27 mod.rs
.rw-r--r-- 1.7k ben 4 Sep 11:30 term.rs

[ben ~/C/e/exa:master]
$
```

lsd

The next gen file listing command. Backwards compatible with `ls`.

```
~ Code > Perso > lsd > master 1f % > prodild > prod lsd -l target/debug
drwxr-xr-x peltoche users - Thu Dec 13 12:27:23 2018 build
drwxr-xr-x peltoche users - Thu Dec 13 15:28:44 2018 deps
drwxr-xr-x peltoche users - Thu Dec 13 10:51:57 2018 examples
drwxr-xr-x peltoche users - Thu Dec 13 14:58:34 2018 incremental
drwxr-xr-x peltoche users - Thu Dec 13 10:51:57 2018 native
-rw-r--r-- peltoche users 879 B Thu Dec 13 14:29:26 2018 liblsd.d
-rw-r--r-- peltoche users 0 B Thu Dec 13 15:28:44 2018 liblsd.rmeta
-rwxr-xr-x peltoche users 11.7 MB Thu Dec 13 14:50:47 2018 lsd
-rwxr-xr-x peltoche users 9.2 MB Thu Dec 13 15:28:41 2018 lsd-e1fd8883f3461759
-rw-r--r-- peltoche users 887 B Thu Dec 13 15:27:01 2018 lsd-e1fd8883f3461759.d
-rw-r--r-- peltoche users 870 B Thu Dec 13 10:52:06 2018 lsd.d
```

delta

A viewer for `git` and `diff` output


redis-cli.c

```
static sds cliReadLine(int fd) {
```

```
135 :135
136 :136     while(1) {
137 :137         char c;
138 :138         ssize_t ret;
139 :139
140 :140         if (read(fd,&c,1) == -1) {
141 :141             ret = read(fd,&c,1);
142 :142             if (ret == -1) {
143 :143                 sdsfree(line);
144 :143                 return NULL;
145 :144             } else if (c == '\n') {
146 :145             } else if ((ret == 0) || (c == '\n')) {
147 :146                 break;
148 :147             } else {
149 :148                 line = sdscatlen(line,&c,1);
150 :149             }
```

dust

A more intuitive version of `du` written in rust.

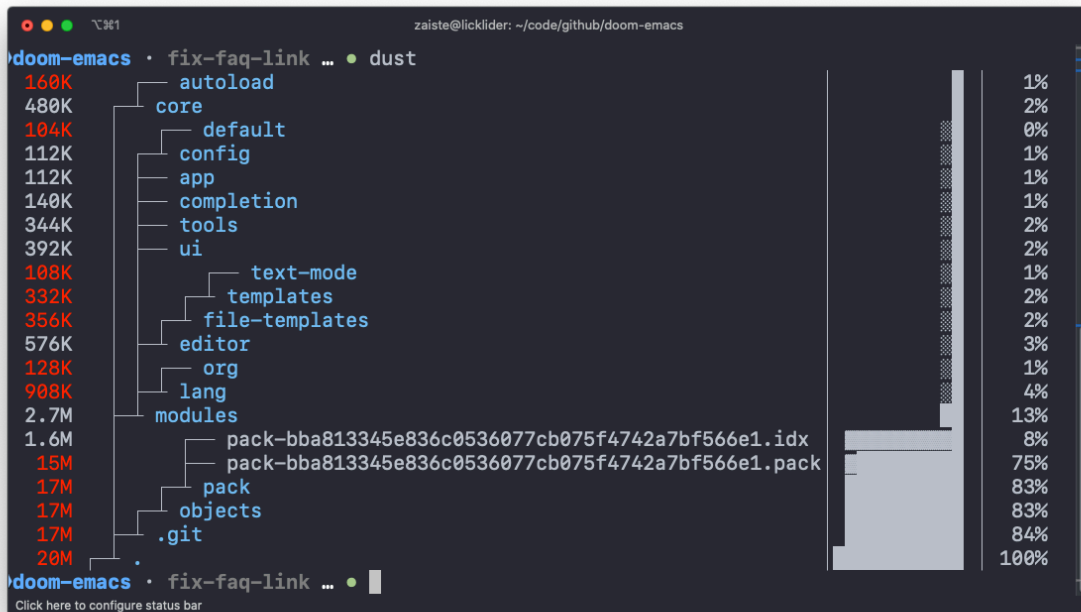

duf

A better `df` alternative

4 local devices							
MOUNTED ON	SIZE	USED	AVAIL	USE%		TYPE	FILESYSTEM
/	80.0G	70.3G	8.3G	[#####.....]	87.9%	btrfs	/dev/bender/root
/boot	511.0M	74.5M	436.4M	[##.....]	14.6%	vfat	/dev/sda1
/home	128.0G	118.7G	8.1G	[#####.....]	92.7%	btrfs	/dev/bender/home
/media/hole	7.2T	5.5T	1.4T	[#####.....]	75.7%	ext4	/dev/mapper/hole

9 network devices							
MOUNTED ON	SIZE	USED	AVAIL	USE%		TYPE	FILESYSTEM
/media/nibbler/books	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/books
/media/nibbler/development	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/development
/media/nibbler/documents	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/documents
/media/nibbler/downloads	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/downloads
/media/nibbler/music	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/music
/media/nibbler/photo	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/photo
/media/nibbler/recording	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/recording
/media/nibbler/transfer	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/transfer
/media/nibbler/video	21.8T	14.2T	7.6T	[#####.....]	65.0%	cifs	//nibbler/video

6 special devices							
MOUNTED ON	SIZE	USED	AVAIL	USE%		TYPE	FILESYSTEM
/dev	15.6G	0B	15.6G			devtmpfs	devtmpfs
/dev/shm	15.6G	1.2G	14.4G	[#.....]	7.9%	tmpfs	tmpfs
/run	6.2G	10.0M	6.2G	[.....]	0.2%	tmpfs	tmpfs
/run/user/1000	3.1G	148.0K	3.1G	[.....]	0.0%	tmpfs	tmpfs
/sys/fs/cgroup	4.0M	0B	4.0M			tmpfs	tmpfs
/tmp	15.6G	2.2M	15.6G	[.....]	0.0%	tmpfs	tmpfs


broot

A new way to see and navigate directory `tree`s

```
/home/dys/dev/miaou/src
405K  └─ main-js
      6K  │   └─ groumf.js
      5K  │   └─ hu.js
          │   └─ 51 unlisted
327K  └─ main-scss
      192 │   └─ autocomplete.scss
3149    │   └─ bubble.scss
      24K │   └─ chat.scss
          │   └─ 25 unlisted
65K    └─ page-js
      1233 │   └─ auths.js
      1444 │   └─ chat.js
      1155 │   └─ chat.mob.js
          │   └─ 10 unlisted
176K   └─ page-scss
      6K  │   └─ intro.scss
      4092 │   └─ pad.mob.scss
      341  │   └─ room.scss
      197  │   └─ rooms.mob.scss
      590  └─ readme.md
6M     └─ rsc
      16K  │   └─ adM.png
      16K  │   └─ adMw.png
      10K  │   └─ ajax-loader-bar.gif
          │   └─ 26 unlisted
8K      └─ sw-js
3840    └─ sw-notifs.js
Hit esc to go back, enter to go up, ? for help, or a few letters to search
h:n gi:y
```



A simple, fast and user-friendly alternative to `find`.



An extremely fast alternative to `grep` that respects your gitignore



A code searching tool similar to `ack`, but faster.

```
ken@ken7 /usr/local/src/the_silver_searcher
$ ag lzma
configure.ac
14:PKG_CHECK_MODULES([LZMA], [liblzma])
20:AC_CHECK_HEADERS([pthread.h, zlib.h lzma.h])

README.md
64: * Ubuntu: `apt-get install -y automake pkg-config libpcre3-dev zlib1g-dev
liblzma-dev`

src/decompress.c
7:#include <lzma.h>
111:static void* decompress_lzma(const void* buf, const int buf_len,
113:    lzma_stream stream = LZMA_STREAM_INIT;
114:    lzma_ret lzrt;
122:    lzrt = lzma_auto_decoder(&stream, -1, 0);
125:    log_err("Unable to initialize lzma_auto_decoder: %d", lzrt);
143:    lzrt = lzma_code(&stream, LZMA_RUN);
144:    log_debug("lzma_code ret = %d", lzrt);
150:    log_err("Found mem/data error while decompressing xz/lzm
a stream: %d", lzrt);
159:    lzma_end(&stream);
165:    lzma_end(&stream);
184:    return decompress_lzma(buf, buf_len, dir_full_path, new_buf_len
);
248:    log_debug("Found lzma-based stream");

ken@ken7 /usr/local/src/the_silver_searcher
$
```



A general purpose command-line fuzzy finder.


```

src/util/eventbox_test.go
src/curses/curses_test.go
src/util/atomicbool.go
src/util/util_test.go
src/tokenizer_test.go
src/chunklist_test.go
src/algo/algo_test.go
src/util/eventbox.go
src/curses/curses.go
src/pattern_test.go
src/options_test.go
src/history_test.go
src/reader_test.go
src/merger_test.go
src/cache_test.go
src/util/util.go
src/tokenizer.go
src/item_test.go
src/constants.go
src/chunklist.go
src/ansi_test.go
src/algo/algo.go
src/terminal.go
src/fzf/main.go
src/pattern.go
> src/options.go
src/matcher.go
src/history.go
src/reader.go
src/cache.go
src/item.go
src/core.go
src/ansi.go
35/63
> .go$

```

```

package fzf

import (
    "fmt"
    "os"
    "regexp"
    "strconv"
    "strings"
    "unicode/utf8"

    "github.com/junegunn/fzf/src/curses"
    "github.com/junegunn/go-shellwords"
)

const usage = `usage: fzf [options]

Search
  -x, --extended      Extended-search mode
                      (enabled by default; +x or --no-extended to disable)
  -e, --exact         Enable Exact-match
  -i                 Case-insensitive match (default: smart-case match)
  +i                 Case-sensitive match
  -n, --nth=N[,..]    Comma-separated list of field index expressions
                      for limiting search scope. Each can be a non-zero
                      integer or a range expression ([BEGIN]..[END]).
                      Transform the presentation of each line using
                      field index expressions
  --with-nth=N[,..]   Transform the presentation of each line using
                      field index expressions
  -d, --delimiter=STR Field delimiter regex (default: AWK-style)
  +s, --no-sort       Do not sort the result
  --tac              Reverse the order of the input
  --tiebreak=CRI[,..] Comma-separated list of sort criteria to apply
                      when the scores are tied [length|begin|end|index]
                      (default: length)

```



Fly through your shell `history`. Great Scott!

```
2. ~/projects/rust/mcfly (mcfly)
McFly | ESC - Exit | ⌘ - Run | TAB - Edit | F2 - Delete

$ git

git st
git add -p
git push origin head --tags
git add -A
git ci --amend
git push
git pull
git push origin head -u -f
git add README.md
git add Cargo.toml
```

choose

A human-friendly and fast alternative to `cut` and (sometimes) `awk`

```
→ choose git:(master) x cat demo1
`choose` is written in Rust 🦀. `choose` is fast and ergonomic.
→ choose git:(master) x cat demo1 | choose 0
`choose`
→ choose git:(master) x cat demo1 | choose 0:5
`choose` is written in Rust 🦀.
→ choose git:(master) x cat demo1 | choose 0 -3 -1
```



`sed` for JSON data.

```
nnieto@Ziltoid ~-> curl -X GET --silent "https://api.digitalocean.com/v2/images" -H "Authorization: Bearer $MY_DO_API_KEY" | jq '.images[] | {name, distribution, slug, type, status} | select(.distribution == "Debian")'
{
  "name": "8.10 x64",
  "distribution": "Debian",
  "slug": "debian-8-x64",
  "type": "snapshot",
  "status": "available"
}
{
  "name": "8.10 x32",
  "distribution": "Debian",
  "slug": "debian-8-x32",
  "type": "snapshot",
  "status": "available"
}
nnieto@Ziltoid ~-> █
```



An intuitive find & replace CLI (`sed` alternative).

```
$ sd '(:<[^>]+>){2}~-[\\w\\s-]+~(:<[^>]+>){2}' '' replace.txt
EasiestSoft.com@DESKTOP-B3J39SP MSYS ~/mybook/easiestsoft.com
$ cat replace.txt
Easiest is easiest
  <li class="cba"><a href="y.html">keep me</a></li>
<!--comments-->
  remove me
  please
<!--comments-->
```

cheat

Create and view interactive cheatsheets on the command-line.

```
/bin/bash
ubuntu hydn ~ $> cheat rsync
# To copy files from remote to local, maintaining file properties and sym-links
# (-a), zipping for faster transfer (-z), verbose (-v):
rsync -avz host:file1 :file1 /dest/
rsync -avz /source host:/dest

# To copy files using checksum (-c) rather than time to detect if the file has
# changed. (Useful for validating backups):
rsync -avc <src> <dest>

# To copy contents of /src/foo to destination:
# This command will create /dest/foo if it does not already exist
rsync -auv <src> <dest>

# To explicitly copy <src> to <dest>
rsync -auv <src> <dest>

# To copy file from local to remote over ssh with non standard port 1234 to
# destination folder in remoteuser's home directory:
rsync -avz -e "ssh -p1234" <source> <username>@<host>:<dest>


ubuntu hydn ~ $> |
```

tldr

A community effort to simplify `man` pages with practical examples.


bottom

Yet another cross-platform graphical process/system monitor.

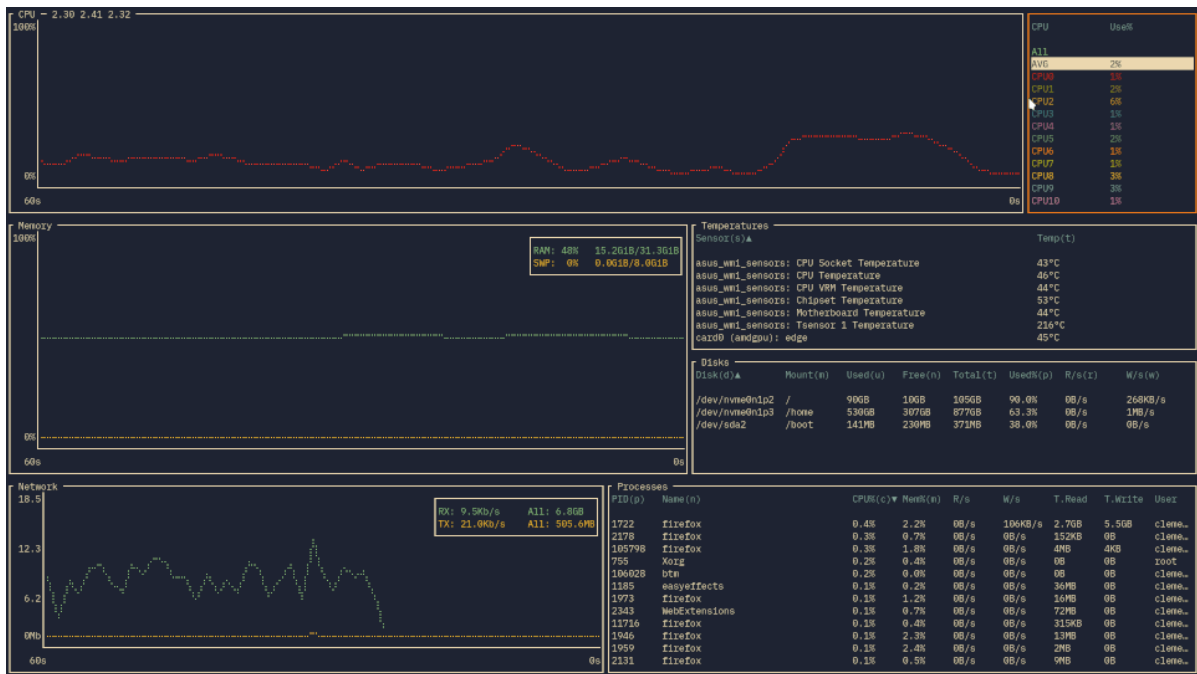




Glances an Eye on your system. A `top` / `htop` alternative for GNU/Linux, BSD, Mac OS and Windows operating systems.

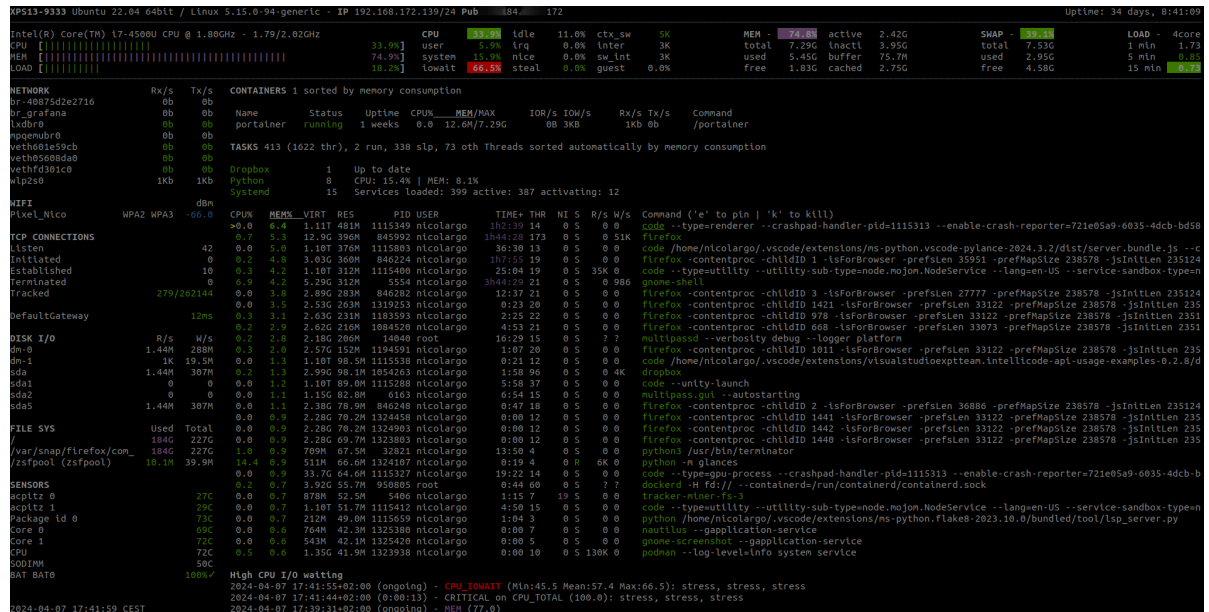

System monitoring dashboard for terminal.

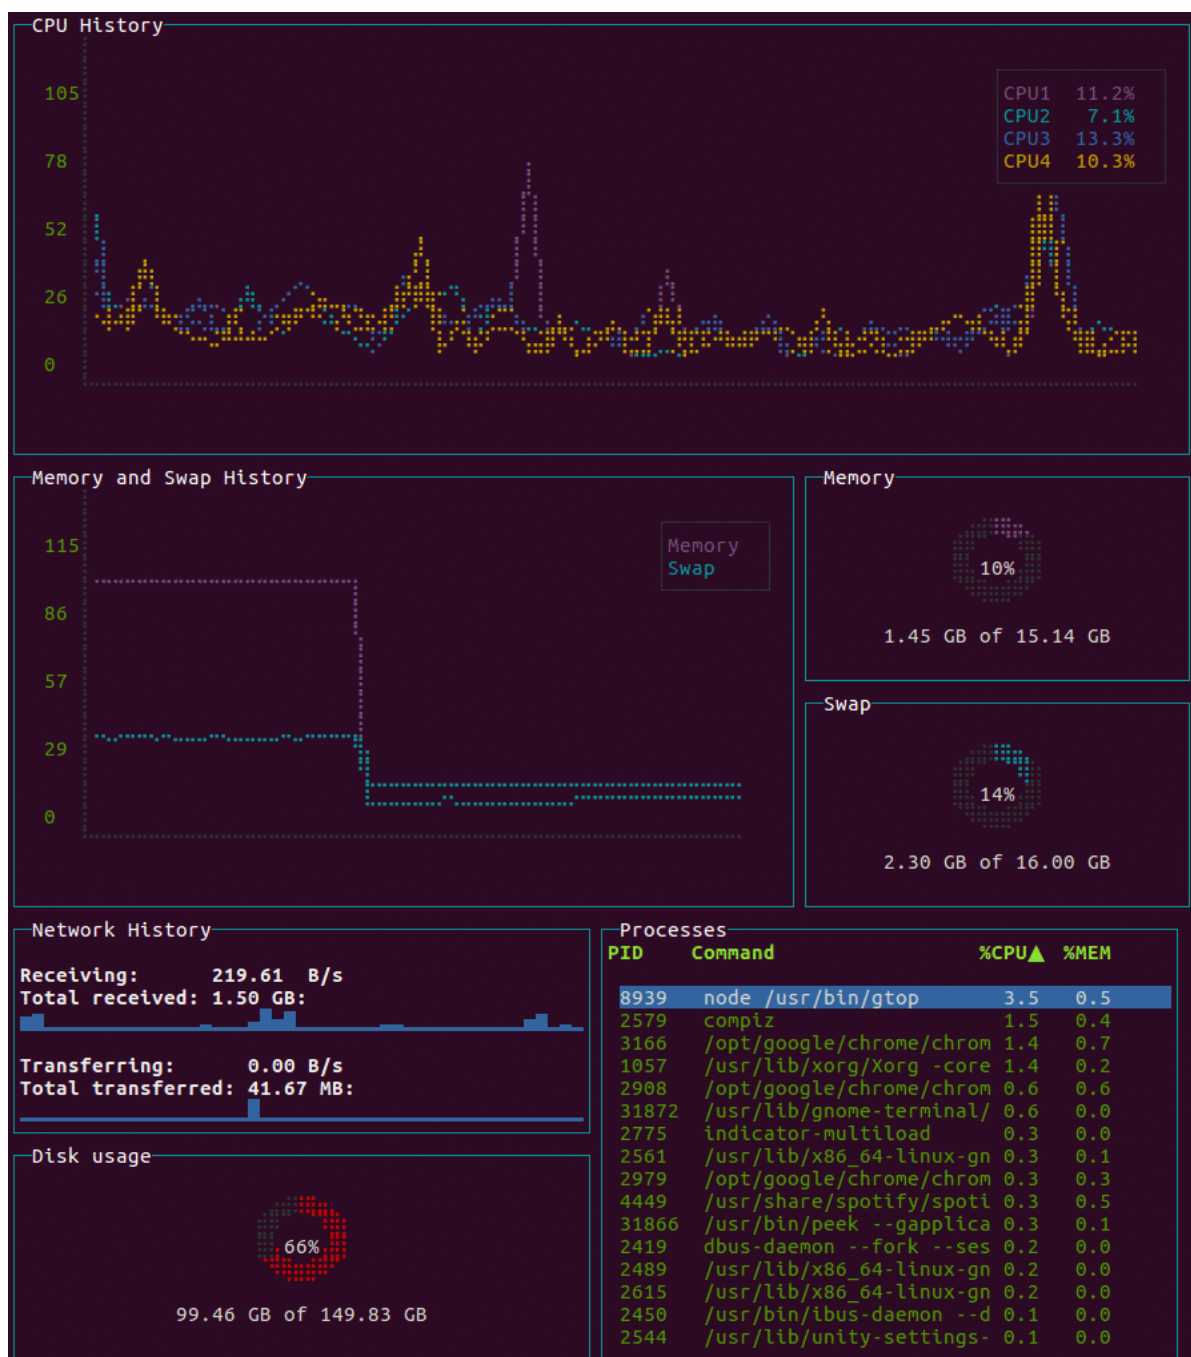


hyperfine

A command-line benchmarking tool.

gping

ping, but with a graph.

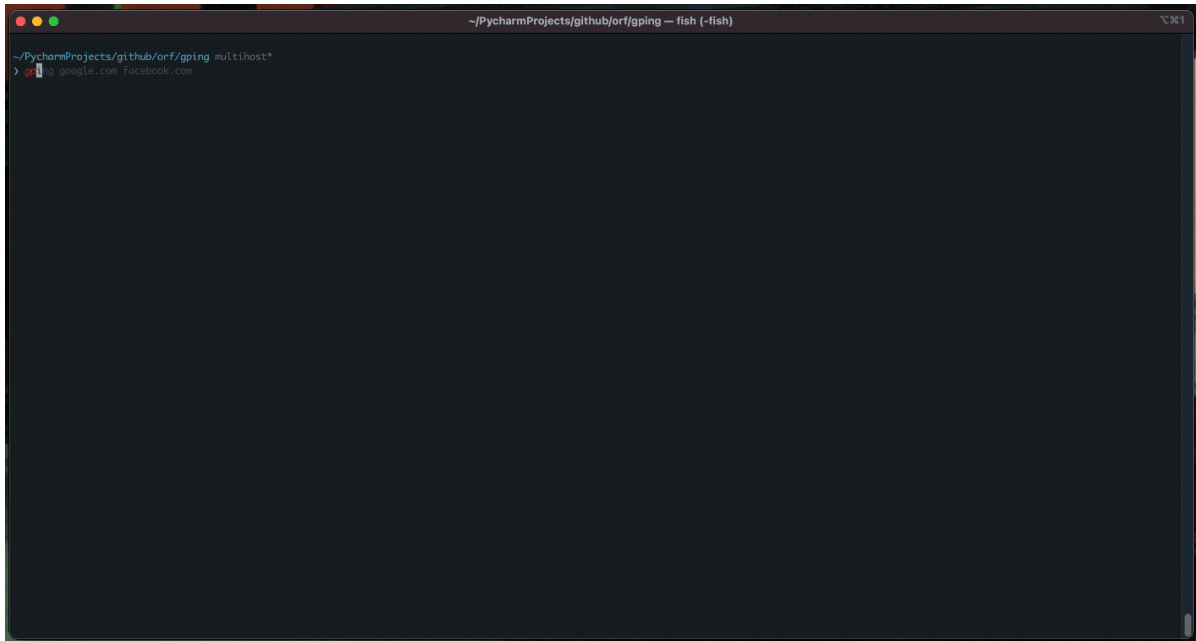

procs

A modern replacement for ps written in Rust.

</


[httpie](https://httpie.io)

A modern, user-friendly command-line HTTP client for the API era.



curlie

The power of `curl`, the ease of use of `httpie`.

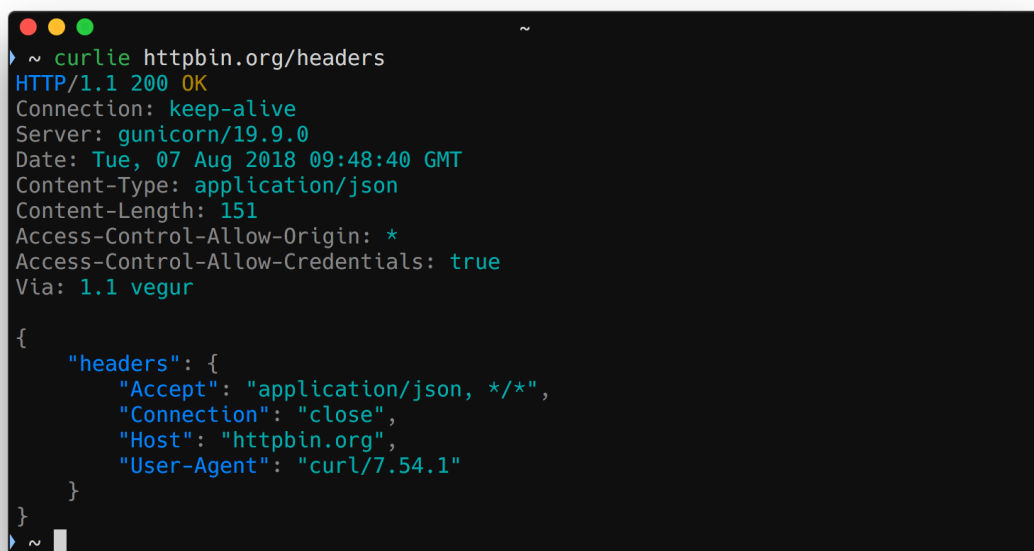A terminal window with a dark background and light-colored text. The prompt is '~ curlie'. The command 'httpbin.org/headers' has been entered. The output shows HTTP status '200 OK' and various headers including 'Connection: keep-alive', 'Server: gunicorn/19.9.0', 'Date: Tue, 07 Aug 2018 09:48:40 GMT', 'Content-Type: application/json', 'Content-Length: 151', 'Access-Control-Allow-Origin: *', 'Access-Control-Allow-Credentials: true', and 'Via: 1.1 vegur'. Below the headers is a JSON object representing the request headers.

```
> ~ curlie httpbin.org/headers
HTTP/1.1 200 OK
Connection: keep-alive
Server: gunicorn/19.9.0
Date: Tue, 07 Aug 2018 09:48:40 GMT
Content-Type: application/json
Content-Length: 151
Access-Control-Allow-Origin: *
Access-Control-Allow-Credentials: true
Via: 1.1 vegur

{
  "headers": {
    "Accept": "application/json, */*",
    "Connection": "close",
    "Host": "httpbin.org",
    "User-Agent": "curl/7.54.1"
  }
}
```

xh

A friendly and fast tool for sending HTTP requests. It reimplements as much as possible of HTTPie's excellent design, with a focus on improved performance.



zoxide

A smarter `cd` command inspired by `z`.





A user-friendly command-line DNS client. `dig` on steroids

A screenshot of a macOS terminal window titled 'woof'. The window has a dark background and displays the output of the 'dog' command. The output is color-coded: green for A and AAAA records, red for NS records, blue for MX records, and orange for TXT records. The first command is 'dog example.net A AAAA NS MX TXT', which returns various DNS records for 'example.net' and its authoritative servers. The second command is 'dog TXT txt-example.lookup.dog @https://cloudflare-dns.com/dns-query --https', which returns a TXT record for 'txt-example.lookup.dog'. The prompt '\$' is visible at the bottom left of the terminal window.

```
$ dog example.net A AAAA NS MX TXT
  A example.net.      23h49m37s  93.184.216.34
 AAAA example.net.    23h49m37s  2606:2800:220:1:248:1893:25c8:1946
 NS example.net.      23h50m08s  "a.iana-servers.net."
 NS example.net.      23h50m08s  "b.iana-servers.net."
  A a.iana-servers.net. 17m59s + 199.43.135.53
 AAAA a.iana-servers.net. 3m28s + 2001:500:8f::53
  A b.iana-servers.net. 27m23s + 199.43.133.53
 AAAA b.iana-servers.net. 6m07s + 2001:500:8d::53
 MX example.net.      23h49m37s  0 ""
 TXT example.net.      23h49m37s  "v=spf1 -all"

$ dog TXT txt-example.lookup.dog @https://cloudflare-dns.com/dns-query --https
 TXT txt-example.lookup.dog. 16m03s  "Cache Invalidation and Naming Things"

$
```