


# 2024-07-24---docker-install

[#Link](#)

## Docker

# The Industry-Leading Container Runtime

Docker Engine powers millions of applications worldwide, providing a standardized packaging format for diverse applications.

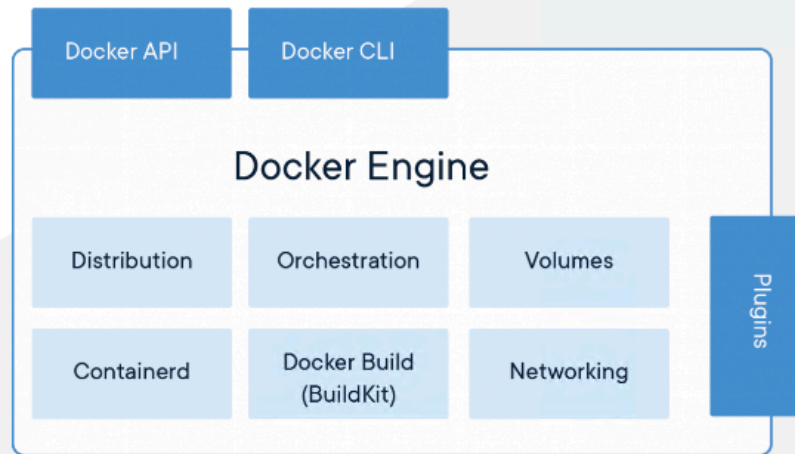


## Docker Engine Sparked the Containerization Movement

Docker Engine is the industry's de facto container runtime that runs on various Linux ([CentOS](#), [Debian](#), [Fedora](#), [RHEL](#), and [Ubuntu](#)) and [Windows Server](#) operating systems. Docker creates simple tooling and a universal packaging approach that bundles up all application dependencies inside a container which is then run on Docker Engine. Docker Engine enables containerized applications to run anywhere consistently on any infrastructure, solving "dependency hell" for developers and operations teams, and eliminating the "it works on my laptop!" problem.

---

## Installation

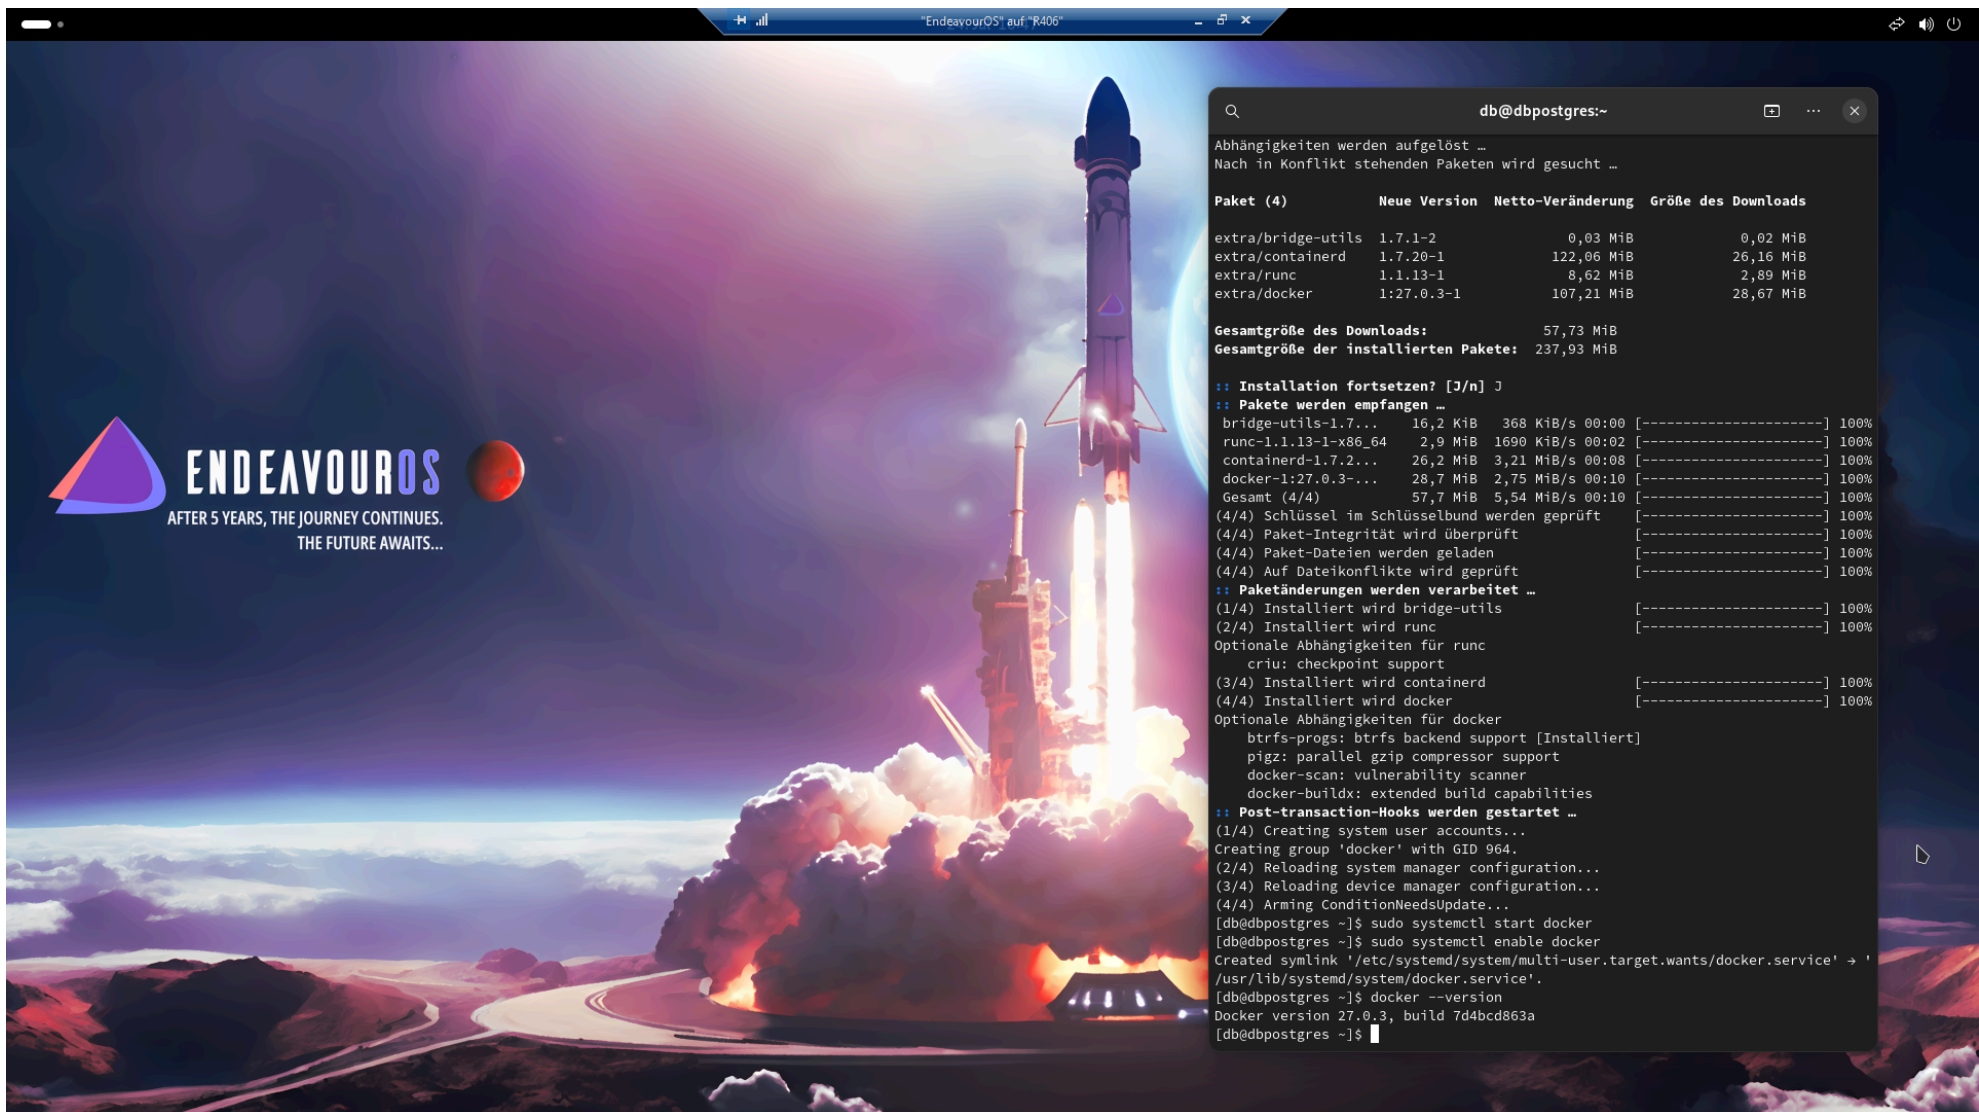

Installing Docker Engine on Arch Linux is a bit more involved than on other distributions, but it's still a relatively straightforward process. Here are the steps:

## Method 1

- 1. **Update your system:**

```
sudo pacman -Syu
```

- 2. **Install the `docker` package:**

```
sudo pacman -S docker
```

- 3. **Start the Docker service:**

```
sudo systemctl start docker
```

- 4. **Enable the Docker service to start at boot:**

```
sudo systemctl enable docker
```

- 5. Method 1 are running ? You've successfully installed Docker Engine on your Arch Linux system

To verify that Docker is working correctly, you can run a few commands:

- 1. **Check the Docker version:**

```
docker --version // `For example: Docker version 27.0.3, build 7d4bcd863a`
```

- 2. **Run a test container:**

```
docker run -it ubuntu /bin/bash
```

- (this will start a new Ubuntu container and open a bash shell inside it)

### 3. List running containers:

```
docker ps
```

- (this should show you the test container you just started)

### 4. Stop the test container:

```
docker stop <container_id> // `replace <container_id> with the ID of the test container`
```

If everything is working as expected, you should see the Docker version, be able to run a test container, and list/stop the container using the above commands.

Now that you have Docker Engine installed, you can start exploring the world of containerization!

When you're running Arch Linux with kernel version 6.10.0-arch1-2.

When it comes to pulling a Docker image, the `arch` image is not a valid option. The `arch` image is not an official Docker image, and it's not designed to run as a container.

Instead, you can use the following Docker images, which are compatible with Arch Linux:

1. `ubuntu` : A popular choice for running a Linux container. You can pull the latest Ubuntu image using `docker pull ubuntu` .
2. `debian` : Another popular Linux distribution that can run as a container. You can pull the latest Debian image using `docker pull debian` .
3. `alpine` : A lightweight Linux distribution that's often used as a base image for other containers. You can pull the latest Alpine image using `docker pull alpine` .

If you want to run a container with a similar environment to your host system (Arch Linux), you can use the `archlinux` image from the Docker Hub. However, please note that this image is not officially supported by Docker, and it might not be up-to-date.

To pull the `archlinux` image, use the following command:

```
docker pull archlinux/archlinux
```

Keep in mind that this image might not be optimized for running as a container, and you might encounter issues.

Some other useful Docker commands you might want to explore:

- `docker images` : List all available Docker images on your system.
- `docker ps` : List all running containers.
- `docker run -it <image_name> /bin/bash` : Run a new container from the specified image and open a bash shell inside it.
- `docker stop <container_id>` : Stop a running container.
- `docker rm <container_id>` : Remove a stopped container.

Feel free to ask if you have any more questions or need help with Docker!

Some next steps you might want to consider:

## Pull a Docker-Image:

```
docker pull <image-name> // `docker pull ubuntu`
```

. and

## Run a Docker-Image

```
docker run -it <image_name> // `docker run -it ubuntu`
```

## Create a Dockerfile

- Create a `Dockerfile` in a new directory and build a custom image using:

```
docker build -t <image_name>
```

## Explore Docker Compose

- Install Docker Compose using:

```
sudo pacman -S docker-compose` and learn how to define and run multi-container applications
```