Supplementary Material

AnchorMTM: Spatially Anchored Merge Tree Maps
for Time-Varying Scalar Fields

Anonymous Authors

This companion gives the full definitions, proofs and implementation details for AnchorMTM (Spatially Anchored Merge Tree Maps). Spatial Anchoring uses a fixed spatial projection as the target for display anchors, with deviations determined by topology and interval constraints. Statements use join convention; split trees are handled by negating the scalar field. Tree nodes with equal merge levels form multifurcations.

Correspondence provenance and temporal confidence. The shared fixed-grid extractor in `experiments/era5.py` calls `match_leaves_by_overlap` on consecutive augmented-tree frames. Supports contain the extremum and leaf-arc regular samples, excluding the parent critical sample. Stable `sample_ids` identify common spatial samples; fixed-grid C-order indexing supplies them in this extractor. A Hungarian assignment maximizes total intersection count, and zero-overlap pairs are discarded. Matched leaves inherit Track IDs; unmatched current leaves receive new IDs. The first frame and declared temporal-window breaks start identities without a predecessor. Tied assignments have no additional physical tie-breaking criterion.

The shared 2D/3D extraction path and the native-volume paths must be distinguished. The latter accumulate intersections from original-voxel leaf-arc ownership arrays, exclude roots, and retain positive-overlap Hungarian pairs. They implement the same count-based assignment principle through different support representations, rather than all calling one matching function. The automatic-reference adapter accepts precomputed, row-aligned Track IDs and checks frame-wise uniqueness; it does not verify their upstream matching provenance. External inputs must therefore declare their support and correspondence conventions.

For a persistent ID present in consecutive frames, `motion_pairs` supplies an extremum displacement to the single sequence-wide direction fit. Unmatched leaves and track interruptions supply no displacement for that step. Rapid motion, support changes or weak overlap may remove or alter correspondences and affect this fit. The implementation does not reconstruct physical split/merge events, branching lineages or links across missing frames.

For placement, the adapter and `solve_unified_sequence` align previous anchors and references by Track ID and pass a valid-match mask. They use unit temporal confidence. Shared preprocessing also records support IoU for diagnostics; the legacy ERA5 extremum-reference branch additionally passes it as `temporal_confidence` to the low-level solver. That branch weights temporal residuals by IoU, but still maximizes intersection counts during matching. The current automatic-reference adapter does not enable this weighting; direction estimation also does not use IoU weights.

Automatic reference and implementation convention. The default preprocessing uses the leading eigenvector of the scatter of all matched extremum displacements, once over the full sequence in either 2D or 3D. It maximizes squared projected motion. The sign gives nonnegative total signed motion; when that sum is within 10^{-12} of zero, the largest-magnitude component is positive. If motion energy is at most 10^{-20}, the longest domain axis is used, choosing the first on a tie. These are the existing `directional_reference` conventions. A physical direction may be supplied. Repeated top eigenvalues need not select a unique direction; the relative eigengap is reported. This is standard spectral estimation, not joint optimization of direction and topology.

The projected bounding-box corners supply origin o and span L. Code stores raw $p_i^t \cdot a$ on $[o, o+L]$; the paper uses $q_i^t = p_i^t \cdot a - o$ and translates anchors and centers by the same origin. Motion differences are invariant under this shift. The low-level `solve_anchored_sequence` adapter connects this preprocessing to the finite width-aware search and four-term capped QP. It returns continuous layouts; the public `anchor_mtm` entry additionally invokes existing reconstruction and diagnostics, as specified below. Neither output is an unconditional raster certificate. Existing fixed-axis experimental drivers and stored evidence have not been rerun or relabelled as automatic-reference experiments.

Single-control configuration and execution. The public execution is `prepare_fields` (or `prepare_sequence`) followed by `anchor_mtm(prepared, epsilon)`. Preprocessing and its fitted reference are reused for all budgets. The fixed numerical allowance is $\varepsilon_0 = 10^{-7}$; every order stage uses the same absolute $\eta = (\varepsilon_0 + \varepsilon)\Delta_F$. Exact Mode ($\varepsilon = 0$) retains this allowance,

which only resolves saddles tied to within $\varepsilon_0\Delta_F$; strict exact topology is the case $\eta = 0$, with both allowances zero. The paper measures Exact Mode against the bound c_0 at this allowance and maps that keep the tree strictly against ν^* (Section S16). Neither 20% nor 100% limits the interface.

The default configuration uses the existing scale rules: width scale $s = 0.5L/\,\mathrm{measure}(D)$, gap $g = L/240$, position slack $\beta_0 = L/120$, $\rho = 0.5$, and weights $(\lambda_R, \lambda_M, \lambda_G, \lambda_C) = (4, 0.5, 1, 0.1)$. All are fixed for a prepared sequence. Output resolution defaults to 2048 samples; insufficient raster capacity is a reported failure. Advanced fixed configurations retain these quantities rather than deleting constraints. Reference-aligned motion and term means are the default. An independently supplied reference cap or conflicting motion control is rejected by the new placement interface.

The canonical ordering implementation retains the existing threshold/selective flattening, midpoint and block-insertion strategies (four initial refinement seeds plus the exact tree, at most eight refinement passes). A collector records generated initial and trial permutations, retaining strict-tree orders and the point candidate. The deduplicated finite pool is evaluated for δ^*, τ and NROE, filtered by η, then selected lexicographically by (τ, NROE); an exact tie uses the permutation lexicographically for reproducibility. The QP receives a singleton order and the explicit cap $\tau + \beta_0$. The older general-purpose `Controls` interface can use an absolute position cap and compare multiple orders by QP objective; it is not the default AnchorMTM entry. Historical experiment drivers and their outputs are unchanged.

Reconstruction calls the existing leaf/LCA filling and optimal-barrier correction. Records include candidate totals and admitted counts, selected order, τ, δ^*, anchors, reference displacement, NROE, continuous motion residual, and separately rendered errors and failures. NMLEmean and NMLEmax use absolute error over the full fixed-label merge matrix (including the diagonal), divided by Δ_F; the *motion residual* is the RMS reference-motion residual divided by L. It differs from the event-based motion error ME of the paper. Rendered motion is also measured at rounded anchors. A successful computation may record a rendered budget violation; it does not certify full-tree label coverage or repair the output. The renderer's strict-extremum clearance remains separate from the continuous optimum.

S1 Interval and Error Conventions

For a frame, T is the supplied merge tree, $\mathscr{F}$ its leaf labels, $\mathscr{D}(v)$ the descendant leaves of node v, and $h(v)$ its scalar level. The matrix V records source LCA levels and fixed extremum values on the diagonal. References lie in $[0, L]$; widths W_i are positive in the interval model, with zero widths used only for its non-strict point-model limit. The support S_i contains the extremum and its leaf-arc regular samples, excluding the parent. Its centroid is their unweighted mean, and relative geometry uses Euclidean centroid distances. The frame representation is $M_t = (\pi_t, x_t, \psi_t)$.

For a fixed order π, introduce interval centers z_i and anchor slack $H_i = \rho W_i/2$, with $0 \le \rho \le 1$. The valid-layout set $\mathscr{L}(\pi)$ consists of pairs (x, z) satisfying

$$\begin{aligned} W_i/2 \le z_i \le L - W_i/2, \qquad & 0 \le x_i \le L, \\ |x_i - z_i| \le H_i, & \\ z_{\pi(k+1)} - z_{\pi(k)} \ge (W_{\pi(k)} + W_{\pi(k+1)})/2 + g, & \end{aligned} \tag{S1}$$

for every adjacent pair, with minimum gap $g \ge 0$. A necessary capacity condition is $\sum_i W_i + (n-1)g \le L$; infeasible widths are reported rather than silently rescaled. We suppress t in within-frame analysis.

Actual reference displacement is $e_i = |x_i - q_i|$, with $E_\infty = \max_i e_i/L$. An order has normalized reference-order error

$$\mathrm{NROE}(\pi) = \frac{1}{2L} \max_k \left(\max_{j \le k} q_{\pi(j)} - q_{\pi(k)} \right). \tag{S2}$$

This is the smallest worst displacement divided by L for a nondecreasing point placement in the specified order, ignoring widths and gaps. It is an order obstruction, not the measured displacement of the final anchors.

For $i \ne j$, the displayed merge is the maximum profile value on the interval between x_i and x_j. Set $V^{\psi}_{ii} = \psi(x_i)$ and define

$$d_{\mathrm{top}}(\psi, T) = \max_{i,j} |V^{\psi}_{ij} - V_{ij}|, \qquad \mathrm{NMLE} = d_{\mathrm{top}}/\Delta_F, \tag{S3}$$

where $\Delta_F > 0$ is the declared scalar range, shared across the sequence. We require

$$d_{\mathrm{top}}(\psi_t, T_t) \le \eta, \qquad \eta = (\varepsilon_0 + \varepsilon)\Delta_F. \tag{S4}$$

Here ε_0 accounts for data resolution and $\varepsilon \ge 0$ is the additional analyst-selected budget. Exact topology below means zero labelled error on the declared tree; a numerical-tie allowance is accounted for through η, rather than assumed to be exactly zero on the original matrix.

If source and displayed trees are interpreted in the canonical cophenetic merge-tree representation, with fixed labels covering all their leaves and induced matrices including the diagonal values, the unnormalized discrepancy in Eq. S3 is the labelled interleaving distance [7, 4]. Under those representation conditions, $d_B \le d_I \le d_{\mathrm{top}}$ for the corresponding persistence diagrams and unlabelled trees [4, 6]. NMLE itself is a normalized discrepancy. If rendering introduces unlabelled extrema, the anchor matrix alone does not justify this identification for the entire displayed tree.

S2 Exact-Topology Bound

In a reduced tree whose proper ancestor levels strictly increase, zero labelled merge error requires every subtree's leaves to form a contiguous block. Otherwise a foreign leaf between two descendants would force a merge above that subtree's level. Equal-level events are treated as one node before imposing this requirement. For subtree X, let $m_X = \min_{i\in\mathscr{D}(X)} q_i$ and $M_X = \max_{i\in\mathscr{D}(X)} q_i$.

Theorem S1 (Exact-topology order bound)**.** *Every zero-error profile satisfies* $\mathrm{NROE}(\pi) \ge \nu^*(T,q)$*, where*

$$\nu^*(T,q) = \frac{1}{2L}\max_{v}\max_{\substack{X,Y\in\mathrm{ch}(v)\\ X\neq Y}} [\min(M_X - m_Y, M_Y - m_X)]^+. \tag{S5}$$

Recursively ordering each node's children by reference-hull midpoint $(m_X + M_X)/2$ *attains this bound for the point-order objective, in* $O(n\log n)$ *time.*

Proof sketch. If block X precedes block Y, an inversion from M_X to m_Y requires worst point displacement at least $[M_X - m_Y]^+/2$. Reversing the blocks gives $[M_Y - m_X]^+/2$. Every legal order must choose one orientation. Midpoint order chooses the less costly one since $m_X + M_X \le m_Y + M_Y$ is equivalent to $M_X - m_Y \le M_Y - m_X$. Every inverted leaf pair belongs to different child blocks at its lowest common ancestor, so the largest of these sibling costs also bounds all inversions from above in the midpoint order. □

The certificate depends only on the source tree and references, not on an observed layout or optimizer. It applies to any exact profile, including outputs of TMTM and ST-MTM with the same feature tree. Attainment refers to Eq. S2: it does not assert that a finite-width layout or its final quadratic placement attains $L\nu^*$.

S3 Width-Aware Bounds and Fixed-Order Evaluation

For nonoverlapping finite intervals, the fixed-order minimax cost is

$$\tau(\pi) = \min_{(x,z)\in\mathscr{L}(\pi)} \|x - q\|_\infty. \tag{S6}$$

The canvas is compact, so the minimum is attained when the layout set is nonempty. Widths, gaps, and canvas ends may force displacement even when the reference order is feasible in the point model. Set

$$\ell_i = q_i - W_i/2 - H_i, \quad h_i = q_i + W_i/2 + H_i, \quad s_i = W_i + g. \tag{S7}$$

For a nonempty leaf set S, define packing summaries

$$\begin{aligned} A(S) &= \max_{\alpha\in\{\ell_i : i\in S\}} \left(\alpha + \sum_{\substack{i\in S\\ \ell_i\ge\alpha}} s_i \right), \\ B(S) &= \max_{\zeta\in\{h_i : i\in S\}} \left(\sum_{\substack{i\in S\\ h_i\le\zeta}} s_i - \zeta \right). \end{aligned} \tag{S8}$$

Here $A(X)$ abbreviates $A(\mathscr{D}(X))$, and likewise for B.

Theorem S2 (Width-aware bound)**.** *If all leaves of* X *precede all leaves of* Y*, every valid placement has worst displacement at least* $(A(X) + B(Y) - g)/2$*. Consequently every exact-topology interval layout satisfies* $\tau(\pi) \ge \mathscr{B}_w(T,q,W)$*, where*

$$\begin{aligned} \mathscr{B}_w &= \max\{0, B(\mathscr{F}) - g, A(\mathscr{F}) - g - L, K_w\}, \\ K_w &= \max_{v}\max_{X\neq Y\in\mathrm{ch}(v)} \frac{\min\{A(X)+B(Y), A(Y)+B(X)\} - g}{2}. \end{aligned} \tag{S9}$$

$$z_b - z_a \geq \sum_{k\in S} s_k - g - W_a/2 - W_b/2. \tag{S10}$$

Here a, b enclose every selected interval in S; other intervals only increase the required span.

Proof. (i) Take $S_X \subseteq X$, $S_Y \subseteq Y$, let a be the first leaf of S_X and b the last leaf of S_Y in the order. All of $S = S_X \cup S_Y$ lies between them, so by (S10) and the anchor slack, $x_b - x_a \geq \sum_S s_k - g - W_a/2 - W_b/2 - H_a - H_b$. Since $\tau \geq q_a - x_a$ and $\tau \geq x_b - q_b$,

$$\tau \;\geq\; \tfrac{1}{2}\big[(q_a - x_a) + (x_b - q_b)\big] \;\geq\; \tfrac{1}{2}\Big[\ell_a - h_b + \sum_{k\in S} s_k - g\Big] \;\geq\; \tfrac{1}{2}\Big[\min_{S_X} \ell + \sum_{S_X} s_k + \sum_{S_Y} s_k - \max_{S_Y} h - g\Big].$$

For $S_X = \{k \in X : \ell_k \geq \alpha\}$ the first two terms are at least $\alpha + \sum_{k\in X, \ell_k \geq \alpha} s_k$; for $S_Y = \{k \in Y : h_k \leq \zeta\}$ the last ones are at least $\sum_{k\in Y, h_k \leq \zeta} s_k - \zeta$. The two choices are independent, so maximizing each gives $A(X)$ and $B(Y)$. Each maximum is over upper (resp. lower) sets of one sorted list and is computed by one sort and a prefix sum. (ii) Let b be the last leaf of a set S. The intervals of S lie in $[0, z_b + W_b/2]$, so $z_b \geq \sum_S s_k - g - W_b/2$, $x_b \geq z_b - H_b$ and $\tau \geq x_b - q_b \geq \sum_S s_k - g - h_b \geq \sum_S s_k - g - \max_S h$. Lower sets of h give $B(\text{all}) - g$. The right end is symmetric with the first leaf of S and gives $A(\text{all}) - g - L$. (iii) Then $\ell = h = q$, $s = 0$, $A(X) = M_X$, $B(Y) = -m_Y$, and $\min(A(X) + B(Y), A(Y) + B(X))/2 = \min(M_X - m_Y, M_Y - m_X)/2$, which is L times the term of ν^*. □

The summaries are evaluated by sorting and cumulative sums. With zero widths and gaps, $A(X) = M_X$ and $B(Y) = -m_Y$, and the bound reduces to $L\nu^*$. For finite widths, Eq. S9 is a universal lower bound, not a formula for the globally optimal order or a promise of attainment.

For a specified order, the implementation also evaluates τ exactly. Index quantities in order as $w_k = W_{\pi(k)}$, $Q_k = q_{\pi(k)}$, and $H_k = \rho w_k/2$, and define packed left and right distances

$$D_k = \sum_{j<k} w_j + w_k/2 + (k-1)g, \quad R_k = \sum_{j>k} w_j + w_k/2 + (n-k)g.$$

The implemented interval-cost expression is

$$\begin{aligned} \tau(\pi) = \max\Big\{ & 0,\ \max_k (D_k - Q_k - H_k), \\ & \max_k (Q_k - H_k - L + R_k), \\ & \max_{j<k} \frac{Q_j - Q_k + D_k - D_j - H_j - H_k}{2} \Big\}. \end{aligned} \tag{S11}$$

These are boundary and pairwise packing requirements for the fixed-order interval problem. This exact subproblem cost, also available through a minimax linear program, is distinct from the tree-wide lower bound in Theorem S2.

Why the fixed-order evaluation is exact. Let $P = \sum_k w_k + (n-1)g \leq L$ and $s_0 = L - P$. Write the centers as $z_{\pi(k)} = D_k + y_k$. The interval constraints are equivalent to $0 \leq y_1 \leq \cdots \leq y_n \leq s_0$. An anchor within H_k of its center and within distance t of Q_k exists exactly when

$$Q_k - D_k - H_k - t \leq y_k \leq Q_k - D_k + H_k + t.$$

After intersecting these bounds with $[0, s_0]$, a nondecreasing sequence exists if and only if every prefix maximum of the lower bounds does not exceed the corresponding upper bound. Expanding this condition gives precisely the left-boundary, right-boundary and pairwise terms in Eq. S11, together with $t \geq 0$. Conversely, choosing prefix maxima supplies feasible centers at the largest of those terms, and each anchor can be chosen in the intersection of its center-slack interval and $[Q_k - t, Q_k + t]$. Thus the expression is attained. This explains the implemented fixed-order evaluation; it does not optimize the leaf permutation.

S4 Chain-Aware Separation and Bounds

Allowing $\eta > 0$ relaxes some displayed merge relationships, but does not eliminate all separation constraints. We use η in scalar units throughout this analysis to avoid confusing it with the normalized budget ε.

Lemma S1 (Separation)**.** *Let $i, j \in \mathscr{D}(u)$ and let leaf k lie strictly between their anchors. If $d_{\text{top}} \leq \eta$, then $V_{ik} \leq h(u) + 2\eta$.*

Proof. The interval from i to k is contained in that from i to j, so $V_{ik} - \eta \leq V_{ik}^{\psi} \leq V_{ij}^{\psi} \leq V_{ij} + \eta \leq h(u) + \eta$. □

Let $A_\eta(u)$ be the highest ancestor of u with level at most $h(u)+2\eta$. This ancestor is determined by the total level difference from u, not by testing each parent gap independently.

Theorem S3 (Chain-aware separation and bounds)**.** *No leaf outside $\mathscr{D}(A_\eta(u))$ can occur between two leaves of u in a profile with $d_{\text{top}} \le \eta$. Further, if*

$$\begin{aligned} \mathscr{D}(w) \cap \mathscr{D}(A_\eta(u)) &= \varnothing, \\ \mathscr{D}(u) \cap \mathscr{D}(A_\eta(w)) &= \varnothing, \end{aligned} \tag{S12}$$

then all leaves of u precede all leaves of w, or conversely. For all such separated pairs (X,Y), including $(u,\{k\})$ with $k \notin \mathscr{D}(A_\eta(u))$, valid lower bounds are

$$\begin{aligned} \mathrm{NROE}(\pi) &\ge \frac{1}{2L} \max_{(X,Y)} [\min(M_X - m_Y, M_Y - m_X)]^+, \\ \tau(\pi) &\ge \max_{(X,Y)} \frac{\min\{A(X)+B(Y), A(Y)+B(X)\} - g}{2}. \end{aligned} \tag{S13}$$

The order-independent canvas terms and zero remain part of the width-aware bound.

Proof sketch. A leaf outside $A_\eta(u)$ merges with each descendant of u above $h(u)+2\eta$, so Lemma S1 excludes it from the span of u. Under Eq. S12, neither leaf set can interleave the other. If one set occupied both sides of the other, the latter would lie between two of its leaves, also contradicting separation. The two possible block orientations give Eq. S13 by the same inversion and packing arguments as before. □

A second certificate flattens internal nodes whose parent gaps are at most 2η and applies the exact-topology bounds to the remaining hierarchy. Neither certificate dominates the other. The chain certificate accounts for accumulated gaps along ancestor chains; the flattened tree also contains pairs of single leaves, which are always separated but are not in $\mathscr{P}_\eta$. For example, two leaves of width 0.2 with equal references under one root give an empty $\mathscr{P}_\eta$, whereas the flattened tree certifies 0.1 (with $\rho = g = 0$). The implementation reports the larger of the two certificates. These certificates express necessary conditions for every budget-feasible layout; they do not construct a feasible order by themselves.

The relaxation concerns merge levels in the displayed profile. The input field, its extracted extrema, and supplied feature identities remain the reference data. The budget is an upper allowance, while measured NMLE records the amount actually used. Increasing it can enlarge the feasible set but does not guarantee smaller displacement for every feature, nor does it establish that a heuristic search returns a better layout at every budget.

For clarity, $C_\eta(T,q)$ is the right-hand side of the first inequality in Eq. S13. Let $K_{w,\eta}$ be the right-hand side of its second inequality. The full width-aware chain certificate is

$$C_{w,\eta}(T,q,W) = \max\{0, K_{w,\eta}, B(\mathscr{F}) - g, A(\mathscr{F}) - g - L\}. \tag{S14}$$

Thus both chain certificates include all eligible node–leaf pairs and mutually excluded node–node pairs; the width-aware one also includes the canvas-end terms. Singleton sets use $A(\{k\}) = \ell_k + s_k$ and $B(\{k\}) = s_k - h_k$. The ancestor test measures the full height difference, not each parent gap independently. All budget calculations use absolute scalar units η.

S5 Optimal Merge Barriers

Changing the leaf order changes which feature pairs span each inter-feature gap. Simply retaining the original LCA value of each adjacent pair need not minimize the resulting merge error. Let b_k be the barrier between leaves $\pi(k)$ and $\pi(k+1)$. The merge level displayed between positions $i < j$ is

$$V^{\psi}_{\pi(i)\pi(j)} = \max_{i \le k < j} b_k. \tag{S15}$$

For fixed extremum values $v_i = V_{ii}$, define

$$C_k = \min_{i \le k < j} V_{\pi(i)\pi(j)}, \quad F_k = \max(v_{\pi(k)}, v_{\pi(k+1)}). \tag{S16}$$

Proposition S1 (Optimal barriers)**.** *The minimum labelled merge error for the fixed order and extremum values in the continuous non-strict model is*

$$\begin{aligned} \delta^*(\pi) = \max\Bigg\{ & 0,\ \max_k (F_k - C_k), \\ & \frac{1}{2} \max_{i<j} \left(V_{\pi(i)\pi(j)} - \max_{i \le k < j} C_k \right) \Bigg\}, \end{aligned} \tag{S17}$$

Algorithm S1: Optimal Merge Barriers for a Fixed Leaf Order

Data: Order π and source merge matrix V, including original extremum values V_{ii}.
Result: Minimum continuous labelled merge error $\delta^*(\pi)$ and optimal barriers b.
Function `OptimalBarriers(`π, V`):`

```
n ← |π|; δ ← 0
if n < 2 then
    return (0, ∅)
for k ← 1 to n − 1 do
    C_k ← min_{1≤i≤k<j≤n} V_{π(i)π(j)}
    F_k ← max{V_{π(k)π(k)}, V_{π(k+1)π(k+1)}}
    δ ← max{δ, F_k − C_k}
for each pair 1 ≤ i < j ≤ n do
    δ ← max{δ, ½(V_{π(i)π(j)} − max_{i≤k<j} C_k)}
for k ← 1 to n − 1 do
    b_k ← C_k + δ
return (δ, b)
```

and $b_k = C_k + \delta^*(\pi)$ attains it.

Proof. The displayed merge of the ith and jth leaf is $\max_{i\le k<j} b_k$, and each barrier must be at least F_k to keep both basins. An error δ requires $b_k \le V_{\pi(i)\pi(j)} + \delta$ for every pair spanning k, i.e., $b_k \le C_k + \delta$; it also requires $\max_{i\le k<j} b_k \ge V_{\pi(i)\pi(j)} - \delta$ and $b_k \ge F_k$. The largest admissible barriers $b_k = C_k + \delta$ satisfy all constraints exactly when δ is at least each term of δ^*; smaller barriers only lower the maxima. Hence δ^* is optimal and attained. □

For fewer than two leaves the barrier list is empty and $\delta^* = 0$. For an exact-tree order, $\delta^* = 0$ and the barriers agree with the relevant adjacent LCA levels. For a conflicting order, the minimax solution balances raised and lowered displayed merges. This exact calculation provides the topology oracle in Eq. S4; it does not establish global optimality of the order search. The implemented direct evaluation costs $O(n^3)$ per order. The proposition permits equality at a leaf value. A raster implementation requiring strict extrema may add a small clearance, which must be counted separately in the measured rendered error.

S6 Candidate Generation and Width-Aware Refinement

The following details specify the existing AnchorMTM heuristic over a restricted family of candidate orders. The source matrix is used by every merge-budget check. Midpoint initialization, threshold and conflict-driven candidates, and the retained point order are the same as in the main-paper algorithm.

Candidate structures. The helper returns the exact tree, threshold flattenings for distinct internal parent gaps up to 2η, and the retained conflict-driven selective flattening. Selective generation starts from the exact tree and considers releasing one or both internal blocks of the sibling pair with the largest order obstruction. Trials respect accumulated ancestor gaps, pass Eq. S4, and are compared by NROE, merge cost, and number of newly released nodes. Non-worsening NROE steps may continue the search; the best strictly improving state is retained. The point candidate π_p is the best feasible threshold midpoint order by NROE, replaced by the selective order only if it improves NROE. This is a finite heuristic candidate family, not enumeration of every permutation.

Refinement and selection. In the refinement, σ is the sum of squared positive boundary and pair terms in Eq. S11. Initial structures are ranked by $(\tau, \sigma, \text{number released})$. A refinement uses every insertion position for nodes with at most eight children and positions within distance three otherwise. A move must improve (τ, σ) lexicographically and pass the exact topology check; comparisons use the implementation's numerical tolerances. Retaining π_p ensures that the final (τ, NROE) selection cannot worsen its fixed-order displacement. Exact midpoint optimality, exact evaluation of τ, and heuristic leaf-order search are separate guarantees. Exhaustive enumeration certifies a global order optimum only when all permutations are covered.

The algorithm assumes the widths fit the canvas under Eq. S1. The exact-tree candidate supplies a feasible continuous topology order; width-capacity failure and insufficient raster resolution are reported by the corresponding routines. For $\eta = 0$, the certificate helper uses the exact-topology bounds; for $\eta > 0$, it evaluates the coarse and chain-aware certificates and retains the stronger applicable bound. These values are reported as benchmarks of unavoidable error. Candidate refinement and final selection use exact fixed-order costs; the certificates are not used as search-pruning thresholds.

Algorithm S2: Width-Aware Refinement of One Candidate Structure

Data: Initialized structure S and order π; references, widths, source merge matrix and scalar budget.
Result: A budget-feasible refined order.
Function `RefineOrder`(S, π, q, W, V, η)**:**
  for *at most eight passes* **do**
    for *each internal node of S in traversal order* **do**
      Enumerate single-child-block insertions
      Find the first improving, budget-feasible move in (τ, σ) order
      Apply the move if one exists
    if *no move was accepted* **then**
      break
  return π

S7 Complete Placement Model

After choosing π_t, we optimize anchors and interval centers over $\mathscr{L}(\pi_t)$. Let $P_t = \{(i,j) : i \text{ precedes } j \text{ in } \pi_t\}$, and let $\gamma_i^t \in [0,1]$ be an optional confidence for a supplied temporal match. Default confidence is one. The reference-aligned target is

$$y_i^t = x_{\mu_t(i)}^{t-1} + \Delta q_i^t, \qquad i \in \mathscr{C}_t.$$

The implemented normalized objective has four terms:

$$\begin{aligned} E_R &= \frac{1}{n_t} \sum_i (x_i^t - q_i^t)^2, \\ E_G &= \frac{1}{\max(1, |P_t|)} \sum_{(i,j) \in P_t} (x_j^t - x_i^t - d_{ij}^t)^2, \\ E_M &= \frac{1}{\max(1, |\mathscr{C}_t|)} \sum_{i \in \mathscr{C}_t} \gamma_i^t (x_i^t - y_i^t)^2, \\ E_C &= \frac{1}{n_t} \sum_i (x_i^t - z_i^t)^2. \end{aligned} \tag{S18}$$

Fixed order turns signed separations into linear expressions, so this is a convex quadratic objective. The cap enforces position fidelity while geometry and temporal terms choose among acceptable placements:

$$\begin{aligned} \min_{x_t, z_t} \quad & \lambda_R E_R + \lambda_G E_G + \lambda_M E_M + \lambda_C E_C \\ \text{subject to} \quad & (x_t, z_t) \in \mathscr{L}(\pi_t), \\ & \|x_t - q_t\|_\infty \le \tau(\pi_t) + \beta, \qquad \beta \ge 0. \end{aligned} \tag{S19}$$

In the formulas below, β denotes the fixed β_0. The parameter-class defaults are $(\lambda_R, \lambda_G, \lambda_M, \lambda_C) = (4, 1, 0.5, 0.1)$, $\rho = 0.5$, and $\beta = 1$ in canvas units. Canvas extent, gap, and width scale are input-dependent quantities in those same units; their class defaults are 120, 0.5, and 0.06, respectively. They are not universal physical settings, and an evaluation must report any overrides. Equation S19 uses term means, as enabled by the default normalization flag, rather than unnormalized sums with the same numerical weights.

The reference-motion term penalizes $(x_i^t - x_{\mu_t(i)}^{t-1}) - \Delta q_i^t$. Equivalently, it favors continuity of the residual $x - q$, rather than a stationary displayed location when a feature moves. The code also supports stationary targets and intermediate motion fractions; Eq. S18 describes its default residual mode. Missing matches contribute no temporal penalty. Frames are processed sequentially using the previous solved anchors and references; this is not a joint global optimum over the entire sequence.

Since $\tau(\pi_t)$ is attained, the cap is feasible whenever the interval model is feasible. It limits the final worst displacement to $\tau(\pi_t) + \beta$ even when relative-distance objectives would favor a different absolute placement. It does not force each anchor to its reference or preserve every projected motion exactly. The solver uses linear feasibility/minimax subproblems and a constrained quadratic solve with numerical residual checks. Its fixed-order convexity does not extend a global guarantee to the discrete candidate search. A caller-selected absolute reference budget is a separate supported policy; Eq. S19 specifies the certificate-plus-slack construction used here.

S8 Profile Reconstruction and Verification

We reuse the augmented-tree sampling and scalar/path filling of the existing merge tree map pipeline [5, 3]. First, continuous intervals and anchors are mapped to a fixed-resolution canvas by one common affine conversion. Leaf extrema are placed at their anchors with their original scalar values. Regular samples of each leaf arc are resampled to the available interval positions and assigned alternately to either side of the anchor. If an arc has no regular samples, the existing renderer interpolates between its critical endpoint values. Thus leaf filling draws on original scalar data, but does not promise a bijective or lossless encoding of every source sample.

For consecutive leaf intervals, the original LCA determines the internal paths whose samples fill the intervening gap. The inherited renderer allocates positions along those paths and inserts the LCA level; direct sibling, direct-to-deep, and deep-to-deep cases differ in how many nonleaf paths contribute. This mechanism preserves the scalar hierarchy for a compatible exact order. In a budgeted order, however, original LCA filling alone does not guarantee the optimal error of Proposition S1.

The repository's optimal-filling path therefore corrects the rendered inter-anchor segments in join convention. For segment k, it clips interior values to the chosen barrier b_k and, if necessary, raises an existing peak to b_k. The anchors and their values remain fixed. This realizes Eq. S15 in the non-strict model; split-tree profiles are sign-restored afterward. Modified interior samples can differ from original scalar samples, and the minimax barrier formula does not impose an additional constraint keeping every barrier within the original scalar range. These are displayed scalar/topology changes, not changes to the input field. The implemented strict-extremum clearance may slightly raise a barrier above its non-strict optimum. Accordingly, δ^* is the exact continuous subproblem optimum, and the final raster must be measured separately.

All frames use the same reference direction, origin, extent, and pixel conversion. Stacking the resulting profiles gives

$$I(t,u) = \psi_t(u), \qquad 0 \le u \le L. \tag{S20}$$

No per-frame recentering or rescaling is applied to the displayed spatial axis. Raster rounding is checked against interval separation and available pixels; insufficient resolution is reported rather than repaired by moving the continuous layout. Temporal identity enters placement through the supplied tracks, while the stacked scalar values provide the temporal overview.

For each frame, reporting distinguishes the order certificate, a width-aware lower bound, the attained fixed-order cost $\tau(\pi_t)$, the final anchor displacement, $\delta^*(\pi_t)$, and the merge error measured from the rendered profile. The requested ε, numerical allowance ε_0, and placement slack β accompany these quantities. Rendered barriers and anchor rounding must be included when checking final budget compliance; a continuous certificate alone is not a raster certificate. Changed barriers can be identified by their discrepancy from the original adjacent merge level. Together these records expose how much of the displayed location is aligned with the reference and how much displayed merge structure has changed, without treating the budget itself as an observed error.

Continuous and rendered acceptance. Exact Mode denotes zero labelled error; a positive numerical tie allowance is explicitly distinct. The exact-tree structure is retained among refinement seeds, but capacity and numerical failures can still stop layout. The renderer reports invalid raster capacity and nonfinite values. Optimal filling may introduce strict-extremum clearance and records measured budget discrepancies and topology diagnostics. There is no uniform final budget/label-coverage rejection or repair gate. Applying the full labelled-tree interpretation requires checking that labels cover the rendered tree; a continuous barrier optimum alone does not establish this.

Part B: Additional Evaluation Material

Sections S9–S16 support statements in Sections 5 and 6 of the paper. Every table is generated from the saved experiment records; figure and table numbers of the paper refer to its current version (Fig. 4: method comparison; Fig. 5: trade-off; Fig. 6: OLR maps).

S9 Cross-Frame Leaf Correspondence

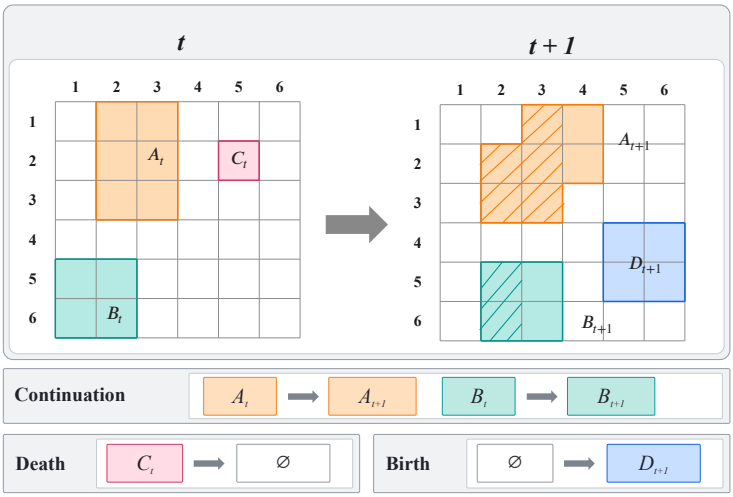


Figure S1: Overlap-based leaf correspondence on a shared grid. Colored regions represent leaf-arc supports; hatching marks samples shared with the previous frame. Maximum-overlap one-to-one assignment continues A and B, leaves C_t unmatched, and assigns a new identity to D_{t+1}. Birth and death denote matching states, not identified physical events.

S10 All Values of the Method Comparison

TMTM and ST-MTM are evaluated on their native outputs; AnchorMTM at $\varepsilon = 0$ (with $\varepsilon_0 = 10^{-7}$) and $\varepsilon = 10\%$; the projection places every leaf at its reference and ignores the tree. TMTM and ST-MTM keep the merge tree strictly and are measured against v^*; Exact Mode keeps the numerical allowance and is measured against c_0 (Section S16). A 1D map has no intrinsic direction, so every compared map (native TMTM and ST-MTM, the TMTM-style and ST-MTM-style objectives of Section S11, and the space-filling curves) is evaluated in the orientation that agrees better with the reference; this only lowers their errors. Merge error, motion error, TD, SNS and TW do not depend on this choice.

TMTM. Our port rebuilds the linearization from TMTM's native branch decisions; on the five planar sequences it matches the pinned official C++ core in all 3127 arc intervals and anchors, with every subtree contiguous and zero merge error. Volumetric TMTM uses a separate compact implementation that was not compared with the official core.

ST-MTM setting. ST-MTM has no public code, so the comparison is with a reimplementation of its published description under the shared-input protocol: it receives the same processed fields, trees, leaf supports and correspondences as the other instances. One setting is fixed in advance for all sequences and not tuned: uniform leaf weights, reordering threshold $r = 0.95$, temporal weight $\lambda = 0.5$, and total leaf extent K equal to the total leaf width that AnchorMTM gives the first frame. The original paper chooses these per dataset; for its storm sequence it uses inverse weights, $K = 135$, $r = 0.65$ and $\lambda = 0.05$, and for its wildfire sequence $K = 10$ and $r = 0.85$. Because K is expressed in input coordinates and our coordinate normalization, frame counts, scalar preprocessing and trees differ from the original inputs, substituting those values would not reproduce the original figures. The values in this section are therefore not a reproduction of the original results. For the same reason we do not quote the SNS and TW values published for ST-MTM: they were measured on other inputs, and placing them next to values measured here would compare different data.

Table S1: Position and topology behind Fig. 4(a,b) of the paper (percent). v^*: mean strict exact-topology bound (Theorem S1), against which TMTM and ST-MTM are measured; c_0: mean bound at Exact Mode's numerical allowance $\varepsilon_0\Delta_F$ (Section S16); the two differ only on Cylinder. NROE: mean order error, for TMTM and ST-MTM in the global mirror that agrees better with the reference; NMLE: worst rendered merge error (zero for TMTM and ST-MTM, and at most ε_0 for $\varepsilon = 0$).

Sequence	v^*	c_0	NROE					NMLE	
			TMTM	ST-MTM	ε=0	ε=10%	Proj.	ε=10%	Proj.
Storms	3.77	3.77	18.31	16.28	3.77	1.43	0.00	8.51	58.66
Wildfires	5.80	5.80	19.65	18.72	5.80	1.09	0.00	8.35	52.58
OLR	0.89	0.89	19.31	16.59	0.89	0.30	0.00	5.15	33.56
$PM_{2.5}$	0.97	0.97	4.44	5.21	0.98	0.00	0.00	5.62	5.62
Ring	2.66	2.66	7.18	4.47	2.66	0.05	0.00	9.40	12.35
Tangaroa	9.24	9.24	19.50	15.80	9.67	4.76	0.00	9.97	31.02
Cylinder	12.24	8.01	26.62	17.77	8.01	0.01	0.00	9.71	14.28

Table S2: Temporal measures behind Fig. 4(c) and the discussion. ME: share of clear approach or separation events shown wrongly (percent); TD: summed map displacement of matched features in canvas units, protocol of ST-MTM.

Sequence	ME (%)					TD				
	TMTM	ST-MTM	ε=0	ε=10%	Proj.	TMTM	ST-MTM	ε=0	ε=10%	Proj.
Storms	47.1	41.3	24.0	19.2	14.4	10.1	7.2	27.8	23.8	23.1
Wildfires	39.3	35.7	34.8	34.8	33.0	11.2	8.0	8.1	3.2	2.8
OLR	44.6	21.4	5.4	7.1	5.4	8.7	2.3	8.9	8.8	8.5
$PM_{2.5}$	45.3	51.6	44.2	49.5	49.5	38.8	7.8	76.4	69.2	69.2
Ring	64.5	34.7	31.5	11.3	12.1	1.3	2.4	3.6	2.1	2.0
Tangaroa	97.5	70.0	52.2	41.3	30.5	64.9	138.6	173.8	140.3	39.9
Cylinder	67.0	46.0	33.1	19.5	19.3	85.0	43.2	56.6	29.2	28.7

Table S3: Distance measures behind Fig. 4(d,e): scale-normalized stress (lower is better) and trustworthiness with $k = 1$ (higher is better), protocol of ST-MTM.

Sequence	SNS					TW				
	TMTM	ST-MTM	ε=0	ε=10%	Proj.	TMTM	ST-MTM	ε=0	ε=10%	Proj.
Storms	0.080	0.030	0.120	0.113	0.106	0.824	0.965	0.770	0.752	0.723
Wildfires	0.221	0.079	0.085	0.061	0.057	0.817	0.919	0.875	0.876	0.861
OLR	0.142	0.006	0.012	0.010	0.009	0.814	0.975	0.956	0.962	0.961
$PM_{2.5}$	0.051	0.026	0.065	0.052	0.052	0.760	0.922	0.751	0.727	0.725
Ring	0.171	0.080	0.164	0.142	0.143	0.707	0.917	0.686	0.707	0.698
Tangaroa	0.525	0.165	0.362	0.341	0.335	0.670	0.814	0.726	0.754	0.748
Cylinder	0.296	0.135	0.110	0.041	0.043	0.802	0.899	0.814	0.889	0.878

Certified orders. The width-aware search of Algorithm 1 of the paper keeps the lower bound it is measured against. Table S4 counts the frames on which the selected order reaches it. On 606 of the 614 planar frames in Exact Mode, and on at least 596 at every tested budget, no admissible order has a smaller worst displacement. Volumetric trees reach the bound less often, mainly on Tangaroa, where the remaining gap does not separate slack in the bound from a suboptimal search.

Table S4: Frames on which the selected leaf order attains the width-aware lower bound, at budgets $\varepsilon = 0, 2, 5, 10\%$, with the mean interval cost τ and mean bound at $\varepsilon = 0$ (percent of L).

Sequence	Frames	0	2%	5%	10%	τ	Bound
Storms	118	116	116	110	110	4.33	4.22
Wildfires	30	25	27	24	24	6.18	6.13
OLR	60	60	60	60	59	0.96	0.96
$PM_{2.5}$	366	365	361	363	363	1.28	1.28
Ring	40	40	40	40	40	2.88	2.88
Tangaroa	201	27	24	30	24	10.37	9.54
Cylinder	102	81	77	76	74	8.47	8.35
Planar	614	606	604	597	596		
Volumetric	303	108	101	106	98		

A frame counts when the interval cost τ of the selected order is within $10^{-9}L$ of the lower bound used by the search, the larger of the width-aware bound of the flattened tree and $C_{w,\eta}$ (Theorem S3) at $\eta = (\varepsilon_0 + \varepsilon)\Delta_F$. The bound holds for every order whose merge error is at most η, so on a counted frame no admissible order has a smaller worst displacement in the interval model. The displayed worst displacement adds at most the slack β_0 of the position cap. Source: `code/results/order_width20261027`.

Configuration. The order search and its bound depend on Θ_0 only through the width scale s, the gap g and the anchor slack ρ; the QP weights and the cap slack β_0 move anchors within the selected order. Halving or doubling s, removing or doubling g, and setting ρ to 0 or 1 leaves the selected order at the bound on 578–608 of the 614 planar frames (Table S5). On Tangaroa the count follows the gap, from 19 to 51 of 201 frames.

Table S5: Sensitivity of the certified orders to Θ_0: frames whose selected order attains the width-aware lower bound, and the planar mean of τ at $\varepsilon = 0$ (percent of L).

Variant	Planar ε=0	Planar ε=10%	mean τ	Tangaroa	Cylinder
default	606/614	596/614	3.12	27/201	81/102
$s \times 0.5$	608/614	598/614	3.00	27/201	81/102
$s \times 2$	578/614	564/614	4.01	26/201	81/102
$g = 0$	606/614	596/614	3.03	51/201	81/102
$g \times 2$	606/614	589/614	3.22	19/201	79/102
$\rho = 0$	605/614	597/614	3.72	27/201	81/102
$\rho = 1$	604/614	595/614	2.93	27/201	81/102

One parameter changed at a time from each sequence's default; τ and the bound depend on Θ_0 only through the width scale s, the gap g and the anchor slack ρ. No variant exceeded the canvas capacity. The default row reproduces Table S4. Script: `figure_drafts/theta_sensitivity.py`.

ST-MTM threshold and orientation. ST-MTM keeps the temporally concordant order of a frame unless optimal leaf ordering lowers the adjacency cost to at most r times that of the concordant order. Its weights, λ and K move anchors but do not change the order, so the threshold $r \in [0, 1]$ spans every ST-MTM order sequence. NROE also depends on the global mirror of a native map, which neither method fixes; the earlier rule flipped a map once, from the first frame against the centroid x coordinate, and on Wildfires, OLR and $PM_{2.5}$ this oriented the maps against the reference. Every compared map is therefore evaluated in the mirror with the lower mean NROE (`figure_drafts/best_mirror.py`). Table S6 lists the resulting order errors and shares, and the earlier values for comparison. TMTM's order error is 53–95% unforced on every sequence; ST-MTM's is 69–95% unforced on the four real-data planar sequences and 31–41% on Ring and the volumetric sequences. Over all thresholds, ST-MTM's share stays at 53–95% on the four real-data planar sequences and at 37–61% on Ring.

Table S6: Order error of OLO, TMTM and ST-MTM ($r = 0.95$) in their favourable mirror, the share not forced by the tree, and its range over all ST-MTM thresholds (percent).

Sequence	ν^*	OLO		TMTM		ST-MTM			earlier rule
		NROE	share	NROE	share	NROE	share	all r	TMTM / ST-MTM
Storms	3.77	15.60	76	18.31	79	16.28	77	73–77	19.2 / 16.3
Wildfires	5.80	19.06	70	19.65	70	18.72	69	53–70	29.3 / 24.0
OLR	0.89	16.27	95	19.31	95	16.59	95	83–95	19.3 / 17.2
$PM_{2.5}$	0.97	5.17	81	4.44	78	5.21	81	80–81	12.9 / 11.6
Ring	2.66	4.23	37	7.18	63	4.47	41	37–61	7.2 / 10.4
Tangaroa	9.24	15.44	40	19.50	53	15.80	41	–	20.1 / 21.3
Cylinder	12.24	18.03	32	26.62	54	17.77	31	–	26.6 / 17.8

Share not forced by the tree: $(\text{NROE} - \nu^*)/\text{NROE}$ of the sequence means, each map in the global mirror that agrees better with the reference. ST-MTM keeps the temporally concordant order of a frame unless the OLO cost is at most r times its cost; weights, λ and K move anchors but not the order, so $r \in \{0, 0.25, 0.5, 0.65, 0.85, 0.95, 1\}$ spans every ST-MTM order sequence ("all r: range over r, favourable mirror for each). Last column: NROE with the earlier orientation rule, one flip from the first frame against the centroid x coordinate. At $r = 0.95$ the recomputed orders reproduce the stored per-frame NROE exactly; volumetric rows use the saved native outputs, whose threshold was not varied (–). OLO: the optimal leaf order of each tree [1] for the centroid-distance cost, mirrored to agree with the previous frame, which is ST-MTM at $r = 1$; on 5 of 614 planar, 51 of 201 Tangaroa and 10 of 102 Cylinder frames the rule keeps the temporally concordant order, which costs no more than the SciPy OLO there. Volumetric OLO trees are rebuilt from the saved hierarchies; the same code reproduces the stored ST-MTM order of every volumetric frame at $r = 0.95$. Scripts: `figure_drafts/stmtm_threshold.py`, `volume_orientation.py`, `olo_volume.py`, `best_mirror.py`.

Space-filling curves. Hilbert and Morton curves linearize the domain rather than the tree [2, 8]. We order the extrema of every frame by the curve index of their grid cells, on the same inputs as all other maps, and measure the induced order (Table S7). Each curve is evaluated in the best of its eight axis-aligned orientations. There its order error falls to 0.3–12.6%, at times below ν^*, because the curve ignores the tree: the least merge error of any profile in that order, δ^* of Proposition S1, reaches 8–40% of the scalar range in the worst frame. Averaged over orientations, the order error is 8.3–23.4%. Their SNS and TW are worse than ST-MTM's on every sequence.

Table S7: Space-filling curves on the five planar sequences, same inputs as all other maps, in their most favourable orientation: order error NROE, worst and mean least merge error δ^*/Δ_F of the curve order, NPE (percent), SNS and TW ($k = 1$). Last row of each sequence: NROE, merge error, SNS and TW of TMTM, ST-MTM and Exact Mode (Table S1, Table S3).

Sequence	Curve	NROE	δ^* worst	δ^* mean	NPE	SNS	TW
Storms	Hilbert	8.46	39.47	4.84	29.73	0.126	0.726
	Morton	5.56	39.47	4.22	27.14	0.131	0.713
	TMTM / ST-MTM / ε=0	18.3 / 16.3 / 3.8	0 / 0 / 0	0 / 0 / 0	–	0.08 / 0.03 / 0.12	0.82 / 0.97 / 0.77
Wildfires	Hilbert	12.60	29.51	4.00	27.84	0.146	0.889
	Morton	2.40	40.12	8.91	23.49	0.085	0.893
	TMTM / ST-MTM / ε=0	19.7 / 18.7 / 5.8	0 / 0 / 0	0 / 0 / 0	–	0.22 / 0.08 / 0.08	0.82 / 0.92 / 0.87
OLR	Hilbert	1.60	24.01	0.69	50.45	0.060	0.881
	Morton	0.91	24.01	2.61	20.80	0.091	0.890
	TMTM / ST-MTM / ε=0	19.3 / 16.6 / 0.9	0 / 0 / 0	0 / 0 / 0	–	0.14 / 0.01 / 0.01	0.81 / 0.98 / 0.96
$PM_{2.5}$	Hilbert	0.97	11.42	0.29	17.83	0.063	0.757
	Morton	0.27	11.42	0.22	8.94	0.070	0.722
	TMTM / ST-MTM / ε=0	4.4 / 5.2 / 1.0	0 / 0 / 0	0 / 0 / 0	–	0.05 / 0.03 / 0.06	0.76 / 0.92 / 0.75
Ring	Hilbert	2.61	7.87	0.79	58.90	0.104	0.899
	Morton	1.12	10.12	1.79	57.37	0.133	0.802
	TMTM / ST-MTM / ε=0	7.2 / 4.5 / 2.7	0 / 0 / 0	0 / 0 / 0	–	0.17 / 0.08 / 0.16	0.71 / 0.92 / 0.69

Each extremum is assigned to its unit grid cell on the smallest power-of-two square covering all extrema of the sequence; the curve index of that cell is its display coordinate. Curves have no canonical orientation on these domains; each is shown in the axis-aligned orientation (of eight) with the lowest mean NROE, the most favourable to the curve. Averaged over the eight orientations, NROE is 8.3–23.4%. δ^* is the smallest merge error of any profile with the curve order (Proposition S1), a lower bound on the merge error of a curve-ordered map. NPE maps the curve index linearly onto the canvas $[\min q, \min q + L]$ and therefore depends on that choice; NROE does not. Scripts: `figure_drafts/space_filling_baselines.py`, `figure_drafts/best_mirror.py`.

S11 Displacement and Layout Jumps in One Interval Model

For the planar sequences, the saved common-model runs also solve two objectives modelled on TMTM and ST-MTM with exact topology in the interval model of AnchorMTM, with the same references and canvas; frame counts and canvas lengths

agree with the trade-off runs. *TMTM-style* aligns each anchor with its previous display position (reference and geometry weights zero); *ST-MTM-style* adds the support-centroid distance term (geometry weight one). Neither has a reference term or a position cap. Both share the widths, gaps, candidate orders and quadratic program of AnchorMTM; they are not reproductions of the original methods, since TMTM optimizes subtree overlap and ST-MTM also optimizes its leaf widths. Table S8 lists their displacement, Table S9 their layout-induced jumps, each layout in the canvas mirror $x \mapsto 2o + L - x$ with the lower mean displacement (only the ST-MTM-style layouts of OLR and Ring are mirrored). The TMTM-style objective keeps its anchors almost still (anchor motion at most 0.43% of L per step) while the references move, so its jump is close to the reference motion.

Table S8: Displacement in one interval model, mean E_{pool} / worst E_∞ (percent of L). TMTM-style and ST-MTM-style: the two objectives of Section S11, solved with exact topology in the same interval model, references and canvas (grey boxes of Fig. 5 of the paper); available for the planar sequences.

Sequence	TMTM-style	ST-MTM-style	ε=0	ε=10%	Projection
Storms	25.31 / 62.8	33.56 / 99.2	4.19 / 26.2	2.40 / 18.5	0.89 / 5.5
Wildfires	16.67 / 48.8	13.94 / 80.7	3.24 / 20.5	1.11 / 7.2	0.64 / 1.2
OLR	24.43 / 63.8	19.33 / 87.6	1.00 / 17.1	0.73 / 17.1	0.57 / 1.7
$PM_{2.5}$	21.71 / 76.0	25.03 / 90.9	1.87 / 20.3	0.75 / 5.9	0.75 / 5.9
Ring	27.37 / 47.5	27.78 / 76.6	2.44 / 11.9	0.69 / 2.8	0.62 / 1.0
Tangaroa	–	–	5.01 / 15.1	3.02 / 13.1	1.18 / 8.0
Cylinder	–	–	3.76 / 27.0	0.54 / 5.3	0.54 / 5.7

Table S9: Layout-induced jump $|\Delta x_i - \Delta q_i|/L$ / anchor motion $|\Delta x_i|/L$ of matched features per step (percent), same interval model. A map that keeps its features still while their references move has a jump close to the reference motion.

Sequence	TMTM-style	ST-MTM-style	ε=0	ε=10%	Projection
Storms	8.55 / 0.13	10.57 / 5.94	5.05 / 10.30	2.47 / 8.83	0.70 / 8.57
Wildfires	1.68 / 0.43	4.50 / 4.44	4.09 / 5.05	0.81 / 1.96	0.39 / 1.71
OLR	5.82 / 0.19	5.93 / 3.56	1.01 / 5.94	0.82 / 5.90	0.60 / 5.67
$PM_{2.5}$	12.39 / 0.24	13.43 / 3.07	2.75 / 13.64	0.85 / 12.35	0.85 / 12.36
Ring	1.30 / 0.12	2.71 / 1.82	2.01 / 2.45	0.47 / 1.46	0.35 / 1.36
Tangaroa	–	–	2.82 / 2.80	2.17 / 2.26	0.33 / 0.64
Cylinder	–	–	3.89 / 5.12	0.42 / 2.64	0.39 / 2.59

S12 Storms: Maps and Marked Barriers

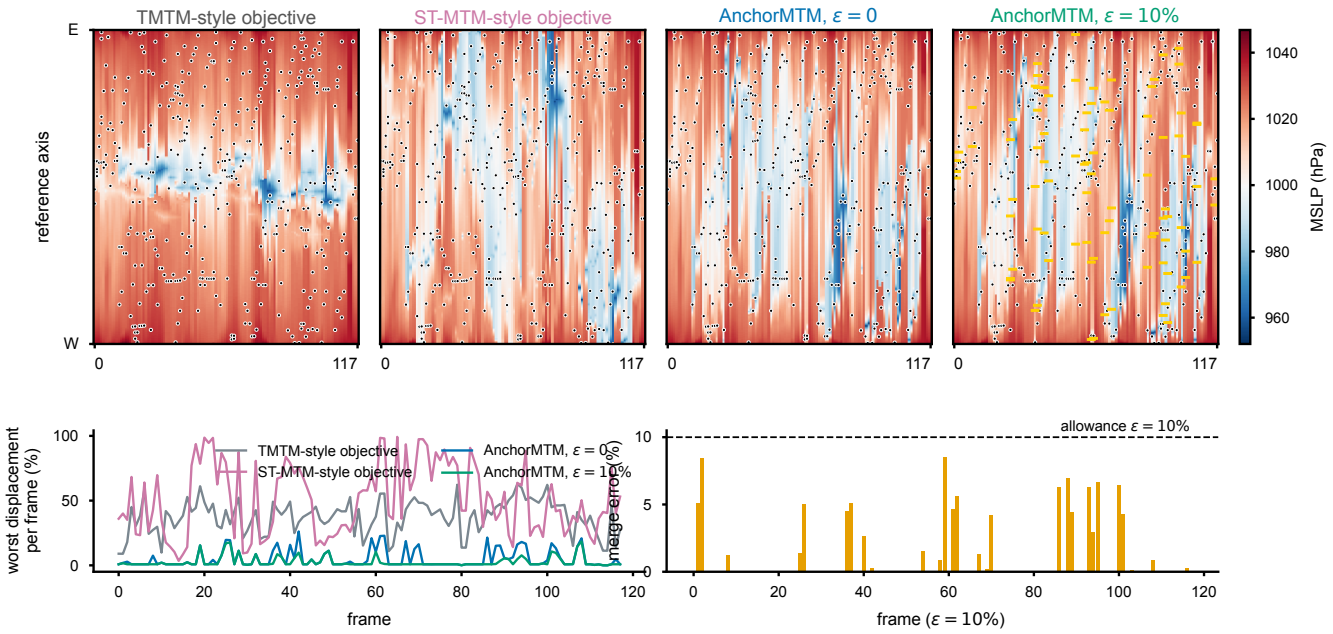


Figure S2: Storms, 118 half-day frames. Top: maps that differ only in the objective, all in the same interval model; dots mark references. On the $\varepsilon = 10\%$ map, yellow ticks mark the 89 barriers whose displayed merge level differs from the source by more than 0.1% of the scalar range. Bottom left: worst displacement per frame; averaged over frames (NPE), 37.3%, 50.7%, 5.1% and 2.7%. Bottom right: merge error per frame at $\varepsilon = 10\%$; the budget is used in 31 of 118 frames, at most 8.51% and 0.90% on average.

S13 OLR: Hovmöller Diagram Along the Reference

Construction. The reference is the stored automatic direction a (171°, roughly east to west), with $q = \langle a, p \rangle$ and the canvas given by the projected domain corners; the stored references are reproduced exactly. For 128 equally spaced positions u on the canvas, the Hovmöller profile averages the processed field from which the merge trees are built over the line through u perpendicular to a, using bilinear samples every 0.5 grid units inside the domain. Binning grid points directly would alias, because bins would be narrower than the grid spacing.

Feature resolution. A source minimum is resolved by a profile if the profile has its own local minimum (plateaus counted once) within δ of the minimum's reference position, with one-to-one nearest-first matching; $\delta \in \{2\%, 5\%\}$ was fixed before the evaluation. The depth error is the profile value at the matched dip minus the source extremum value. The Hovmöller profile has on average 12.1 local minima per day against 4.4 source minima, so this matching favours it. The merge tree maps have exactly one dip per minimum; a minimum is unresolved by them if its dip is displaced by more than δ or is taken first by a nearer neighbouring minimum.

Column change. For each rendered map I, the change between consecutive steps is the mean absolute difference of the two columns, normalized by the scalar range. A step has a topological event if a track identity appears or vanishes.

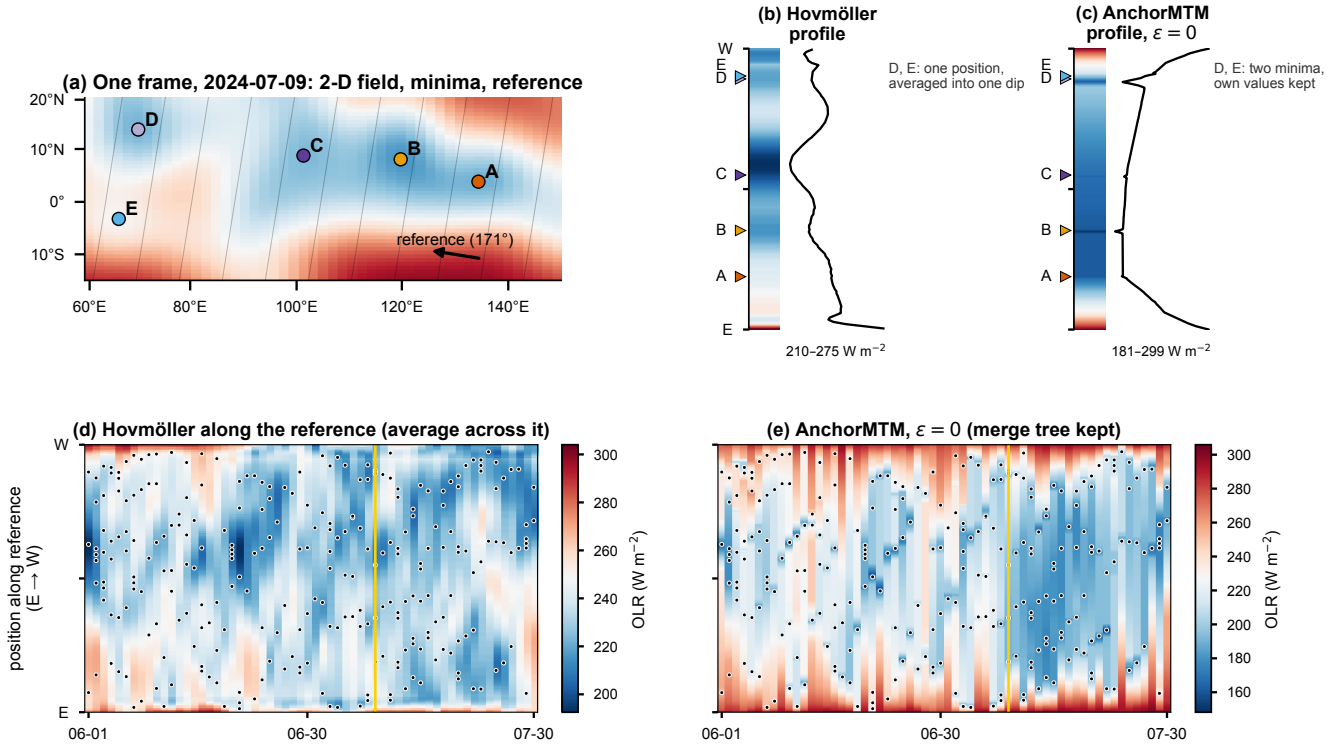


Figure S3: One OLR day (9 July 2024) with five minima. (a) Field, minima and reference direction; thin lines indicate the averaging direction. (b) Hovmöller profile: D and E share a reference position at different latitudes and are averaged into one shallow dip. (c) AnchorMTM profile at $\varepsilon = 0$: five dips at the exact extremum values. (d, e) The 60-day Hovmöller diagram and Exact-Mode map with reference positions; the yellow line marks the day of (a)–(c). Each panel uses its own colour range.

Table S10: OLR, 60 days, 264 minima. Share of minima with their own profile dip within δ of their reference position (percent; one-to-one, nearest first), and depth error of matched dips, mean / median (W m^{-2}). δ was fixed before the evaluation.

Profile	δ=2%	δ=5%	depth, δ=2%	depth, δ=5%
Hovmöller	58.7	77.3	31.7 / 34.5	30.8 / 31.8
AnchorMTM, $\varepsilon = 0$	94.3	96.6	-0.0 / 0.0	0.1 / 0.0
AnchorMTM, $\varepsilon = 10\%$	98.5	99.2	0.1 / 0.0	0.0 / 0.0

Table S11: Mean column change $\frac{1}{L}\int |I(t+1,u)-I(t,u)|\,du$ of the rendered maps, in percent of the scalar range, overall and at steps without and with a topological event (a tracked minimum appears or vanishes), and its Spearman correlation with the number of events. In parentheses: steps with an event / all steps.

Sequence	Map	all	no event	event	ρ_S
OLR (59/59)	TMTM-style	5.07	–	5.07	0.36
OLR (59/59)	ST-MTM-style	7.82	–	7.82	0.01
OLR (59/59)	AnchorMTM, $\varepsilon = 0$	9.04	–	9.04	0.19
OLR (59/59)	AnchorMTM, $\varepsilon = 10\%$	9.11	–	9.11	0.20
OLR (59/59)	Hovmöller	4.10	–	4.10	0.06
Storms (100/117)	TMTM-style	3.28	1.68	3.56	0.24
Storms (100/117)	ST-MTM-style	7.27	3.52	7.91	0.18
Storms (100/117)	AnchorMTM, $\varepsilon = 0$	9.46	4.14	10.36	0.22
Storms (100/117)	AnchorMTM, $\varepsilon = 10\%$	9.12	4.27	9.94	0.21
Ring (24/39)	TMTM-style	0.57	0.29	0.74	0.51
Ring (24/39)	ST-MTM-style	2.61	1.02	3.60	0.52
Ring (24/39)	AnchorMTM, $\varepsilon = 0$	2.11	0.97	2.83	0.39
Ring (24/39)	AnchorMTM, $\varepsilon = 10\%$	1.77	0.90	2.32	0.45

S14 Reference Direction in 3D

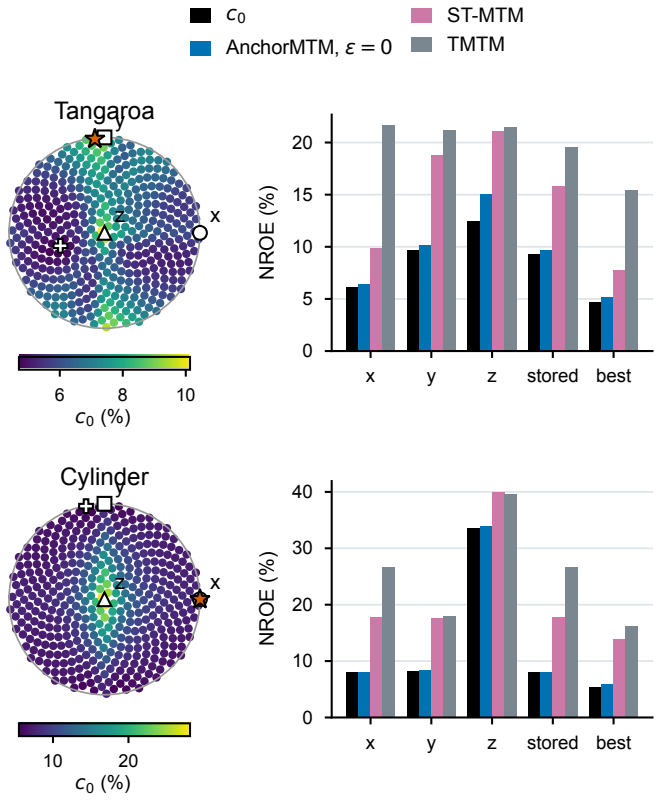


Figure S4: Choosing the reference in 3D. Disks: mean order bound c_0 at the numerical allowance (Section S16) over 400 sampled directions of the hemisphere (equal-area projection; centre $= z$, rim $= xy$ plane); markers: coordinate axes, the stored direction (star; estimated motion direction on Tangaroa, streamwise axis on Cylinder) and the smallest bound (cross). Bars: c_0 and mean order error of Exact Mode, ST-MTM and TMTM for the key directions (native orientations chosen in their favour). The coordinate axes are evaluated in addition to the 400 samples.

S15 One Tracked Feature Across Six Budgets

Vortex is a 90-frame volumetric diagnostic outside the benchmark aggregates. It shows that aggregate gains are not pointwise gains: raising ε from 20% to 30% more than halves the pooled displacement (8.79% to 4.27% of L), while 30.91% of the 12,446 feature–frame observations move farther from their references, 24.72% by at least 0.5 percentage points of L (`code/results/local_redistribution20261030`).

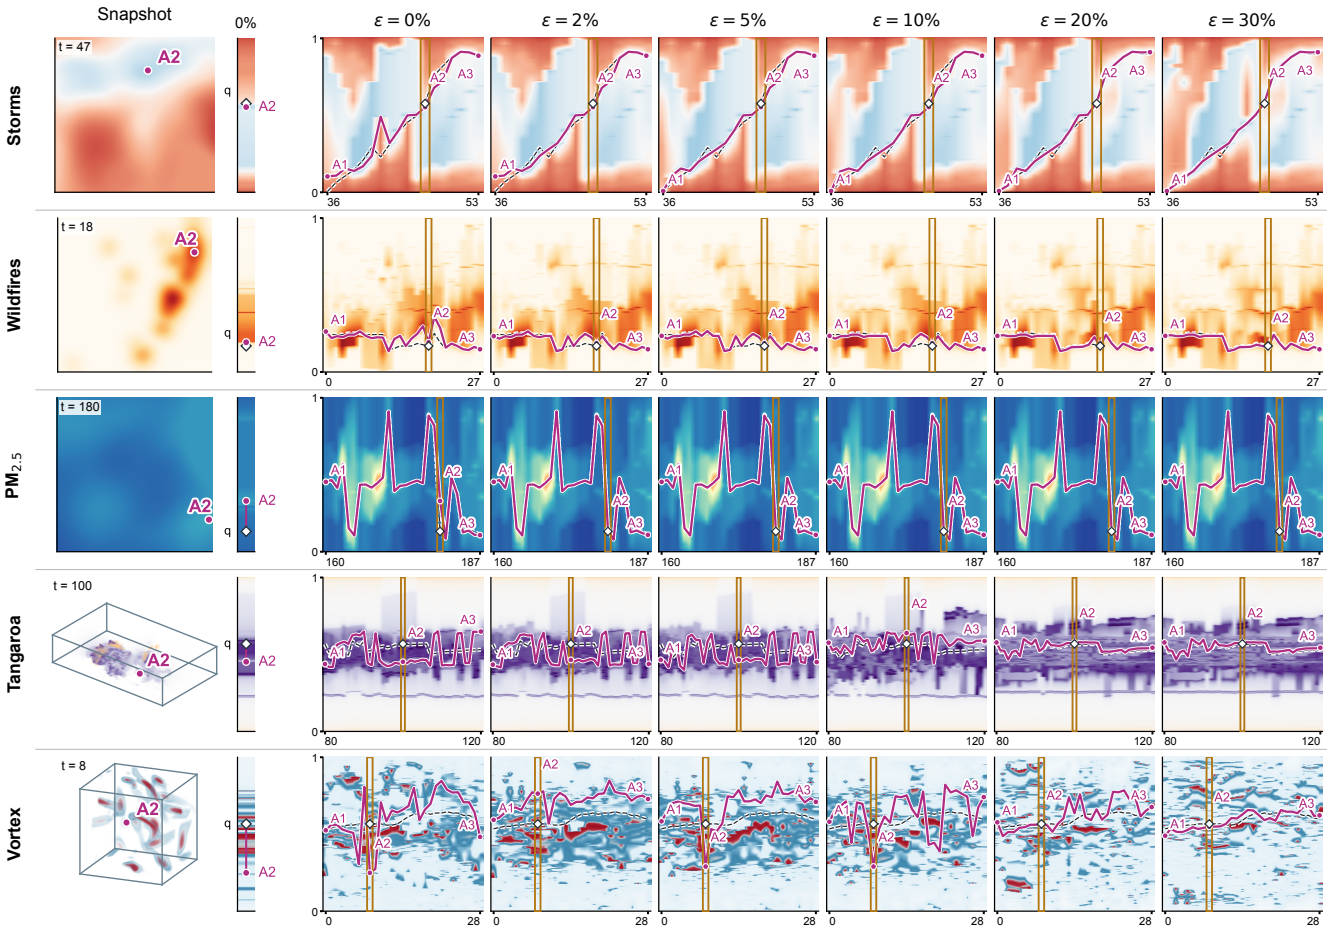


Figure S5: Snapshots, exact-layout strips and budget responses for Storms, Wildfires, $PM_{2.5}$, Tangaroa and Vortex. Each row shows the same tracked extremum at the window start (A1), snapshot time (A2) and window end (A3), across $\varepsilon = 0, 2, 5, 10, 20, 30\%$. Circles indicate mapped positions and diamonds spatial references; gold boxes select the snapshot profile column. Black dashed curves show the reference trajectory. Volume snapshots include their actual domain boxes; Tangaroa is non-cubic. Within each row all budgets share a colour scale. Tangaroa and Vortex use their volume-rendering RGB transfer functions; $PM_{2.5}$ uses a fixed [12,80] display range for the selected window.

S16 Numerical Allowance of the Order Bound

Table S12: Mean order bound (percent) for maps whose merge error is at most $\varepsilon_0\Delta_F$, for several numerical allowances ε_0. Rows give the optimum attained by the order search, which equals C_η of Theorem S3 at $\eta = \varepsilon_0\Delta_F$ on every frame; for Cylinder, the weaker bound obtained by flattening every parent gap of at most 2η is also listed. Last column: value used in the paper ($\varepsilon_0 = 10^{-7}$).

Sequence	0	10^{-8}	10^{-7}	10^{-6}	10^{-5}	paper
Storms	3.77	3.77	3.77	3.77	3.77	3.77
Wildfires	5.80	5.80	5.80	5.80	5.80	5.80
OLR	0.89	0.89	0.89	0.89	0.89	0.89
$PM_{2.5}$	0.97	0.97	0.97	0.97	0.97	0.97
Ring	2.66	2.66	2.66	2.66	2.66	2.66
Tangaroa	9.24	9.24	9.24	9.24	9.24	9.24
Cylinder (attained)	12.24	11.22	8.01	6.15	5.91	8.01
Cylinder (flattening only)	12.24	11.22	7.72	6.15	5.84	–

Only Cylinder is sensitive. At $\varepsilon_0 = 10^{-7}$, flattening every parent gap of at most $2\varepsilon_0\Delta_F$ and applying Theorem S1 gives 7.72%, the value reported in earlier drafts. It is valid but not attained: on frames 58 and 62, chains of near-tied saddles make it certify 4.85% and 4.48%, but the order that reaches these values has merge error 1.6 and 2.0 times $\varepsilon_0\Delta_F$. Enumerating all 92,160 and 368,640 orders that are legal after this flattening and keeping those within the allowance gives the optimum 19.03% and 19.40%, equal to C_η of Theorem S3 at $\eta = \varepsilon_0\Delta_F$. On every frame the order search attains C_η (102/102 frames, merge error below $\varepsilon_0\Delta_F$), so the paper reports $c_0 = 8.01\%$ for Exact Mode. TMTM and ST-MTM have zero merge error, so they are measured against the strict bound v^* of the exact tree ($\varepsilon_0 = 0$), 12.24%: their avoidable shares on Cylinder in Fig. 4a are 54% and 31% (against $c_0 = 8.01\%$ they would be 70% and 55%). Exact Mode, which keeps the numerical allowance, is measured against c_0.

References

[1] Z. Bar-Joseph, D. K. Gifford, and T. S. Jaakkola. Fast optimal leaf ordering for hierarchical clustering. *Bioinformatics*, 17(Suppl. 1):S22–S29, June 2001. doi: 10.1093/bioinformatics/17.suppl_1.s22

[2] R. Dafner, D. Cohen-Or, and Y. Matias. Context-based space filling curves. *Computer Graphics Forum*, 19(3):209–218, 2000. doi: 10.1111/1467-8659.00413

[3] M. Diaz, J. Heredia, N. Ferreira, and J. Poco. Spatiotemporal merge tree maps: A topology and geometry aware visualization for temporal scalar data, 2026. Preprint, SSRN 6604235. doi: 10.2139/ssrn.6604235

[4] E. Gasparovic, E. Munch, S. Oudot, K. Turner, B. Wang, and Y. Wang. Intrinsic interleaving distance for merge trees. *La Matematica*, 4(1):40–65, 2025. doi: 10.1007/s44007-024-00143-9

[5] W. Köpp and T. Weinkauf. Temporal merge tree maps: A topology-based static visualization for temporal scalar data. *IEEE Transactions on Visualization and Computer Graphics*, 29(1):1157–1167, Jan. 2023. doi: 10.1109/tvcg.2022.3209387

[6] D. Morozov, K. Beketayev, and G. H. Weber. Interleaving distance between merge trees. `https://mrzv.org/publications/interleaving-distance-merge-trees/`, 2013. Manuscript presented at TopoInVis.

[7] E. Munch and A. Stefanou. The ℓ^∞-cophenetic metric for phylogenetic trees as an interleaving distance. In *Research in Data Science*, pp. 109–127. Springer, Cham, Switzerland, 2019. doi: 10.1007/978-3-030-11566-1_5

[8] J. Weißenböck, B. Fröhler, E. Gröller, J. Kastner, and C. Heinzl. Dynamic volume lines: Visual comparison of 3D volumes through space-filling curves. *IEEE Transactions on Visualization and Computer Graphics*, 25(1):1040–1049, 2019. doi: 10.1109/tvcg.2018.2864510