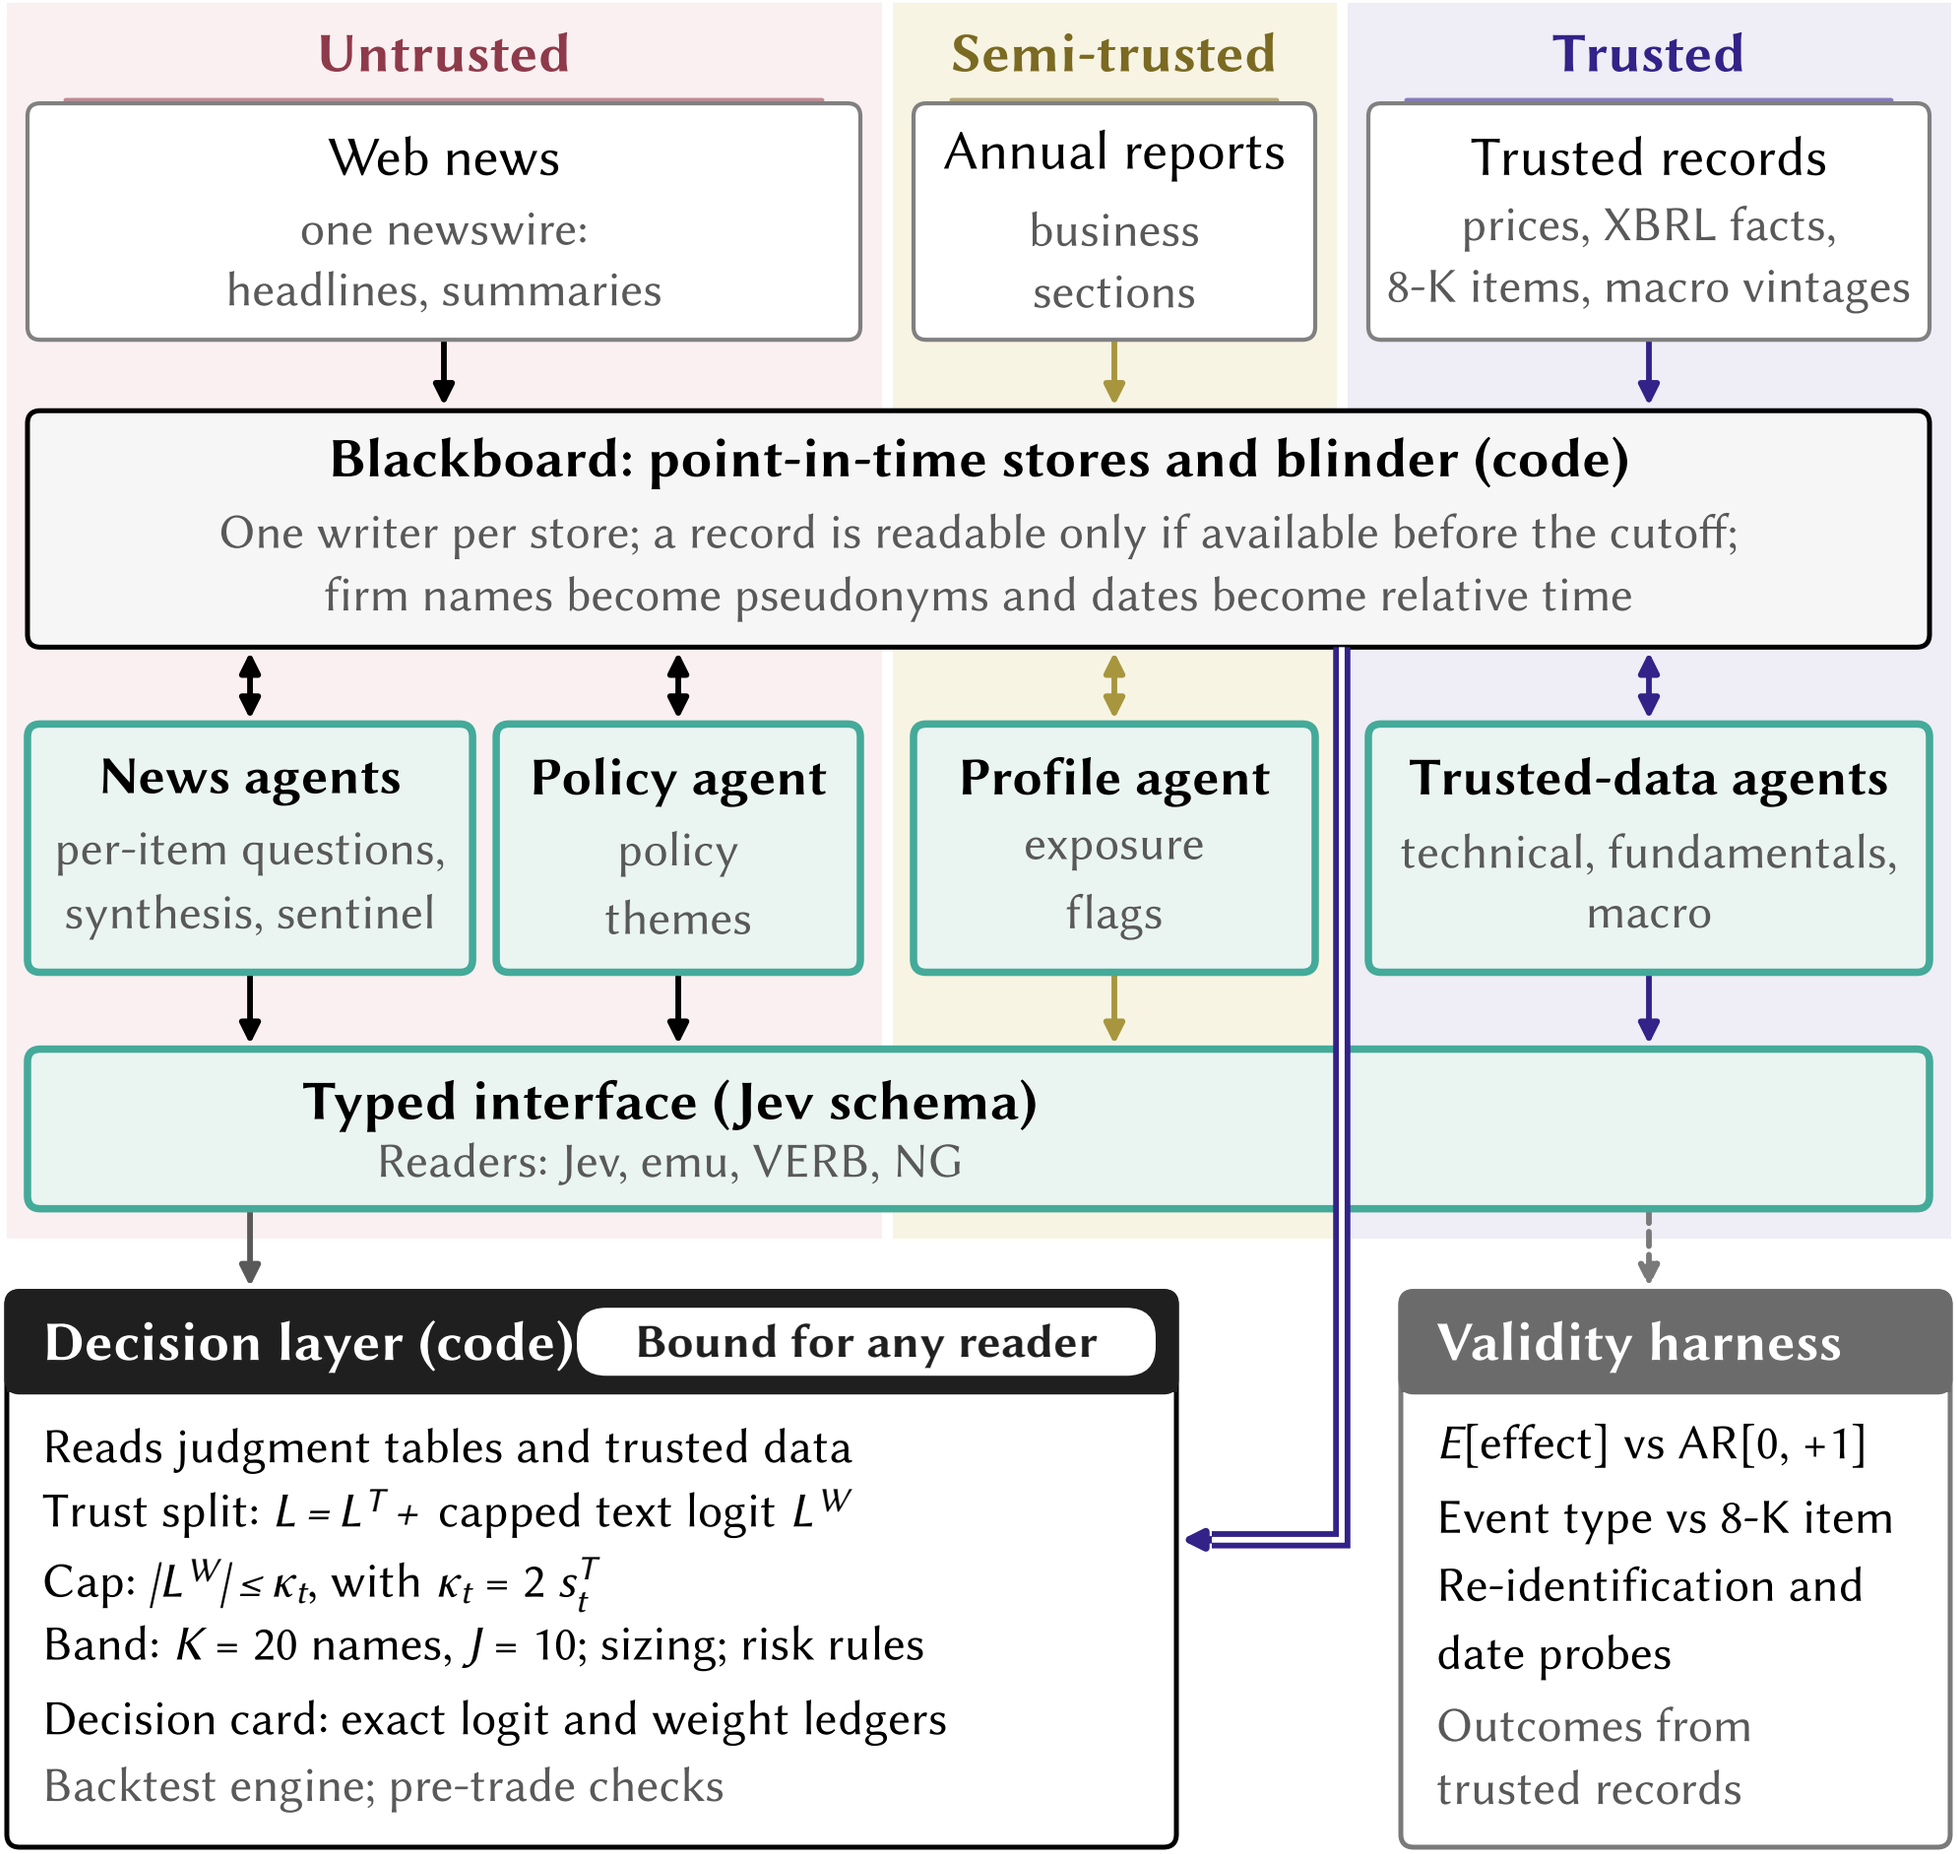
Untrusted
Semi-trusted
Trusted
Web news
one newswire:
headlines, summaries
Annual reports
business
sections
Trusted records
prices, XBRL facts,
8-K items, macro vintages
Blackboard: point-in-time stores and blinder (code)
One writer per store; a record is readable only if available before the cutoff;
firm names become pseudonyms and dates become relative time
News agents
per-item questions,
synthesis, sentinel
Policy agent
policy
themes
Profile agent
exposure
flags
Trusted-data agents
technical, fundamentals,
macro
Typed interface (Jev schema)
Readers: Jev, emu, VERB, NG
Decision layer (code)
Bound for any reader
Reads judgment tables and trusted data
Trust split: $L = L^T +$ capped text logit L^W
Cap: $|L^W| \le \kappa_t$, with $\kappa_t = 2\, s_t^T$
Band: $K = 20$ names, $J = 10$; sizing; risk rules
Decision card: exact logit and weight ledgers
Backtest engine; pre-trade checks
Validity harness
E[effect] vs AR[0, +1]
Event type vs 8-K item
Re-identification and
date probes
Outcomes from
trusted records