Script-Controlled ACL – Restrict Record Access Based on Field Value

Project Planning Phase: Project Planning Template (Product Backlog, Sprint Planning, Stories, Story points)

Date:	October 3, 2026	**Maximum Marks:**	4 Marks
Team ID:	SWTID-2026-8089	**Project Name:**	Script-Controlled ACL

Product Backlog, Sprint Schedule, and Estimation (4 Marks)

Use the below template to create product backlog and sprint schedule

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	User & Role Management	USN-1	As an administrator, I can create the EEE User so that record-level access can be tested.	2	High	To be filled
Sprint-1	User & Role Management	USN-2	As an administrator, I can create the custom roles bb1, bb2, bb3 and bb4 and assign them to the EEE User.	3	High	To be filled
Sprint-1	Custom Table Setup	USN-3	As an administrator, I can create the Institution Details table (u_institution_details) with the required fields, including the Branch choice field (ECE, EEE, CSE).	3	High	To be filled
Sprint-1	Custom Table Setup	USN-4	As an administrator, I can create sample records with different Branch values (ECE, EEE, CSE) to test access control.	2	High	To be filled
Sprint-2	Access Control (ACL) Configuration	USN-5	As an administrator, I can elevate to security_admin and create a script-controlled READ ACL (role bb1, data condition Branch is EEE, advanced script) so that only EEE records are visible.	5	High	To be filled
Sprint-2	Access Control (ACL) Configuration	USN-6	As an administrator, I can create a CREATE ACL that requires the bb2 role so that authorized users can add records.	2	High	To be filled
Sprint-2	Access Control (ACL) Configuration	USN-7	As an administrator, I can create a WRITE ACL that requires the bb3 role so that authorized users can edit records.	2	High	To be filled
Sprint-2	Access Control (ACL) Configuration	USN-8	As an administrator, I can create a DELETE ACL that requires the bb4 role so that authorized users can delete records.	2	High	To be filled
Sprint-2	Validation & Testing	USN-9	As a tester, I can impersonate the EEE User, a user without roles and the administrator to verify that read access follows the ACL.	2	High	To be filled
Sprint-2	Validation & Testing	USN-10	As a tester, I can verify the create, edit and delete operations for a user holding bb1, bb2, bb3 and bb4.	2	Medium	To be filled

Project Tracker, Velocity & Burndown Chart: (4 Marks)

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	10	6 Days	To be filled	To be filled	10	To be filled
Sprint-2	15	6 Days	To be filled	To be filled	15	To be filled


Velocity:

For this ServiceNow project, Sprint-1 contains 10 story points and Sprint-2 contains 15 story points. Average velocity is calculated as total completed story points divided by the number of sprints.

Average Velocity (AV) = Total Story Points / Number of Sprints = (10 + 15) / 2 = 25 / 2 = **12.5 story points per sprint**

Burndown Chart:

A burndown chart shows the amount of work remaining over the project timeline. For this project, the planned remaining work is 25 story points at the start, 15 story points after Sprint-1, and 0 after Sprint-2.

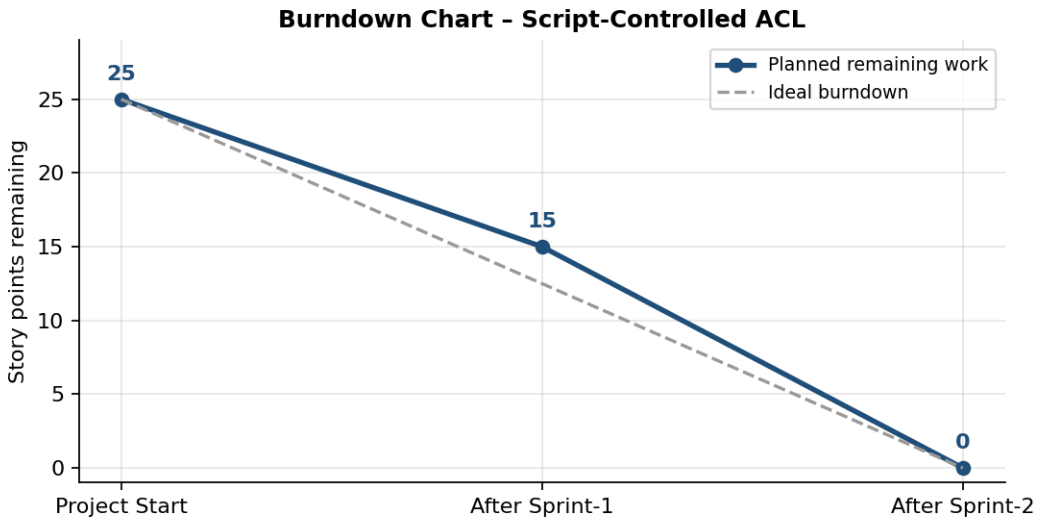

Project Planning Logic

Sprint-1 focuses on creating the EEE User, the custom roles (bb1–bb4), the Institution Details table and the sample records. Sprint-2 focuses on creating the READ, CREATE, WRITE and DELETE ACLs and on validating access through impersonation.

Total Story Points = 10 + 15 = 25. Number of Sprints = 2. Average Velocity = 25 / 2 = 12.5 Story Points per Sprint.

Planned Burndown: Project Start = 25 points remaining; after Sprint-1 = 15 points remaining; after Sprint-2 = 0 points remaining