

Dead Code

YEGOR BUGAYENKO

Lecture #12 out of 24

80 minutes

The slidedeck was presented by the author in this [YouTube Video](#)

All visual and text materials presented in this slidedeck are either originally made by the author or taken from public Internet sources, such as web sites. Copyright belongs to their respected authors.

Motivating Example

Before (**wrong**):

```
1 class Book
2     private int id;
3     public Book(int it)
4         this.id = i;
5     public int getId()
6         return this.id;
7
8     private int setId(int i)
9         this.id = i;
```

After (**better**):

```
1 class Book
2     private final int id;
3     public Book(int it)
4         this.id = i;
5     public int getId()
6         return this.id;
```

Dead Code Elimination (Compiler Optimization)

Dead code is here:

```
1 void main(int x) {  
2     int a = 42;  
3     if (x > 0) {  
4         a = 256;  
5     }  
6     a = 7;  
7     print(a);  
8 }
```

“Dead code refers to computations whose results are never used. Code that is dead can be eliminated without affecting the behavior of the program.”

Source: *Compiler Techniques for Code Compaction*, Saumya K. Debray, William Evans, Robert Muth, Bjorn De Sutter, ACM Transactions on Programming languages and Systems (TOPLAS), 22(2), 2000



MIKA MÄNTYLÄ

“Dead code is code that has been used in the past, but is currently never executed. Dead code hinders code comprehension and makes the current program structure less obvious.”

— M. Mantyla, J. Vanhanen, and C. Lassenius. A Taxonomy and an Initial Empirical Study of Bad Smells in Code. In *Proceedings of the International Conference on Software Maintenance*, 2003. doi:[10.1109/icsm.2003.1235447](https://doi.org/10.1109/icsm.2003.1235447)



SEBASTIAN EDER

“We conducted the study on the level of methods in the sense of object oriented programming. The systems contains 25,390 methods. We found that 25% of all methods were never used during the complete period.”

— Sebastian Eder, Maximilian Junker, Elmar Jurgens, Benedikt Hauptmann, Rudolf Vaas, and Karl-Heinz Prommer. How Much Does Unused Code Matter for Maintenance? In *Proceedings of the 34th International Conference on Software Engineering (ICSE)*, 2012. doi:[10.1109/icse.2012.6227109](https://doi.org/10.1109/icse.2012.6227109)

Unreachable/Dead Methods in Java

Table 1: Dataset Information					
Software		LOCs	#Types	#Meth.	#Un. Meth. %Un. Meth.
ArtOfIllusion	2.4.1	79,383	600	5,426	545 10%
LaTeXDraw	2.0.8	65,334	252	3,130	212 7%
aTunes	1.10.1	42,357	778	4,067	240 6%
MediaPesata	1.0	1,580	31	162	8 5%

Source: *A Graph-based Approach to Detect Unreachable Methods in Java Software*, Simone Romano, Giuseppe Scanniello, Carlo Sartiani, Michele Risi, Proceedings of the 31st Annual ACM Symposium on Applied Computing, 2016



SIMONE ROMANO

“Although there is some consensus on the fact that dead code is a common phenomenon, it could be harmful, and it seems to matter to software professionals; surprisingly, dead code has received very little empirical attention from the software engineering research community.”

— Simone Romano, Christopher Vendome, Giuseppe Scanniello, and Denys Poshyvanyk. A Multi-Study Investigation into Dead Code. *IEEE Transactions on Software Engineering*, 2018. doi:[10.1109/tse.2018.2842781](https://doi.org/10.1109/tse.2018.2842781)

Volatility Metric



“The variance $\text{Var}(g)$ is the **Volatility** of the source code. The smaller the Volatility the more *cohesive* is the repository and the smaller the amount of the abandoned code inside it.”

Then, the mean μ is calculated as:

$$\mu = \frac{1}{Z} \sum_{j=1}^Z g_j \quad (5)$$


Finally, the variance is calculated as:

$$\text{Var}(g) = \frac{1}{Z} \sum_{j=1}^Z |g_j - \mu|^2 \quad (6)$$

The variance $\text{Var}(g)$ is the Volatility of the source code.

Source: Yegor Bugayenko. Volatility Metric to Detect Anomalies in Source Code Repositories. In *Proceedings of the 1st ACM SIGPLAN International Workshop on Beyond Code: No Code*, pages 1–4, 2021. doi:[10.1145/3486949.3486961](https://doi.org/10.1145/3486949.3486961)

Volatility vs. Number of Files in a Repo

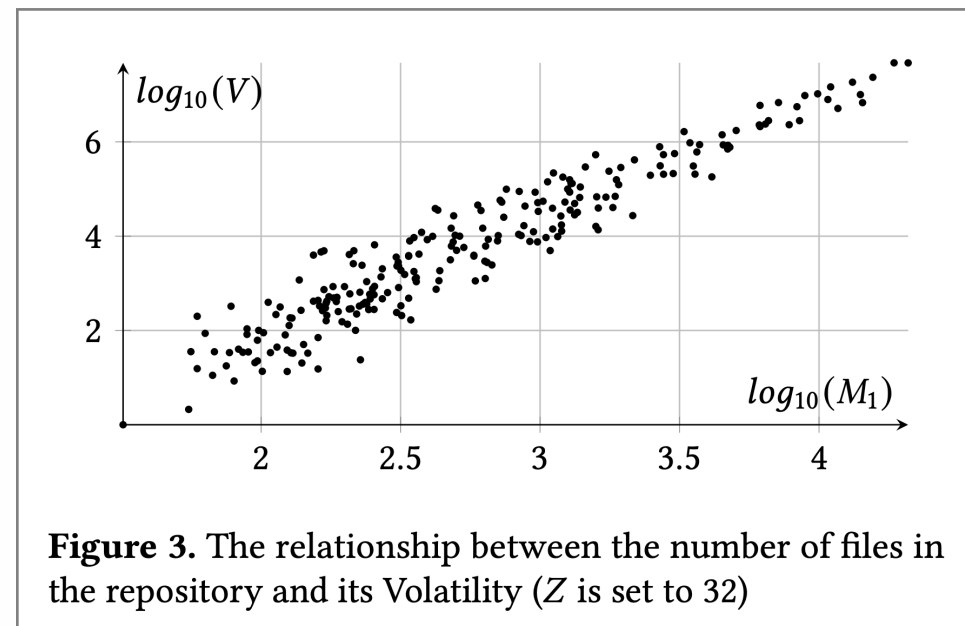

Source: Yegor Bugayenko. Volatility Metric to Detect Anomalies in Source Code Repositories. In *Proceedings of the 1st ACM SIGPLAN International Workshop on Beyond Code: No Code*, pages 1–4, 2021.
 doi:[10.1145/3486949.3486961](https://doi.org/10.1145/3486949.3486961)



CIERA JASPAN

“Our survey results show that engineers at Google strongly prefer our monolithic repo, and that visibility of the codebase and simple dependency management were the primary factors for this preference.”

— Ciera Jaspan, Matthew Jorde, Andrea Knight, Caitlin Sadowski, Edward K Smith, Collin Winter, and Emerson Murphy-Hill. Advantages and Disadvantages of a Monolithic Repository: A Case Study at Google. In *Proceedings of the 40th International Conference on Software Engineering: Software Engineering in Practice*, pages 225–234, 2018.
[doi:10.1145/3183519.3183550](https://doi.org/10.1145/3183519.3183550)

Monolithic Repositories

Centralization The codebase is contained in a single repo encompassing multiple projects.

Visibility Code is viewable and searchable by all engineers in the organization.

Synchronization: The development process is trunk-based; engineers commit to the head of the repo.

Completeness Any project in the repo can be built only from dependencies also checked into the repo.

Dependencies are unversioned; projects must use whatever version of their dependency is at the repo head.

Standardization A shared set of tooling governs how engineers interact with the code, including building, testing, browsing, and reviewing code.

Source: Ciera Jaspan, Matthew Jorde, Andrea Knight, Caitlin Sadowski, Edward K Smith, Collin Winter, and Emerson Murphy-Hill. Advantages and Disadvantages of a Monolithic Repository: A Case Study at Google. In *Proceedings of the 40th International Conference on Software Engineering: Software Engineering in Practice*, pages 225–234, 2018. doi:[10.1145/3183519.3183550](https://doi.org/10.1145/3183519.3183550)



RACHEL POTVIN

“The **Google** codebase includes approximately one billion files and has a history of approximately 35 million commits spanning Google’s entire 18-year existence. The repository contains 86TBa of data, including approximately two billion lines of code in nine million unique source files.”

— Rachel Potvin and Josh Levenberg. Why Google Stores Billions of Lines of Code in a Single Repository. *Communications of the ACM*, 2016.
[doi:10.1145/2854146](https://doi.org/10.1145/2854146)



DURHAM GOODE

“**Facebook**’s main source repository is enormous—many times larger than even the Linux kernel, which checked in at 17 million lines of code and 44,000 files in 2013.”

— Rain Durham Goode. Scaling Mercurial at Facebook.
<https://engineering.fb.com/2014/01/07/core-infra/scaling-mercurial-at-facebook/>, 2014. [Online; accessed 15-03-2024]



TOMAS VOTRUBA

“Before monorepo, I had to upgrade every package manually, which resulted in dissonance: one package used Symfony\Console 3.2, but other only 2.8 and it got messy for no reason.”

— Tomas Votruba. How Monolithic Repository in Open Source Saved My Laziness. <https://tomasvotruba.com/blog/2017/01/31/how-monolithic-repository-in-open-source-saved-my-laziness>, 2017. [Online; accessed 15-03-2024]

What About Yandex?

Сейчас большая часть исходного кода проектов Яндекса хранится в едином репозитории, либо находится в процессе переезда в него:

- над проектами трудятся более 2000 разработчиков.
- более 50 000 проектов и библиотек.
- размер репозитория превышает 25 Гб.
- в репозиторий уже совершено более 3 000 000 коммитов.

Source: Alexey Kruglov. Continuous Integration in Yandex.

<https://habr.com/ru/companies/yandex/articles/428972/>, nov 2018. [Online; accessed 15-12-2024]

Benefits of “Manyrepo” Approach

Encapsulation Each repo encapsulates and hides its details from everybody else.

Fast Builds When a repo is small, the time its automated build takes is small.

Accurate Metrics Calculating LoC for a large repository doesn't make any sense.

Homogeneous Tasks It's easier to make tasks similar in size and complexity.

Single Coding Standard Smaller repositories look more beautiful.

Short Names Smaller namespaces mean better maintainability.

Simple Tests More dependencies are difficult to mock and test.

Source: Yegor Bugayenko. Monolithic Repos Are Evil. <https://www.yegor256.com/180905.html>, sep 2018.
[Online; accessed 15-12-2024]

References

Yegor Bugayenko. Monolithic Repos Are Evil.
<https://www.yegor256.com/180905.html>, sep 2018. [Online; accessed 15-12-2024].

Yegor Bugayenko. Volatility Metric to Detect Anomalies in Source Code Repositories. In *Proceedings of the 1st ACM SIGPLAN International Workshop on Beyond Code: No Code*, pages 1–4, 2021. doi:[10.1145/3486949.3486961](https://doi.org/10.1145/3486949.3486961).

Rain Durham Goode. Scaling Mercurial at Facebook.
<https://engineering.fb.com/2014/01/07/core-infra/scaling-mercurial-at-facebook/>, 2014. [Online; accessed 15-03-2024].

Sebastian Eder, Maximilian Junker, Elmar Jurgens, Benedikt Hauptmann, Rudolf Vaas, and Karl-Heinz Prommer. How Much Does Unused Code Matter for Maintenance? In *Proceedings of the 34th International Conference on Software Engineering (ICSE)*, 2012.

doi:[10.1109/icse.2012.6227109](https://doi.org/10.1109/icse.2012.6227109).

Ciera Jaspán, Matthew Jorde, Andrea Knight, Caitlin Sadowski, Edward K Smith, Collin Winter, and Emerson Murphy-Hill. Advantages and Disadvantages of a Monolithic Repository: A Case Study at Google. In *Proceedings of the 40th International Conference on Software Engineering: Software Engineering in Practice*, pages 225–234, 2018. doi:[10.1145/3183519.3183550](https://doi.org/10.1145/3183519.3183550).

Alexey Kruglov. Continuous Integration in Yandex.
<https://habr.com/ru/companies/yandex/articles/428972/>, nov 2018. [Online; accessed 15-12-2024].

M. Mantyla, J. Vanhanen, and C. Lassenius. A Taxonomy and an Initial Empirical Study of Bad Smells in Code. In *Proceedings of the International Conference on Software Maintenance*, 2003. doi:[10.1109/icsm.2003.1235447](https://doi.org/10.1109/icsm.2003.1235447).

Rachel Potvin and Josh Levenberg. Why Google Stores Billions of Lines of Code in a Single Repository. *Communications of the ACM*, 2016. doi:[10.1145/2854146](https://doi.org/10.1145/2854146).

Simone Romano, Christopher Vendome, Giuseppe Scanniello, and Denys Poshyvanyk. A Multi-Study Investigation into Dead Code. *IEEE Transactions on Software Engineering*, 2018. doi:[10.1109/tse.2018.2842781](https://doi.org/10.1109/tse.2018.2842781).

Tomas Votruba. How Monolithic Repository in Open Source Saved My Laziness. <https://tomasvotruba.com/blog/2017/01/31/how-monolithic-repository-in-open-source-saved-my-laziness>, 2017. [Online; accessed 15-03-2024].