

UML



and XMI, OCL, MOF, etc.

Yegor Bugayenko

Lecture #8 out of 16
80 minutes

The slidedeck was presented by the author in this [YouTube Video](#).

All visual and text materials presented in this slidedeck are either originally made by the author or taken from public Internet sources, such as web sites. Copyright belongs to their respected authors.

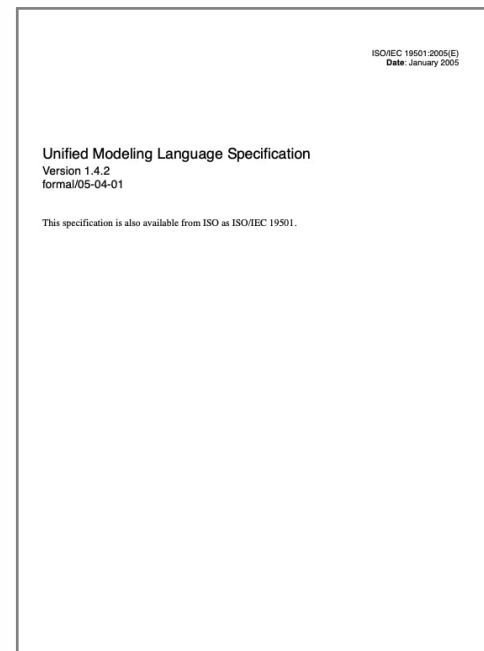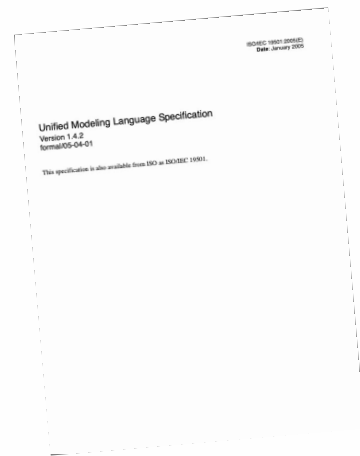

“The primary audience for this detailed description consists of the OMG, other standards organizations, tool builders, metamodelers, methodologists, and expert modelers. The authors assume familiarity with metamodeling and advanced object modeling. Readers looking for an introduction to the UML or object modeling should consider another source.”

— International Standardization Organization ISO. *ISO/IEC 19501:2005: Information Technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2*. 2005



Class Diagram

Some Other Diagrams

MDA: MOF, XMI, OCL, QVT, fUML, ...


Books, Venues, Call-to-Action

Chapter #1:


Class Diagram

[Classes Generalization Composition Aggregation Association Dependency]

Classes

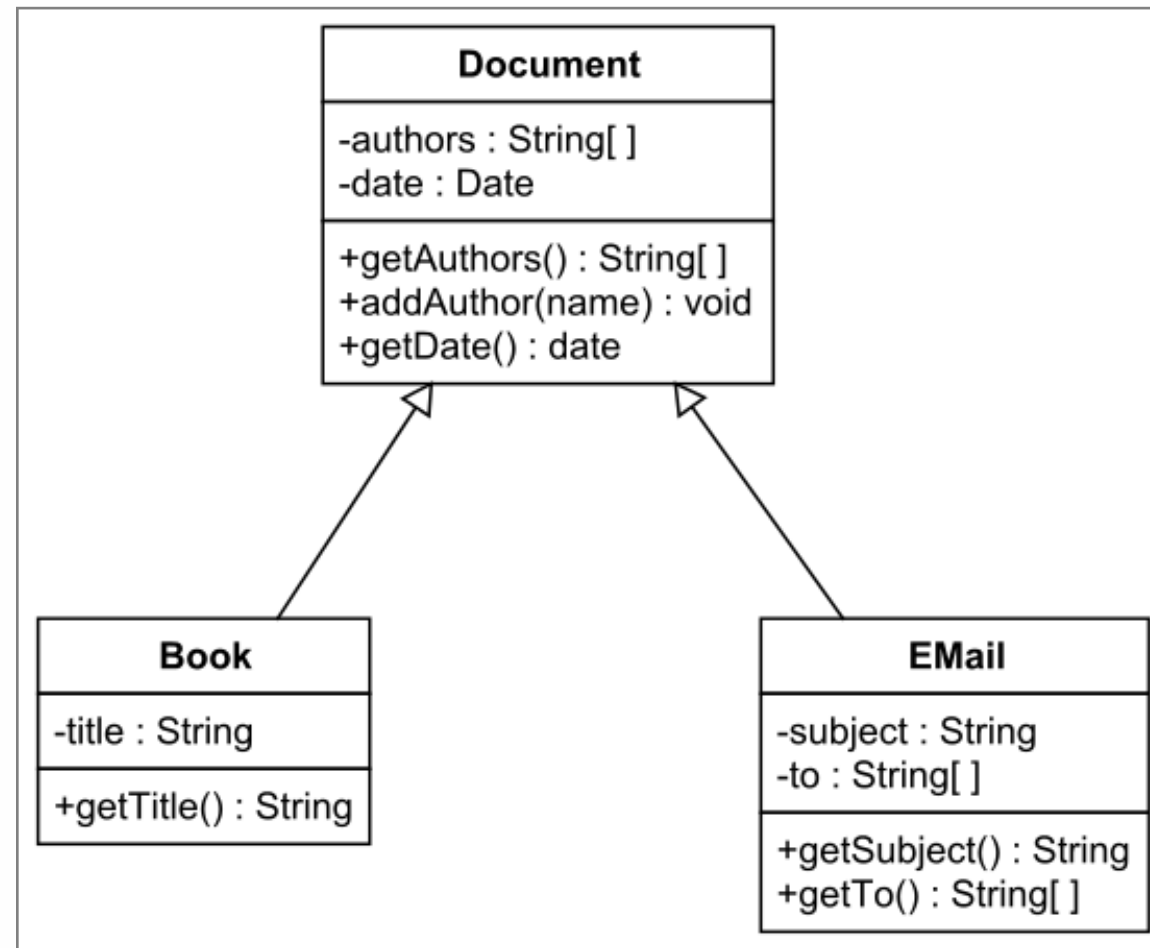


Generalization

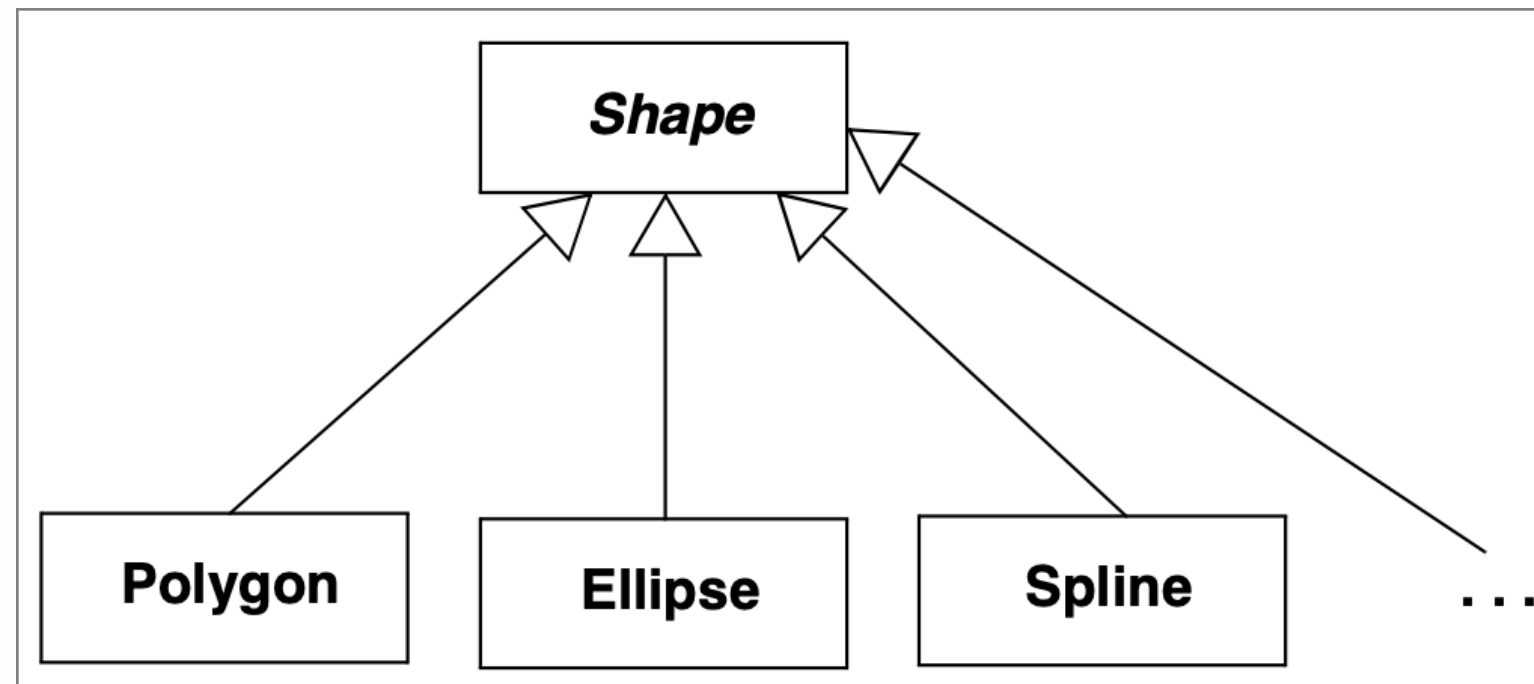


[Classes Generalization Composition Aggregation Association Dependency]

Composition

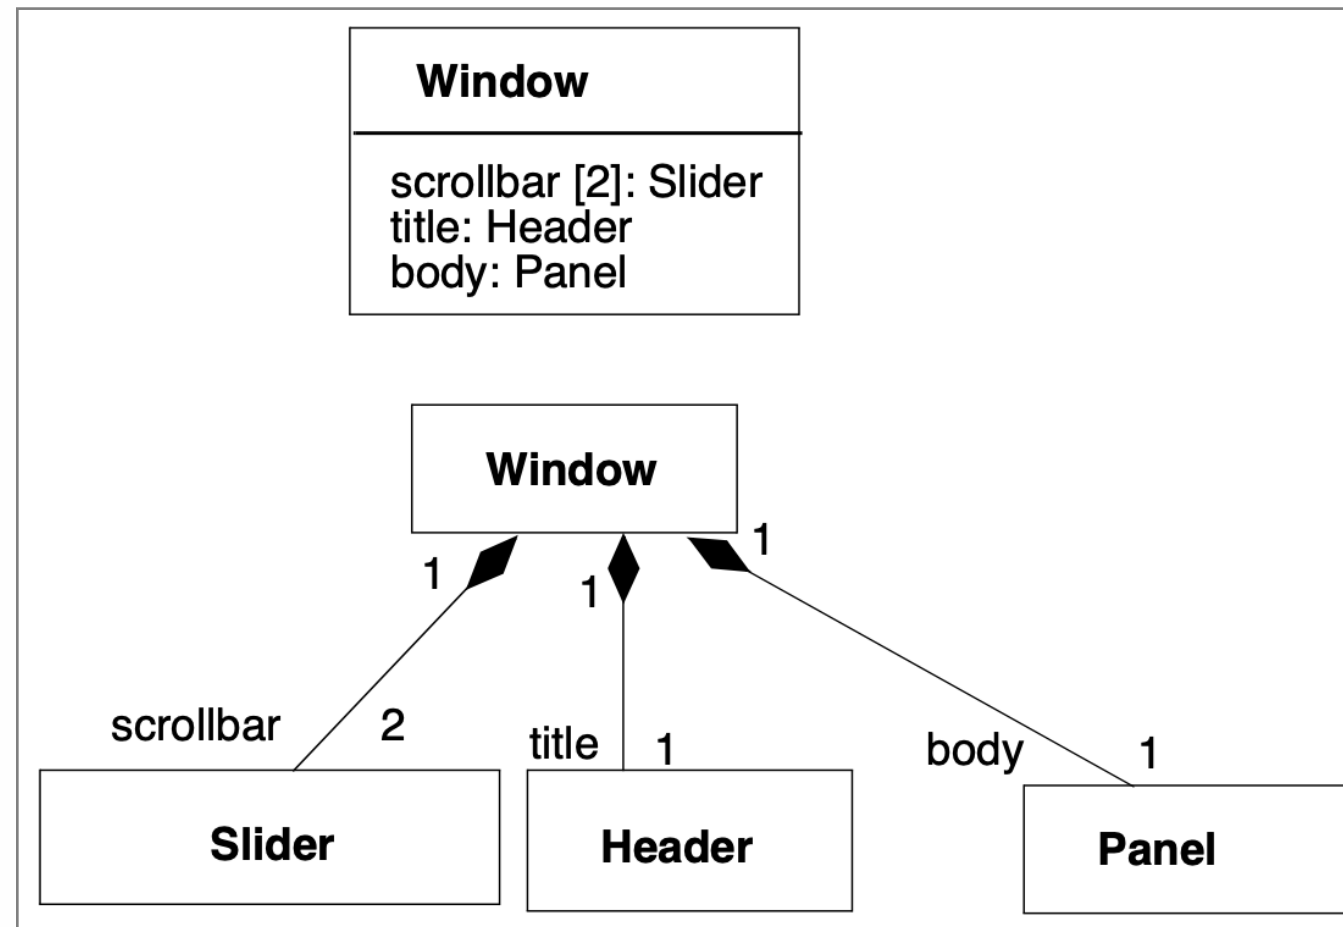


[Classes Generalization Composition Aggregation Association Dependency]

Aggregation

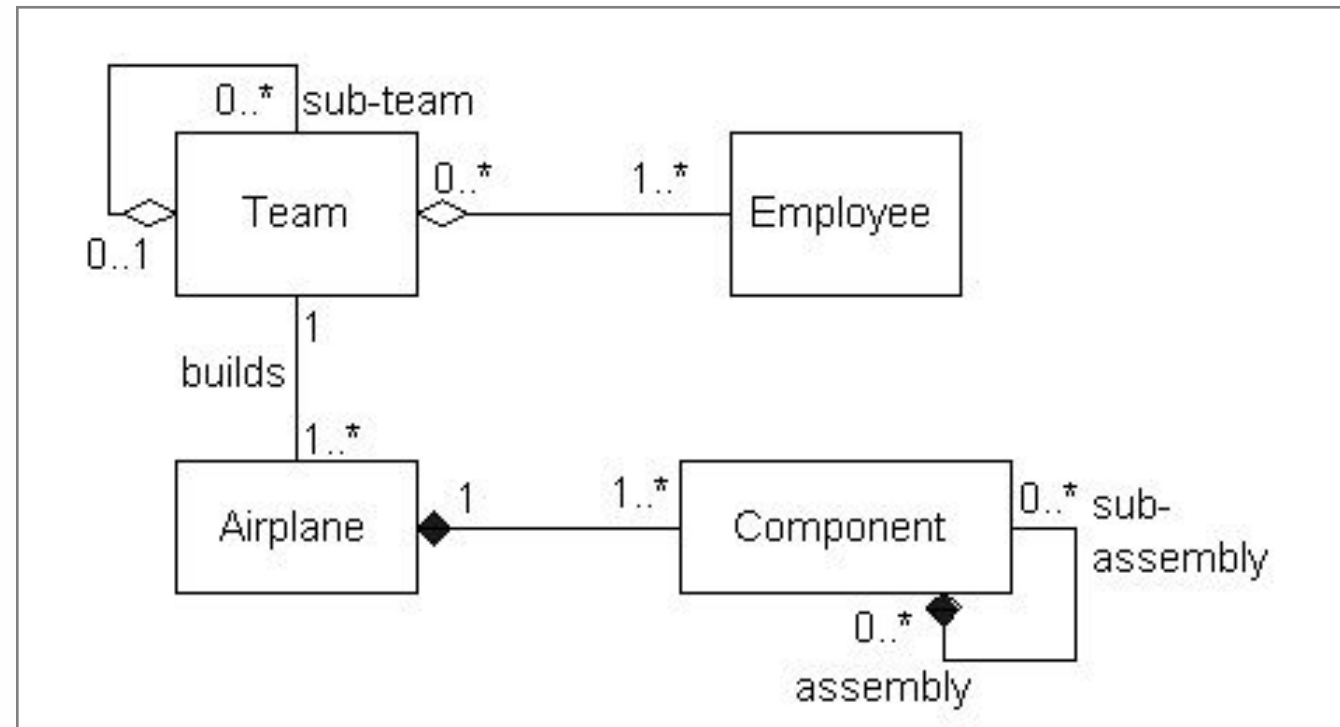


[Classes Generalization Composition Aggregation Association Dependency]

Association

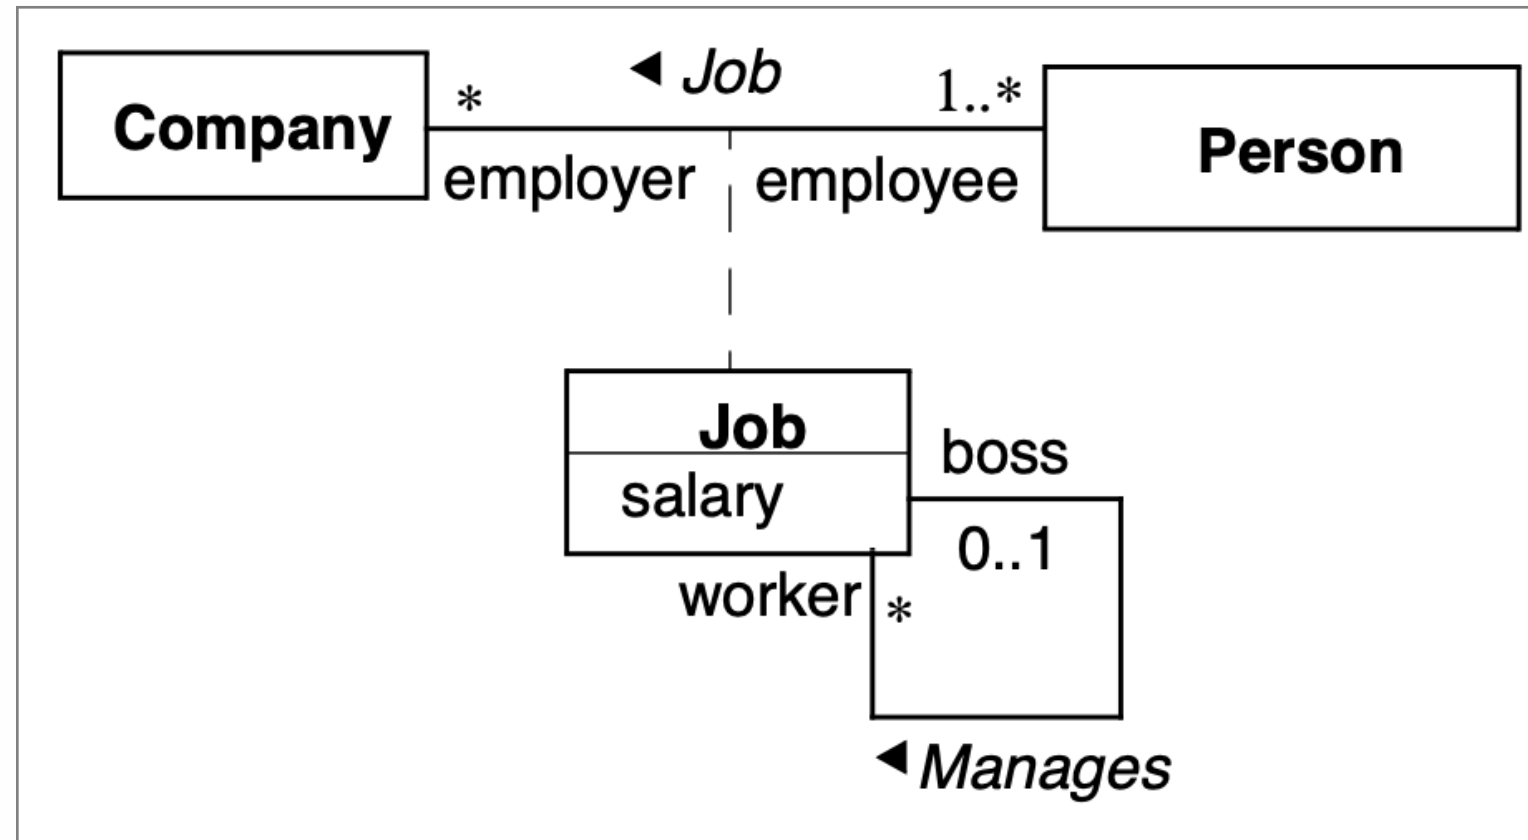

Dependency

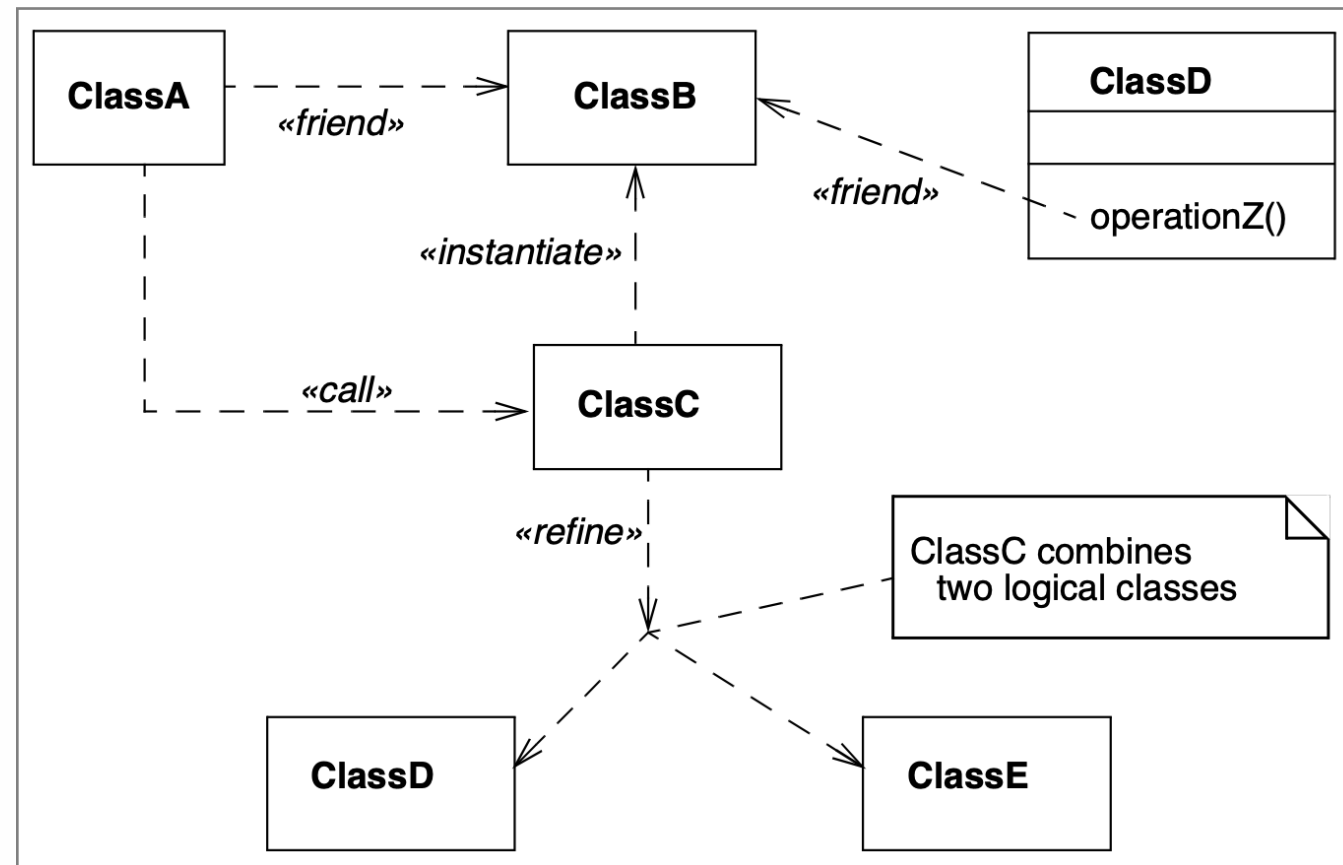


Chapter #2:

Some Other Diagrams


[[UC](#) Component Deployment Activity Sequence]

Use Case Diagram

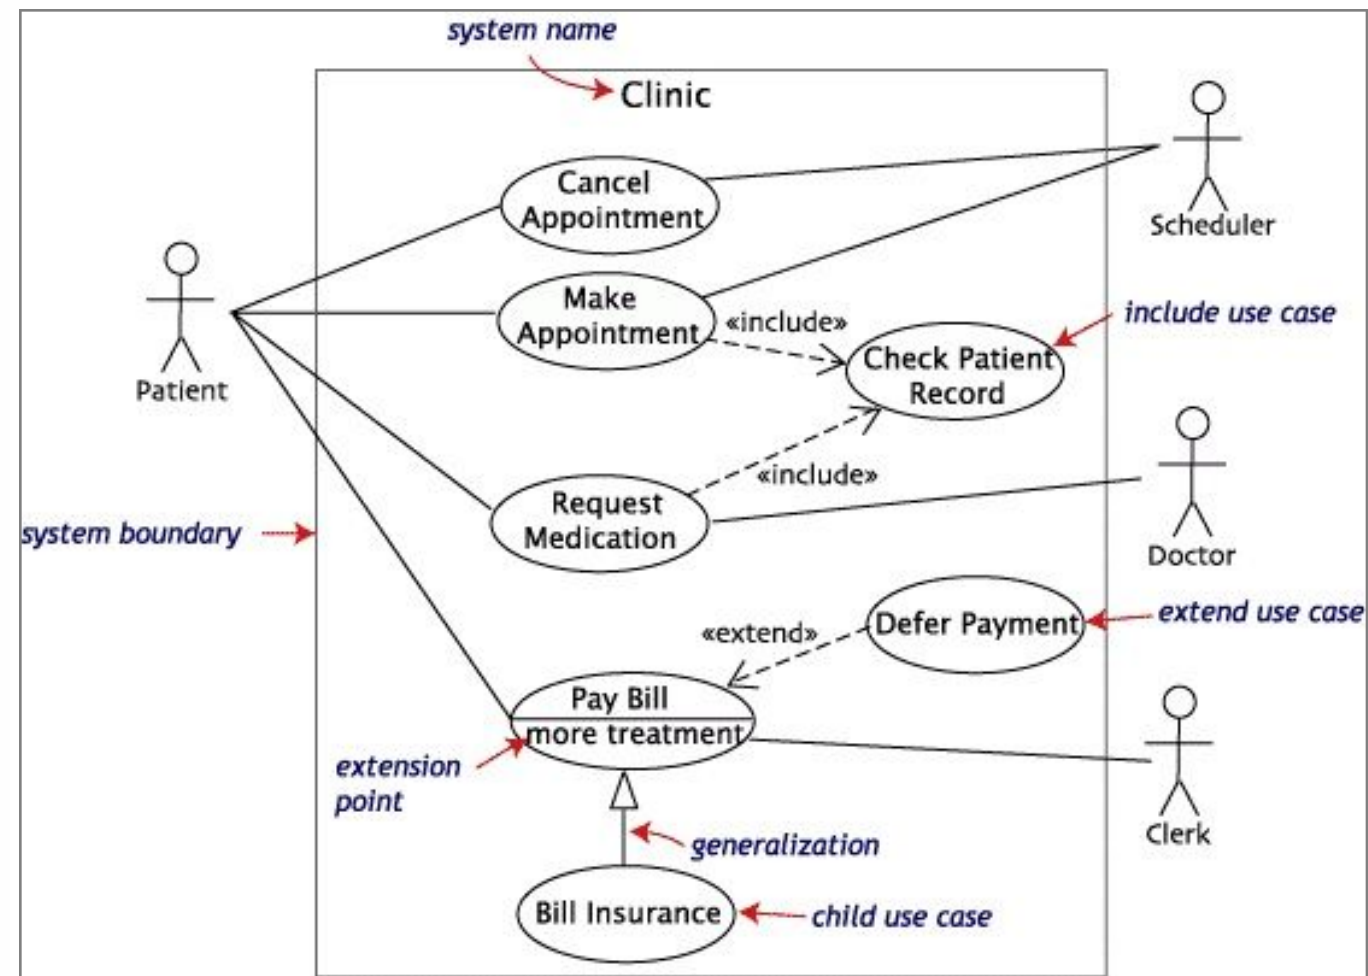


[UC [Component](#) Deployment Activity Sequence]

Component Diagram

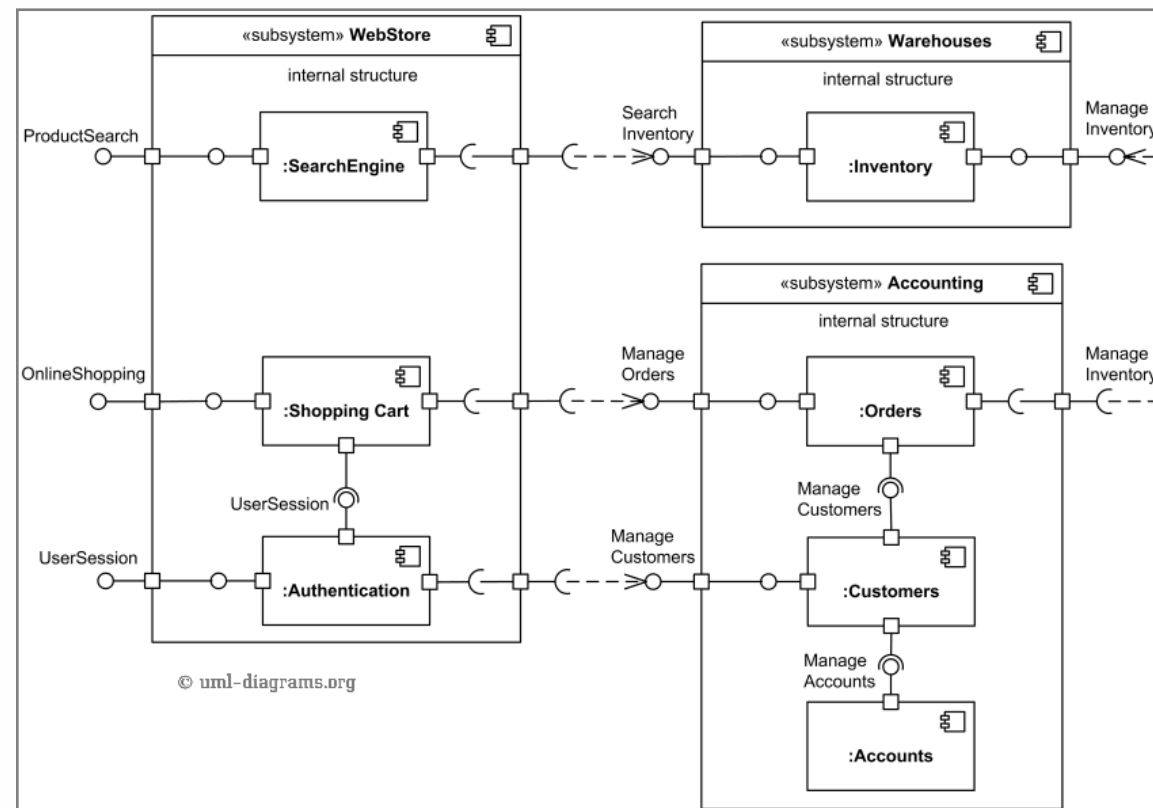


[UC Component Deployment Activity Sequence]

Deployment Diagram

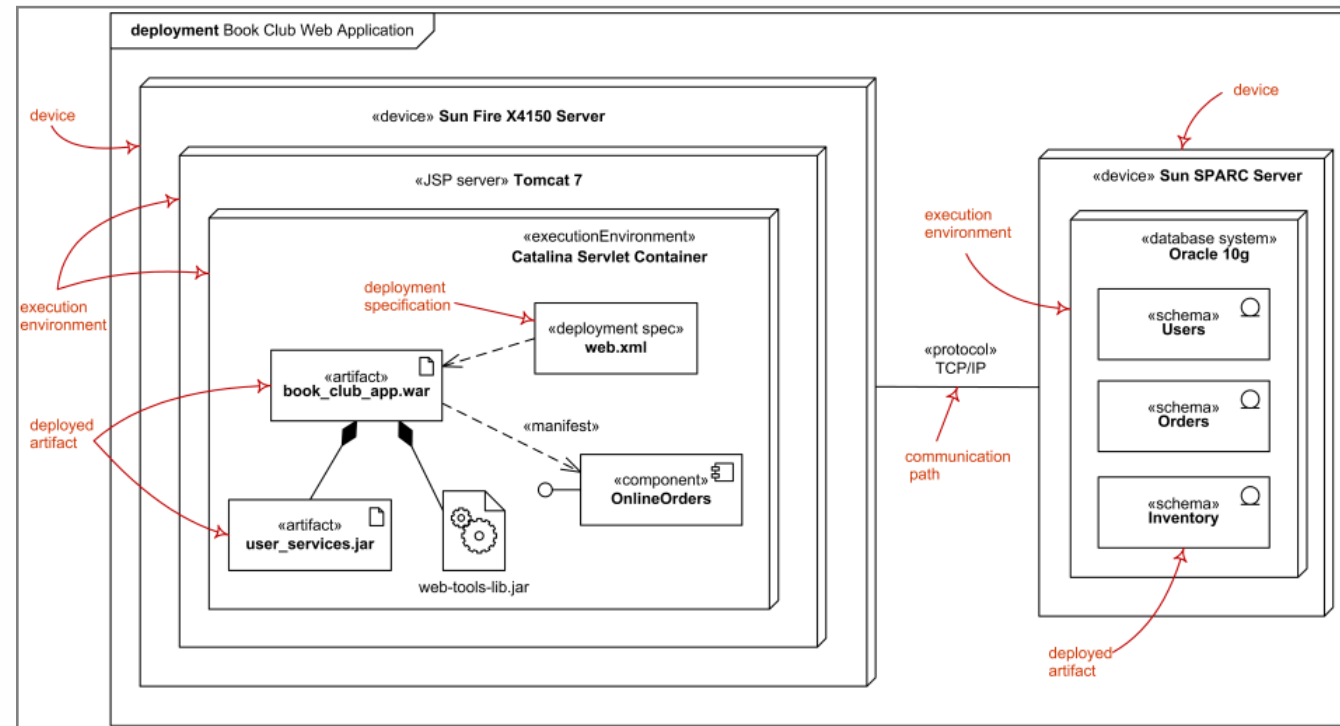


[UC Component Deployment [Activity](#) Sequence]

Activity Diagram

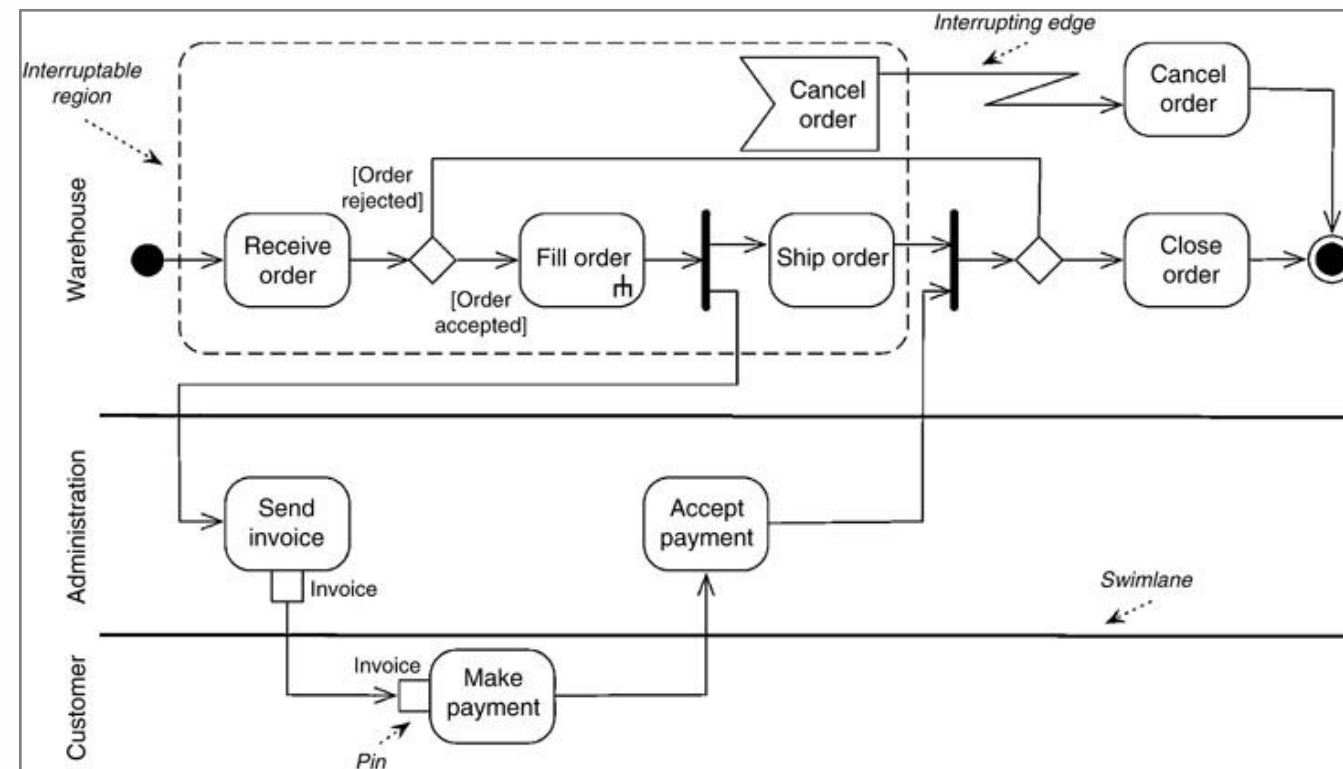

[UC Component Deployment Activity [Sequence](#)]

Sequence Diagram

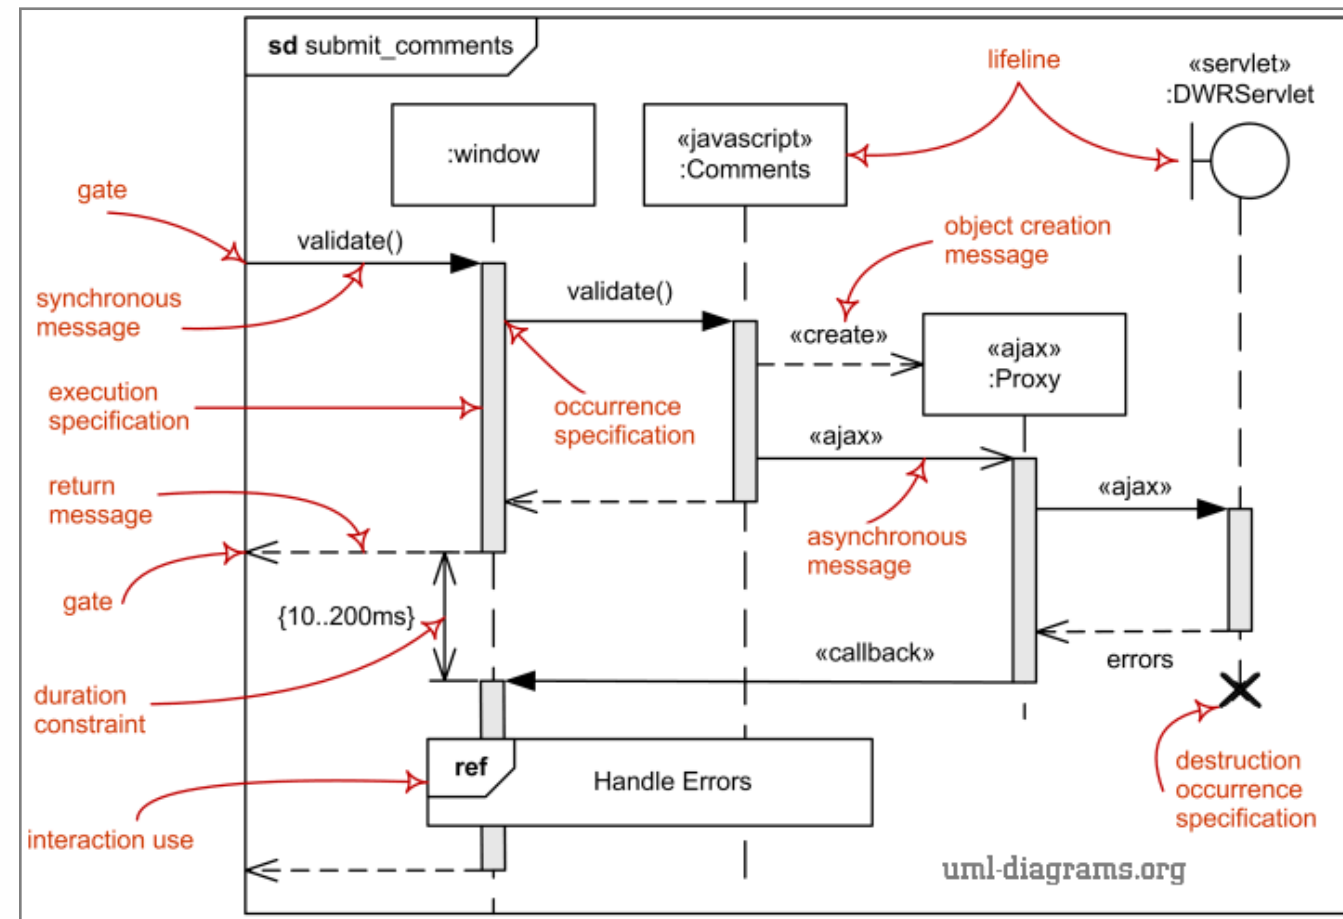


Chapter #3:

MDA: MOF, XMI, OCL, QVT, fUML, ...

[[MDA](#) MOF XMI OCL QVT fUML]


Model Driven Architecture (MDA)

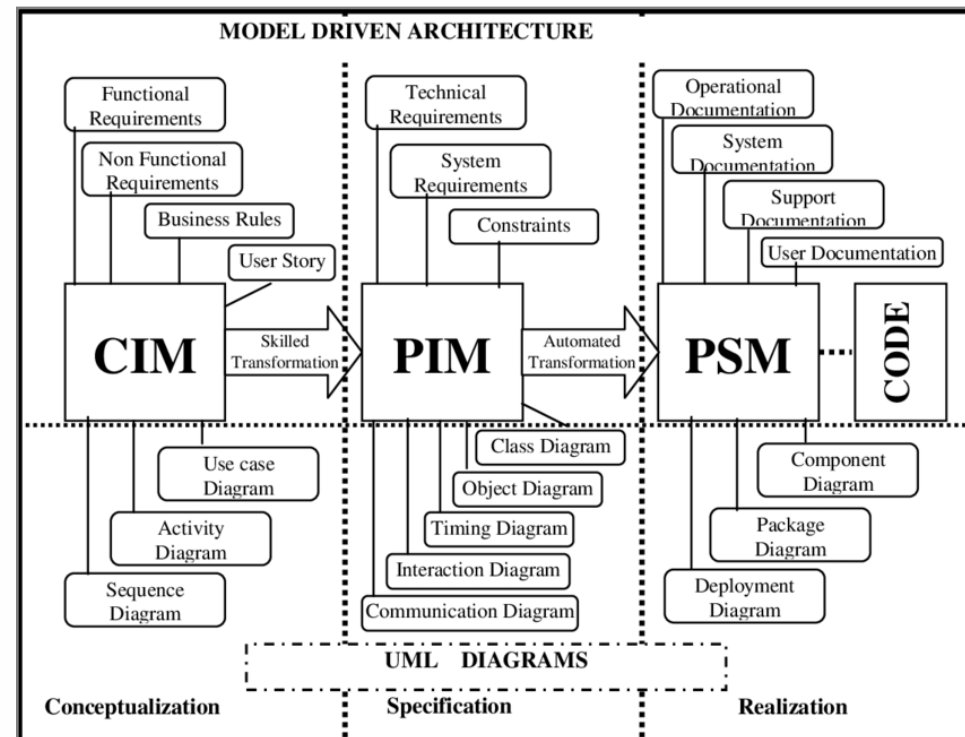

Computation Independent Model (CIM), Platform Independent Model (PIM), Platform Specific Model (PSM).

[MDA [MOF](#) XMI OCL QVT fUML]

Meta-Object Facility (MOF)

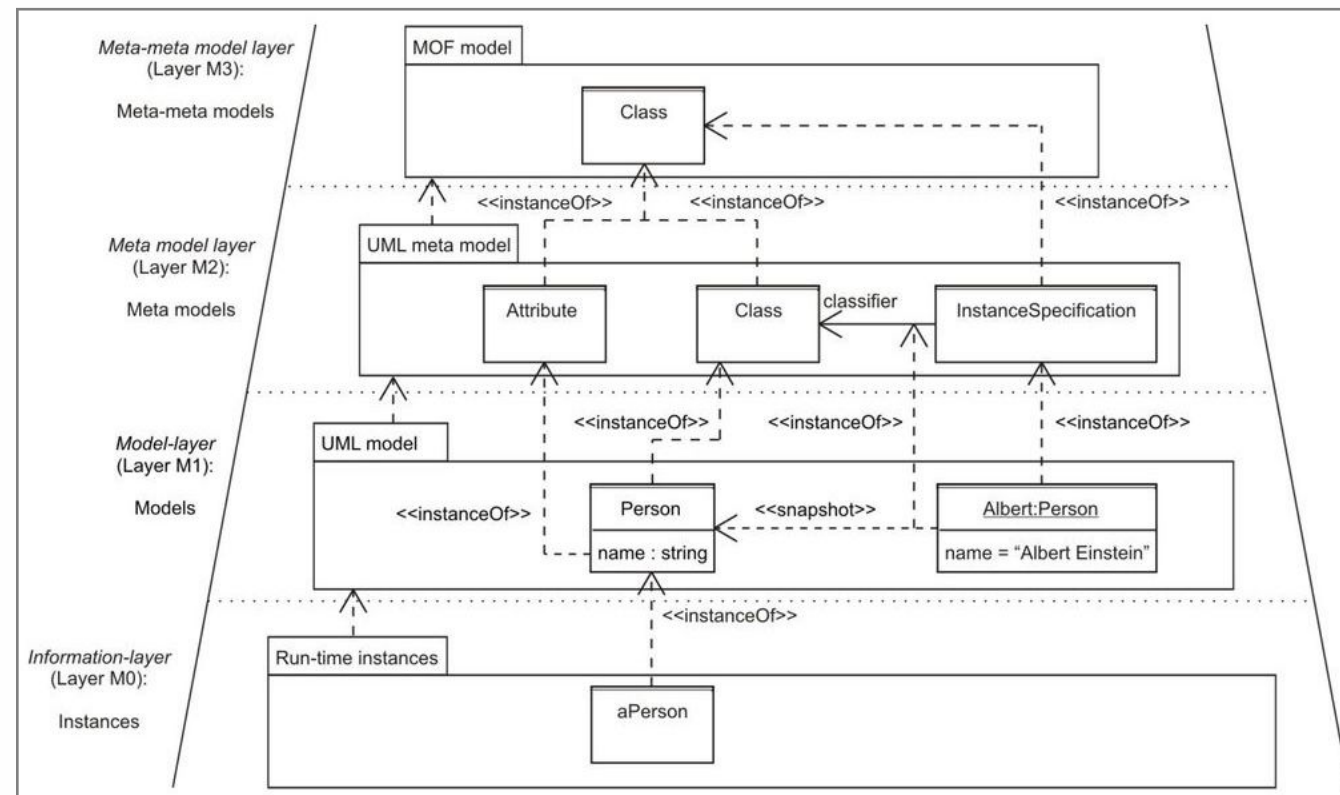

“MOF is a Domain Specific Language (DSL) used to define metamodels, just as EBNF is a DSL for defining grammars” — [Wikipedia](#)

XML Metadata Interchange (XMI)

Car

manufacturer : String

- ownedCars

*

- owner


1

Owner


name : String

```
<?xml version='1.0' encoding='UTF-8'?>
<xmi:XMI xmi:version='2.1' xmlns:uml='http://schema.omg.org/spec/UML/2.1.2'
        xmlns:xmi='http://schema.omg.org/spec/XMI/2.1'>
<uml:Model xmi:id='eee_1045467100313_135436_1' name='Data' visibility='public'>
  <packagedElement xmi:type='uml:Class' xmi:id='_477' name='Car' visibility='public'>
    <ownedAttribute xmi:type='uml:Property' xmi:id='_628' name='owner'
                    visibility='private' type='_498' association='_627'>
      <upperValue xmi:type='uml:LiteralUnlimitedNatural' xmi:id='_680' visibility='public' value='1' />
      <lowerValue xmi:type='uml:LiteralInteger' xmi:id='_679' visibility='public' value='1' />
    </ownedAttribute>
    <ownedAttribute xmi:type='uml:Property' xmi:id='_681' name='manufacturer' visibility='private'>
      <type xmi:type='uml:PrimitiveType' href='http://schema.omg.org/spec/UML/2.0/uml.xml#String' />
    </ownedAttribute>
  </packagedElement>
  <packagedElement xmi:type='uml:Class' xmi:id='_498' name='Owner' visibility='public'>
    <ownedAttribute xmi:type='uml:Property' xmi:id='_629' name='ownedCars'
                    visibility='private' type='_477' association='_627'>
      <upperValue xmi:type='uml:LiteralUnlimitedNatural' xmi:id='_678' visibility='public' value='-1' />
      <lowerValue xmi:type='uml:LiteralUnlimitedNatural' xmi:id='_677' visibility='public' value='-1' />
    </ownedAttribute>
    <ownedAttribute xmi:type='uml:Property' xmi:id='_685' name='name' visibility='private'>
      <type xmi:type='uml:PrimitiveType' href='http://schema.omg.org/spec/UML/2.0/uml.xml#String' />
    </ownedAttribute>
  </packagedElement>
  <packagedElement xmi:type='uml:Association' xmi:id='_627' visibility='public'>
    <memberEnd xmi:idref='_628' />
    <memberEnd xmi:idref='_629' />
  </packagedElement>
</uml:Model>
</xmi:XMI>
```

Object Constraint Language (OCL)

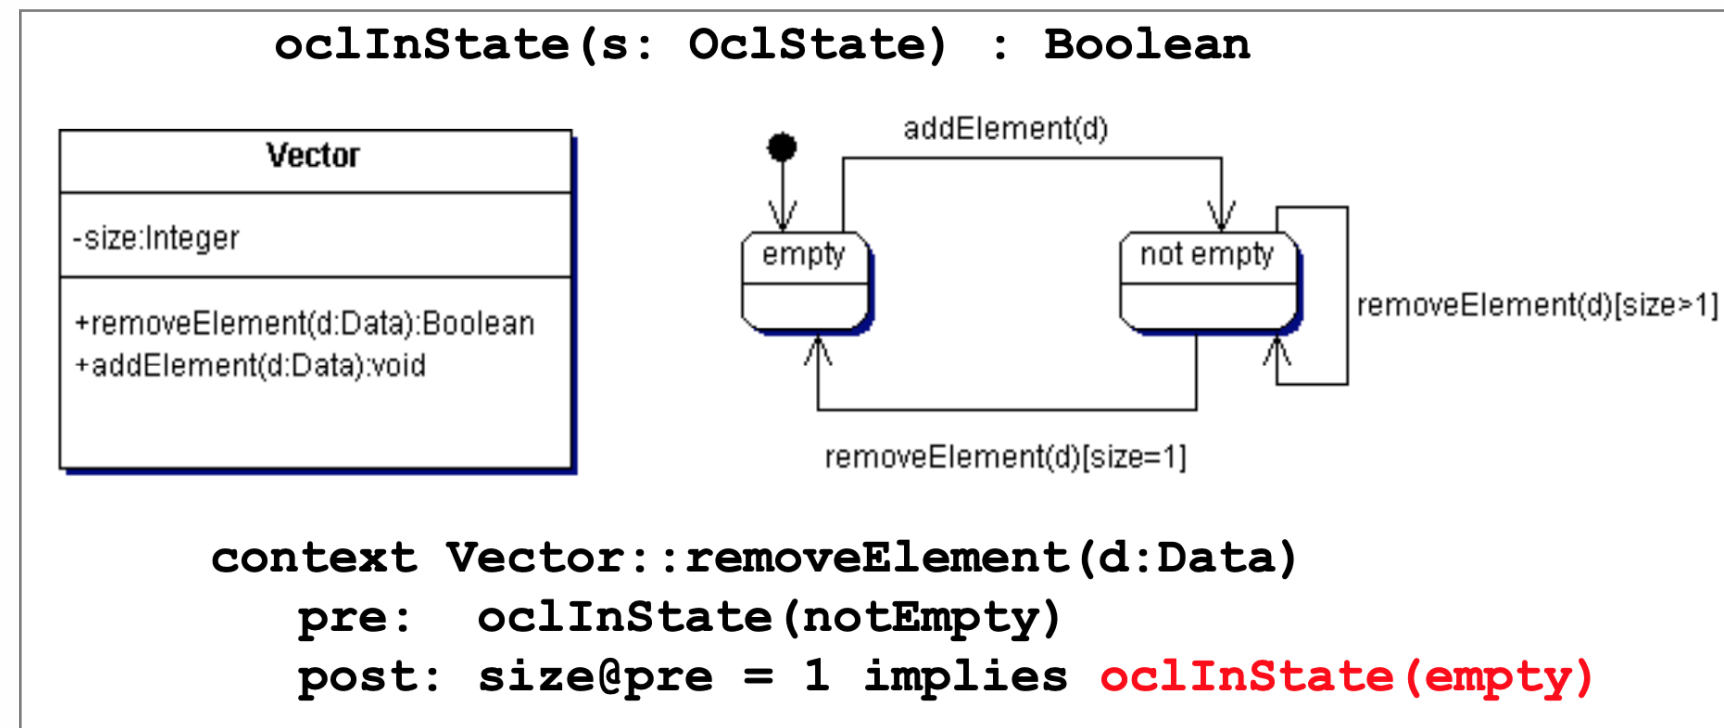

Query/View/Transformation (QVT)

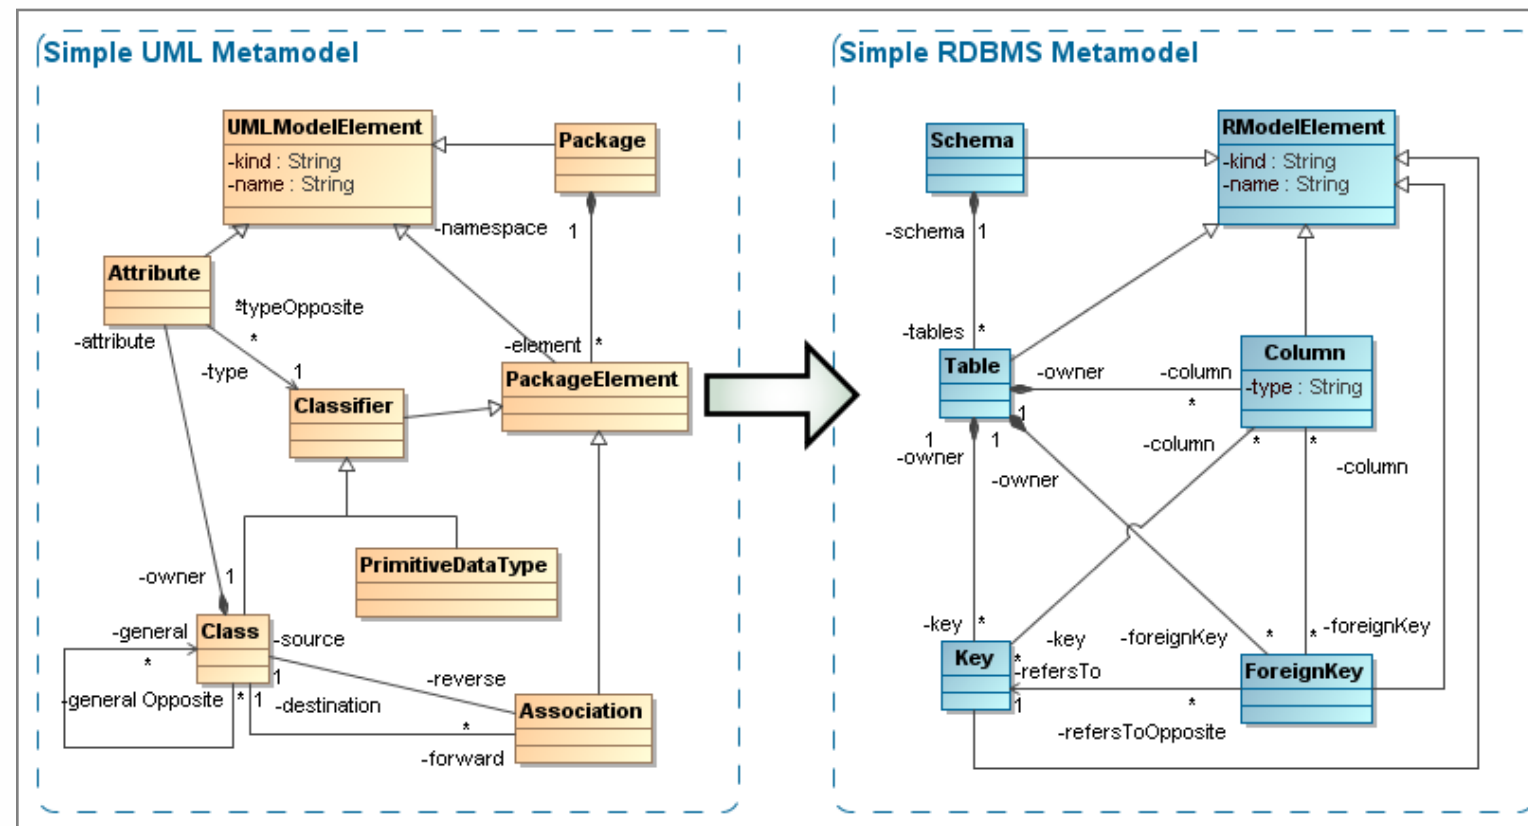


[MDA MOF XMI OCL QVT [fUML](#)]

Executable UML, fUML, Alf


```
private import CustomerAccounts;  
activity SumBalances(in customer : Customer) : Integer {  
    totalBalance = 0;  
    for (balance in customer.accounts.balance) {  
        totalBalance += balance;  
    }  
    return totalBalance;  
}
```

Chapter #4:

Books, Venues, Call-to-Action

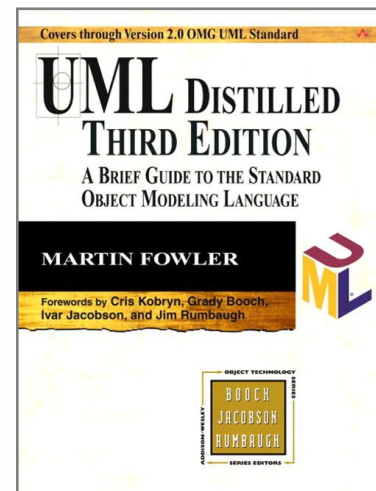

Martin Fowler. *UML Distilled: A Brief Guide to the Standard Object Modeling Language*. 3rd ed. Addison-Wesley, 2004

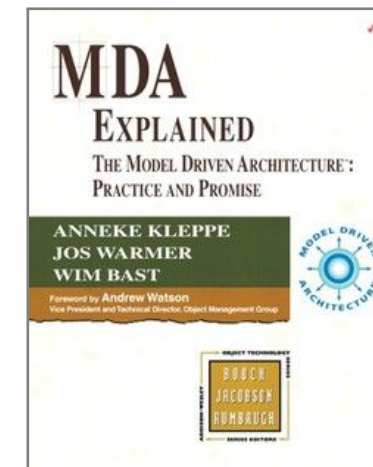

Anneke G. Kleppe, Jos B. Warmer, and Wim Bast. *MDA Explained: The Model Driven Architecture: Practice and Promise*. Addison-Wesley, 2003

Where to go:

OMG Certified UML Professional 2 (OCUP 2)



Call to Action:

For your application, make one class, one component, one deployment, and three sequence diagrams.

Still unresolved issues:

- How to reverse code to a model?
- How to sync a model with the code?
- How to simplify UML for practical programming?
- How to restore faith in MDA?

References

- [1] Martin Fowler. *UML Distilled: A Brief Guide to the Standard Object Modeling Language*. 3rd ed. Addison-Wesley, 2004.
- [2] International Standardization Organization ISO. *ISO/IEC 19501:2005: Information Technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2*. 2005.
- [3] Anneke G. Kleppe, Jos B. Warmer, and Wim Bast. *MDA Explained: The Model Driven Architecture: Practice and Promise*. Addison-Wesley, 2003.