

1z0-047

Number: 1z0-047

Passing Score: 800

Time Limit: 120 min

File Version: V

1z0-047



Exam A

QUESTION 1

Which three possible values can be set for the TIME_ZONE session parameter by using the ALTER SESSION command? (Choose three.)

- A. 'os'
- B. local
- C. -8:00'
- D. dbtimezone Li
- E. 'Australia'

Correct Answer: BCD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 2

EMPDET is an external table containing the columns EMPNO and ENAME. Which command would work in relation to the EMPDET table?

- A. UPDATE empdet SET ename = 'Amit' WHERE empno = 1234;
- B. DELETE FROM empdet WHERE ename LIKE 'J%';
- C. CREATE VIEW empvu AS SELECT* FROM empdept;
- D. CREATE INDEX empdet_dx ON empdet(empno);

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 3

Which three tasks can be performed using regular expression support in Oracle Database 10g? (Choose three.)

- A. it can be used to concatenate two strings.
- B. it can be used to find out the total length of the string.
- C. it can be used for string manipulation and searching operations.
- D. it can be used to format the output for a column or expression having string data.
- E. it can be used to find and replace operations for a column or expression having string data.

Correct Answer: CDE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 4

Which three statements are true regarding single-row functions? (Choose three.)

- A. They can accept only one argument.
- B. They can be nested up to only two levels.
- C. They can return multiple values of more than one data type.

- D. They can be used in SELECT, WHERE, and ORDER BY clauses.
- E. They can modify the data type of the argument that is referenced.
- F. They can accept a column name, expression, variable name, or a user-supplied constant as arguments.

Correct Answer: DEF


Section: (none)

Explanation

Explanation/Reference:

QUESTION 5

View the Exhibit and examine the structure of the ORDERS and ORDERITEMS tables.

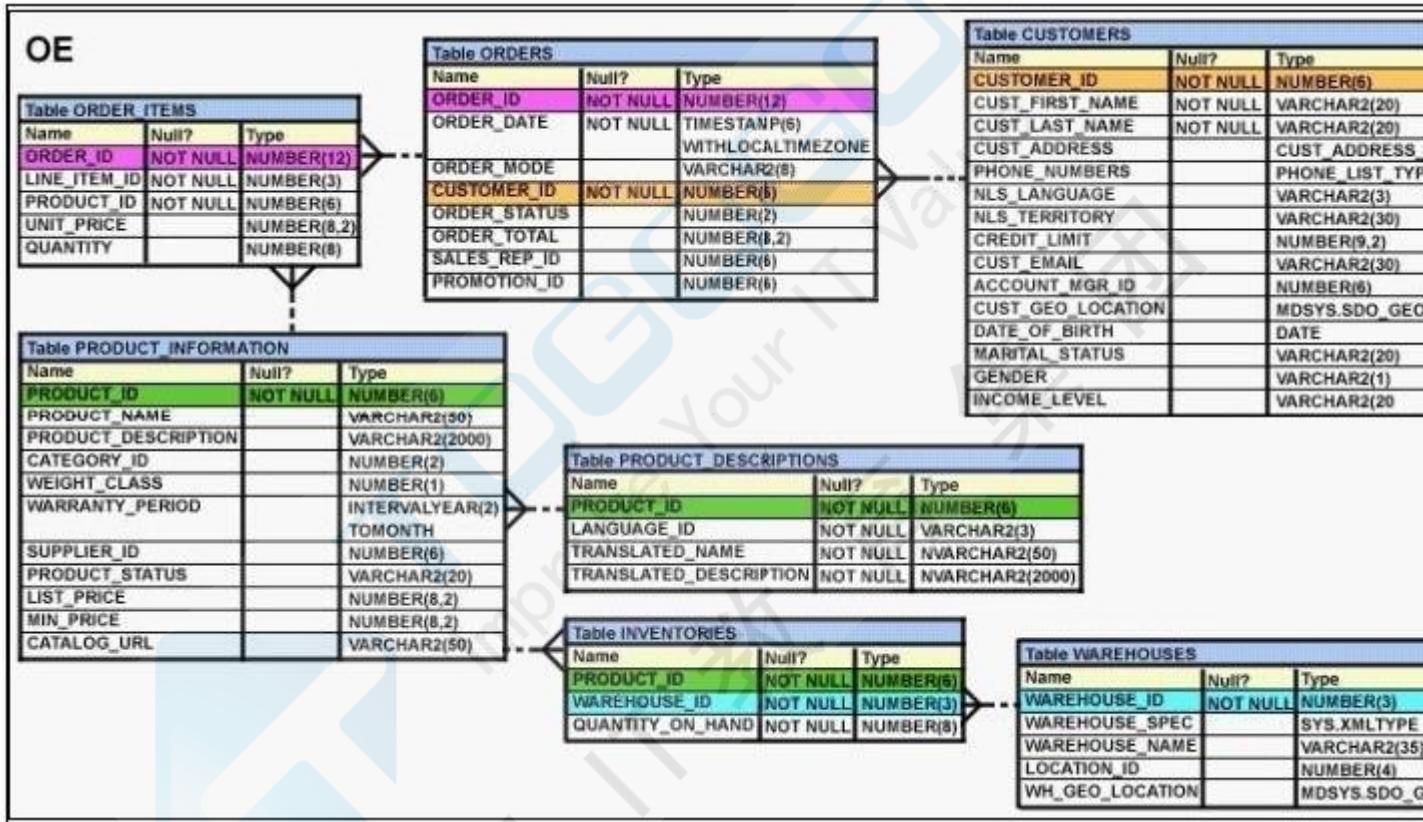

Evaluate the following SQL statement:

```
SELECT oi.order_id, product_id, order_date
FROM order_items oi JOIN orders o
USING(order_id);
```

Which statement is true regarding the execution of this SQL statement?

- A. The statement would not execute because table aliases are not allowed in the JOIN clause.
- B. The statement would not execute because the table alias prefix is not used in the USING clause.
- C. The statement would not execute because all the columns in the SELECT clause are not prefixed with table aliases.
- D. The statement would not execute because the column part of the USING clause cannot have a qualifier in the SELECT list.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 6

Which two statements are true regarding the execution of the correlated subqueries? (Choose two.)

- A. The nested query executes after the outer query returns the row.
- B. The nested query executes first and then the outer query executes.
- C. The outer query executes only once for the result returned by the inner query.
- D. Each row returned by the outer query is evaluated for the results returned by the inner query.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 7

Evaluate the CREATE TABLE statement:

```
CREATE TABLE products
(product_id NUMBER(6) CONSTRAINT prod_id_pk PRIMARY KEY,
product_name VARCHAR2(15));
```

Which statement is true regarding the PROD_ID_PK constraint?

- A. It would be created only if a unique index is manually created first.
- B. It would be created and would use an automatically created unique index.
- C. It would be created and would use an automatically created nonunique index.
- D. It would be created and remains in a disabled state because no index is specified in the command.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 8

View the Exhibit and examine the data in the PRODUCT INFORMATION table.

PDT_ID	SUP_ID	PDT_STATUS	LIST_PRICE	MIN_PRICE
1797	102094	orderable	349	288
2254	102071	obsolete	453	371
2382	102050	under development	850	731
2459	102099	under development	899	568
3127	102087	orderable	498	444
3353	102071	obsolete	489	413
3354	102066	orderable	543	478

Which two tasks would require subqueries? (Choose two.)

- A. displaying the minimum list price for each product status
- B. displaying all supplier IDs whose average list price is more than 500
- C. displaying the number of products whose list prices are more than the average list price
- D. displaying all the products whose minimum list prices are more than the average list price of products having the product status orderable
- E. displaying the total number of products supplied by supplier 102071 and having product status OBSOLETE

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 9

Which statement best describes the GROUPING function?

- A. It is used to set the order for the groups to be used for calculating the grand totals and subtotals.
- B. It is used to form various groups to calculate total and subtotals created using ROLLUP and CUBE operators.
- C. It is used to identify if the NULL value in an expression is a stored NULL value or created by ROLLUP or CUBE.
- D. It is used to specify the concatenated group expressions to be used for calculating the grand totals and subtotals.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 10

Evaluate the following statement: INSERT ALL WHEN order_total < 10000 THEN INTO small_orders WHEN order_total > 10000 AND order_total < 20000 THEN INTO medium_orders WHEN order_total > 2000000 THEN INTO large_orders SELECT order_id, order_total, customer_id FROM orders;

Which statement is true regarding the evaluation of rows returned by the subquery in the INSERT statement?

- A. They are evaluated by all the three WHEN clauses regardless of the results of the evaluation of any other WHEN clause.
- B. They are evaluated by the first WHEN clause. If the condition is true, then the row would be evaluated by the subsequent WHEN clauses.
- C. They are evaluated by the first WHEN clause. If the condition is false, then the row would be evaluated by the subsequent WHEN clauses.
- D. The INSERT statement would give an error because the ELSE clause is not present for support in case none of the WHEN clauses are true.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 11

View the Exhibit and examine the data in ORDERS_MASTER and MONTHLYjDRDERS tables.

ORDERS_MASTER

ORDER_ID	ORDER_TOTAL
1	1000
2	2000
3	3000
4	

MONTHLY_ORDERS

ORDER_ID	ORDER_TOTAL
2	2500
3	

Evaluate the following MERGE statement: MERGE INTO orders_master o USING monthly_orders m ON (o.order_id = m.order_id) WHEN MATCHED THEN UPDATE SET o.order_total = m.order_total DELETE WHERE (m.order_total IS NULL) WHEN NOT MATCHED THEN INSERT VALUES (m.order_id, m.order_total);
What would be the outcome of the above statement?

- A. The ORDERS_MASTER table would contain the ORDERIDs 1 and 2.
- B. The ORDERS_MASTER table would contain the ORDERIDs 1,2 and 3.
- C. The ORDERS_MASTER table would contain the ORDERIDs 1,2 and 4.
- D. The ORDERS MASTER table would contain the ORDER IDs 1,2,3 and 4.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 12

The user SCOTT who is the owner of ORDERS and ORDERJTEMS tables issues the following GRANT command:

GRANT ALL ON orders, order_items TO PUBLIC;

What correction needs to be done to the above statement?

- A. PUBLIC should be replaced with specific usernames.
- B. ALL should be replaced with a list of specific privileges.
- C. WITH GRANT OPTION should be added to the statement.
- D. Separate GRANT statements are required for ORDERS and ORDERJTEMS tables.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 13

View the Exhibit and examine the structure of the EMP table.

EMP		
Name	Null?	Type
EMP_ID		NUMBER(3)
EMP_NAME		VARCHAR2(10)
SALARY		NUMBER(10,2)

You executed the following command to add a primary key to the EMP table:

```
ALTER TABLE emp
ADD CONSTRAINT emp_id_pk PRIMARY KEY (emp_id)
USING INDEX emp_id_idx;
```

Which statement is true regarding the effect of the command?

- A. The PRIMARY KEY is created along with a new index.
- B. The PRIMARY KEY is created and it would use an existing unique index.
- C. The PRIMARY KEY would be created in a disabled state because it is using an existing index.
- D. The statement produces an error because the USING clause is permitted only in the CREATE TABLE command.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 14

Which two statements are true regarding roles? (Choose two.)

- A. A role can be granted to itself.
- B. A role can be granted to PUBLIC.
- C. A user can be granted only one role at any point of time.
- D. The REVOKE command can be used to remove privileges but not roles from other users.
- E. Roles are named groups of related privileges that can be granted to users or other roles.

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 15

Which statement is true regarding Flashback Version Query?

- A. It returns versions of rows only within a transaction.
- B. It can be used in subqueries contained only in a SELECT statement.
- C. It will return an error if the undo retention time is less than the lower bound time or SCN specified.
- D. It retrieves all versions including the deleted as well as subsequently reinserted versions of the rows.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 16

Evaluate the following SQL statements that are issued in the given order:

```
CREATE TABLE emp
(emp_no NUMBER(2) CONSTRAINT emp_emp_no_pk PRIMARY KEY,
enameVARCHAR2(15),
salary NUMBER(8,2),
mgr_no NUMBER(2) CONSTRAINT emp_mgr_fk REFERENCES emp);
ALTER TABLE emp
DISABLE CONSTRAINT emp_emp_no_pk CASCADE;
ALTER TABLE emp
ENABLE CONSTRAINT emp_emp_no_pk; What would be the status of the foreign key EMP_MGR_FK?
```

- A. It would be automatically enabled and deferred.
- B. It would be automatically enabled and immediate.
- C. It would remain disabled and has to be enabled manually using the ALTER TABLE command.
- D. It would remain disabled and can be enabled only by dropping the foreign key constraint and re-creating it.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 17

Which statements are correct regarding indexes? (Choose all that apply.)

- A. When a table is dropped, the corresponding indexes are automatically dropped.
- B. For each DML operation performed, the corresponding indexes are automatically updated.
- C. Indexes should be created on columns that are frequently referenced as part of an expression.
- D. A non-deferrable PRIMARY KEY or UNIQUE KEY constraint in a table automatically creates a unique index.

Correct Answer: ABD


Section: (none)

Explanation

Explanation/Reference:

QUESTION 18

View the Exhibit and examine the structure of the ORDERS table. Which task would require subqueries?

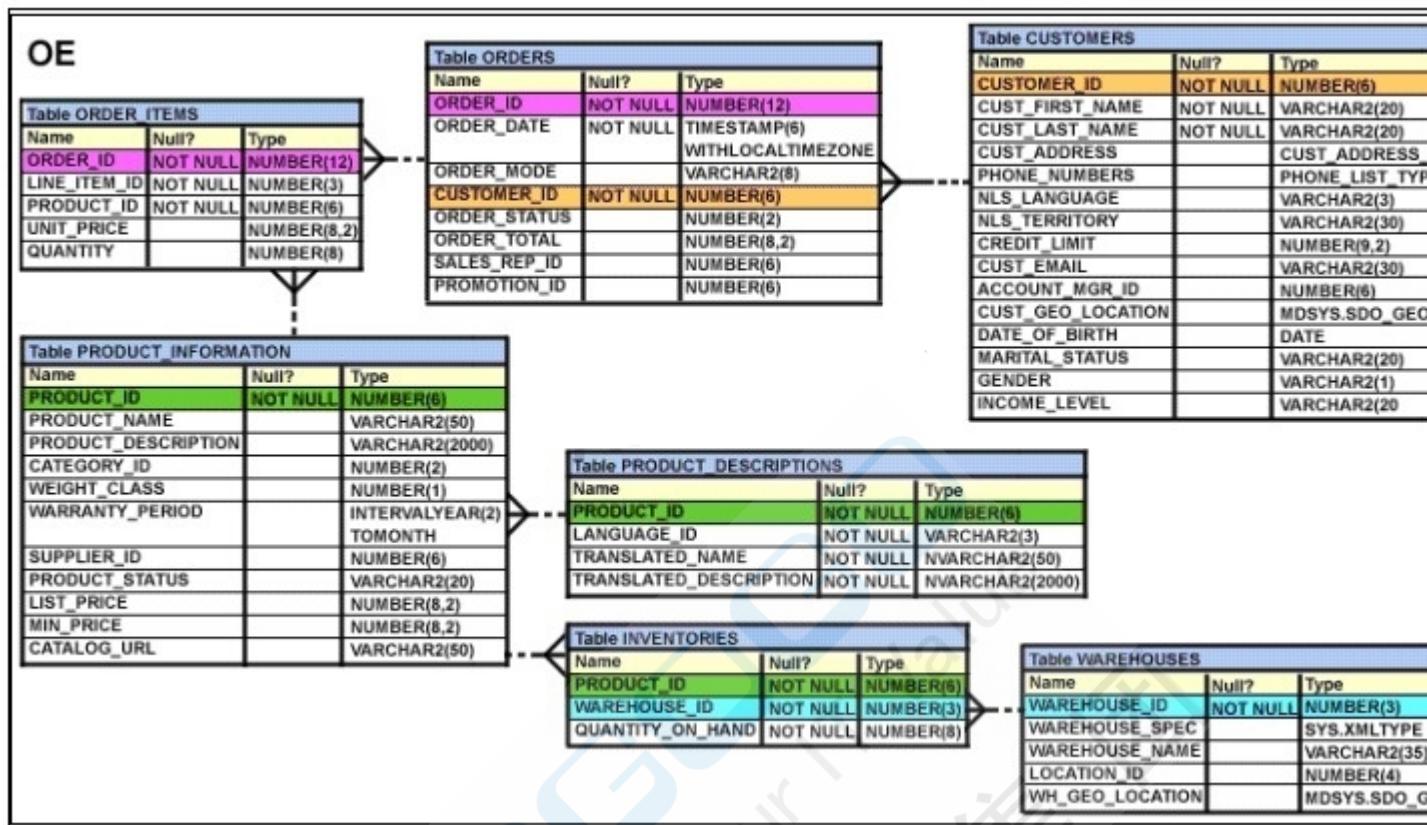

- A. displaying the total order value for sales representatives 161 and 163
- B. displaying the order total for sales representative 161 in the year 1999
- C. displaying the number of orders that have order mode online and order date in 1999
- D. displaying the number of orders whose order total is more than the average order total for all online orders

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 19

View the Exhibit and examine the details of the EMPLOYEES table.

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	PHONE_NUMBER	HIRE_DATE	JOB_ID	SALARY
198	Donald	OConnell	DOCONNEL	650.507.9833	21-JUN-99	SH_CLERK	2600
199	Douglas	Grant	DGRANT	650.507.9844	13-JAN-00	SH_CLERK	2600
200	Jennifer	Whalen	JWHALEN	515.123.4444	17-SEP-87	AD_ASST	4400
201	Michael	Hartstein	MHARTSTE	515.123.5555	17-FEB-96	MK_MAN	13000
202	Pat	Fay	PFAY	603.123.6666	17-AUG-97	MK_REP	6000
203	Susan	Mavris	SMAVRIS	515.123.7777	07-JUN-94	HR_REP	6500
204	Hermann	Baer	HBAER	515.123.8888	07-JUN-94	PR_REP	10000
205	Shelley	Higgins	SHIGGINS	515.123.8080	07-JUN-94	AC_MGR	12000
206	William	Gietz	WGIETZ	515.123.8181	07-JUN-94	AC_ACCOUNT	8300
100	Steven	King	SKING	515.123.4567	17-JUN-87	AD_PRES	24000
101	Neena	Kochhar	NKOCHHAR	515.123.4568	21-SEP-89	AD_VP	17000
102	Lex	De Haan	LDEHAAN	515.123.4569	13-JAN-93	AD_VP	17000
103	Alexander	Hunold	AHUNOLD	590.423.4567	03-JAN-90	IT_PROG	9000
104	Bruce	Ernst	BERNST	590.423.4568	21-MAY-91	IT_PROG	6000
105	David	Austin	DAUSTIN	590.423.4569	25-JUN-97	IT_PROG	4800
106	Valli	Pataballa	VPATABAL	590.423.4560	05-FEB-98	IT_PROG	4800
107	Diana	Lorentz	DLORENTZ	590.423.5567	07-FEB-99	IT_PROG	4200
108	Nancy	Greenberg	NGREENBE	515.124.4569	17-AUG-94	FI_MGR	12000

Evaluate the following SQL statement:

```
SELECT phone_number,
REEXP_REPLACE(phone_number,'([[: digit: ]]{3}).([[: digit: ]]{3}).([[: digit: ]]{4})', ,(\1)2-\3')
"PHONE NUMBER"
```

FROM employees;

The query was written to format the PHONE_NUMBER for the employees. Which option would be the correct format in the output?

- A. xxx-xxx-xxxx
- B. (xxx) xxxxxxx
- C. (xxx) xxx-xxxx
- D. xxx-(xxx)-xxxx

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 20

The details of the order ID, order date, order total, and customer ID are obtained from the ORDERS table. If the order value is more than 30000, the details have to be added to the LARGEJDRDERS table. The order ID, order date, and order total should be added to the ORDERJHISTORY table, and order ID and customer ID should be added to the CUSTJHISTORY table. Which multitable INSERT statement would you use?

- A. Pivoting INSERT
- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 21

View the Exhibit and examine the data in the LOCATIONS table.

LOCATION_ID	STREET_ADDRESS	POSTAL_CODE	CITY	ST
1000	1297 Via Cola di Rie	00989	Roma	
1100	93091 Calle della Testa	10934	Venice	
1200	2017 Shinjuku-ku	1689	Tokyo	Toky
1300	9450 Kamiya-cho	6823	Hiroshima	
1400	2014 Jabberwocky Rd	26192	Southlake	Texa
1500	2011 Interiors Blvd	99236	South San Francisco	Calif
1600	2007 Zagora St	50090	South Brunswick	New
1700	2004 Charade Rd	98199	Seattle	Was
1800	147 Spadina Ave	M5V 2L7	Toronto	Onta
1900	6092 Boxwood St	Y5W 9T2	Whitehorse	Yuk
2000	40-5-12 Laogianggen	190518	Beijing	
2100	1298 Vileparle (E)	490231	Bombay	Mah
2200	12-98 Victoria Street	2901	Sydney	New
2300	198 Clementi North	540198	Singapore	
2400	8204 Arthur St		London	
2500	Magdalen Centre, The Oxford Science Park	OX9 9ZB	Oxford	Oxf

Evaluate the following SOL statement:

```
SELECT street_address  
FROM locations  
WHERE  
REGEXP_INSTR(street_address,'[^[:alpha:]]') = 1;
```

Which statement is true regarding the output of this SOL statement?

- A. It would display all the street addresses that do not have a substring 'alpha'.
- B. It would display all the street addresses where the first character is a special character.
- C. It would display all the street addresses where the first character is a letter of the alphabet.
- D. It would display all the street addresses where the first character is not a letter of the alphabet.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 22

Which statement is true regarding the ROLLUP operator specified in the GROUP BY clause of a SQL statement?

- A. It produces only the subtotals for the groups specified in the GROUP BY clause.
- B. It produces only the grand totals for the groups specified in the GROUP BY clause.
- C. It produces higher-level subtotals, moving from right to left through the list of grouping columns specified in the GROUP BY clause.
- D. It produces higher-level subtotals, moving in all the directions through the list of grouping columns specified in the GROUP BY clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 23

View the Exhibit and examine the data in the CUST_DET table.

CUST DET

CUST_ID	CREDIT_LIMIT	GRADE	GENDER
1	6000	A	F

You executed the following multitable INSERT statement:

```
INSERT FIRST
WHEN credit_limit >= 5000 THEN

INTO cust_1 VALUES(cust_id, credit_limit, grade, gender)
WHEN grade = THE
INTO cust_2 VALUES(cust_id, credit_limit, grade, gender)
WHEN gender = THE
INTO cust_3 VALUES(cust_id, credit_limit, grade, gender)
INTO cust_4 VALUES(cust_id, credit_limit, grade, gender)
ELSE
INTO cust_5 VALUES(cust_id, credit_limit, grade, gender)
SELECT * FROM cust_det;
```

The row will be inserted in _____.

- A. CUST_1 table only because CREDIT_LIMIT condition is satisfied
- B. CUST_1 and CUST_2 tables because CREDIT_LIMIT and GRADE conditions are satisfied
- C. CUST_1 ,CUST_2 and CUST_5 tables because CREDIT_LIMIT and GRADE conditions are satisfied but GENDER condition is not satisfied
- D. CUST 1, CUST 2 and CUST 4 tables because CREDIT LIMIT and GRADE conditions are satisfied for CUST 1 and CUST 2, and CUST 4 has no condition on it

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 24

You executed the following SQL statements in the given order:

```
CREATE TABLE orders
(order_id NUMBER(3) PRIMARY KEY,
order_date DATE,
customer_id number(3));
INSERT INTO orders VALUES (100,'10-mar-2007,,222);
ALTER TABLE orders MODIFY order_date NOT NULL;
UPDATE orders SET customer_id=333;
DELETE FROM order;
```

The DELETE statement results in the following error:

ERROR at line 1:

ORA-00942: table or view does not exist

What would be the outcome?

- A. All the statements before the DELETE statement would be rolled back.
- B. All the statements before the DELETE statement would be implicitly committed within the session.
- C. All the statements up to the ALTER TABLE statement would be committed and the outcome of

- UPDATE statement would be rolled back.
- D. All the statements up to the ALTER TABLE statement would be committed and the outcome of the UPDATE statement is retained uncommitted within the session.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 25

Evaluate the following statements:

```
CREATE TABLE digits  
(id NUMBER(2),  
description VARCHAR2(15));
```

```
INSERT INTO digits VALUES (1,'ONE');  
UPDATE digits SET description ='TWO'WHERE id=1;  
INSERT INTO digits VALUES (2 , 'TWO');  
COMMIT;  
DELETE FROM digits;  
SELECT description FROM digits  
VERSIONS BETWEEN TIMESTAMP MINVALUE AND MAXVALUE;
```

What would be the outcome of the above query?

- A. It would not display any values.
- B. It would display the value TWO once.
- C. It would display the value TWO twice.
- D. It would display the values ONE, TWO, and TWO.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 26

A non-correlated subquery can be defined as _____ .

- A. a set of sequential queries, all of which must always return a single value
- B. a set of sequential queries, all of which must return values from the same table
- C. a SELECT statement that can be embedded in a clause of another SELECT statement only
- D. a set of one or more sequential queries in which generally the result of the inner query is used as the search value in the outer query

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 27

View the Exhibit and examine the data in ORDERS_MASTER and MONTHLY_ORDERS tables.

ORDERS_MASTER

ORDER_ID	ORDER_TOTAL
1	1000
2	2000
3	3000
4	

MONTHLY_ORDERS

ORDER_ID	ORDER_TOTAL
2	2500
3	

Evaluate the following MERGE statement:

```
MERGE INTO orders_master o USING monthly_orders m ON (o.order_id = m.order_id) WHEN MATCHED THEN UPDATE SET o.order_total = m.order_total DELETE WHERE (m.order_total IS NULL)
```

```
WHEN NOT MATCHED THEN INSERT VALUES (m.order_id, m.order_total);
```

What would be the outcome of the above statement?

- A. The ORDERS_MASTER table would contain the ORDER_IDs 1 and 2.
- B. The ORDERS_MASTER table would contain the ORDER_IDs 1,2 and 3.
- C. The ORDERS_MASTER table would contain the ORDER_IDs 1,2 and 4.
- D. The ORDERS_MASTER table would contain the ORDER_IDs 1,2,3 and 4.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 28

Which CREATE TABLE statement is valid?

- A. CREATE TABLE ord_details
(ord_no NUMBER(2) PRIMARY KEY,
item_no NUMBER(3) PRIMARY KEY,
ord_date date NOT NULL);
- B. CREATE TABLE ord_details
(ord_no NUMBER(2) UNIQUE, NOT NULL,
item_no NUMBER(3),
ord_date date DEFAULT SYSDATE NOT NULL);
- C. CREATE TABLE ord_details
(ord_no NUMBER(2),
item_no NUMBER(3),
ord_date date DEFAULT NOT NULL,
CONSTRAINT ord_uq UNIQUE (ord_no),
CONSTRAINT ord_pk PRIMARY KEY (ord_no));
- D. CREATE TABLE ord_details
(ord_no NUMBER(2),
item_no NUMBER(3),
ord_date date DEFAULT SYSDATE NOT NULL,
CONSTRAINT ord_pk PRIMARY KEY (ord_no, item_no));

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 29

Evaluate the following CREATE SEQUENCE statement:

CREATE SEQUENCE seq1 START WITH 100 INCREMENT BY 10 MAXVALUE 200 CYCLE NOCACHE;

The sequence SEQ1 has generated numbers up to the maximum limit of 200. You issue the following SQL statement:

SELECT seq1.nextval FROM dual;

What is displayed by the SELECT statement?

- A. 1
- B. 10
- C. 100
- D. an error

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 30


View the Exhibit and examine the descriptions of the EMPLOYEES and DEPARTMENTS tables.

DEPARTMENT_ID	JOB_ID	LOCATION_ID	TOTAL	GRP_DEPT	GRP_JOB	GRP_LOC
10	AD_ASST	1700	4400	0	0	0
10	AD_ASST		4400	0	0	1
10			4400	0	1	1
20	MK_MAN	1800	13000	0	0	0
20	MK_MAN		13000	0	0	1
20	MK_REP	1800	6000	0	0	0
20	MK_REP		6000	0	0	1
20			19000	0	1	1
30	PU_MAN	1700	11000	0	0	0
30	PU_MAN		11000	0	0	1
30	PU_CLERK	1700	13900	0	0	0
30	PU_CLERK		13900	0	0	1
30			24900	0	1	1

The following SQL statement was executed:

```
SELECT e.department_id, e.job_id, d.location_id, sum(e.salary) total,  
GROUPING(e.department_id) GRP_DEPT,  
GROUPING(e.job_id) GRPJOB,  
GROUPING(d.location_id) GRP_LOC  
FROM employees e JOIN departments d  
ON e.department_id = d.department_id  
GROUP BY ROLLUP (e.department_id, e.job_id, d.location_id);
```

View the Exhibit2 and examine the output of the command.

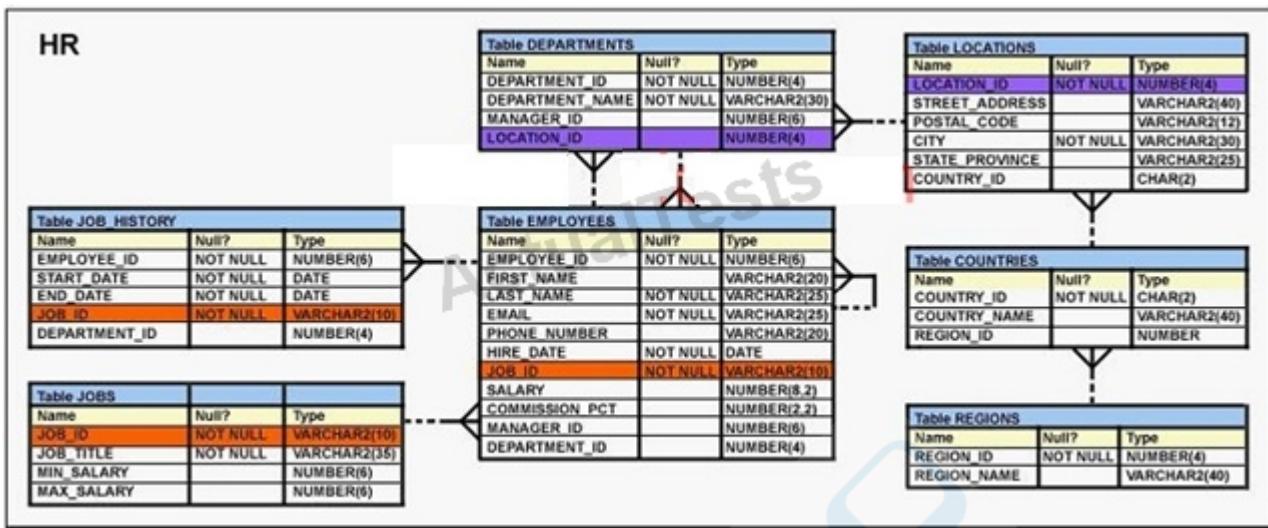

Which two statements are true regarding the output? (Choose two.)

- A. The value 1 in GRP_LOC means that the LOCATION_ID column is taken into account to generate the subtotal.
- B. The value 1 in GRPJOB and GRP_LOC means that JOB_ID and LOCATION_ID columns are not taken into account to generate the subtotal.
- C. The value 1 in GRPJOB and GRP_LOC means that the NULL value in JOBD and LOCATIONJD columns are taken into account to generate the subtotal.
- D. The value 0 in GRP_DEPT, GRPJOB, and GRP_LOC means that DEPARTMENT_ID, JOB_ID, and LOCATION_ID columns are taken into account to generate the subtotal

Correct Answer: BD

Section: (none)


Explanation

Explanation/Reference:

QUESTION 31

View the Exhibit and examine the description of EMPLOYEES and DEPARTMENTS tables.

You want to display the EMPLOYEE_ID, LAST_NAME, and SALARY for the employees who get the maximum salary in their respective departments. The following SQL statement was written:

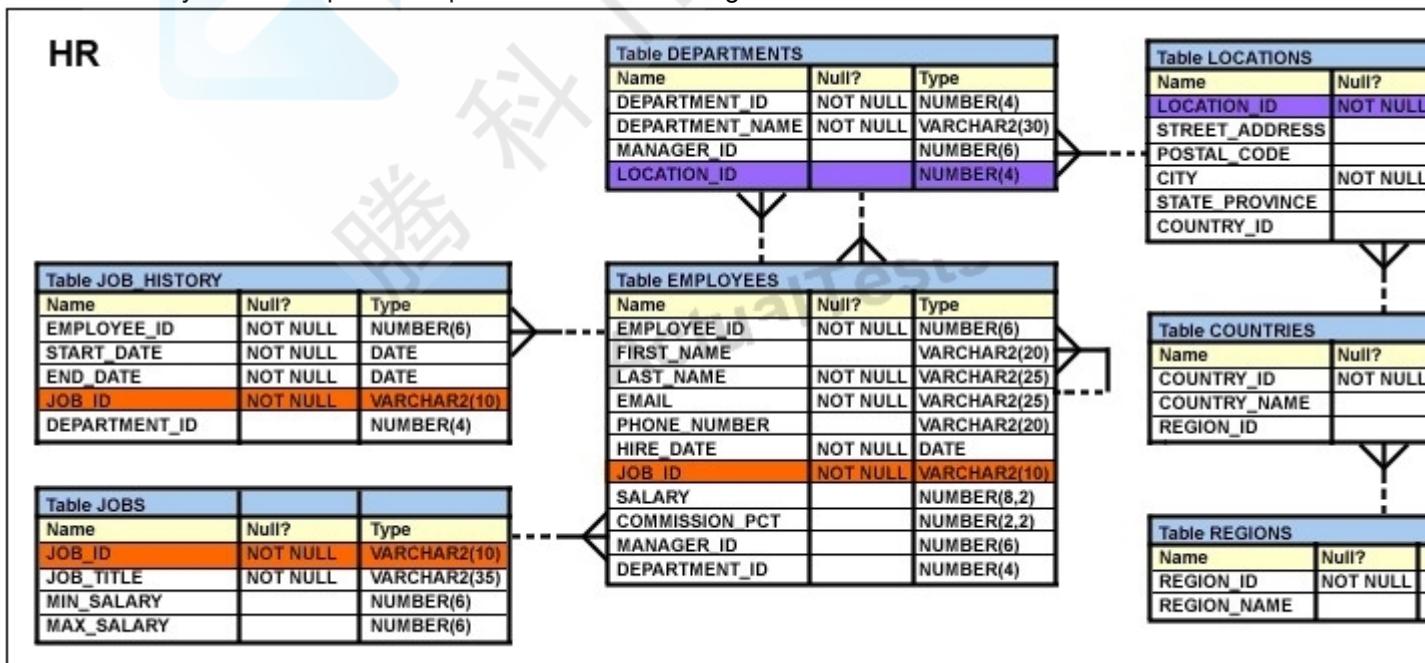

```

WITH
SELECT employee_id, last_name, salary
FROM employees
WHERE (department_id, salary) = ANY (SELECT*
FROM dept_max)

dept_max as (SELECT d.department_id, max(salary)
FROM departments d JOIN employees j
ON (d. department_id = j. department_id)
GROUP BY d. department_id);

```

Which statement is true regarding the execution and the output of this statement?

- A. The statement would execute and give the desired results.
- B. The statement would not execute because the = ANY comparison operator is used instead of=.
- C. The statement would not execute because the main query block uses the query name before it is even created.
- D. The statement would not execute because the comma is missing between the main query block and the query name.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 32

Which statement is true regarding synonyms?

- A. Synonyms can be created for tables but not views.
- B. Synonyms are used to reference only those tables that are owned by another user.
- C. A public synonym and a private synonym can exist with the same name for the same table.
- D. The DROP SYNONYM statement removes the synonym, and the status of the table on which the synonym has been created becomes invalid.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 33

Which two statements are true regarding the EXISTS operator used in the correlated subqueries? (Choose two.)

- A. The outer query stops evaluating the result set of the inner query when the first value is found.
- B. It is used to test whether the values retrieved by the inner query exist in the result of the outer query.
- C. It is used to test whether the values retrieved by the outer query exist in the result set of the inner query.
- D. The outer query continues evaluating the result set of the inner query until all the values in the result set are processed.

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 34

Which two statements are true regarding multiple-row subqueries? (Choose two.)

- A. They can contain group functions.
- B. They always contain a subquery within a subquery.
- C. They use the < ALL operator to imply less than the maximum.
- D. They can be used to retrieve multiple rows from a single table only.
- E. They should not be used with the NOT IN operator in the main query if NULL is likely to be a part of the result of the subquery.

Correct Answer: AE


Section: (none)

Explanation

Explanation/Reference:

QUESTION 35

View the Exhibit and examine the description of the EMPLOYEES table.

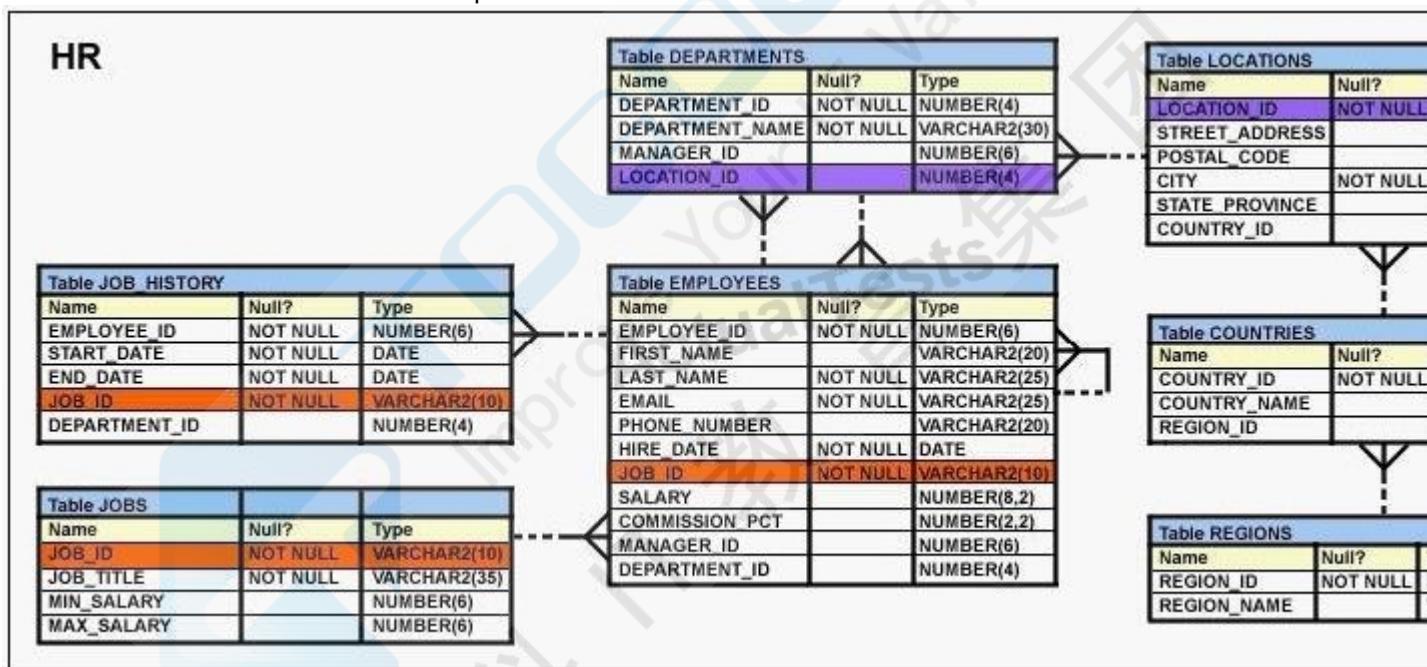

Your company decided to give a monthly bonus of \$50 to all the employees who have completed five years in the company. The following statement is written to display the LAST_NAME, DEPARTMENT_ID, and the total annual salary:

```
SELECT last_name, department_id, salary+50*12 "Annual Compensation" FROM employees WHERE
MONTHS_BETWEEN(SYSDATE, hire_date)/12 >= 5;
```

When you execute the statement, the "Annual Compensation" is not computed correctly. What changes would you make to the query to calculate the annual compensation correctly?

- A. Change the SELECT clause to SELECT last_name, department_id, salary*12+50 "Annual Compensation".
- B. Change the SELECT clause to SELECT last_name, department_id, salary+(50*12) "Annual Compensation".
- C. Change the SELECT clause to SELECT last_name, department_id, (salary +50)*12 "Annual Compensation".
- D. Change the SELECT clause to SELECT last_name, department_id, (salary*12)+50 "Annual Compensation".

Correct Answer: C

Section: (none)**Explanation****Explanation/Reference:****QUESTION 36**

SCOTT is a user in the database.

Evaluate the commands issued by the DBA:

1 - CREATE ROLE mgr;
 2 - GRANT CREATE TABLE, SELECT
 ON oe.orders
 TO mgr;
 3 - GRANT mgr, create table TO SCOTT;

Which statement is true regarding the execution of the above commands?

- A. Statement 1 would not execute because the WITH GRANT option is missing.
- B. Statement 1 would not execute because the IDENTIFIED BY <password> clause is missing.
- C. Statement 3 would not execute because role and system privileges cannot be granted together in a single GRANT statement.
- D. Statement 2 would not execute because system privileges and object privileges cannot be granted together in a single GRANT command.

Correct Answer: D

Section: (none)**Explanation****Explanation/Reference:****QUESTION 37**

Evaluate the following SELECT statement and view the Exhibit to examine its output: SELECT constraint_name, constraint_type, search_condition, r_constraint_name, delete_rule, status FROM user_constraints WHERE table_name = ORDERS

CONSTRAINT_NAME	CON	SEARCH_CONDITION	R_CONSTRAINT_NAME	DELETE_RULE	STATUS
ORDER_DATE_NN	C	"ORDER_DATE" IS NOT NULL			ENABLED
ORDER_CUSTOMER_ID_NN	C	"CUSTOMER_ID" IS NOT NULL			ENABLED
ORDER_MODE_LOV	C	order_mode in ('direct', 'online')			ENABLED
ORDER TOTAL MIN	C	order total >= 0			ENABLED
ORDER PK	P				ENABLED
ORDERS CUSTOMER ID	R		CUSTOMERS_ID	SET NULL	ENABLED
ORDERS SALES REP	R		EMP_EMP_ID	SET NULL	ENABLED

Which two statements are true about the output? (Choose two.)

- A. In the second column, indicates a check constraint.
- B. The STATUS column indicates whether the table is currently in use.
- C. The R_CONSTRAINT_NAME column gives the alternative name for the constraint.
- D. The column DELETE_RULE decides the state of the related rows in the child table when the corresponding row is deleted from the parent table.

Correct Answer: AD

Section: (none)**Explanation**

Explanation/Reference:

QUESTION 38

Evaluate the following expression using meta character for regular expression:

'[AAle]ax.r\$'

Which two matches would be returned by this expression? (Choose two.)

- A. Alex
- B. Alax
- C. Alxer
- D. Alaxendar
- E. Alexender

Correct Answer: DE


Section: (none)

Explanation

Explanation/Reference:

QUESTION 39

View the Exhibit and examine the data in the DEPARTMENTS tables.

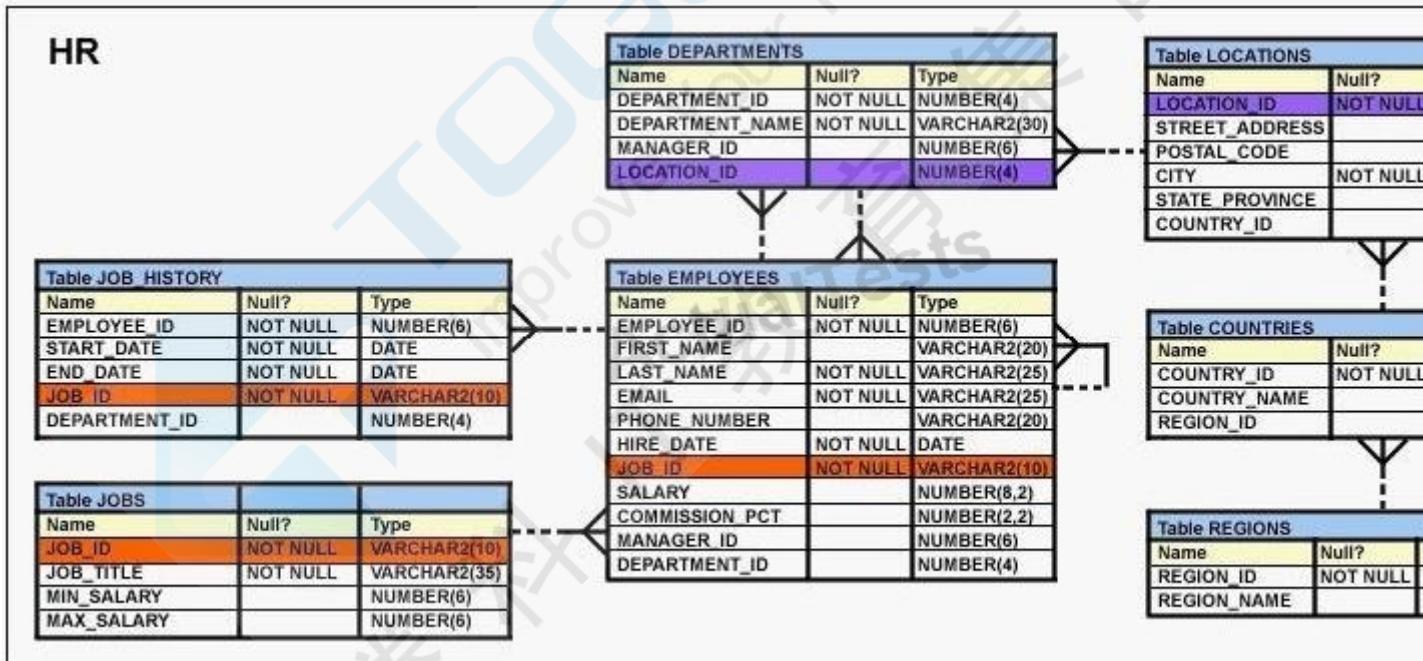

Evaluate the following SQL statement:

```
SELECT department_id "DEPT_ID", department_name , 'b' FROM departments WHERE  
department_id=90 UNION SELECT department_id, department_name DEPT_NAME, 'a' FROM  
departments WHERE department_id=10
```

Which two ORDER BY clauses can be used to sort the output of the above statement? (Choose two.)

- A. ORDER BY 3;
- B. ORDER BY 'b';
- C. ORDER BY DEPT_ID;
- D. ORDER BY DEPT NAME;

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:**QUESTION 40**

View the Exhibit and examine the details of the EMPLOYEES table.

EMPLOYEE_ID	LAST_NAME	JOB_ID	MANAGER_ID
201	Hartstein	MK_MAN	100
101	Kochhar	AD_VP	100
102	De Haan	AD_VP	100
114	Raphaely	PU_MAN	100
120	Weiss	ST_MAN	100
121	Fripp	ST_MAN	100
122	Kaufling	SA_MAN	100
123	Vollman	SA_MAN	100
124	Mourgos	SA_MAN	100
145	Russell	SA_MAN	100
146	Partners	SA_MAN	100
147	Erazuriz	SA_MAN	100
148	Cambrault	SA_MAN	100
149	Zlotkey	SA_MAN	100
200	Whalen	AD_ASST	101
203	Mavris	HR_REP	101
204	Baer	PR_REP	101
205	Higgins	AC_MGR	101
108	Greenberg	FI_MGR	101

Evaluate the following SQL statements:

Statement 1:

SELECT employee_id, last_name, job_id, manager_id FROM employees START WITH

employee_id = 101

CONNECT BY PRIOR employee_id = manager_id AND manager_id != 108;

Statement 2:

SELECT employee_id, last_name, job_id, manager_id
FROM employees
WHERE manager_id != 108
START WITH employee_id = 101
CONNECT BY PRIOR employee_id = manager_id;

Which two statements are true regarding the above SQL statements? (Choose two.)

- A. Statement 2 would not execute because the WHERE clause condition is not allowed in a statement that has the START WITH clause.
- B. The output for statement 1 would display the employee with MANAGERID 108 and all the employees below him or her in the hierarchy.
- C. The output of statement 1 would neither display the employee with MANAGERID 108 nor any employee below him or her in the hierarchy.
- D. The output for statement 2 would not display the employee with MANAGERID 108 but it would display all the employees below him or her in the hierarchy.

Correct Answer: CD**Section:** (none)**Explanation****Explanation/Reference:****QUESTION 41**

Evaluate the CREATE TABLE statement:

CREATE TABLE products
(product_id NUMBER(6) CONSTRAINT prod_id_pk PRIMARY KEY,
product_name VARCHAR2(15));

Which statement is true regarding the PROD_ID_PK constraint?

- A. It would be created only if a unique index is manually created first.

- B. It would be created and would use an automatically created unique index.
- C. It would be created and would use an automatically created nonunique index.
- D. It would be created and remains in a disabled state because no index is specified in the command.

Correct Answer: B

Section: (none)


Explanation

Explanation/Reference:

QUESTION 42

View the Exhibit and examine the structure of the ORDERS table.

You have to display ORDER_ID, ORDER_DATE, and CUSTOMER_ID for all those orders that were placed after the last order placed by the customer whose CUSTOMER_ID is 101

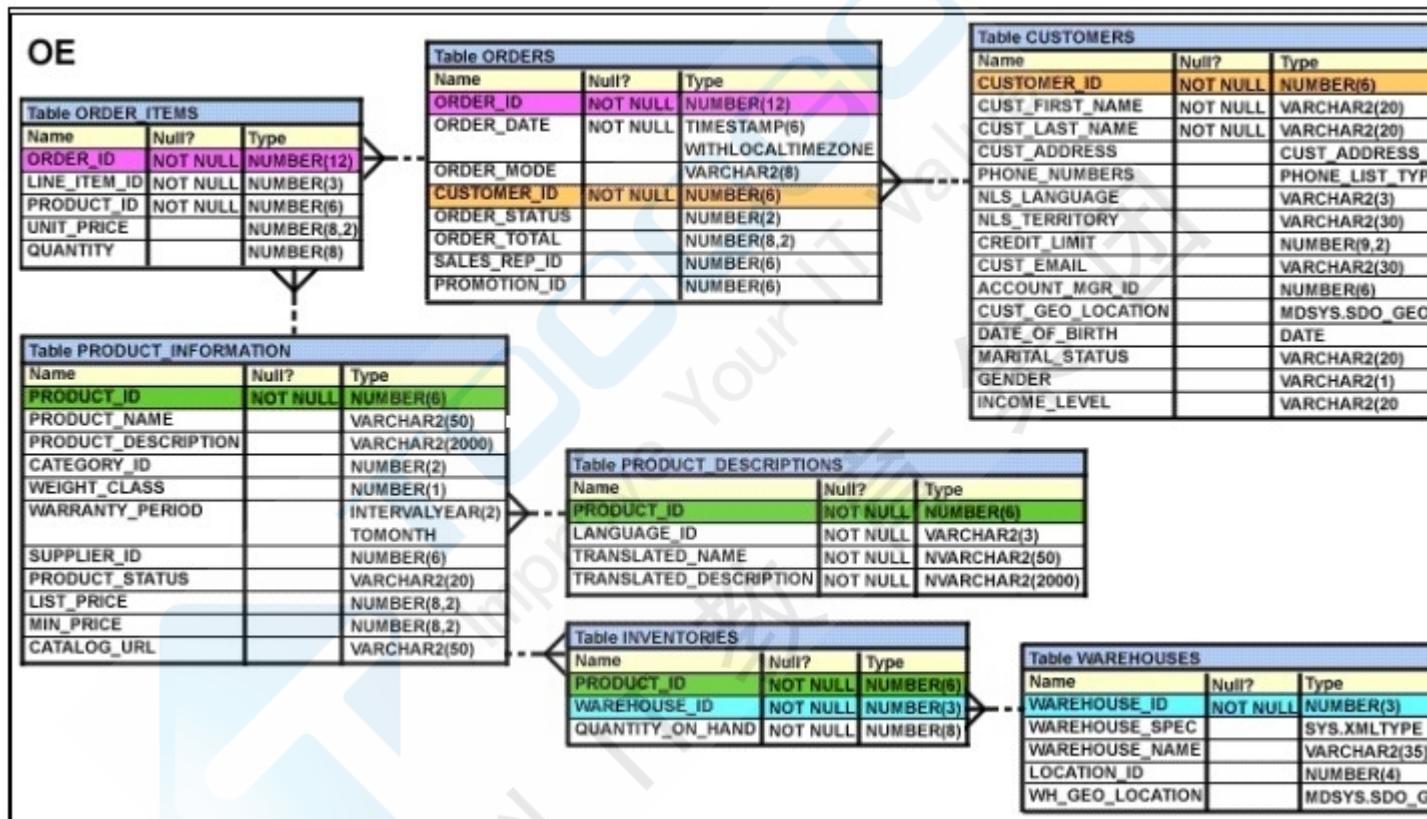

Which query would give you the desired output?

- A. SELECT order_id, order_date FROM orders
WHERE order_date > ALL (SELECT MAX(order_date)
FROM orders) AND
Customer_id = 101;
- B. SELECT order_id, order_date FROM orders
WHERE order_date > ANY (SELECT order_date
FROM orders
WHERE customer_id = 101);
- C. SELECT order_id, order_date FROM orders
WHERE order_date > ALL (SELECT order_date
FROM orders
WHERE customer_id = 101);
- D. SELECT order_id, order_date FROM orders
WHERE order_date IN (SELECT order_date
FROM orders
WHERE customer id = 101);

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 43

You need to load information about new customers from the NEW_CUST table into the tables CUST and CUST_SPECIAL. If a new customer has a credit limit greater than 10,000, then the details have to be inserted into CUST_SPECIAL. All new customer details have to be inserted into the CUST table. Which technique should be used to load the data most efficiently?

- A. external table
- B. the MERGE command
- C. the multitable INSERT command
- D. INSERT using WITH CHECK OPTION

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 44

View the Exhibit and examine the data in the EMPLOYEES tables.

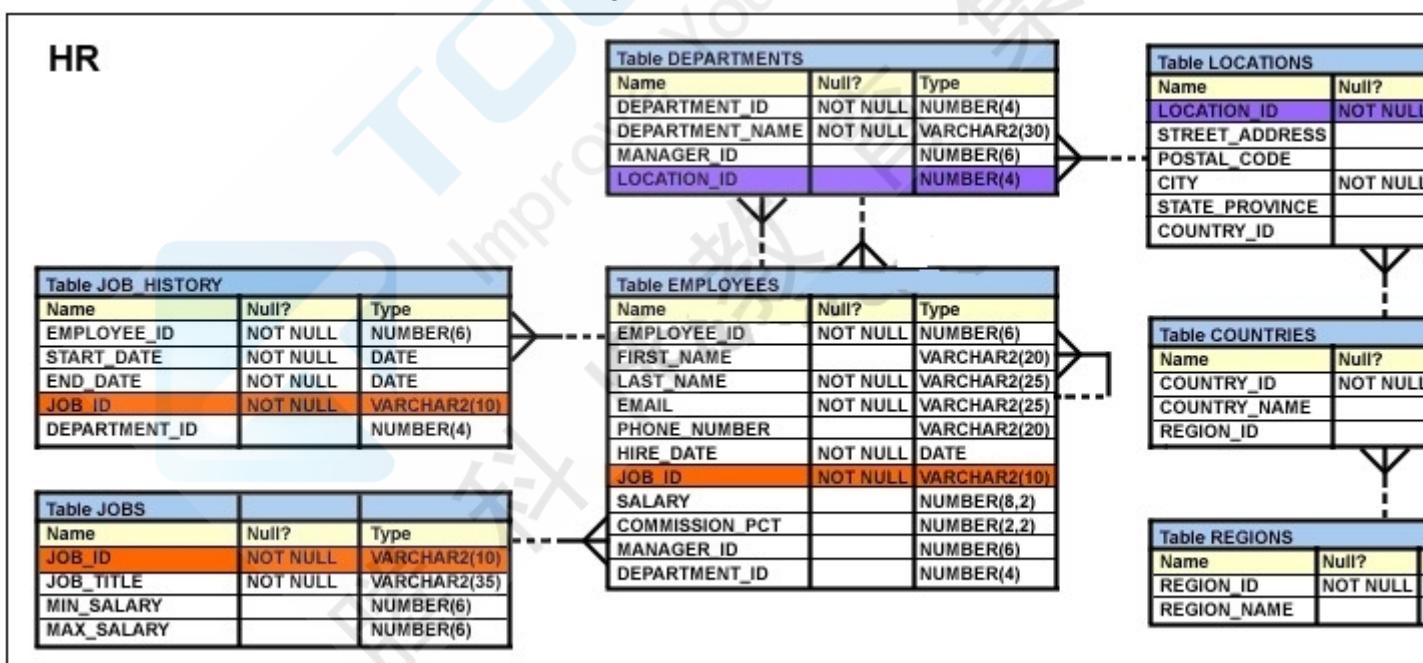

Evaluate the following SQL statement: `SELECT employee_id, department_id FROM employees WHERE department_id= 50 ORDER BY department_id UNION SELECT employee_id, department_id FROM employees WHERE department_id= 90 UNION SELECT employee_id, department_id FROM employees WHERE department_id= 10;` What would be the outcome of the above SQL statement?

- A. The statement would execute successfully and display all the rows in the ascending order of DEPARTMENT_ID.
- B. The statement would execute successfully but it will ignore the ORDER BY clause and display the rows in random order.
- C. The statement would not execute because the positional notation instead of the column name should be used with the ORDER BY clause.
- D. The statement would not execute because the ORDER BY clause should appear only at the end of the

SQL statement, that is, in the last SELECT statement.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 45

Evaluate the following command:

```
CREATE TABLE employees  
(employee_id NUMBER(2) PRIMARY KEY,  
last_name VARCHAR2(25) NOT NULL,  
department_id NUMBER(2), job_id VARCHAR2(8),  
salary NUMBER(10,2));
```

You issue the following command to create a view that displays the IDs and last names of the sales staff in the organization:

```
CREATE OR REPLACE VIEW sales_staff_vu AS  
SELECT employee_id, last_name job_id  
FROM employees  
WHERE job_id LIKE 'SA_%' WITH CHECK OPTION;
```

Which statements are true regarding the above view? (Choose all that apply.)

- A. It allows you to insert details of all new staff into the EMPLOYEES table.
- B. It allows you to delete the details of the existing sales staff from the EMPLOYEES table.
- C. It allows you to update the job ids of the existing sales staff to any other job id in the EMPLOYEES table.
- D. It allows you to insert the IDs, last names and job ids of the sales staff from the view if it is used in multitable INSERT statements.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 46

View the Exhibit and examine the data in EMPLOYEES and

EMPLOYEES						
EMPLOYEE_ID	FIRST_NAME	LAST_NAME	DEPARTMENT_ID	SALARY	COMMISSION_PCT	
154	Nanette	Cambrault	80	7500	.2	
166	Sundar	Ande	80	6400	.1	
167	Amit	Banda	80	6200	.1	
169	Harrison	Bloom	80	10000	.2	

DEPARTMENTS		
DEPARTMENT_ID	DEPARTMENT_NAME	LOCATION_ID
10	Administration	1700
40	Human Resources	2400
70	Public Relations	2700
80	Sales	2500

DEPARTMENTS tables. In the EMPLOYEES table EMPLOYEE_ID is the PRIMARY KEY and DEPARTMENT_ID is the FOREIGN KEY. In the DEPARTMENTS table DEPARTMENT_ID is the PRIMARY KEY.

Evaluate the following UPDATE statement:

```

UPDATE employees a
SET department_id =
(SELECT department_id
FROM departments
WHERE location_id = '2100'),
(salary, commission_pct) =
(SELECT 1.1*AVG(salary), 1.5*AVG(commission_pct)
FROM employees b

```

WHERE a.department_id = b.department_id)
WHERE first_name|| last_name = 'Amit Banda';
What would be the outcome of the above statement?

- A. It would execute successfully and update the relevant data.
- B. It would not execute successfully because there is no LOCATION_ID 2100 in the DEPARTMENTS table.
- C. It would not execute successfully because the condition specified with the concatenation operator is not valid.
- D. It would not execute successfully because multiple columns (SALARY, COMMISSION_PCT) cannot be used in an UPDATE statement.

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 47

View the Exhibit and examine the description of the ORDERS table.

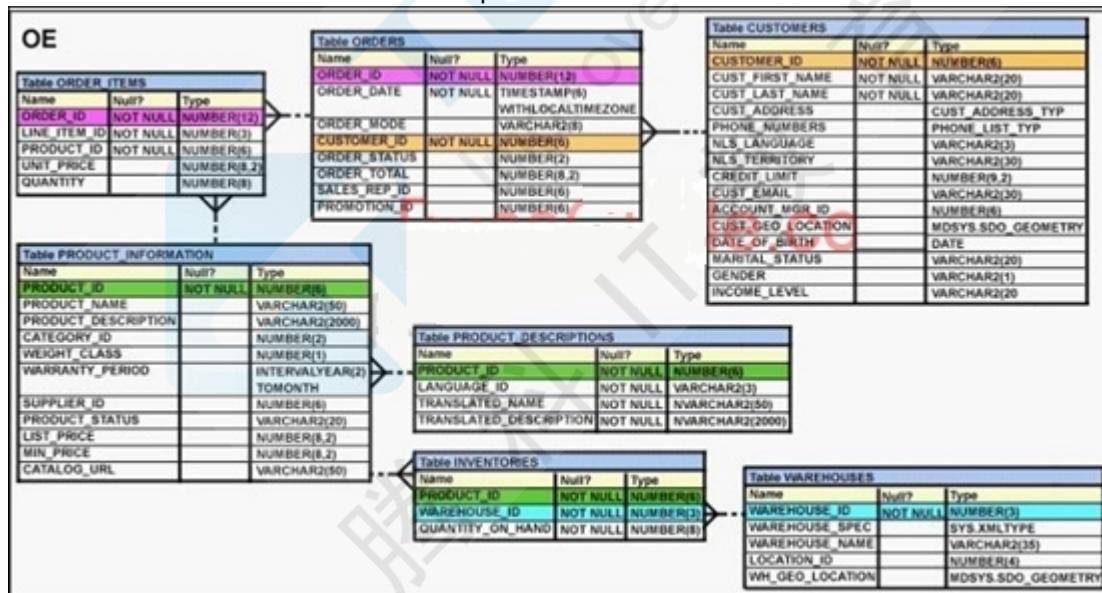

Your manager asked you to get the SALES REP ID and the total numbers of orders placed by each of the sales representatives. Which statement would provide the desired result?

- A. SELECT sales_rep_id, COUNT(order_id) total_orders FROM orders GROUP BY sales_rep_id;
- B. SELECT sales_rep_id, COUNT(order_id) total_orders FROM orders GROUP BY sales_rep_id, total_orders;
- C. SELECT sales_rep_id, COUNT(order_id) total_orders FROM orders;
- D. SELECT sales_rep_id, COUNT(order_id) total_orders FROM orders WHERE sales_rep_id IS NOT NULL;

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 48

View the Exhibit and examine the description of the PRODUCT_INFORMATION table.

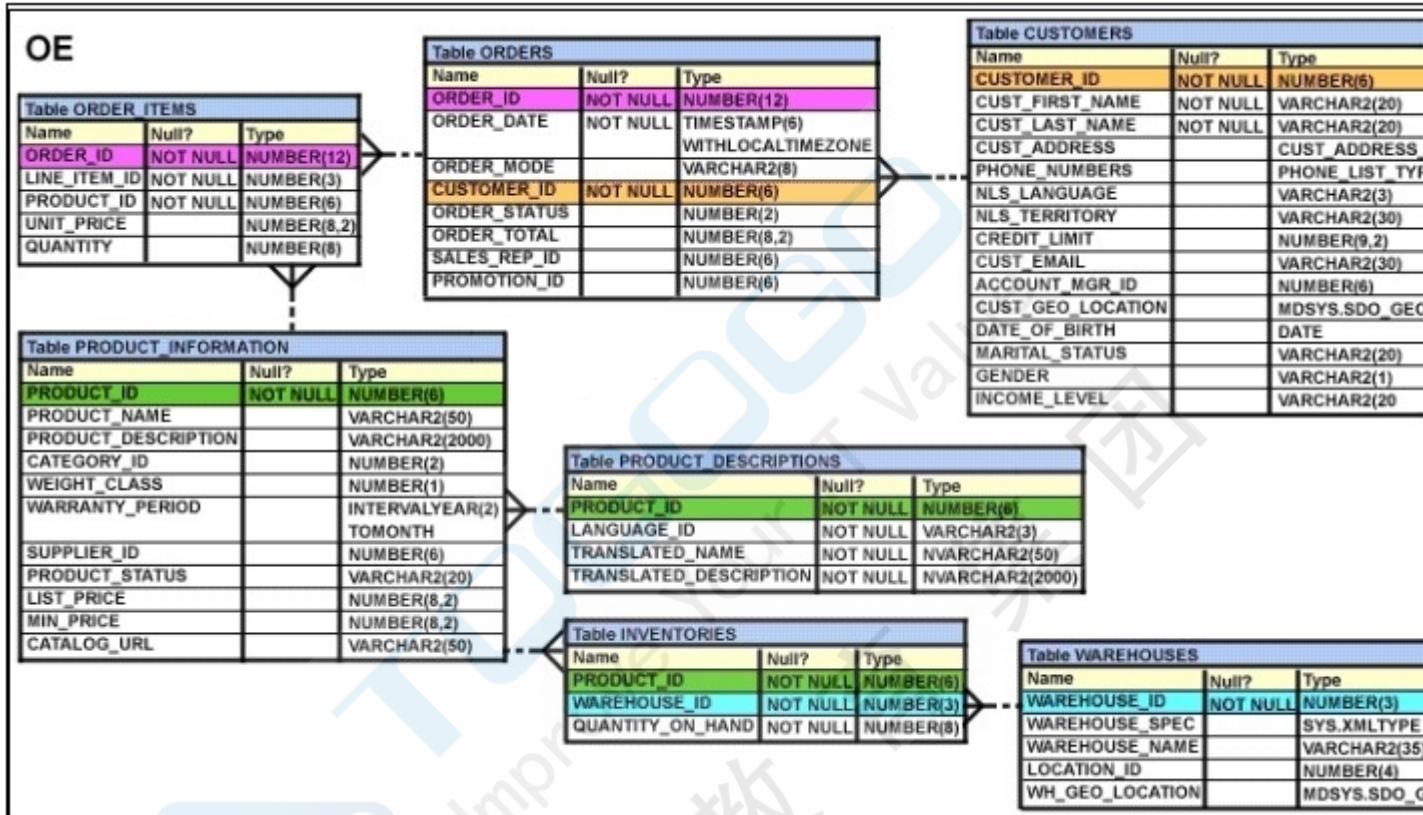

You want to display the expiration date of the warranty for a product. Which SQL statement would you execute?

- SELECT product_id, SYSDATE + warranty_period FROM product_information;
- SELECT product_id, TO_YMINTERVAL(warranty_period) FROM product_information;
- SELECT product_id, TO_YMINTERVAL(SYSDATE) + warranty_period FROM product_information;
- SELECT product_id, TO_YMINTERVAL(SYSDATE + warranty_period) FROM product_information;

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 49

View the Exhibit and examine the structure of the ORDERS and ORDER_ITEMS tables.

In the ORDERS table, ORDER_ID is the PRIMARY KEY and ORDER_DATE has the DEFAULT value as SYSDATE.

ORDERS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE		DATE
CUSTOMER_ID		NUMBER(6)
ORDER_TOTAL		NUMBER(8,2)

ORDER_ITEMS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(3)
PRODUCT_ID	NOT NULL	NUMBER(2)
QTY		NUMBER(6,2)
UNIT PRICE		NUMBER(8,2)

Evaluate the following statement:

```
UPDATE orders
SET order_date=DEFAULT
WHERE order_id IN (SELECT order_id FROM order_items
WHERE qty IS NULL);
```

What would be the outcome of the above statement?

- A. The UPDATE statement would not work because the main query and the subquery use different tables.
- B. The UPDATE statement would not work because the DEFAULT value can be used only in INSERT statements.
- C. The UPDATE statement would change all ORDER_DATE values to SYSDATE provided the current ORDER_DATE is NOT NULL and QTY is NULL
- D. The UPDATE statement would change all the ORDER_DATE values to SYSDATE irrespective of what the current ORDER_DATE value is for all orders where QTY is NULL

Correct Answer: D


Section: (none)

Explanation

Explanation/Reference:

QUESTION 50

View the Exhibit and examine the structure of the PRODUCT INFORMATION table.

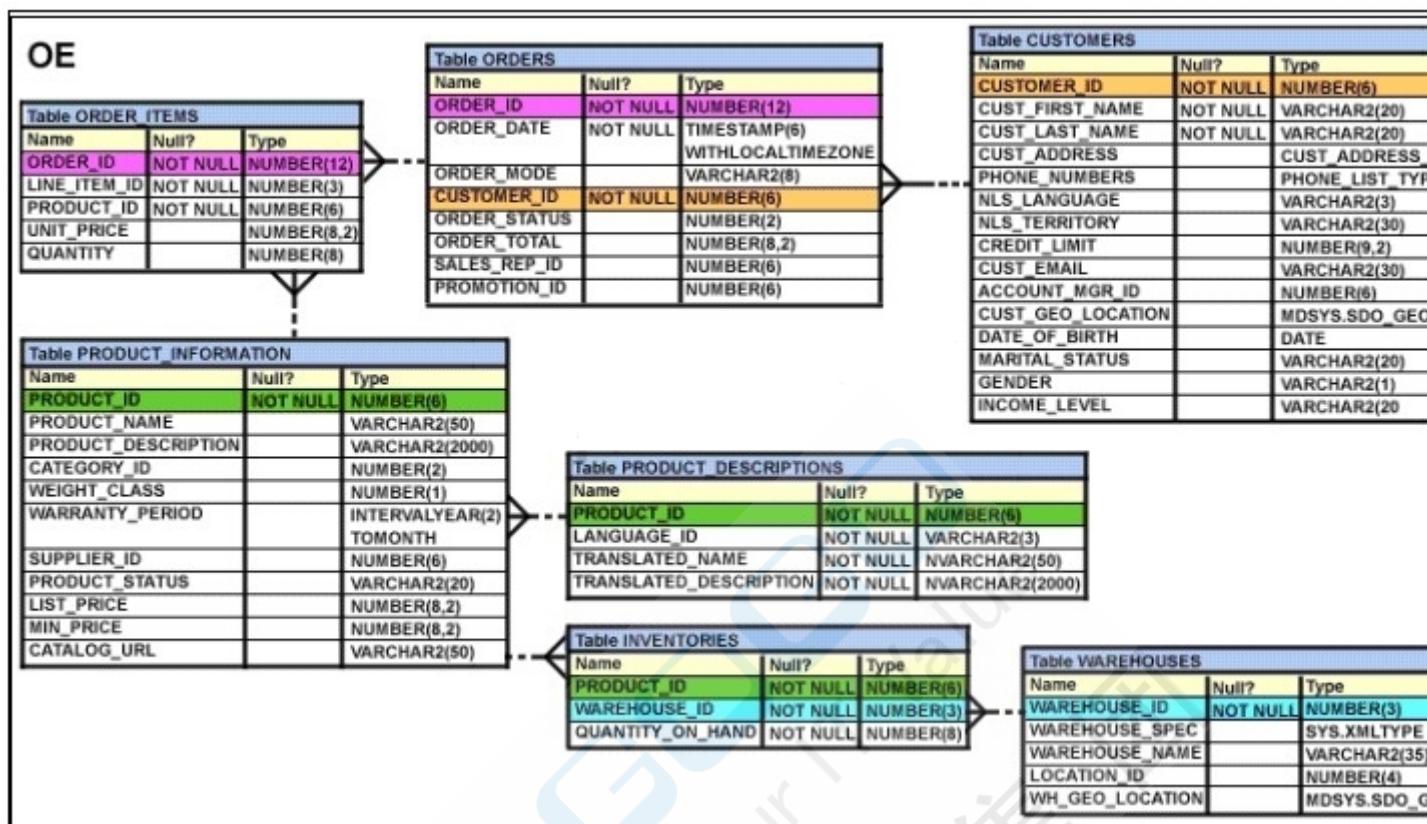

Which two queries would work? (Choose two.)

- SELECT product_name
FROM product_information
WHERE list_price = (SELECT AVG(list_price)
FROM product_information);
- SELECT product_status
FROM product_information
GROUP BY product_status
WHERE list_price < (SELECT AVG(list_price)
FROM product_information);
- SELECT product_status
FROM product_information
GROUP BY product_status
HAVING list_price > (SELECT AVG(list_price)
FROM product_information);
- SELECT product_name FROM product_information WHERE list_price < ANY(SELECT AVG(list_price)
FROM product_information GROUP BY product_status);

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 51

Which two statements best describe the benefits of using the WITH clause? (Choose two.)

- It enables users to store the results of a query permanently.
- It enables users to store the query block permanently in the memory and use it to create complex queries.
- It enables users to reuse the same query block in a SELECT statement, if it occurs more than once in a complex query.

- D. It can improve the performance of a large query by storing the result of a query block having the WITH clause in the user's temporary tablespace.

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 52

Evaluate the following SQL statement:

```
SELECT 2 col1,ycol2
```

```
FROM dual
```

```
UNION
```

```
SELECT 1 , 'x'
```

```
FROM dual
```

```
UNION
```

```
SELECT 3 .NULL
```

```
FROM dual
```

```
ORDER BY 2;
```

Which statement is true regarding the output of the SQL statement?

- A. It would execute and the order of the values in the first column would be 3,2,1.
B. It would execute and the order of the values in the first column would be 1,2,3.
C. It would not execute because the column alias name has not been used in the ORDER BY clause.
D. It would not execute because the number 2 in the ORDER BY clause would conflict with the value 2 in the first SELECT statement.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 53

View the Exhibit and examine the data in the PRODUCTS table.

PRODUCTS	
PRODUCT_ID	PRODUCT_NAME
3054	Plasma Monitor
1782	Compact 400/DQ
1791	Industrial 700/HD
2302	Inkjet B/6
2459	LaserPro 1200/8/BW

Which statement would add a column called PRICE, which cannot contain NULL?

- A. ALTER TABLE products
ADD price NUMBER(8,2) NOT NULL;
B. ALTER TABLE products
ADD price NUMBER(8,2) DEFAULT NOT NULL;
C. ALTER TABLE products
ADD price NUMBER(8,2) DEFAULT 0 NOT NULL;
D. ALTER TABLE products
ADD price NUMBER(8,2) DEFAULT CONSTRAINT p_nn NOT NULL;

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:


QUESTION 54

Evaluate the following SQL statement:

```
CREATE INDEX upper_name_idx
```

```
ON product_information(UPPER(product_name));
```

Which query would use the UPPER_NAME_IDX index?

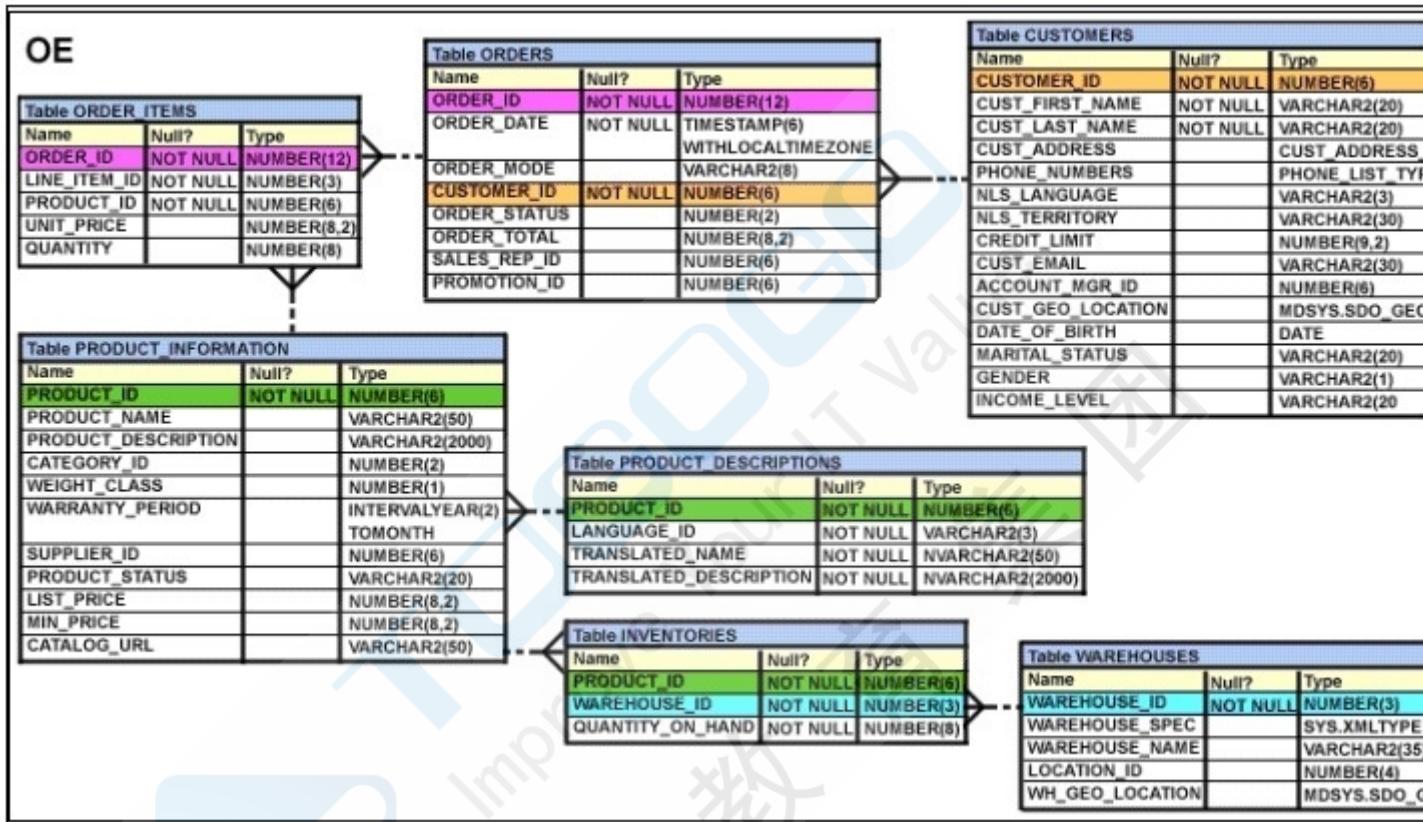

- SELECT UPPER(product_name)
FROM product_information
WHERE product_id = 2254;
- SELECT UPPER(product_name)
FROM product_information;
- SELECT product_id
FROM product_information
WHERE UPPER(product_name) IN ('LASERPRO', 'Cable');
- SELECT product_id, UPPER(product_name)
FROM product_information
WHERE UPPER(product_name)='LASERPRO' OR list_price > 1000;

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 55

View the Exhibit and examine the details for the CATEGORIES_TAB table. Evaluate the following incomplete SQL statement:

CATEGORY_NAME	CATEGORY_DESCRIPTION	CATEGORY_ID
hardware1	monitors	11
hardware2	printers	12
hardware3	harddisks	13
hardware4	memory components/upgrades	14
hardware5	processors, sound and video cards, network cards, motherboards	15
hardware6	keyboards, mouses, mouse pads	16
hardware7	other peripherals (CD-ROM, DVD, tape cartridge drives, ...)	17
hardware8	miscellaneous hardware (cables, screws, power supplies ...)	19
software1	spreadsheet software	21
software2	word processing software	22
software3	database software	23
software4	operating systems	24
software5	software development tools (including languages)	25
software6	miscellaneous software	29
office1	capitalizable assets (desks, chairs, phones ...)	31
office2	office supplies for daily use (pencils, erasers, staples, ...)	32
office3	manuals, other books	33
office4	miscellaneous office supplies	39
hardware	computer hardware and peripherals	10
software	computer software	20
office equipment	office furniture and supplies	30
online catalog	catalog of computer hardware, software, and office equipment	90

SELECT category_name ,category_description FROM categories_tab

You want to display only the rows that have 'harddisks' as part of the string in the CATEGORY_DESCRIPTION column.

Which two WHERE clause options can give you the desired result? (Choose two.)

- A. WHERE REGEXPJJKE (category_description, 'hard+.s');
- B. WHERE REGEXPJJKE (category_description, '^H|hard+.s');
- C. WHERE REGEXPJJKE (category_description, '^H|hard+.s\$');
- D. WHERE REGEXPJJKE (category_description, '[^H]hard+.s');

Correct Answer: AB


Section: (none)

Explanation

Explanation/Reference:

QUESTION 56

View the Exhibit and examine the description of the EMPLOYEES table.

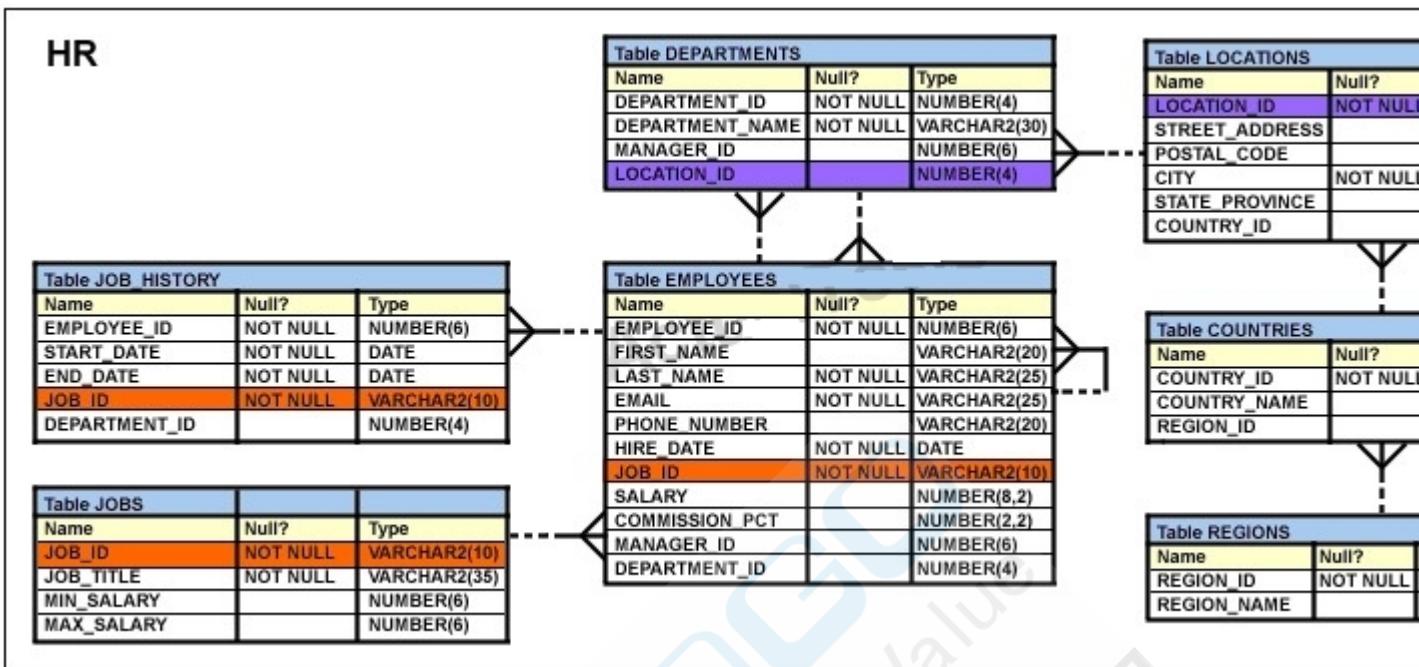

Your company decided to give a monthly bonus of \$50 to all the employees who have completed five years in the company. The following statement is written to display the LAST_NAME, DEPARTMENT_ID, and the total annual salary:

```
SELECT last_name, department_id, salary*450*12 "Annual Compensation" FROM employees WHERE
MONTHS_BETWEEN(SYSDATE, hire_date)/12 >= 5;
```

When you execute the statement, the "Annual Compensation" is not computed correctly. What changes would you make to the query to calculate the annual compensation correctly?

- Change the SELECT clause to SELECT last_name, department_id, salary*12+50 "Annual Compensation".
- Change the SELECT clause to SELECT last_name, department_id, salary+(50*12) "Annual Compensation".
- Change the SELECT clause to SELECT last_name, department_id, (salary +50)*12 "Annual Compensation".
- Change the SELECT clause to SELECT last_name, department_id, (salary*12)+50 "Annual Compensation".

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 57

View the Exhibit and examine the description of the ORDERS table.

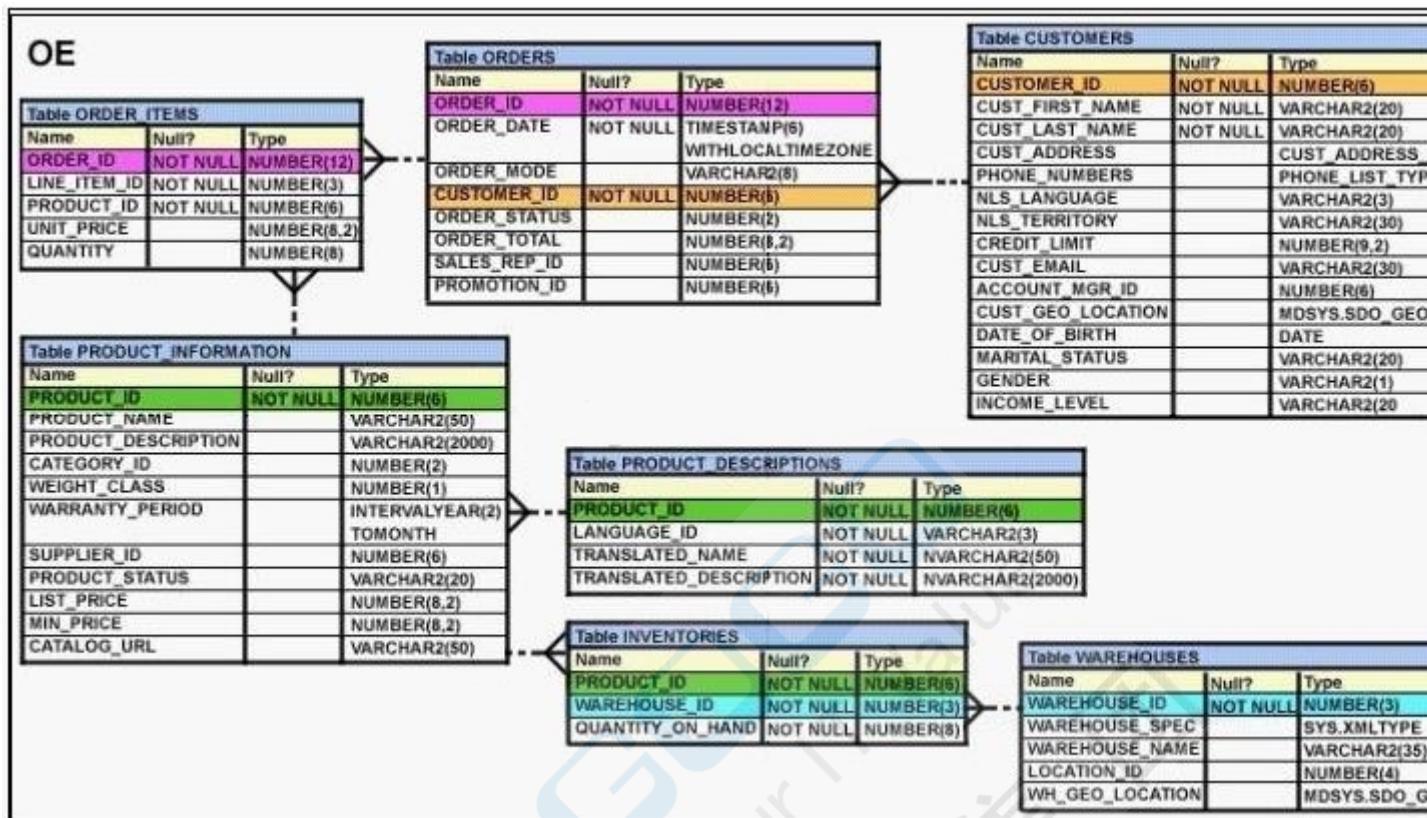

Evaluate the following SQL statement:

SELECT order_id, customer_id

FROM orders

WHERE order_date > 'June 30 2001';

Which statement is true regarding the execution of this SQL statement?

- A. It would not execute because 'June 30 2001' in the WHERE condition is not enclosed within double quotation marks.
- B. It would execute and would return ORDER_ID and CUSTOMER_ID for all records having ORDER_DATE greater than 'June 30 2001'.
- C. It would not execute because 'June 30 2001' in the WHERE condition cannot be converted implicitly and needs the use of the TO_DATE conversion function for proper execution.
- D. It would not execute because 'June 30 2001' in the WHERE condition cannot be converted implicitly and needs the use of the TO_CHAR conversion function for proper execution.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 58

Which statement correctly differentiates a system privilege from an object privilege?

- A. System privileges can be granted only by the DBA whereas object privileges can be granted by DBAs or the owner of the object.
- B. System privileges give the rights to only create user schemas whereas object privileges give rights to manipulate objects in a schema.
- C. Users require system privileges to gain access to the database whereas they require object privileges to create objects in the database.
- D. A system privilege is the right to perform specific activities in a database whereas an object privilege is a right to perform activities on a specific object in the database.

Correct Answer: D


Section: (none)

Explanation

Explanation/Reference:

QUESTION 59

View the Exhibit and examine the structure of the EMPLOYEES table.

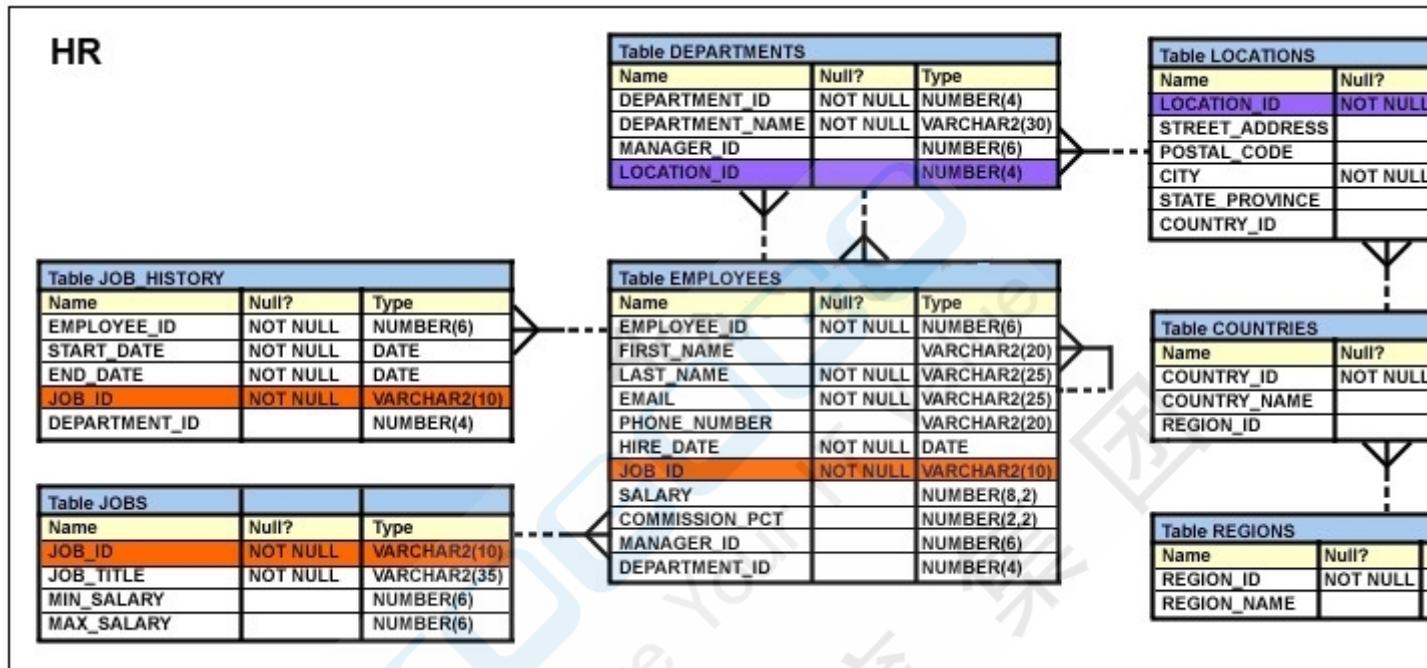

You want to retrieve hierarchical data of the employees using the top-down hierarchy. Which SQL clause would let you choose the direction to walk through the hierarchy tree?

- A. WHERE
- B. HAVING
- C. GROUP BY
- D. START WITH
- E. CONNECT BY PRIOR

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

QUESTION 60

Evaluate the following CREATE TABLE command:

```
CREATE TABLE order_item
(order_id NUMBER(3),
item_id NUMBER(2),
qty NUMBER(4),
CONSTRAINT ord_itm_id_pk
PRIMARY KEY (order_id item_id)
USING INDEX
(CREATE INDEX ord_itm_idx
ON order_item(order_id,item_id)));
```

Which statement is true regarding the above SQL statement?

- A. It would execute successfully and only ORD_ITM_IDX index would be created.

- B. It would give an error because the USING INDEX clause cannot be used on a composite primary key.
- C. It would execute successfully and two indexes ORD_ITM_IDX and ORD_ITM_ID_PK would be created.
- D. It would give an error because the USING INDEX clause is not permitted in the CREATE TABLE command.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 61

Which two statements best describe the benefits of using the WITH clause? (Choose two.)

- A. It enables users to store the results of a query permanently.
- B. It enables users to store the query block permanently in the memory and use it to create complex queries.
- C. It enables users to reuse the same query block in a SELECT statement, if it occurs more than once in a complex query.
- D. It can improve the performance of a large query by storing the result of a query block having the WITH clause in the user's temporary tablespace.

Correct Answer: CD


Section: (none)

Explanation

Explanation/Reference:

QUESTION 62

View the Exhibit and examine the description of the ORDERS table.

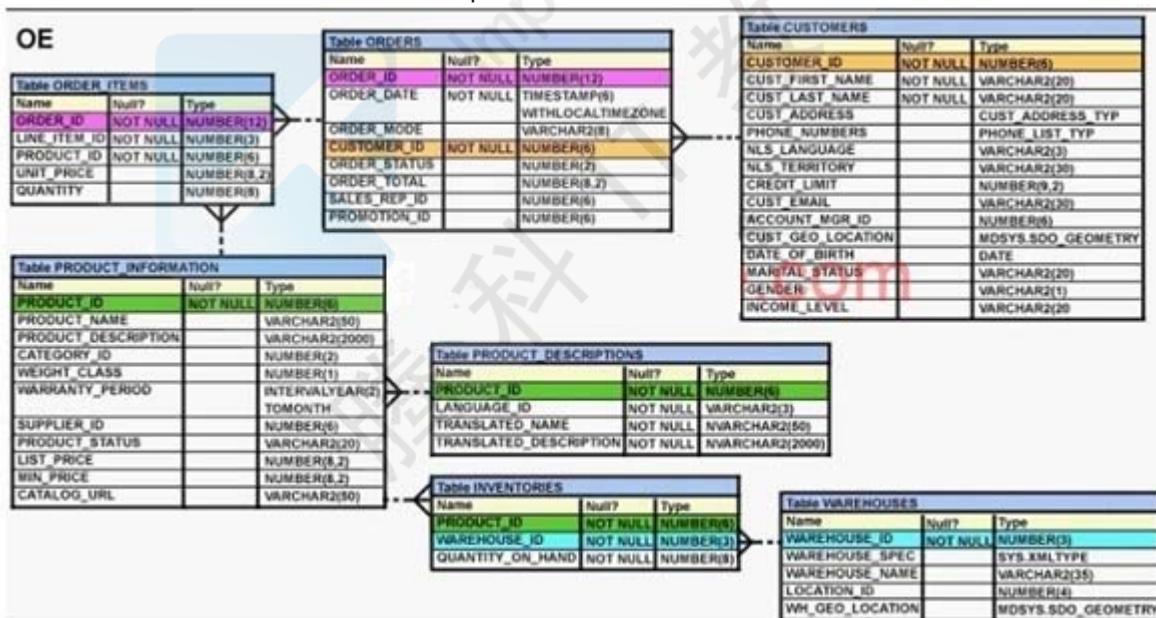

The orders in the ORDERS table are placed through sales representatives only. You are given the task to get the SALES_REP_ID from the ORDERS table of those sales representatives who have successfully referred more than 10 customers. Which statement would achieve this purpose?

- A. SELECT sales_rep_id, COUNT(customer_id) "Total"
FROM orders "
HAVING COUNT(customer_id) > 10;

- B. SELECT sales_rep_id, COUNT(customer_id) "Total"
 FROM orders "
 WHERE COUNT(customer_id) > 10
 GROUP BY sales_rep_id;
- C. SELECT sales_rep_id, COUNT(customer_id) "Total"
 FROM orders "
 GROUP BY sales_rep_id
 HAVING total > 10;
- D. SELECT sales_rep_id, COUNT(customer_id) "Total"
 FROM orders "
 GROUP BY sales_rep_id
 HAVING COUNT(customer_id) > 10;

Correct Answer: D


Section: (none)

Explanation

Explanation/Reference:

QUESTION 63

View the Exhibit and examine the description of the EMPLOYEES table.

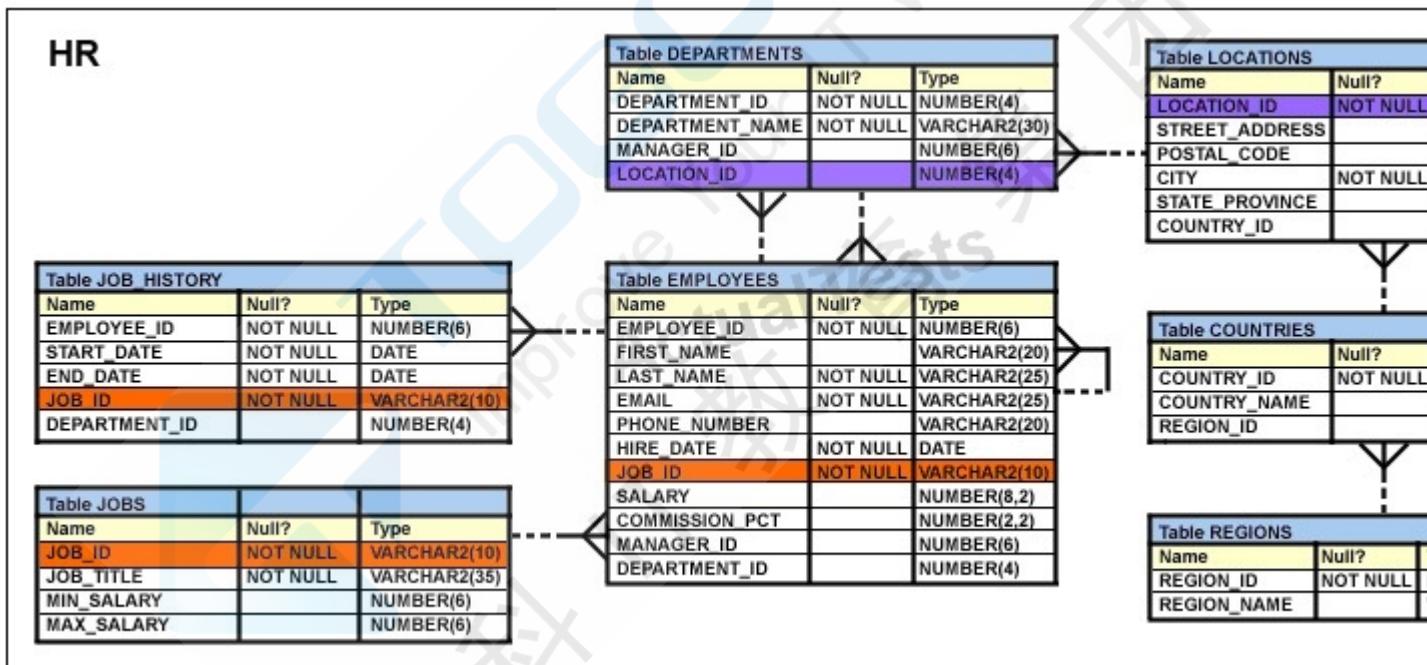

Evaluate the following SQL statement:

SELECT employee_id, last_name, job_id, manager_id, LEVEL

FROM employees

START WITH employee_id = 101

CONNECT BY PRIOR employee_id=manager_id ;

Which two statements are true regarding the output of this command? (Choose two.)

- A. The output would be in top-down hierarchy starting with EMPLOYEE_ID having value 101.
- B. The output would be in bottom-up hierarchy starting with EMPLOYEE_ID having value 101.
- C. The LEVEL column displays the number of employees in the hierarchy under the employee having the EMPLOYEE_ID 101.
- D. The LEVEL column displays the level in the hierarchy at which the employee is placed under the employee having the EMPLOYEE_ID 101

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 64

View the Exhibit and examine the structure of ORD and ORD_ITEMS tables.

ORD		
Name	Null?	Type
ORD_NO	NOT NULL	NUMBER(2)
ORD_DATE		DATE
CUST_ID		NUMBER(4)

ORD_ITEMS		
Name	Null?	Type
ORD_NO	NOT NULL	NUMBER(2)
ITEM_NO	NOT NULL	NUMBER(3)
QTY		NUMBER(8,2)

In the ORD table, the PRIMARY KEY is ORD_NO and in the ORD_ITEMS tables the composite PRIMARY KEY is (ORD_NO, ITEM_NO).

Which two CREATE INDEX statements are valid? (Choose two.)

- A. CREATE INDEX ord_idx ON ord(ord_no);
- B. CREATE INDEX ord_idx ON ord_items(ord_no);
- C. CREATE INDEX ord_idx ON ord_items(item_no);
- D. CREATE INDEX ord_idx
ON ord,ord_items(ord_no, ord_date,qty);

Correct Answer: BC


Section: (none)

Explanation

Explanation/Reference:

QUESTION 65

View the Exhibit and examine the description of the EMPLOYEES table.

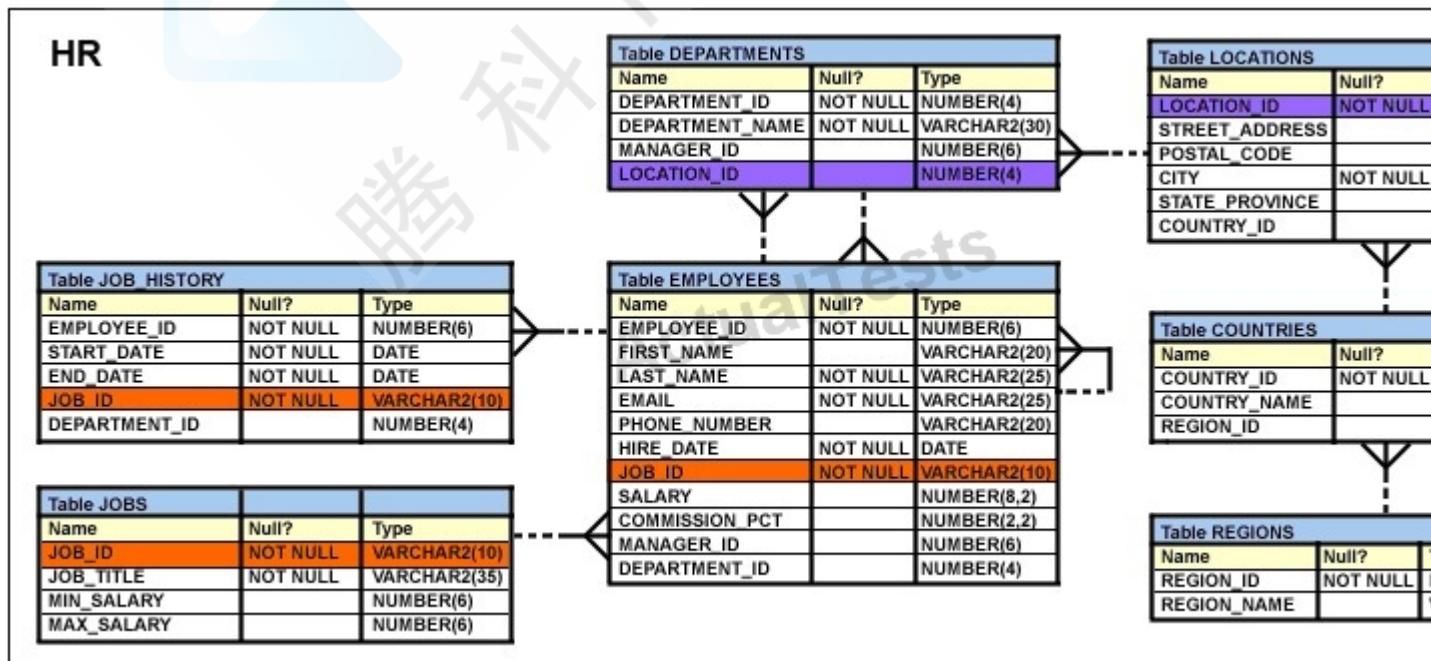

Evaluate the following SQL statement:

```
SELECT first_name, employee_id, NEXT_DAY(ADD_MONTHS(hire_date, 6), 1) "Review" FROM employees;
```

The query was written to retrieve the FIRST_NAME, EMPLOYEE_ID, and review date for employees.

The review date is the first Monday after the completion of six months of the hiring. The NLS_TERRITORY parameter is set to AMERICA in the session.

Which statement is true regarding this query?

- A. The query would execute to give the desired output.
- B. The query would not execute because date functions cannot be nested.
- C. The query would execute but the output would give review dates that are Sundays.
- D. The query would not execute because the NEXT_DAY function accepts a string as argument.

Correct Answer: C

Section: (none)


Explanation

Explanation/Reference:

QUESTION 66

View the Exhibit and examine the table structure of DEPARTMENTS and LOCATIONS tables.

HR

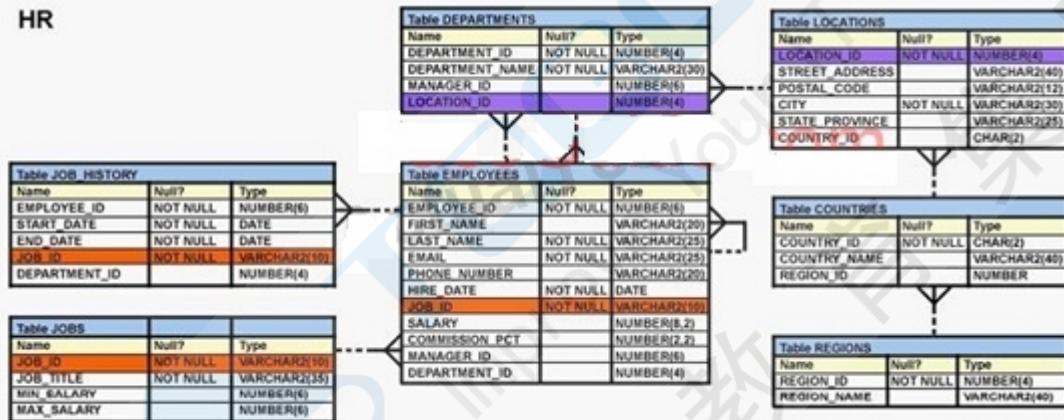

You want to display all the cities that have no departments and the departments that have not been allocated cities.

Which type of join between DEPARTMENTS and LOCATIONS tables would produce this information as part of its output?

- A. NATURAL JOIN
- B. FULL OUTER JOIN
- C. LEFT OUTER JOIN
- D. RIGHT OUTER JOIN

Correct Answer: B


Section: (none)

Explanation

Explanation/Reference:

QUESTION 67

View the Exhibit and examine DEPARTMENTS and the LOCATIONS tables.

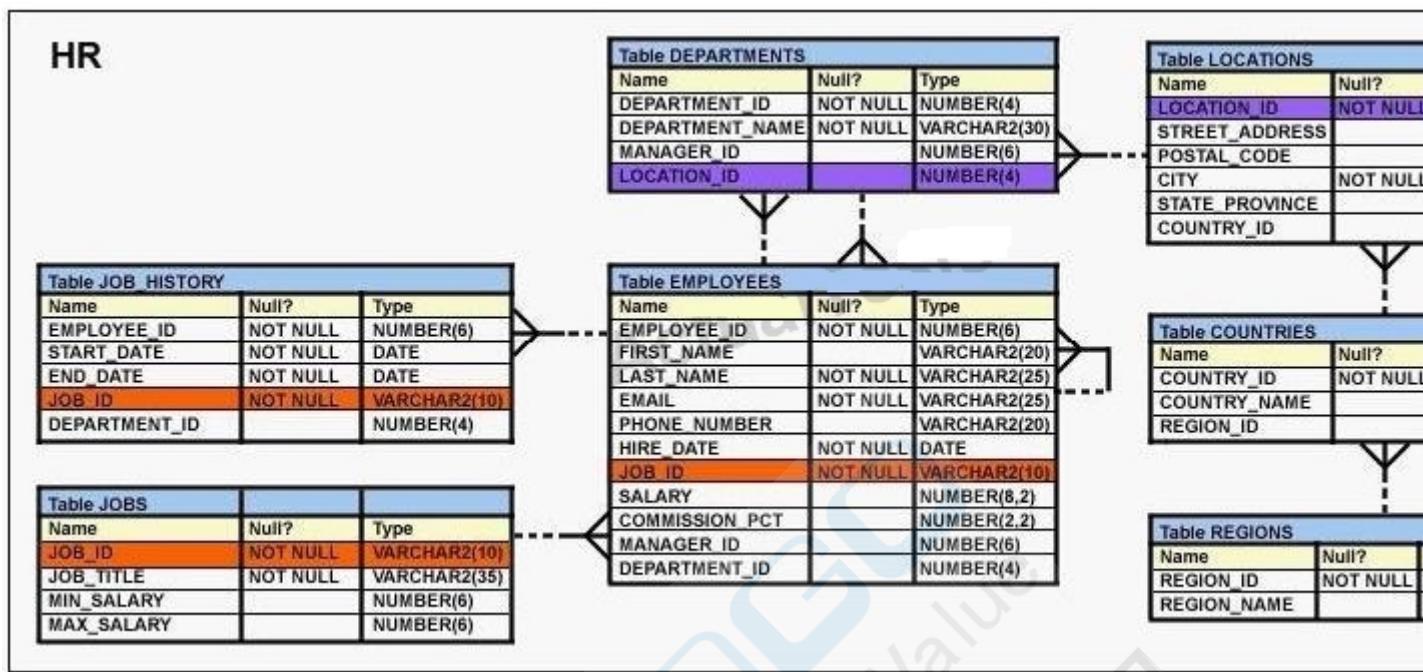

Evaluate the following SQL statement: `SELECT location_id, city`

`FROM locations`
`I WHERE NOT EXISTS (SELECT location_id`
`FROM departments`
`WHERE location_id <> I.location_id);`

This statement was written to display LOCATIONID and CITY where there are no departments located.
 Which statement is true regarding the execution and output of the command?

- A. The statement would execute and would return the desired results.
- B. The statement would not execute because the = comparison operator is missing in the WHERE clause of the outer query.
- C. The statement would execute but it will return zero rows because the WHERE clause in the inner query should have the = operator instead of <>.
- D. The statement would not execute because the WHERE clause in the outer query is missing the column name for comparison with the inner query result.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 68

View the Exhibit and examine PRODUCTS and ORDER_ITEMS tables.

PRODUCTS

PRODUCT_ID	PRODUCT_NAME
1	Inkjet C/8/HQ
2	CPU D300
3	HD 8GB /I
4	HD 12GB /R

ORDER_ITEMS

ORDER_ID	PRODUCT_ID	QTY	UNIT PRICE
11	1	10	100
22	2	15	120
33	3	10	50
44	1	5	10
66	2	20	125

You executed the following query to display PRODUCT_NAME and the number of times the product has been ordered:

```
SELECT p.product_name, i.item_cnt
FROM (SELECT product_id, COUNT (*) item_cnt
      FROM order_items
     GROUP BY product_id) i RIGHT OUTER JOIN products p
       ON i.product_id = p.product_id;
What would happen when the above statement is executed?
```

- A. The statement would execute successfully to produce the required output.
- B. The statement would not execute because inline views and outer joins cannot be used together.
- C. The statement would not execute because the ITEM_CNT alias cannot be displayed in the outer query.
- D. The statement would not execute because the GROUP BY clause cannot be used in the inline view.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 69

View the Exhibit and examine the details of the PRODUCT_INFORMATION table.

PRODUCT_NAME	CATEGORY_ID
Inkjet C/8/HQ	12
Inkjet C/4	12
LaserPro 600/6/BW	12
LaserPro 1200/8/BW	12
Inkjet B/6	12
Industrial 700/HD	12
Industrial 600/DQ	12
Compact 400/LQ	12
Compact 400/DQ	12
HD 12GB /R	13
HD 10GB /I	13
HD 12GB @7200 /SE	13
HD 18.2GB @10000 /E	13
HD 18.2GB@10000 /I	13
HD 18GB /SE	13
HD 6GB /I	13
HD 8.2GB @5400	13

You have the requirement to display PRODUCT_NAME and LIST_PRICE from the table where the CATEGORYID column has values 12 or 13, and the SUPPLIER_ID column has the value 102088. You executed the following SQL statement:

```
SELECT product_name, list_price
FROM product_information
WHERE (category_id = 12 AND category_id = 13) AND supplier_id = 102088;
```

Which statement is true regarding the execution of the query?

- A. It would execute but the output would return no rows.
- B. It would execute and the output would display the desired result.
- C. It would not execute because the entire WHERE clause condition is not enclosed within the parentheses.
- D. It would not execute because the same column has been used in both sides of the AND logical operator to form the condition.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 70

Given below is a list of functions and the tasks performed by using these functions, in random order.

Function Usage

- 1) LPAD a) Used to truncate a column, expression, or value to n decimal places
- 2) TRUNC b) Used to remove heading or trailing or both characters from the character string
- 3) DECODE c) Pads the character value right-justified to a total width of n character positions
- 4) TRIM d) Used to return the numeric value for position of a named character from the character string
- 5) INSTR e) Used to translate an expression after comparing it with each search value

Which option correctly matches the function names with their usage?

- A. 1-c, 2-b, 3-e, 4-a, 5-d
- B. 1-e, 2-b, 3-c, 4-a, 5-d
- C. 1-e, 2-a, 3-c, 4-d, 5-b

D. 1-c, 2-a, 3-e, 4-b, 5-d

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 71

Which statements are true regarding the hierarchical query in Oracle Database 10g? (Choose all that apply.)

- A. It is possible to retrieve data only in top-down hierarchy.
- B. It is possible to retrieve data in top-down or bottom-up hierarchy.
- C. It is possible to remove an entire branch from the output of the hierarchical query.
- D. You cannot specify conditions when you retrieve data by using a hierarchical query.

Correct Answer: BC

Section: (none)


Explanation

Explanation/Reference:

QUESTION 72

View the Exhibit and examine the structure of the LOCATIONS and DEPARTMENTS tables.

HR

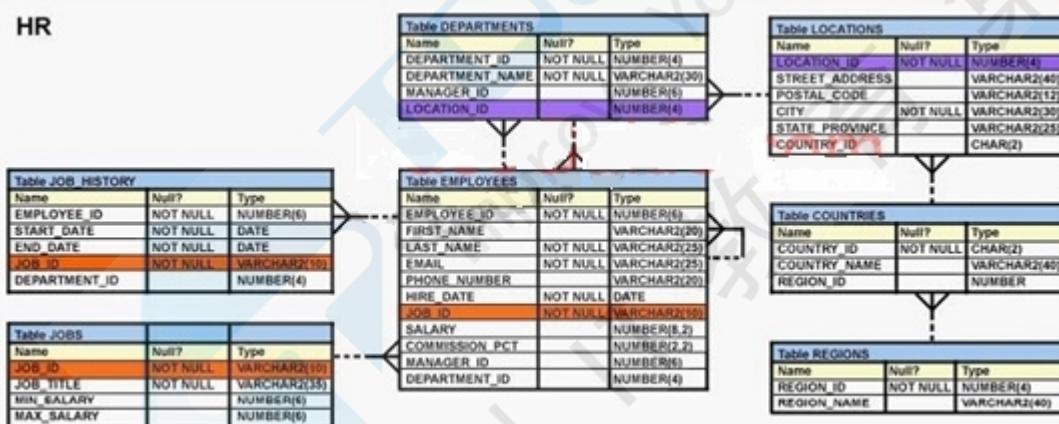

Which SET operator should be used in the blank space in the following SQL statement to display the cities that have departments located in them?

SELECT location_id, city

FROM locations

SELECT location_id, city

FROM locations JOIN departments

USING(location_id);

- A. UNION
- B. MINUS
- C. INTERSECT
- D. UNION ALL

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 73

The details of the order ID, order date, order total, and customer ID are obtained from the ORDERS table. If the order value is more than 30000, the details have to be added to the LARGE_DRDERS table. The order ID, order date, and order total should be added to the ORDER_HISTORY table, and order ID and customer ID should be added to the CUST_HISTORY table. Which multitable INSERT statement would you use?

- A. Pivoting INSERT
- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 74

View the Exhibit and examine the structure of ORDERS and CUSTOMERS tables.

ORDERS		
Name	Null?	Type
ORDER_ID	NOT NULL	NUMBER(4)
ORDER_DATE	NOT NULL	DATE
ORDER_MODE		VARCHAR2(8)
CUSTOMER_ID	NOT NULL	NUMBER(6)
ORDER_TOTAL		NUMBER(8, 2)

CUSTOMERS		
Name	Null?	Type
CUSTOMER_ID	NOT NULL	NUMBER(6)
CUST_FIRST_NAME	NOT NULL	VARCHAR2(20)
CUST_LAST_NAME	NOT NULL	VARCHAR2(20)
CREDIT_LIMIT		NUMBER(9, 2)
CUST_ADDRESS		VARCHAR2(40)

Which INSERT statement should be used to add a row into the ORDERS table for the customer whose CUST LAST NAME is Roberts and CREDIT LIMIT is 600?

- A. `INSERT INTO orders VALUES (1,'10-mar-2007', 'direct', (SELECT customer_id FROM customers WHERE cust_last_name='Roberts' AND credit_limit=600), 1000);`
- B. `INSERT INTO orders (order_id,order_date,order_mode, (SELECT customer_id FROM customers WHERE cust_last_name='Roberts' AND credit_limit=600) .order_total) VALUES(1 , '10-mar-2007', 'direct', &&customer_id, 1000);`
- C. `INSERT INTO orders (order_id.order_date.order_mode, (SELECT customer_id FROM customers WHERE cust_last_name='Roberts' AND credit_limit=600) .order_total) VALUES(1 , '10-mar-2007', 'direct', &customer_id, 1000);`
- D. `INSERT INTO(SELECT o.order_id, o.order_date.o.order_mode.c.customer_id, o.order_total FROM orders o, customers c WHERE o.customer_id = c.customer_id AND c.cust_last_name='Roberts'ANDc. Credit_limit=600)`

```

VALUES (1,'10-mar-2007', 'direct',(SELECT customer_id
FROM customers
WHERE cust_last_name='Roberts' AND
Credit_limit=600), 1000);

```

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 75

View the Exhibit and examine the structure of the ORDERS table. The columns ORDER_MODE and ORDER_TOTAL have the default values 'direct' and 0 respectively.

ORDERS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE	NOT NULL	TIMESTAMP(6)
ORDER_MODE		VARCHAR2(8)
CUSTOMER_ID	NOT NULL	NUMBER(6)
ORDER_TOTAL		NUMBER(8,2)

Which two INSERT statements are valid? (Choose two.)

- A. `INSERT INTO orders
VALUES (1, O9-mar-2007', 'online', ,1000);`
- B. `INSERT INTO orders
(order_id ,order_date ,order_mode ,
customer_id ,order_total)
VALUES(1 ,TO_DATE(NULL), 'online', 101, NULL);`
- C. `INSERT INTO
(SELECT order_id ,order_date .customer_id
FROM orders)
VALUES (1,O9-mar-2007', 101);`
- D. `INSERT INTO orders
VALUES (1,09-mar-2007', DEFAULT, 101, DEFAULT);`
- E. `INSERT INTO orders
(order_id ,order_date ,order_mode .order_total)
VALUES (1 , '10-mar-2007','online',1000);`

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 76

View the Exhibit and examine the details of the EMPLOYEES table.

EMPLOYEE_ID		LAST_NAME	JOB_ID
	201	Hartstein	MK_MAN
	101	Kochhar	AD_VP
	102	De Haan	AD_VP
	114	Raphaely	PU_MAN
	120	Weiss	ST_MAN
	121	Fripp	ST_MAN
	122	Kaufling	ST_MAN
	123	Vollman	ST_MAN
	124	Mourgos	ST_MAN
	145	Russell	SA_MAN
	146	Partners	SA_MAN
	147	Errazuriz	SA_MAN
	148	Cambrault	SA_MAN
	149	Zlotkey	SA_MAN
	200	Whalen	AD_ASST
	203	Mavris	HR_REP
	204	Baer	PR_REP
	205	Higgins	AC_MGR
	108	Greenberg	FI_MGR

You want to generate a hierarchical report for all the employees who report to the employee whose EMPLOYEE_ID is 100.

Which SQL clauses would you require to accomplish the task? (Choose all that apply.)

- A. WHERE
- B. HAVING
- C. GROUP BY
- D. START WITH
- E. CONNECT BY

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 77

A subquery is called a single-row subquery when

- A. the inner query returns a single value to the main query
- B. the inner query uses an aggregate function and returns one or more values
- C. there is only one inner query in the main query and the inner query returns one or more values
- D. the inner query returns one or more values and the main query returns a single value as output

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 78

View the Exhibit and examine the structure of the EMPLOYEES table.

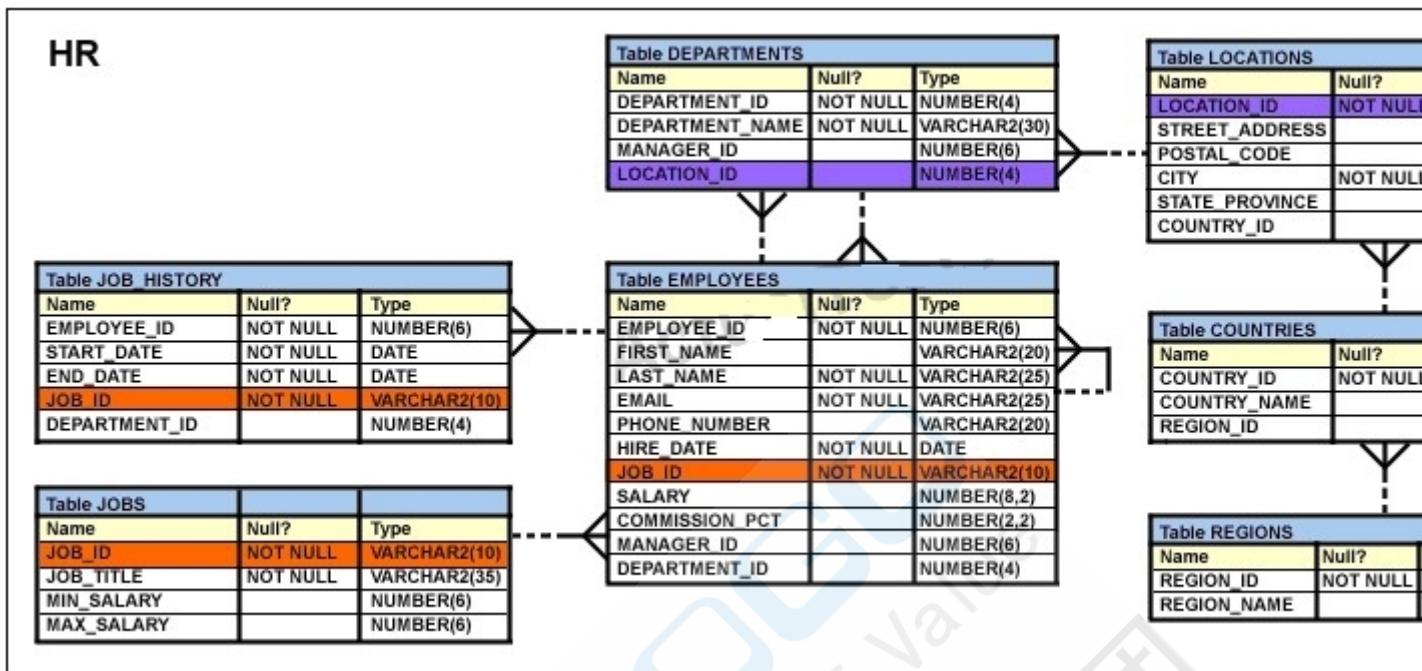

You want to know the FIRST_NAME and SALARY for all employees who have the same manager as that of the employee with the first name 'Neena' and have salary equal to or greater than that of 'Neena'. Which SQL statement would give you the desired result?

- SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= ALL (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena') AND first_name <> 'Neena';
- SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena') AND first_name <> 'Neena';
- SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= ANY (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena' AND first_name <> 'Neena');
- SELECT first_name, salary FROM employees WHERE (manager_id = (SELECT manager_id FROM employees WHERE first_name = 'Neena')) AND salary >= (SELECT salary FROM employees WHERE first_name = 'Neena')) AND first_name <> 'Neena';

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 79

View the Exhibit and examine the data in EMP and DEPT tables.

DEPT	
DEPTNO	DEPTNAME
10	IT
20	HR

EMP		
EMPNO	ENAME	DEPTNO
1	KING	10
2	HARI	20

In the DEPT table, DEPTNO is the PRIMARY KEY.

In the EMP table, EMPNO is the PRIMARY KEY and DEPTNO is the FOREIGN KEY referencing the DEPTNO column in the DEPT table.

What would be the outcome of the following statements executed in the given sequence?

```
DROP TABLE emp;
FLASHBACK TABLE emp TO BEFORE DROP;
INSERT INTO emp VALUES (2,COTT 10); INSERT INTO emp VALUES (3,ING 55);
```

- A. Both the INSERT statements would fail because all constraints are automatically retrieved when the table is flashed back.
- B. Both the INSERT statements would succeed because none of the constraints on the table are automatically retrieved when the table is flashed back.
- C. Only the first INSERT statement would succeed because all the constraints except the primary key constraint are automatically retrieved after a table is flashed back.
- D. Only the second INSERT statement would succeed because all the constraints except referential integrity constraints that reference other tables are retrieved automatically after the table is flashed back.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 80

Evaluate the following CREATE TABLE command:
CREATE TABLE order_item (order_id NUMBER(3),
Item_id NUMBER(2),
qty NUMBER(4),
CONSTRAINT ord_itm_id_pk
PRIMARY KEY (order_id item_id)
USING INDEX
(CREATE INDEX ord_itm_idx
ON order_item(order_id item_id)));

Which statement is true regarding the above SOL statement?

- A. It would execute successfully and only ORD_ITM_IDX index would be created.
- B. It would give an error because the USING INDEX clause cannot be used on a composite primary key.
- C. It would execute successfully and two indexes ORD_ITM_IDX and ORD_ITM_ID_PK would be created.
- D. It would give an error because the USING INDEX clause is not permitted in the CREATE TABLE command.

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 81

View the Exhibit and examine the description of the CUSTOMERS table.

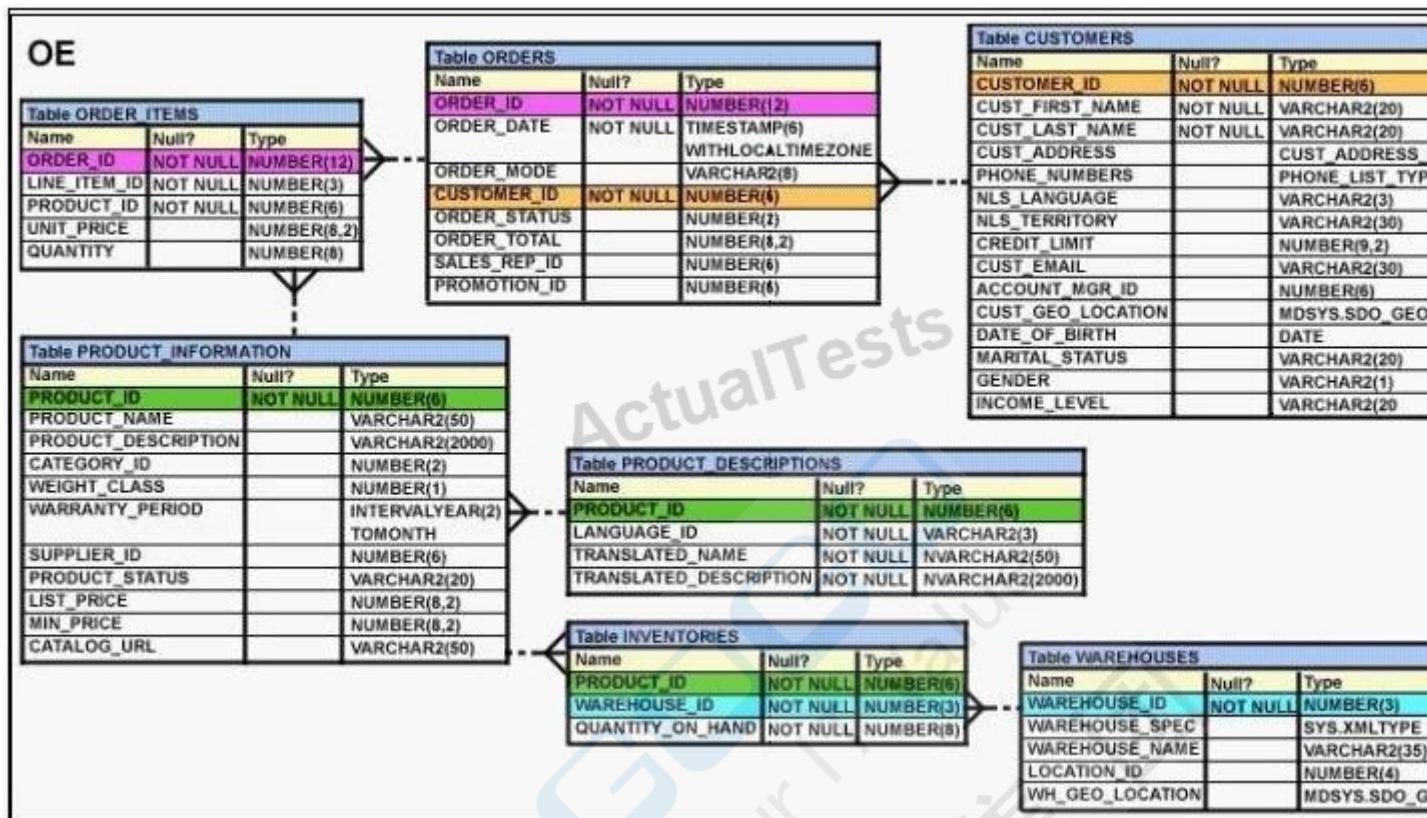

You want to add a constraint on the CUST_FIRST_NAME column of the CUSTOMERS table so that the value inserted in the column does not have numbers.

Which SQL statement would you use to accomplish the task?

- ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CUST_FIRST_NAME REGEXP '^[A-Z]+') NOVALIDATE;
- ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CUST_FIRST_NAME REGEXP '^[0-9]') NOVALIDATE;
- ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CUST_FIRST_NAME REGEXP '[:alpha:]') NOVALIDATE;
- ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CUST_FIRST_NAME REGEXP '[:digit:]') NOVALIDATE ;

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 82

View the Exhibit and examine the structure of the CUST table.

CUST

Name	Null?	Type
CUST_ID	NOT NULL	NUMBER(2)
CUST_NAME		VARCHAR2(15)

Evaluate the following SQL statements executed in the given order:

```

ALTER TABLE cust
ADD CONSTRAINT cust_id_pk PRIMARY KEY(cust_id) DEFERRABLE INITIALLY DEFERRED;
    
```

```
INSERT INTO cust VALUES (1 /RAJ1); --row 1  
INSERT INTO cust VALUES (1 ,SAM); --row 2  
COMMIT;
```

```
SET CONSTRAINT cust_id_pk IMMEDIATE;
```

```
INSERT INTO cust VALUES (1 /LATA1); --row 3  
INSERT INTO cust VALUES (2 .KING1); --row 4  
COMMIT;
```

Which rows would be made permanent in the CUST table?

- A. row 4 only
- B. rows 2 and 4
- C. rows 3 and 4
- D. rows 1 and 4

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 83

You need to create a table with the following column specifications:

1. Employee ID (numeric data type) for each employee
2. Employee Name, (character data type) which stores the employee name
3. Hire date, to store the date when the employee joined the organization
4. Status (character data type). It should contain the value if no data is entered.
5. Resume (character large object [CLOB] data type), which would contain the resume submitted by the employee

Which is the correct syntax to create this table?

- A. CREATE TABLE EMP_1
(emp_id NUMBER(4),
emp_name VARCHAR2(25),
start_date DATE,
e_status VARCHAR2(10) DEFAULT ACTIVE',
resume CLOB(200));
- B. CREATE TABLE 1_EMP
(emp_id NUMBER(4),
emp_name VARCHAR2(25),
start_date DATE,
emp_status VARCHAR2(10) DEFAULT ACTIVE',
resume CLOB);
- C. CREATE TABLE 1_EMP
(emp_id NUMBER(4),
emp_name VARCHAR2(25), start_date DATE,
emp_status VARCHAR2(10) DEFAULT "ACTIVE",

- resume CLOB);
- D. CREATE TABLE EMP_1
(emp_id NUMBER, emp_name VARCHAR2(25),
start_date DATE,
emp_status VARCHAR2(10) DEFAULT ACTIVE',
resume CLOB);

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 84

Which two statements are true regarding the types of table joins available in Oracle Database 10g?
(Choose two.)

- A. You can use the JOIN clause to join only two tables.
- B. You can explicitly provide the join condition with a NATURAL JOIN.
- C. You can use the USING clause to join tables on more than one column.
- D. You can use the ON clause to specify multiple conditions while joining tables.

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 85

Which statement is true regarding the CUBE operator in the GROUP BY clause of a SQL statement?

- A. It produces only aggregates for the groups specified in the GROUP BY clause.
- B. It finds all the NULL values in the superaggregates for the groups specified in the GROUP BY clause.
- C. It produces 2^n possible superaggregate combinations, if the n columns and expressions are specified in the GROUP BY clause.
- D. It produces $n+1$ possible superaggregate combinations, if the n columns and expressions are specified in the GROUP BY clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 86

Which two statements are true about sequences created in a single instance database? (Choose two.)

- A. The numbers generated by a sequence can be used only for one table.
- B. DELETE <sequencename> would remove a sequence from the database.
- C. CURRVAL is used to refer to the last sequence number that has been generated.
- D. When the MAXVALUE limit for a sequence is reached, you can increase the MAXVALUE limit by using the ALTER SEQUENCE statement.
- E. When a database instance shuts down abnormally, the sequence numbers that have been cached but not used would be available once again when the database instance is restarted.

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 87

Evaluate the following SQL statements in the given order:

```
DROP TABLE dept;
CREATE TABLE dept
(deptno NUMBER(3) PRIMARY KEY,
deptname VARCHAR2(10));
DROP TABLE dept;
FLASHBACK TABLE dept TO BEFORE DROP;
```

Which statement is true regarding the above FLASHBACK operation?

- A. It recovers only the first DEPT table.
- B. It recovers only the second DEPT table.
- C. It does not recover any of the tables because FLASHBACK is not possible in this case.
- D. It recovers both the tables but the names would be changed to the ones assigned in the RECYCLEBIN.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 88

View the Exhibit and examine the structure of the MARKS_DETAILS and MARKStables.

MARKS DETAILS		
Name	Null?	Type
STUDENT_ID	NOT NULL	NUMBER (4)
SUBJECT_ID		NUMBER (2)
MARKS_ENGLISH		NUMBER (3)
SUBJECT_ID		NUMBER (2)
MARKS_MATH		NUMBER (3)
SUBJECT_ID		NUMBER (2)
MARKS_PHYSICS		NUMBER (3)
SUBJECT_ID		NUMBER (2)
MARKS_CHEMISTRY		NUMBER (3)
SUBJECT_ID		NUMBER (2)
MARKS_BIOLOGY		NUMBER (3)

MARKS		
Name	Null?	Type
STUDENT_ID	NOT NULL	NUMBER (4)
SUBJECT_ID		NUMBER (2)
MARKS		NUMBER (3)

Which is the best method to load data from the MARKS DETAILStable to the MARKStable?

- A. Pivoting INSERT

- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 89

Which statements are true regarding the usage of the WITH clause in complex correlated subqueries? (Choose all that apply.)

- A. It can be used only with the SELECT clause.
- B. The WITH clause can hold more than one query.
- C. If the query block name and the table name were the same, then the table name would take precedence.
- D. The query name in the WITH clause is visible to other query blocks in the WITH clause as well as to the main query block.

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 90

OE and SCOTT are the users in the database. The ORDERS table is owned by OE. Evaluate the statements issued by the DBA in the following sequence:

CREATE ROLE r1;
GRANT SELECT, INSERT ON oe.orders TO r1;

GRANT r1 TO scott;

GRANT SELECT ON oe.orders TO scott;

REVOKE SELECT ON oe.orders FROM scott;

What would be the outcome after executing the statements?

- A. SCOTT would be able to query the OE.ORDERS table.
- B. SCOTT would not be able to query the OE.ORDERS table.
- C. The REVOKE statement would remove the SELECT privilege from SCOTT as well as from the role R1.
- D. The REVOKE statement would give an error because the SELECT privilege has been granted to the role R1

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 91

Which statements are true? (Choose all that apply.)

- A. The data dictionary is created and maintained by the database administrator.
- B. The data dictionary views can consist of joins of dictionary base tables and user-defined tables.
- C. The usernames of all the users including the database administrators are stored in the data dictionary.

- D. The USER_CONS_COLUMNS view should be queried to find the names of the columns to which a constraint applies.
- E. Both USER_OBJECTS and CAT views provide the same information about all the objects that are owned by the user.
- F. Views with the same name but different prefixes, such as DBA, ALL and USER, use the same base tables from the data dictionary

Correct Answer: CDF

Section: (none)

Explanation

Explanation/Reference:

QUESTION 92

Which three statements are true? (Choose three.)

- A. Only one LONG column can be used per table.
- B. ATIMESTAMP data type column stores only time values with fractional seconds.
- C. The BLOB data type column is used to store binary data in an operating system file.
- D. The minimum column width that can be specified for a varchar2 data type column is one.
- E. The value for a CHAR data type column is blank-padded to the maximum defined column width.

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 93

Which statement best describes the GROUPING function?

- A. It is used to set the order for the groups to be used for calculating the grand totals and subtotals.
- B. It is used to form various groups to calculate total and subtotals created using ROLLUP and CUBE operators.
- C. It is used to identify if the NULL value in an expression is a stored NULL value or created by ROLLUP or CUBE.
- D. It is used to specify the concatenated group expressions to be used for calculating the grand totals and subtotals.

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 94

View the Exhibit and examine the description of the DEPARTMENTS and EMPLOYEES tables.

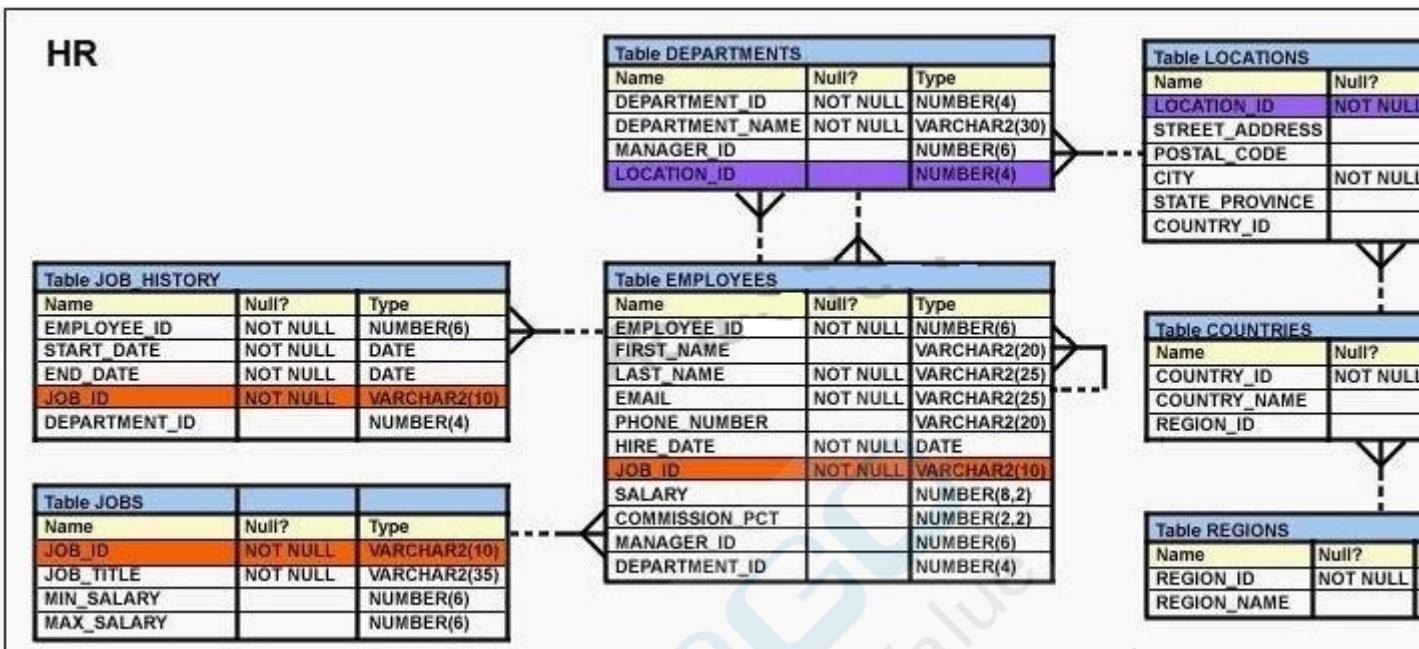

To retrieve data for all the employees for their EMPLOYEE_ID, FIRST_NAME, and DEPARTMENT NAME, the following SQL statement was written:

```
SELECT employee_id, first_name, department_name
FROM employees NATURAL JOIN departments;
```

The desired output is not obtained after executing the above SQL statement. What could be the reason for this?

- A. The NATURAL JOIN clause is missing the USING clause.
- B. The table prefix is missing for the column names in the SELECT clause.
- C. The DEPARTMENTS table is not used before the EMPLOYEES table in the FROM clause.
- D. The EMPLOYEES and DEPARTMENTS tables have more than one column with the same column name and data type.

Correct Answer: D

Section: (none)


Explanation

Explanation/Reference:

QUESTION 95

View the Exhibit and examine the structure of EMPLOYEES and JOB_HISTORY tables.

The EMPLOYEES table maintains the most recent information regarding salary, department, and job for all the employees. The JOB_HISTORY table maintains the record for all the job changes for the employees. You want to delete all the records from the JOB_HISTORY table that are repeated in the EMPLOYEES table.

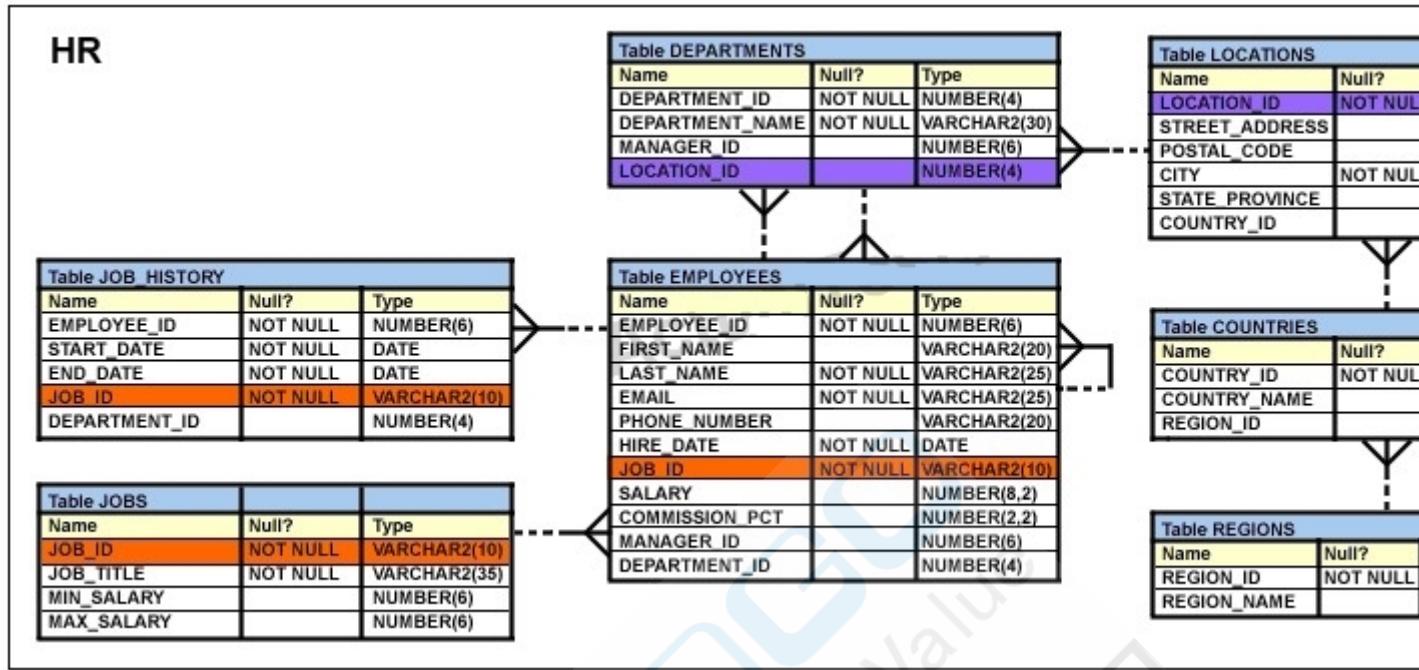

Which two SQL statements can you execute to accomplish the task? (Choose two.)

- A. DELETE FROM job_history j WHERE employee_id = (SELECT employee_id FROM employees e WHERE j.employee_id = e.employee_id) AND job_id = (SELECT job_id FROM employees e WHERE j.job_id = e.job_id);
- B. DELETE FROM job_history j WHERE (employee_id, job_id) = ALL (SELECT employee_id, job_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)
- C. DELETE FROM job_history j WHERE employee_id = (SELECT employee_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)
- D. DELETE FROM job_history j WHERE (employee_id, job_id) = (SELECT employee_id, job_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 96

View the Exhibit and examine PRODUCTS and ORDER_ITEMS tables.

You executed the following query to display PRODUCT_NAME and the number of times the product has been ordered:

```

SELECT p.product_name, i.item_cnt
FROM (SELECT product_id, COUNT (*) item_cnt
      FROM order_items
      GROUP BY product_id) i RIGHT OUTER JOIN products p
      ON i.product_id = p.product_id;
  
```

PRODUCTS	
PRODUCT_ID	PRODUCT_NAME
1	Inkjet C/8/HQ
2	CPU D300
3	HD 8GB/I
4	HD 12GB/r

ORDER_ITEMS			
ORDER_ID	PRODUCT_ID	QTY	UNIT_PRICE
11	1	10	100
22	2	15	120
33	3	10	50
44	1	5	10
66	2	20	125

What would happen when the above statement is executed?

- A. The statement would execute successfully to produce the required output.
- B. The statement would not execute because inline views and outer joins cannot be used together.
- C. The statement would not execute because the ITEM_CNT alias cannot be displayed in the outer query.
- D. The statement would not execute because the GROUP BY clause cannot be used in the inline view.

Correct Answer: A

Section: (none)

Explanation


Explanation/Reference:

QUESTION 97

View the Exhibit and examine the description of the EMPLOYEES table.

You want to display the EMPLOYEE_ID, FIRST_NAME, and DEPARTMENT_ID for all the employees who work in the same department and have the same manager as that of the employee having EMPLOYEE_ID 104. To accomplish the task, you execute the following SQL statement:

```
SELECT employee_id, first_name, department_id
FROM employees
WHERE (manager_id, department_id) =(SELECT department_id, manager_id FROM employees WHERE
employee_id = 104)
AND employee_id <> 104;
```

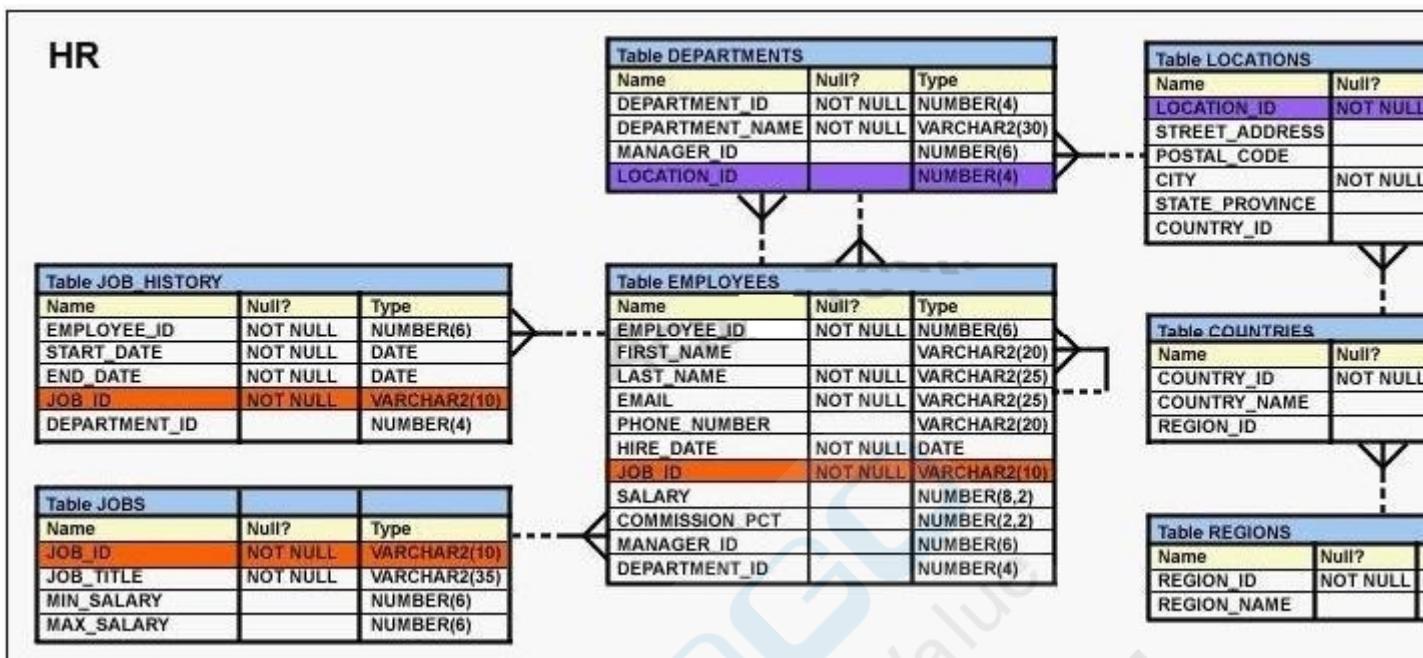

When you execute the statement it does not produce the desired output. What is the reason for this?

- A. The WHERE clause condition in the main query is using the = comparison operator, instead of EXISTS.
- B. The WHERE clause condition in the main query is using the = comparison operator, instead of the IN operator.
- C. The WHERE clause condition in the main query is using the = comparison operator, instead of the = ANY operator.
- D. The columns in the WHERE clause condition of the main query and the columns selected in the subquery should be in the same order.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 98

View the Exhibit and examine the structure of the EMP table.

You executed the following command to add a primary key to the EMP table:

```

ALTER TABLE emp
ADD CONSTRAINT emp_id_pk PRIMARY KEY (emp_id)
USING INDEX emp_id_idx;
    
```

EMP		
Name	Null?	Type
EMP_ID		NUMBER(3)
EMP_NAME		VARCHAR2(10)
SALARY		NUMBER(10,2)

Which statement is true regarding the effect of the command?

- A. The PRIMARY KEY is created along with a new index.
- B. The PRIMARY KEY is created and it would use an existing unique index.
- C. The PRIMARY KEY would be created in a disabled state because it is using an existing index.
- D. The statement produces an error because the USING clause is permitted only in the CREATE TABLE

command.

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 99

View the Exhibit1 and examine the descriptions of the EMPLOYEES and DEPARTMENTS tables.

DEPARTMENT_ID	JOB_ID	LOCATION_ID	TOTAL	GRP_DEPT	G
10	AD_ASST	1700	4400	0	
10	AD_ASST		4400	0	
10			4400	0	
20	MK_MAN	1800	13000	0	
20	MK_MAN		13000	0	
20	MK_REP	1800	6000	0	
20	MK_REP		6000	0	
20			19000	0	
30	PU_MAN	1700	11000	0	
30	PU_MAN		11000	0	
30	PU_CLERK	1700	13900	0	
30	PU_CLERK		13900	0	
30			24900	0	

The following SQL statement was executed:


```
SELECT e.department_id, e.job_id, d.location_id, sum(e.salary) total,  
GROUPING(e.department_id)GRP_DEPT,  
GROUPING(e.job_id) GRPJOB,  
GROUPING(d. location_id) GRP_LOC
```

FROM employees e JOIN departments d

ON e.department_id = d.department_id

GROUP BY ROLLUP (e.department_id, e.job_id, d.location_id);

View the Exhibit2 and examine the output of the command.

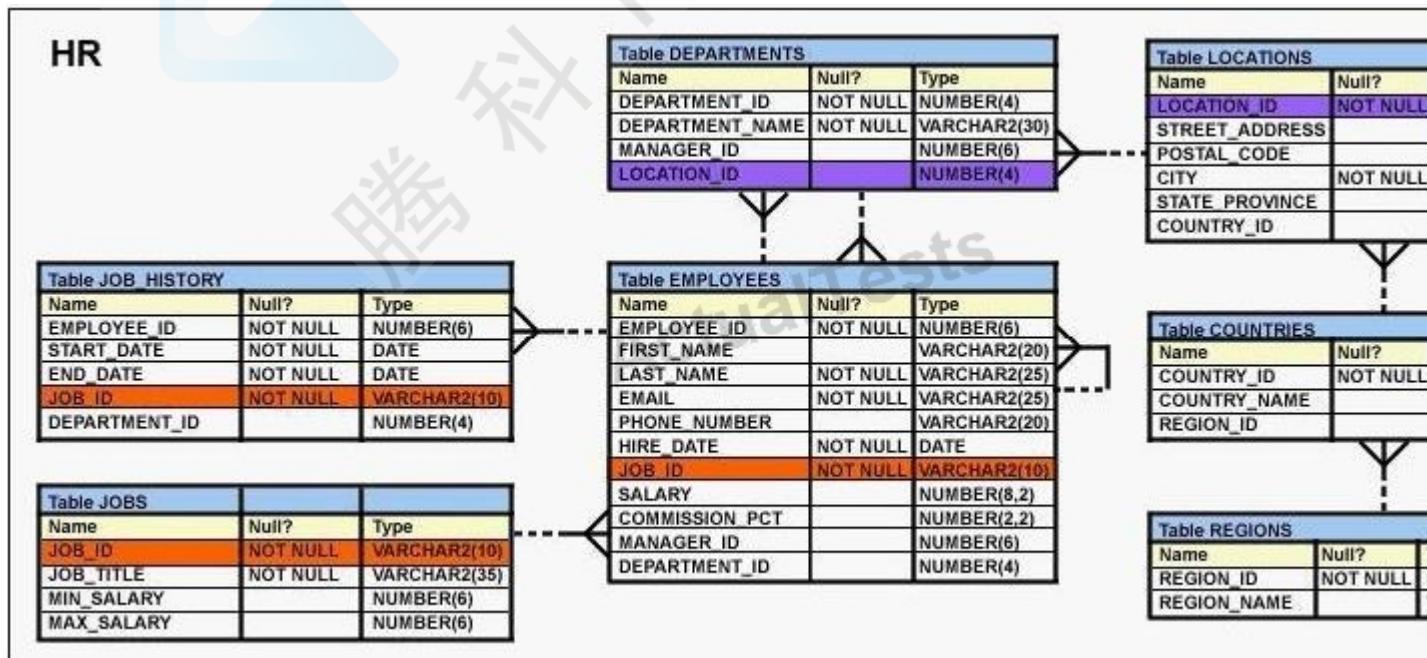

Which two statements are true regarding the output? (Choose two.)

- A. The value 1 in GRP_LOC means that the LOCATION_ID column is taken into account to generate the subtotal.
- B. The value 1 in GRP_JOB and GRP_LOC means that JOB_ID and LOCATION_ID columns are not taken into account to generate the subtotal.
- C. The value 1 in GRP_JOB and GRP_LOC means that the NULL value in JOB_ID and LOCATIONJD columns are taken into account to generate the subtotal.
- D. The value 0 in GRP_DEPT, GRPJOB, and GRP_LOC means that DEPARTMENT_ID, JOB_ID, and LOCATION_ID columns are taken into account to generate the subtotal

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 100

Which statements are correct regarding indexes? (Choose all that apply.)

- A. When a table is dropped, the corresponding indexes are automatically dropped.
- B. For each DML operation performed, the corresponding indexes are automatically updated.
- C. Indexes should be created on columns that are frequently referenced as part of an expression.
- D. A non-deferrable PRIMARY KEY or UNIQUE KEY constraint in a table automatically creates a unique index.

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 101

View the Exhibit and examine the structure of the ORD table.

ORD		
Name	Null?	Type
ORD_NO	NOT NULL	NUMBER(2)
ORD_DATE		DATE
CUST_ID		NUMBER(4)

Evaluate the following SQL statements that are executed in a user session in the specified order: CREATE SEQUENCE ord_seq;
SELECT ord_seq.nextval FROM dual;
INSERT INTO ord
VALUES (ord_seq.CURRVAL, '25-jan-2007', 101);
UPDATE ord
SET ord_no = ord_seq.NEXTVAL
WHERE cust_id = 101;
What would be the outcome of the above statements?

- A. All the statements would execute successfully and the ORD_NO column would contain the value 2 for the CUSTJD 101.
- B. The CREATE SEQUENCE command would not execute because the minimum value and maximum value for the sequence have not been specified.
- C. The CREATE SEQUENCE command would not execute because the starting value of the sequence

- and the increment value have not been specified.
- D. All the statements would execute successfully and the ORD_NO column would have the value 20 for the CUST_ID 101 because the default CACHE value is 20.

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 102

View the Exhibit and examine the description of the ORDERS table.

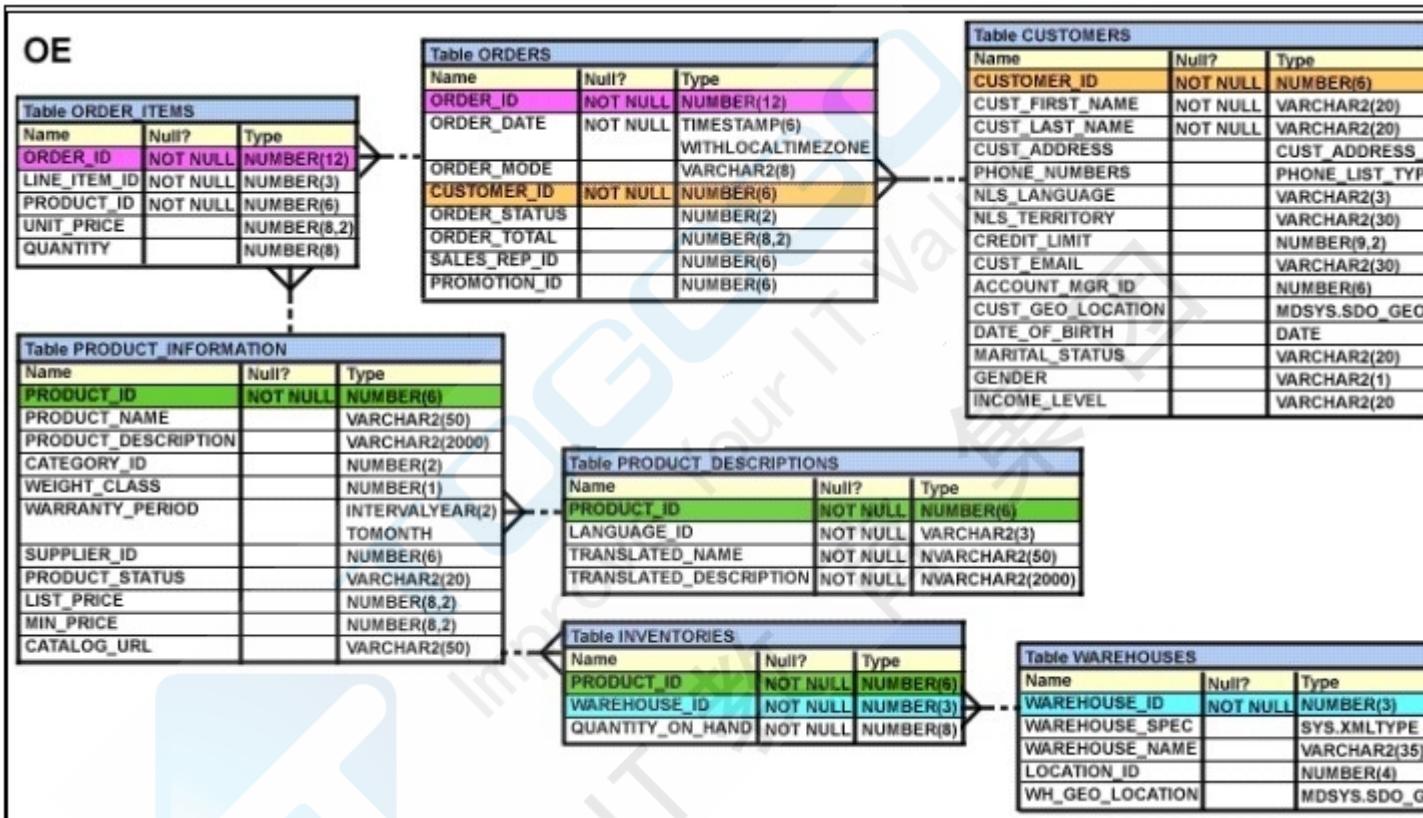

Which two WHERE clause conditions demonstrate the correct usage of conversion functions? (Choose two.)

- A. WHERE order_date > TO_DATE('JUL 10 2006','MON DD YYYY')
- B. WHERE TO_CHAR(order_date,'MON DD YYYY') = 'JAN 20 2003'
- C. WHERE order_date > TO_CHAR(ADD_MONTHS(SYSDATE,6),'MON DD YYYY")
- D. WHERE order_date IN (TO_DATE('Oct 21 2003','Mon DD YYYY"), TO_CHAR('NOV 21 2003','Mon DD YYYY"))

Correct Answer: AB

Section: (none)


Explanation

Explanation/Reference:

QUESTION 103

View the Exhibit and examine the structure of the EMPLOYEES table.

You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.

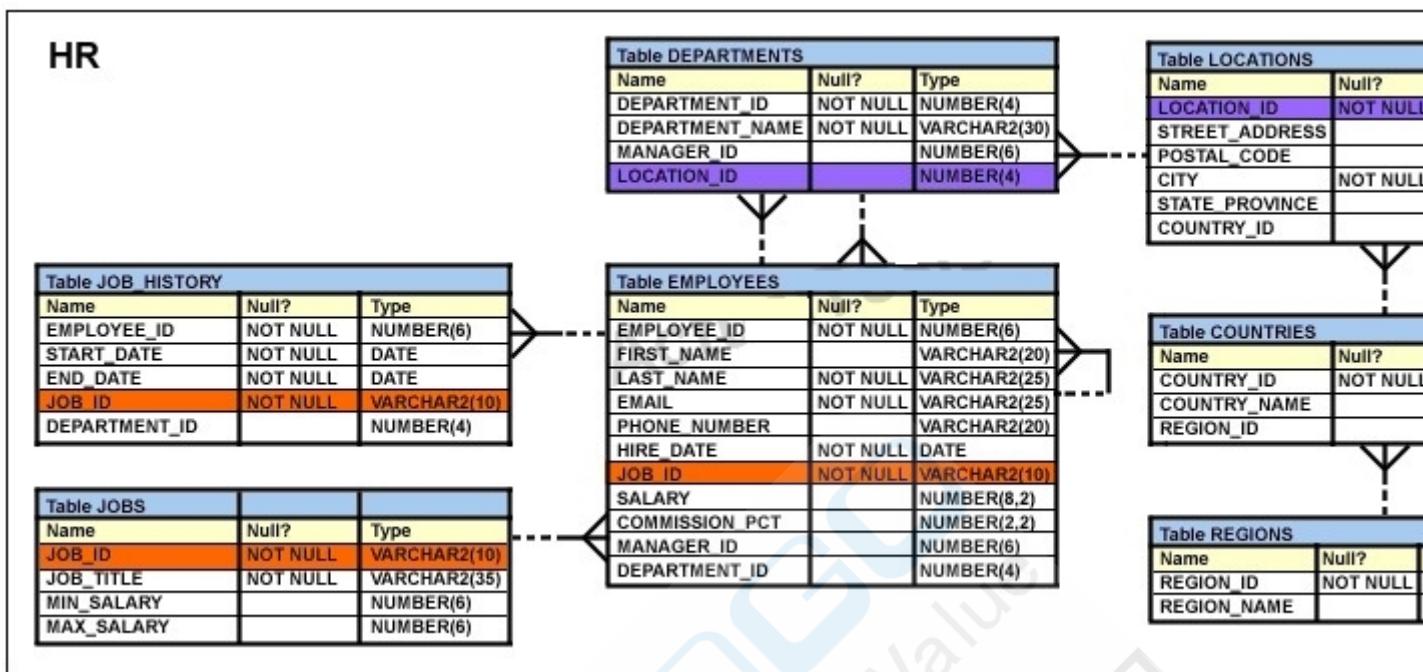

Which SQL statement would you execute?

- A. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
ON m.employee_id = e.manager_id
WHERE m.manager_id=100;
- B. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
ON m.employee_id = e.manager_id
WHERE e.managerid=100;
- C. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
ON e.employee_id = m.manager_id
WHERE m.manager_id=100;
- D. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
WHERE m.employee_id = e.manager_id AND e.managerjd=100;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 104

Which two statements are true about the GROUPING function? (Choose two.)

- A. It is used to find the groups forming the subtotal in a row.
- B. It is used to identify the NULL value in the aggregate functions.
- C. It is used to form the group sets involved in generating the totals and subtotals.
- D. It can only be used with ROLLUP and CUBE operators specified in the GROUP BY clause.

Correct Answer: AD


Section: (none)

Explanation

Explanation/Reference:

QUESTION 105

View the Exhibit and examine the structure of the EMPLOYEES table.

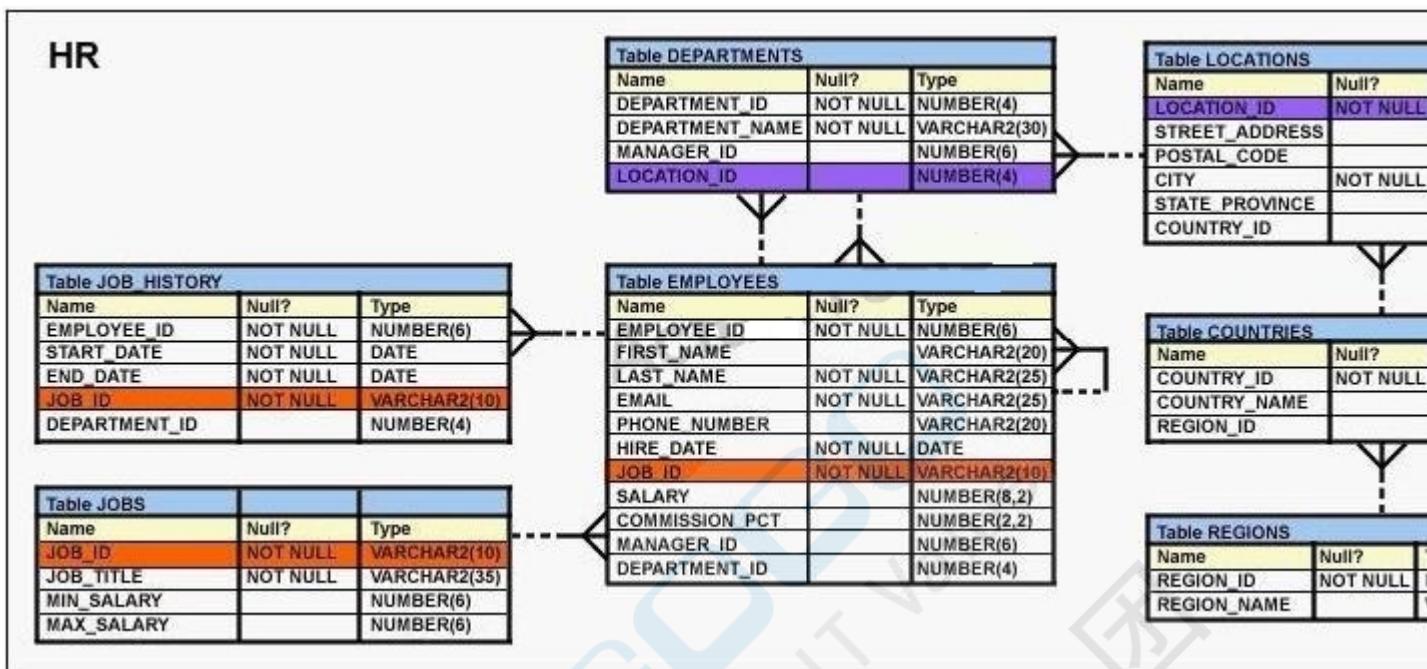

Evaluate the following SQL statement:

```
SELECT employee_id, last_name, job_id, manager_id
FROM employees
START WITH employee_id = 101
```

```
CONNECT BY PRIOR employee_id=manager_id;
```

Which statement is true regarding the output for this command?

- A. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by his or her peers.
- B. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by the employee to whom he or she reports.
- C. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by employees below him or her in the hierarchy.
- D. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by employees up to one level below him or her in the hierarchy.

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 106

View the Exhibit and examine the structure of the CUST table.

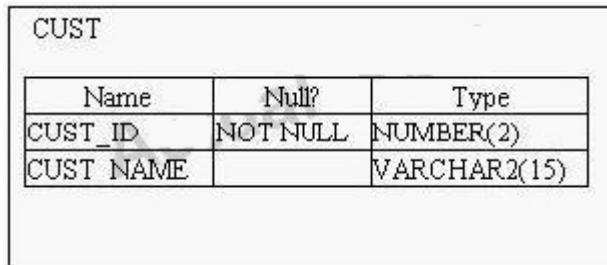

Evaluate the following SQL statements executed in the given order:

```
ALTER TABLE cust
```

```
ADD CONSTRAINT cust_id_pk PRIMARY KEY(cust_id) DEFERRABLE INITIALLY DEFERRED;
```

```
INSERT INTO cust VALUES (1,'RAJ1'); --row 1  
INSERT INTO cust VALUES (1,'SAM'); --row 2  
COMMIT;
```

```
SET CONSTRAINT cust_id_pk IMMEDIATE;
```

```
INSERT INTO cust VALUES (1,'LATA'); --row 3  
INSERT INTO cust VALUES (2,'KING'); --row 4  
COMMIT;
```

Which rows would be made permanent in the CUST table?

- A. row 4 only
- B. rows 2 and 4
- C. rows 3 and 4
- D. rows 1 and 4

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 107

View the Exhibit and examine the structure of the EMPLOYEES and JOB_HISTORY tables.

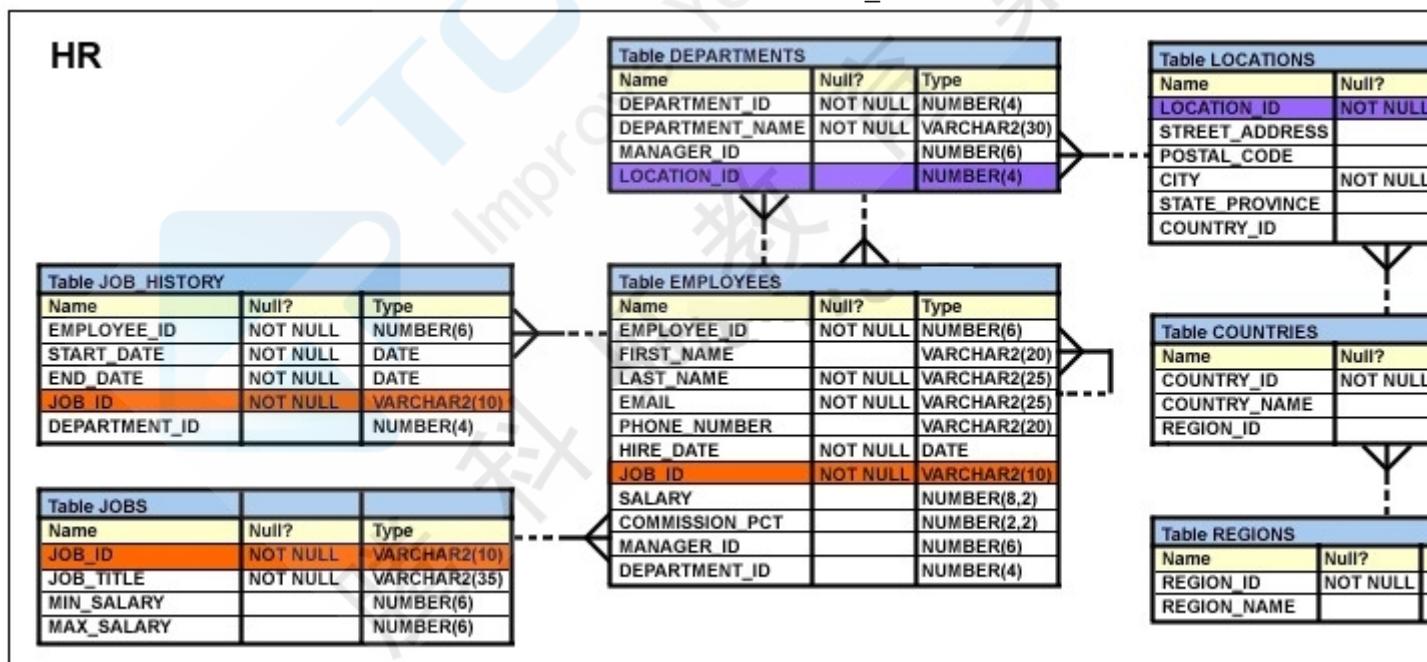

The query should display the employee IDs of all the employees who have held the job SA_MAN at any time during their tenure.

Choose the correct SET operator to fill in the blank space and complete the following query.

```
SELECT employee_id  
FROM employees  
WHERE job_id = 'SA_MAN'  
SELECT employee_id  
FROM job_history  
WHERE job_id='SA_MAN'
```

- A. UNION

- B. MINUS
- C. INTERSECT
- D. UNION ALL

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 108

View the Exhibit and examine the details for the CATEGORIES_TAB table.

CATEGORY_NAME	CATEGORY_DESCRIPTION	CATEGORY_ID
hardware1	monitors	11
hardware2	printers	12
hardware3	harddisks	13
hardware4	memory components/upgrades	14
hardware5	processors, sound and video cards, network cards, motherboards	15
hardware6	keyboards, mouses, mouse pads	16
hardware7	other peripherals (CD-ROM, DVD, tape cartridge drives, ...)	17
hardware8	miscellaneous hardware (cables, screws, power supplies ...)	19
software1	spreadsheet software	21
software2	word processing software	22
software3	database software	23
software4	operating systems	24
software5	software development tools (including languages)	25
software6	miscellaneous software	29
office1	capitalizable assets (desks, chairs, phones ...)	31
office2	office supplies for daily use (pencils, erasers, staples, ...)	32
office3	manuals, other books	33
office4	miscellaneous office supplies	39
hardware	computer hardware and peripherals	10
software	computer software	20
office equipment	office furniture and supplies	30
online catalog	catalog of computer hardware, software, and office equipment	90

Evaluate the following incomplete SQL statement:

```
SELECT category_name ,category_description
FROM categories_tab
```

You want to display only the rows that have 'harddisks' as part of the string in the CATEGORY_DESCRIPTION column.

Which two WHERE clause options can give you the desired result? (Choose two.)

- A. WHERE REGEXP_LIKE (category_description, 'hard+.s');
- B. WHERE REGEXP_LIKE (category_description, '^H|hard+.s');
- C. WHERE REGEXP_LIKE (category_description, '^H|hard+.s\$');
- D. WHERE REGEXP_LIKE (category_description, '[^H]hard+.s');

Correct Answer: AB


Section: (none)

Explanation

Explanation/Reference:

QUESTION 109

View the Exhibit and examine the structure of the LOCATIONS and DEPARTMENTS tables.

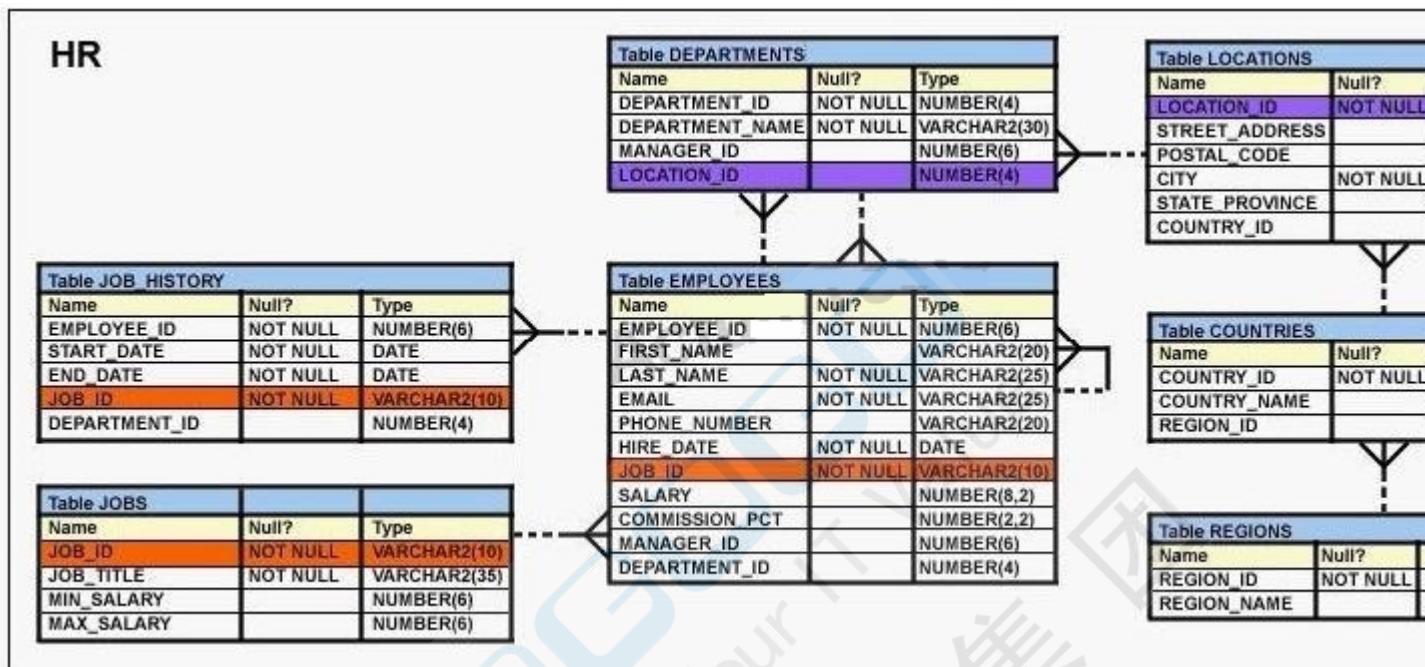

Which SET operator should be used in the blank space in the following SQL statement to display the cities that have departments located in them?

```
SELECT location_id, city
FROM locations
SELECT location_id, city
FROM locations JOIN departments
USING(location_id);
```

- A. UNION
- B. MINUS
- C. INTERSECT
- D. UNION ALL

Correct Answer: C

Section: (none)


Explanation

Explanation/Reference:

QUESTION 110

View the Exhibit and examine the structure of ORDERS and ORDER_ITEMS tables.

ORDER_ID is the primary key in the ORDERS table. It is also the foreign key in the ORDER_ITEMS table wherein it is created with the ON DELETE CASCADE option.

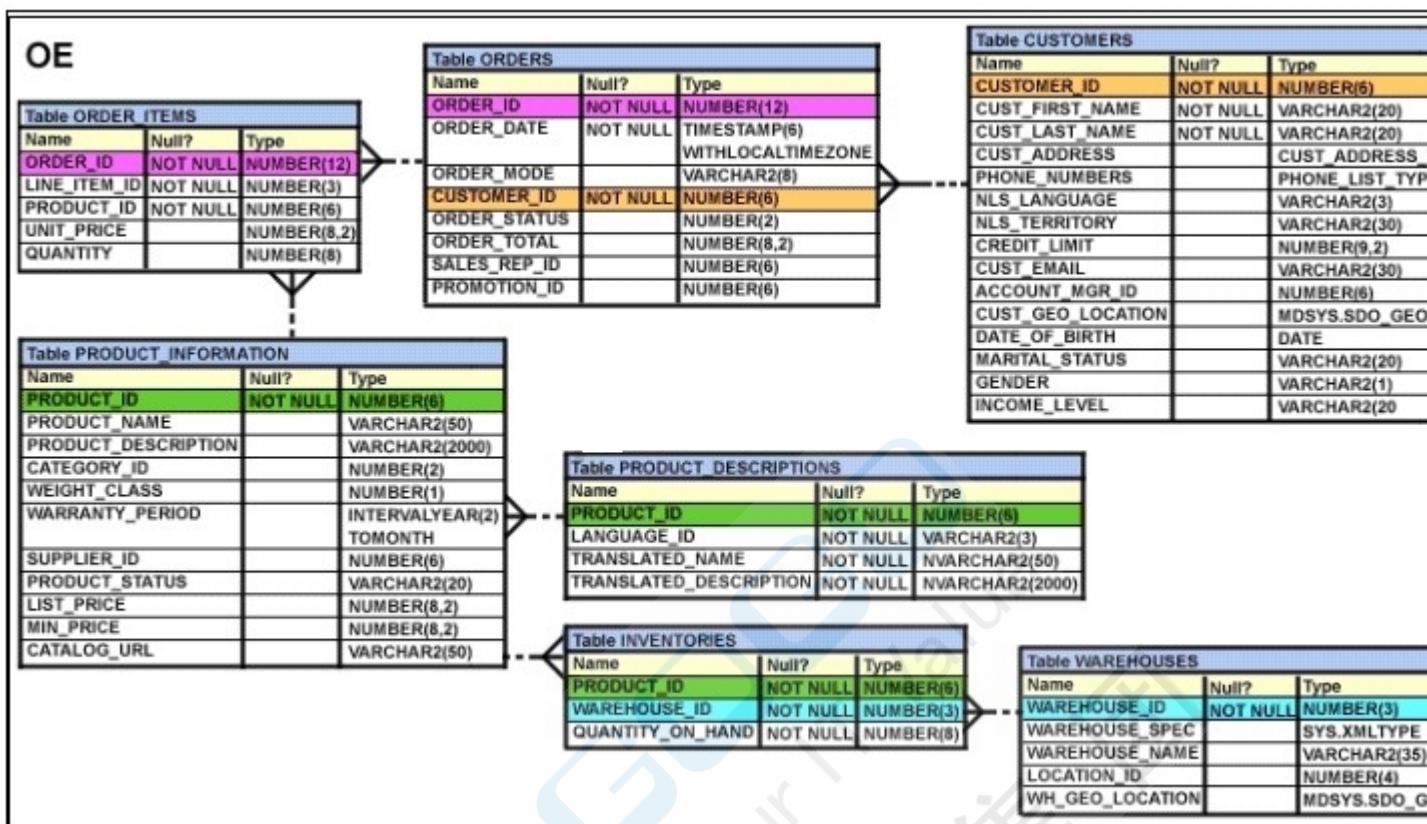

Which DELETE statement would execute successfully?

- A. DELETE order_id
FROM orders
WHERE order_total < 1000;
- B. DELETE orders
WHERE order_total < 1000;
- C. DELETE
FROM orders
WHERE (SELECT order_id
FROM order_items);
- D. DELETE orders o, order_items i
WHERE o.order_id = i.order_id;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 111

Which two statements are true regarding roles? (Choose two.)

- A. A role can be granted to itself.
- B. A role can be granted to PUBLIC.
- C. A user can be granted only one role at any point of time.
- D. The REVOKE command can be used to remove privileges but not roles from other users.
- E. Roles are named groups of related privileges that can be granted to users or other roles.

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 112

Which two statements are true regarding the EXISTS operator used in the correlated subqueries? (Choose two.)

- A. The outer query stops evaluating the result set of the inner query when the first value is found.
- B. It is used to test whether the values retrieved by the inner query exist in the result of the outer query.
- C. It is used to test whether the values retrieved by the outer query exist in the result set of the inner query.
- D. The outer query continues evaluating the result set of the inner query until all the values in the result set are processed.

Correct Answer: AC

Section: (none)


Explanation

Explanation/Reference:

QUESTION 113

View the Exhibit and examine the structure of ORDER_ITEMS and ORDERS tables.

You need to remove from the ORDER_ITEMS table those rows that have an order status of 0 or 1 in the ORDERS table.

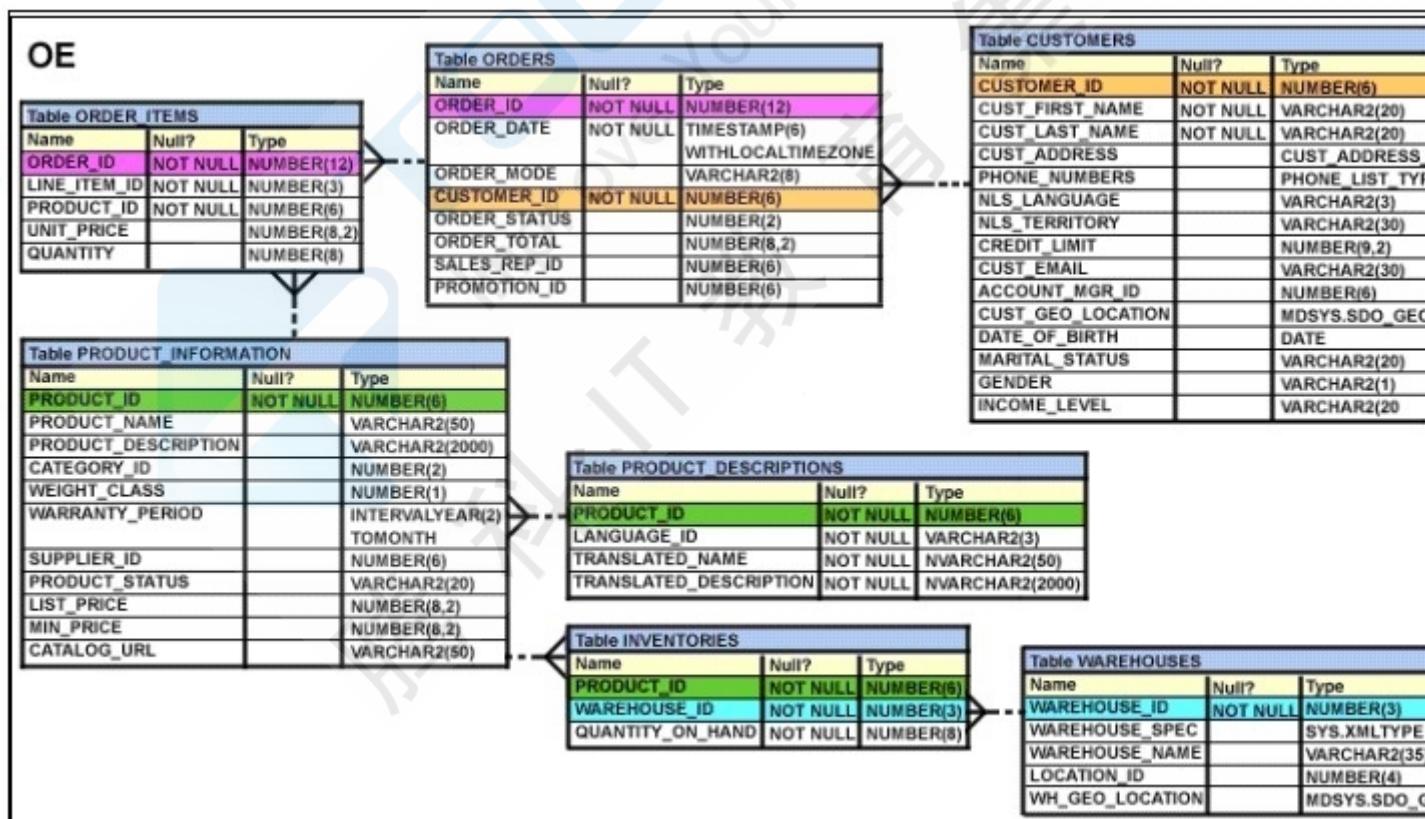

Which DELETE statements are valid? (Choose all that apply.)

- A. DELETE FROM order_items WHERE order_id IN (SELECT order_id FROM orders WHERE order_status in (0,1));
- B. DELETE * FROM order_items WHERE order_id IN (SELECT order_id FROM orders WHERE order_status IN (0,1));
- C. DELETE FROM order_items i WHERE order_id = (SELECT order_id FROM orders o WHERE i.order_id = o.order_id AND order_status IN (0,1));

- D. DELETE FROM (SELECT* FROM order_items i.orders o WHERE i.order_id = o.order_id AND order_status IN (0,1));

Correct Answer: ACD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 114

You need to create a table for a banking application with the following considerations:

- 1) You want a column in the table to store the duration of the credit period.
- 2) The data in the column should be stored in a format such that it can be easily added and subtracted with date type data without using the conversion functions.
- 3) The maximum period of the credit provision in the application is 30 days.
- 4) The interest has to be calculated for the number of days an individual has taken a credit for.

Which data type would you use for such a column in the table?

- A. INTERVAL YEAR TO MONTH
- B. INTERVAL DAY TO SECOND
- C. TIMESTAMP WITH TIME ZONE
- D. TIMESTAMP WITH LOCAL TIME ZONE

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 115

View the Exhibit and examine the structure of the ORDERS table:

The ORDER_ID column has the PRIMARY KEY constraint and CUSTOMER_ID has the NOT NULL constraint.

ORDERS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE		DATE
CUSTOMER_ID	NOT NULL	NUMBER(6)
ORDER_TOTAL		NUMBER(8,2)
SALES REP ID		NUMBER(6)

Evaluate the following statement:

INSERT INTO (SELECT order_id,order_date,customer_id FROM ORDERS WHERE order_total = 1000 WITH CHECK OPTION) VALUES (13, SYSDATE, 101);

What would be the outcome of the above INSERT statement?

- A. It would execute successfully and the new row would be inserted into a new temporary table created by the subquery.
- B. It would execute successfully and the ORDER_TOTAL column would have the value 1000 inserted automatically in the new row.
- C. It would not execute successfully because the ORDER_TOTAL column is not specified in the SELECT list and no value is provided for it.
- D. It would not execute successfully because all the columns from the ORDERS table should have been included in the SELECT list and values should have been provided for all the columns.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 116

Which statements are true regarding the usage of the WITH clause in complex correlated subqueries? (Choose all that apply.)

- A. It can be used only with the SELECT clause.
- B. The WITH clause can hold more than one query.
- C. If the query block name and the table name were the same, then the table name would take precedence.
- D. The query name in the WITH clause is visible to other query blocks in the WITH clause as well as to the main query block.

Correct Answer: ABD

Section: (none)

Explanation


Explanation/Reference:

QUESTION 117

View the Exhibit and examine the structure of the ORDERS and ORDER_ITEMS tables.

Evaluate the following SQL statement:

```
SELECT oi.order_id, product_id, order_date FROM order_items oi JOIN orders o
USING(order_id);
```

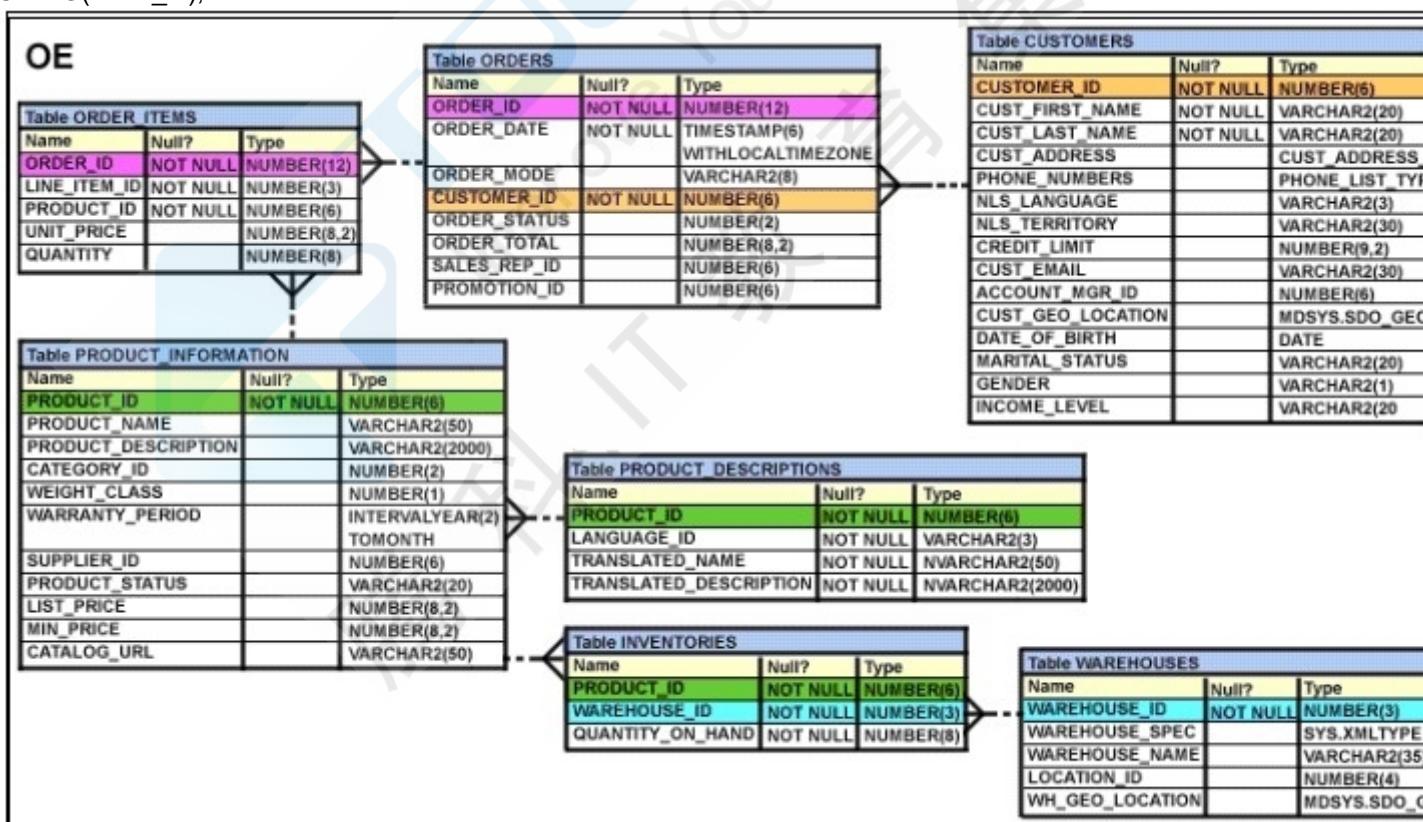

Which statement is true regarding the execution of this SQL statement?

- A. The statement would not execute because table aliases are not allowed in the JOIN clause.
- B. The statement would not execute because the table alias prefix is not used in the USING clause.
- C. The statement would not execute because all the columns in the SELECT clause are not prefixed with table aliases.
- D. The statement would not execute because the column part of the USING clause cannot have a qualifier

in the SELECT list.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 118

Given below are the SQL statements executed in a user session:

```
CREATE TABLE product  
(PCODE NUMBER(2),  
PNAME VARCHAR2(10));  
INSERT INTO product VALUES(1, 'pen');  
INSERT INTO product VALUES (2,'penci');
```

```
SAVEPOINT a;  
UPDATE product SET PCODE = 10 WHERE PCODE = 1;  
SAVEPOINT b;  
DELETE FROM product WHERE PCODE = 2;  
COMMIT;  
DELETE FROM product WHERE PCODE=10;  
ROLLBACK TO SAVEPOINT a;
```

Which statement describes the consequences?

- A. No SQL statement would be rolled back.
- B. Both the DELETE statements would be rolled back.
- C. Only the second DELETE statement would be rolled back.
- D. Both the DELETE statements and the UPDATE statement would be rolled back.

Correct Answer: A

Section: (none)

Explanation


Explanation/Reference:

QUESTION 119

View the Exhibit and examine the description of the ORDER_ITEMS table.

The following SQL statement was written to retrieve the rows for the PRODUCT_ID that has a UNIT_PRICE of more than 1,000 and has been ordered more than five times:

```
SELECT product_id, COUNT(order_id) total, unit_price FROM order_items WHERE unit_price>1000 AND  
COUNT(order_id)>5 GROUP BY product_id, unit_price;
```

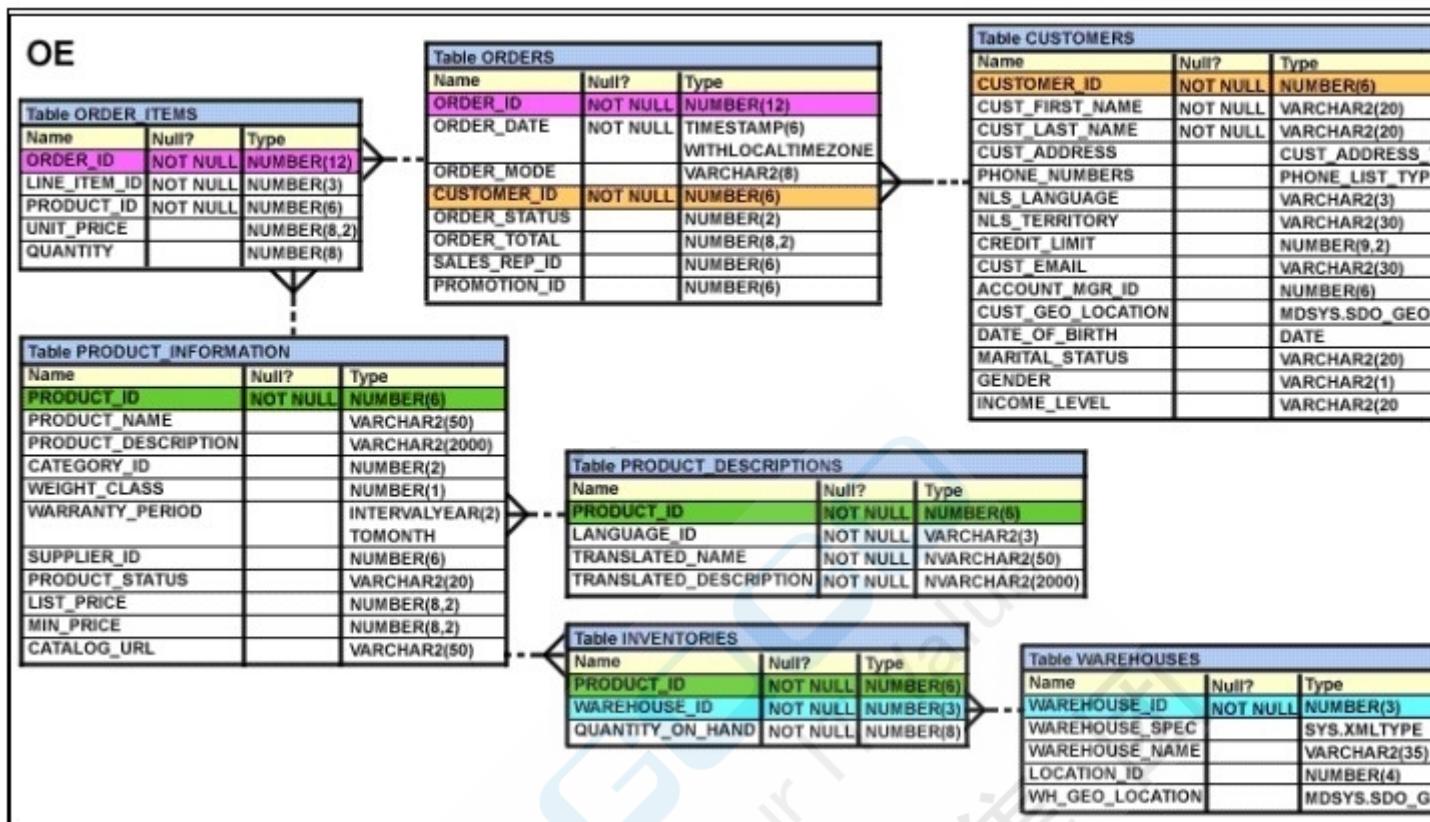

Which statement is true regarding this SQL statement?

- A. The statement would execute and give you the desired result.
- B. The statement would not execute because the aggregate function is used in the WHERE clause.
- C. The statement would not execute because the WHERE clause should have the OR logical operator instead of AND.
- D. The statement would not execute because in the SELECT clause, the UNIT_PRICE column is placed after the column having the aggregate function.

Correct Answer: B

Section: (none)


Explanation

Explanation/Reference:

QUESTION 120

View the Exhibit and examine the details of the EMPLOYEES table.

You want to generate a hierarchical report for all the employees who report to the employee whose EMPLOYEE_ID is 100.

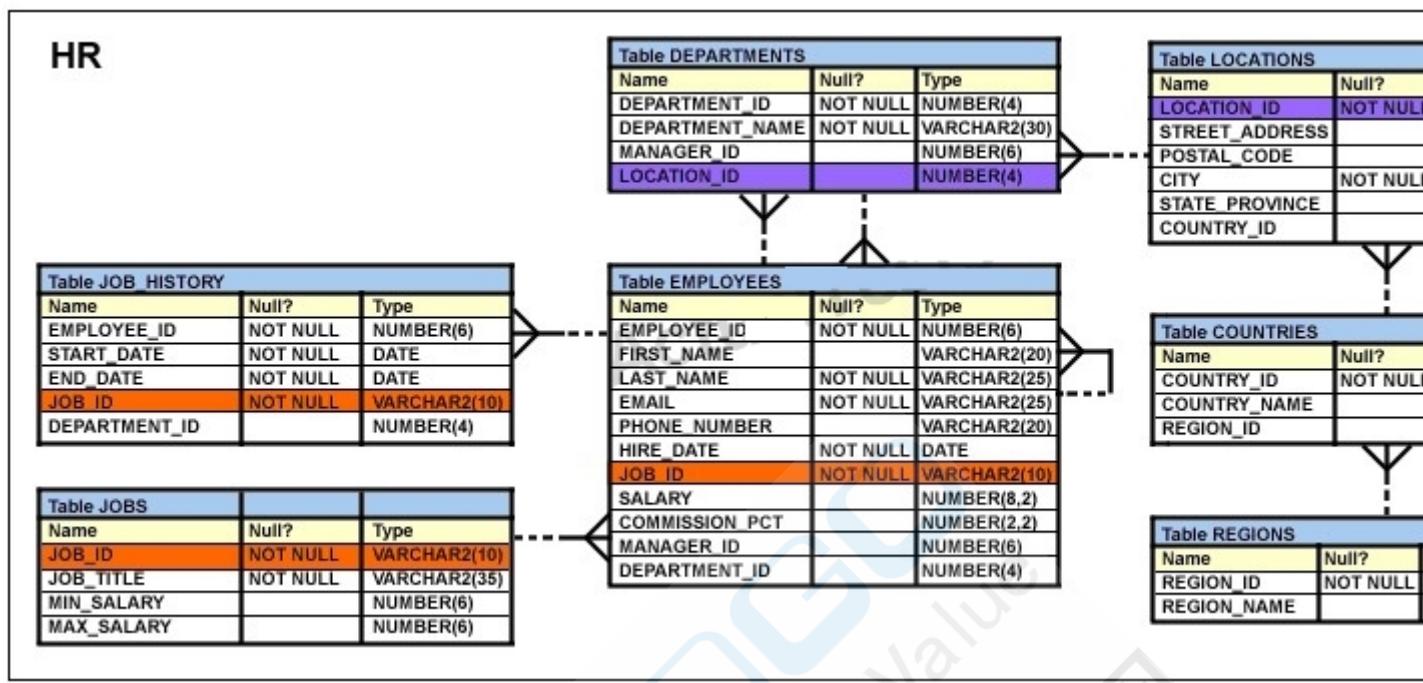

Which SQL clauses would you require to accomplish the task? (Choose all that apply.)

- A. WHERE
- B. HAVING
- C. GROUP BY
- D. START WITH
- E. CONNECT BY

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 121

Which SQL statement would display the view names and definitions of all the views owned by you?

- A. SELECT view_name, text FROM user_view;
- B. SELECT view_name, text FROM user_object;
- C. SELECT view_name, text FROM user_objects;
- D. SELECT view_name, text FROM user_views;

Correct Answer: D

Section: (none)


Explanation

Explanation/Reference:

QUESTION 122

View the Exhibit and examine the description of the PRODUCT_INFORMATION table.

SELECT product_name, list_price, min_price, list_price - min_price Difference FROM product_information

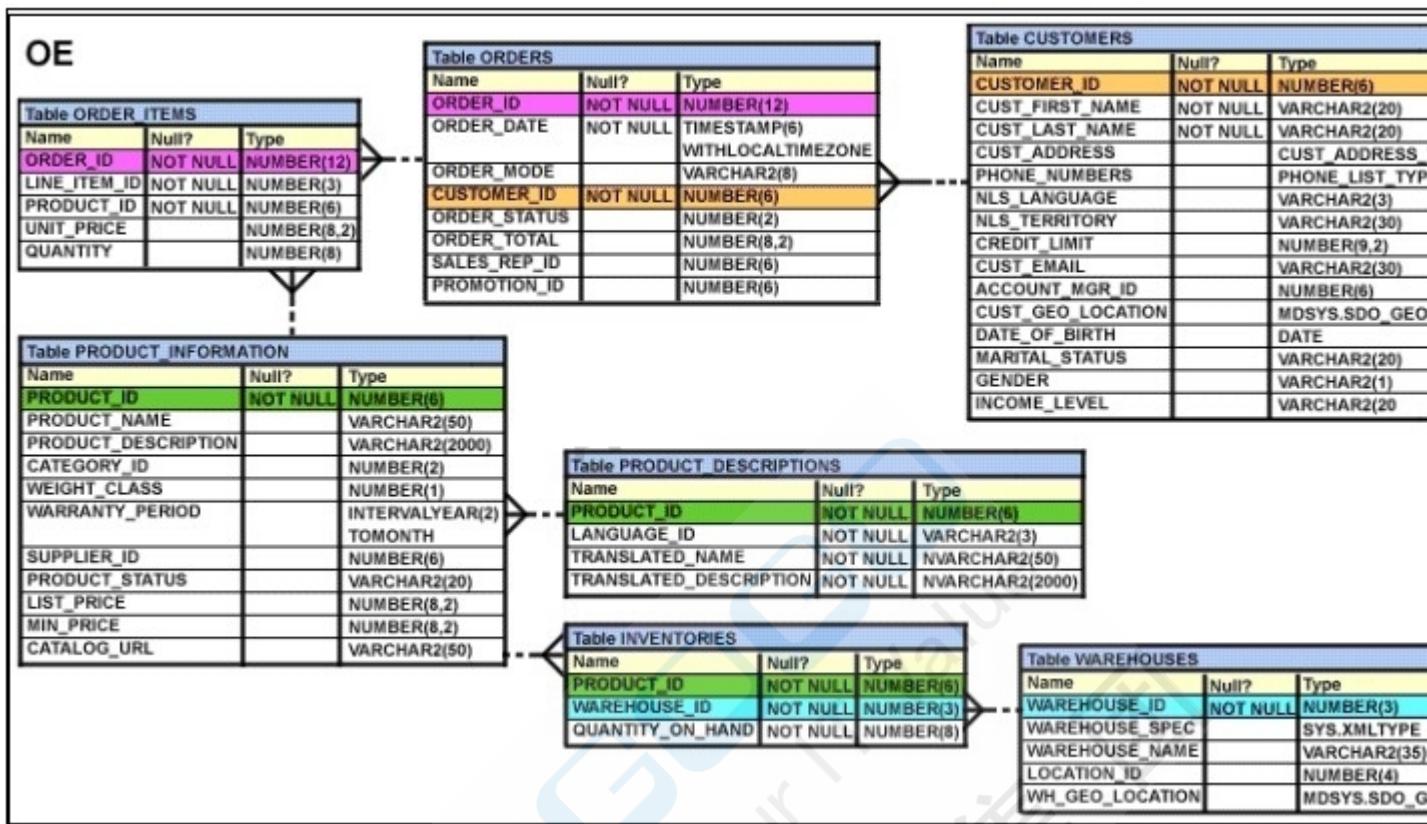

Which options when used with the above SQL statement can produce the sorted output in ascending order of the price difference between LIST_PRICE and MIN_PRICE? (Choose all that apply.)

- A. ORDER BY 4
- B. ORDER BY MIN_PRICE
- C. ORDER BY DIFFERENCE
- D. ORDER BY LIST_PRICE
- E. ORDER BY LIST_PRICE – MIN_PRICE

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 123

Which two statements are true regarding subqueries? (Choose three.)

- A. The ORDER BY clause can be used in the subquery.
- B. A subquery can be used in the FROM clause of a SELECT statement.
- C. If the subquery returns NULL, the main query may still return result rows.
- D. A subquery can be placed in a WHERE clause, GROUP BY clause, or a HAVING clause.
- E. Logical operators, such as AND, OR and NOT, cannot be used in the WHERE clause of a subquery.

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 124

Evaluate the following statement:

```
INSERT ALL
WHEN order_total < 10000 THEN
INTO small_orders
WHEN order_total > 10000 AND order_total < 20000 THEN
INTO medium_orders
WHEN order_total > 200000 THEN
INTO large_orders
SELECT order_id, order_total, customer_id
FROM orders;
```

Which statement is true regarding the evaluation of rows returned by the subquery in the INSERT statement?

- A. They are evaluated by all the three WHEN clauses regardless of the results of the evaluation of any other WHEN clause.
- B. They are evaluated by the first WHEN clause. If the condition is true, then the row would be evaluated by the subsequent WHEN clauses.
- C. They are evaluated by the first WHEN clause. If the condition is false, then the row would be evaluated by the subsequent WHEN clauses.
- D. The INSERT statement would give an error because the ELSE clause is not present for support in case none of the WHEN clauses are true.

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 125

View the Exhibit and examine the structure of the EMPLOYEES and DEPARTMENTS tables.

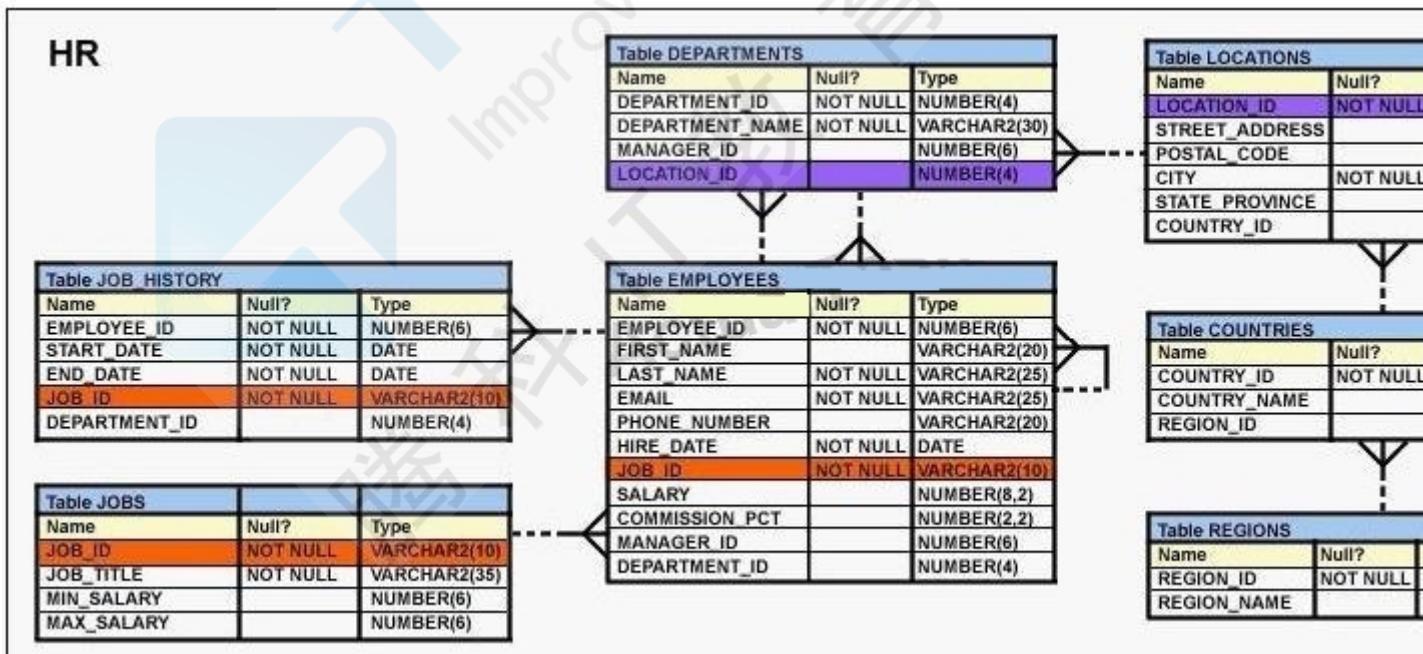

Which SET operator would you use in the blank space in the following SQL statement to list the departments where all the employees have managers?

```
SELECT department_id
FROM departments
SELECT department_id
FROM employees
WHERE manager_id IS NULL;
```

- A. UNION

- B. MINUS
- C. INTERSECT
- D. UNION ALL

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 126

Evaluate the following query:

```
SELECT INTERVAL 300' MONTH,  
INTERVAL 54-2' YEAR TO MONTH,  
INTERVAL '11:12:10.1234567' HOUR TO SECOND  
FROM dual;
```

What is the correct output of the above query?

- A. +25-00, +54-02, +00 11:12:10.123457
- B. +00-300, +54-02, +00 11:12:10.123457
- C. +25-00, +00-650, +00 11:12:10.123457
- D. +00-300, +00-650, +00 11:12:10.123457

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 127

Which two statements are true regarding the execution of the correlated subqueries? (Choose two.)

- A. The nested query executes after the outer query returns the row.
- B. The nested query executes first and then the outer query executes.
- C. The outer query executes only once for the result returned by the inner query.
- D. Each row returned by the outer query is evaluated for the results returned by the inner query.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 128

Evaluate the following SQL statement:

```
SELECT product_name || 'it's not available for order'  
FROM product_information  
WHERE product_status = 'obsolete';
```

You received the following error while executing the above query:

ERROR:

ORA-01756: quoted string not properly terminated

What would you do to execute the query successfully?

- A. Enclose the character literal string in the SELECT clause within the double quotation marks.
- B. Do not enclose the character literal string in the SELECT clause within the single quotation marks.
- C. Use Quote (q) operator and delimiter to allow the use of single quotation mark in the literal character

string.

- D. Use escape character to negate the single quotation mark inside the literal character string in the SELECT clause.

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 129

View the Exhibit and examine the details of the PRODUCT_INFORMATION table.

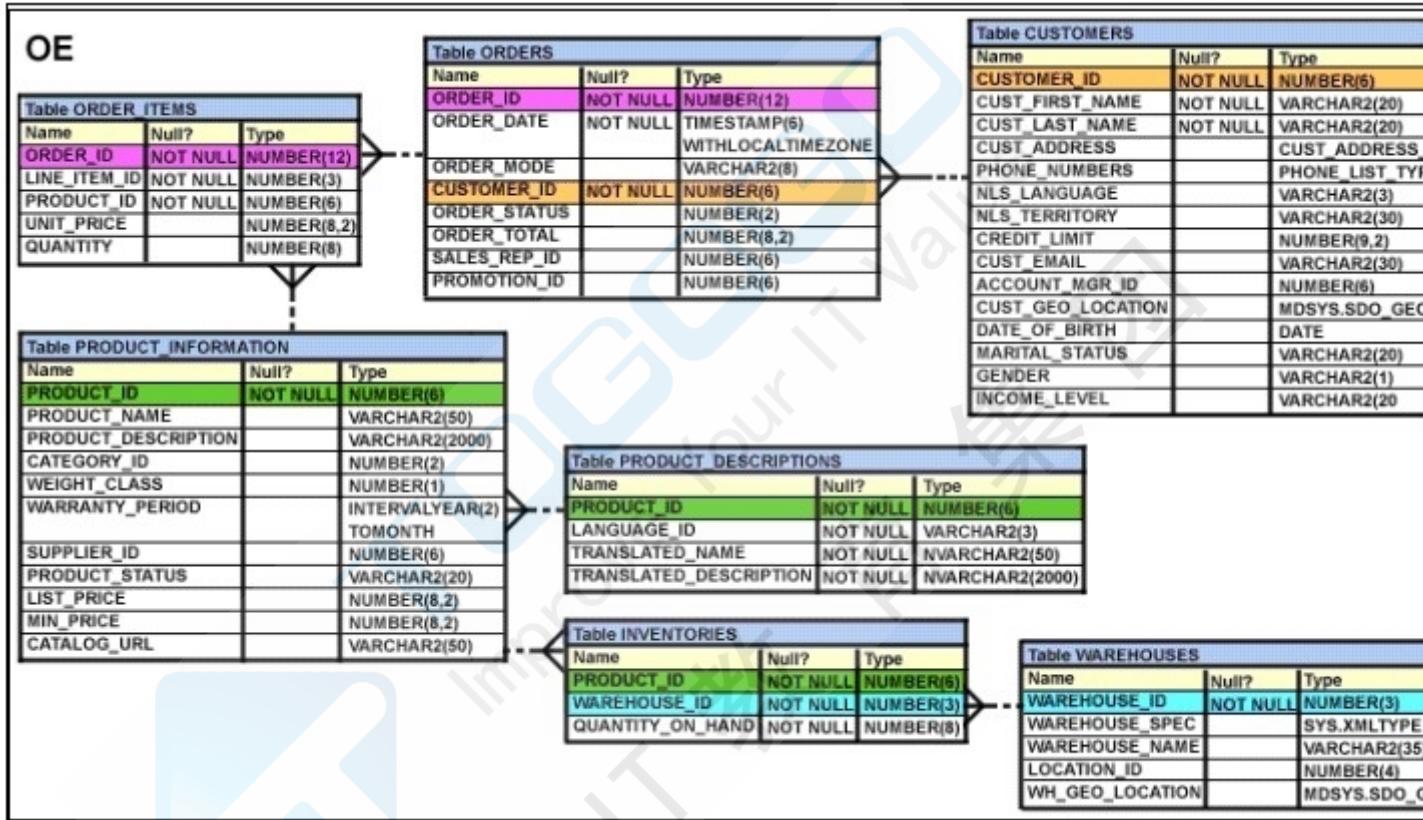

Evaluate the following SQL statement:

SELECT TO_CHAR(list_price ,'\$9,999') FROM product_information; Which two statements would be true regarding the output for this SQL statement? (Choose two.)

- The LIST_PRICE column having value 1123.90 would be displayed as \$1,124.
- The LIST_PRICE column having value 1123.90 would be displayed as \$1,123.
- The LIST_PRICE column having value 11235.90 would be displayed as \$1,123.
- The LIST_PRICE column having value 11235.90 would be displayed as #####.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 130

Which three statements are true regarding single-row functions? (Choose three.)

- They can accept only one argument.

- B. They can be nested up to only two levels.
- C. They can return multiple values of more than one data type.
- D. They can be used in SELECT, WHERE, and ORDER BY clauses.
- E. They can modify the data type of the argument that is referenced.
- F. They can accept a column name, expression, variable name, or a user-supplied constant as arguments.

Correct Answer: DEF

Section: (none)

Explanation

Explanation/Reference:

QUESTION 131

Which statement correctly grants a system privilege?

- A. GRANT EXECUTE ON prod TO PUBLIC;
- B. GRANT CREATE VIEW ON table1 TO used;
- C. GRANT CREATE TABLE TO used ,user2;
- D. GRANT CREATE SESSION TO ALL;

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 132

Given below is a list of functions and their purpose in random order.

Function Purpose

- 1)NVL a) Used for evaluating NOT NULL and NULL values
 - 2)NULLIF b) Used to return the first non- null values in a list of expressions 3)COALESCE c) Used to compare two expressions. If both are same, it returns NULL; otherwise, it returns only the first expression.
 - 4)NVL2 d) Used to convert NULL values to actual values
- Identify the correct combination of functions and their usage.

- A. 1-a,2-c,3-b,4-d
- B. 1-d,2-c,3-b,4-a
- C. 1-b,2-c,3-d,4-a
- D. 1-d,2-b,3-c,4-a

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 133

The first DROP operation is performed on PRODUCTS table using the following command:

DROP TABLE products PURGE;

Then you performed the FLASHBACK operation by using the following command:

FLASHBACK TABLE products TO BEFORE DROP;

Which statement describes the outcome of the FLASHBACK command?

- A. It recovers only the table structure.
- B. It recovers the table structure, data, and the indexes.

- C. It recovers the table structure and data but not the related indexes.
- D. It is not possible to recover the table structure, data, or the related indexes.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 134

Evaluate the SQL statements:

CREATE TABLE new_order

(orderno NUMBER(4),
booking_date TIMESTAMP WITH LOCAL TIME ZONE);

The database is located in San Francisco where the time zone is -8:00.

The user is located in New York where the time zone is -5:00.

A New York user inserts the following record:

```
INSERT INTO new_order  
VALUES(1, TIMESTAMP ?007-05-10 6:00:00 -5:00?);
```

Which statement is true?

- A. When the New York user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000'.
- B. When the New York user selects the row, booking_date is displayed as 2007-05-10 6.00.00.000000 - 5:00'.
- C. When the San Francisco user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000'.
- D. When the San Francisco user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000 -8:00'.

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 135

View the Exhibit and examine the description of the PRODUCT_INFORMATION table.

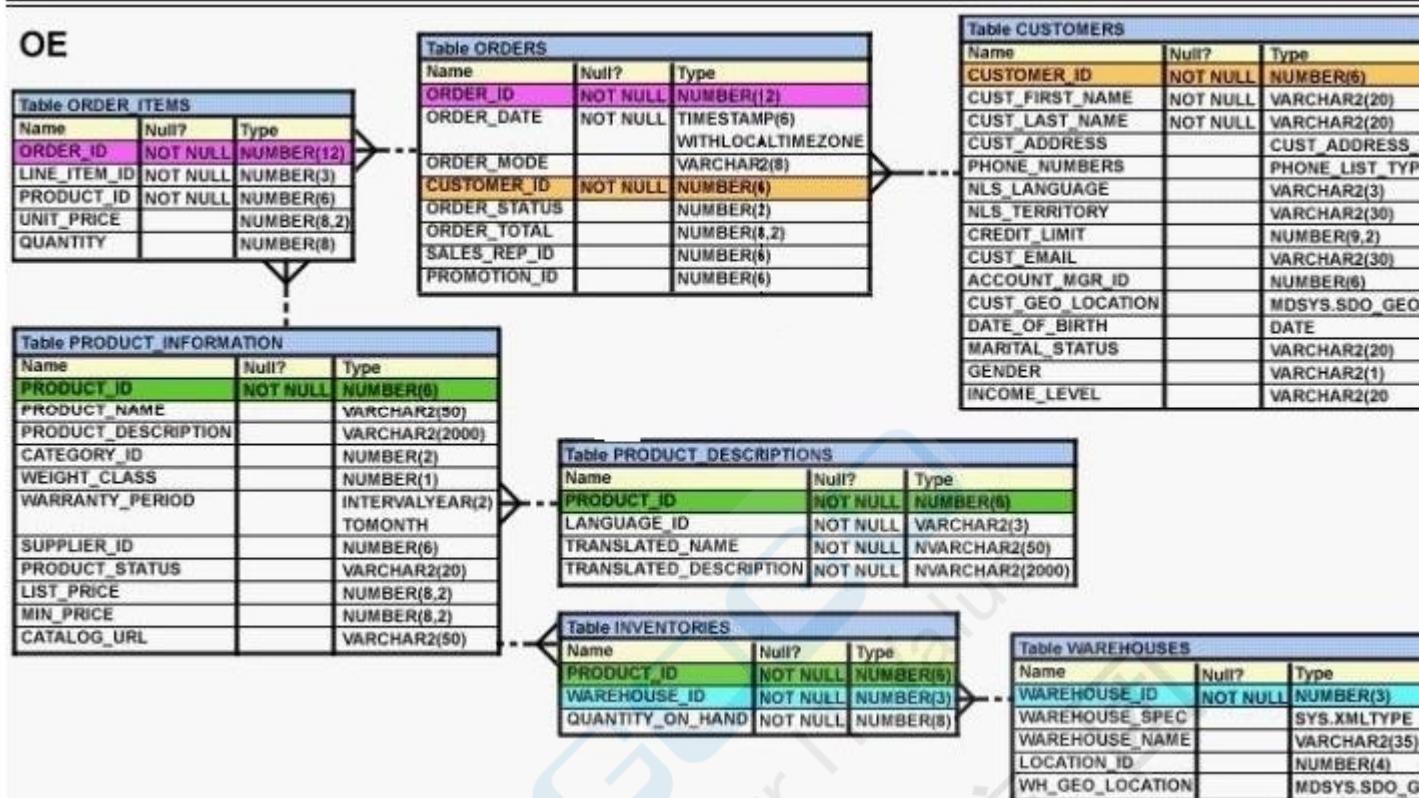

Which SQL statement would retrieve from the table the number of products having LIST_PRICE as NULL?

- A. SELECT COUNT(list_price) FROM product_information WHERE list_price IS NULL;
- B. SELECT COUNT(list_price) FROM product_information WHERE list_price = NULL;
- C. SELECT COUNT(NVL(list_price, 0)) FROM product_information WHERE list_price IS NULL;
- D. SELECT COUNT(DISTINCT list_price)
FROM product_information
WHERE list_price IS NULL;

Correct Answer: C

Section: (none)


Explanation

Explanation/Reference:

QUESTION 136

View the Exhibit and examine the data in ORDERS and ORDER_ITEMS tables.

You need to create a view that displays the ORDER ID, ORDER_DATE, and the total number of items in each order.

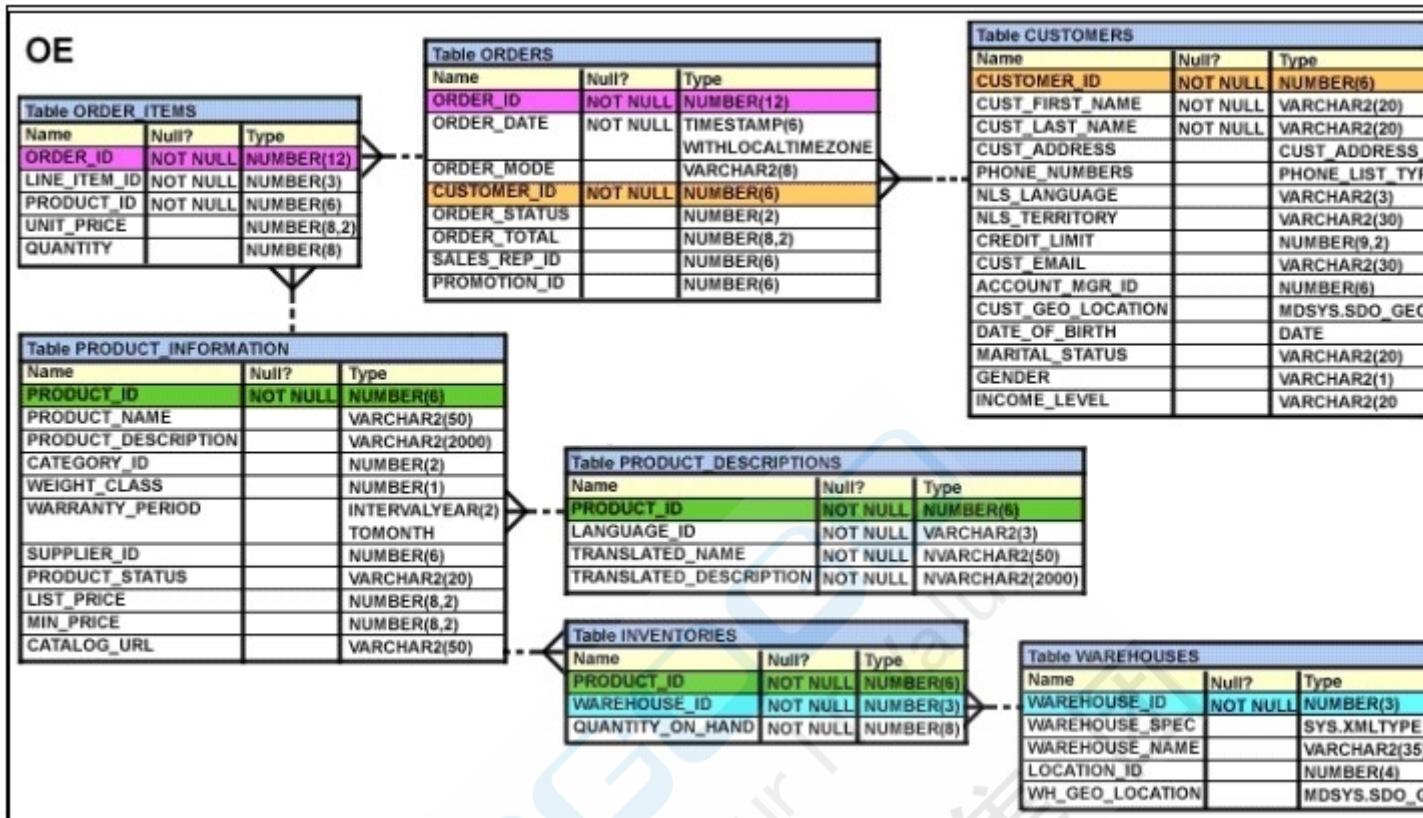

Which CREATE VIEW statement would create the view successfully?

- A. CREATE OR REPLACE VIEW ord_vu (order_id,order_date)
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
"NO OF ITEMS"
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date;
- B. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
"NO OF ITEMS"
FROM orders o JOIN order_items i

ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date;
- C. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
FROM orders o JOIN order_items i ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date;
- D. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)||' NO OF ITEMS'
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date
WITH CHECK OPTION;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 137

Which two statements are true regarding operators used with subqueries? (Choose two.)

- A. The NOT IN operator is equivalent to IS NULL
- B. The <ANY operator means less than the maximum.
- C. =ANY and =ALL operators have the same functionality.
- D. The IN operator cannot be used in single-row subqueries.
- E. The NOT operator can be used with IN, ANY and ALL operators.

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 138

Given below is the list of meta character syntaxes and their descriptions in random order:

Meta character syntax Description

- 1) ^a) Matches character not in the list
 - 2) [...] b) Matches character when it occurs at the beginning of a line 3) | c) Treats the subsequent meta character as a literal 4) \ d) Matches one of the characters such as the OR operator
- Identify the option that correctly matches the meta character syntaxes with their descriptions.

- A. 1-b, 2-a, 3-d.4-c
- B. 1-a, 2-b, 3-d.4-c
- C. 1-d, 2-b, 3-a.4-c
- D. 1-b, 2-c, 3-d, 2-a

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 139

View the Exhibit and examine the structure of the ORDER_ITEMS table.

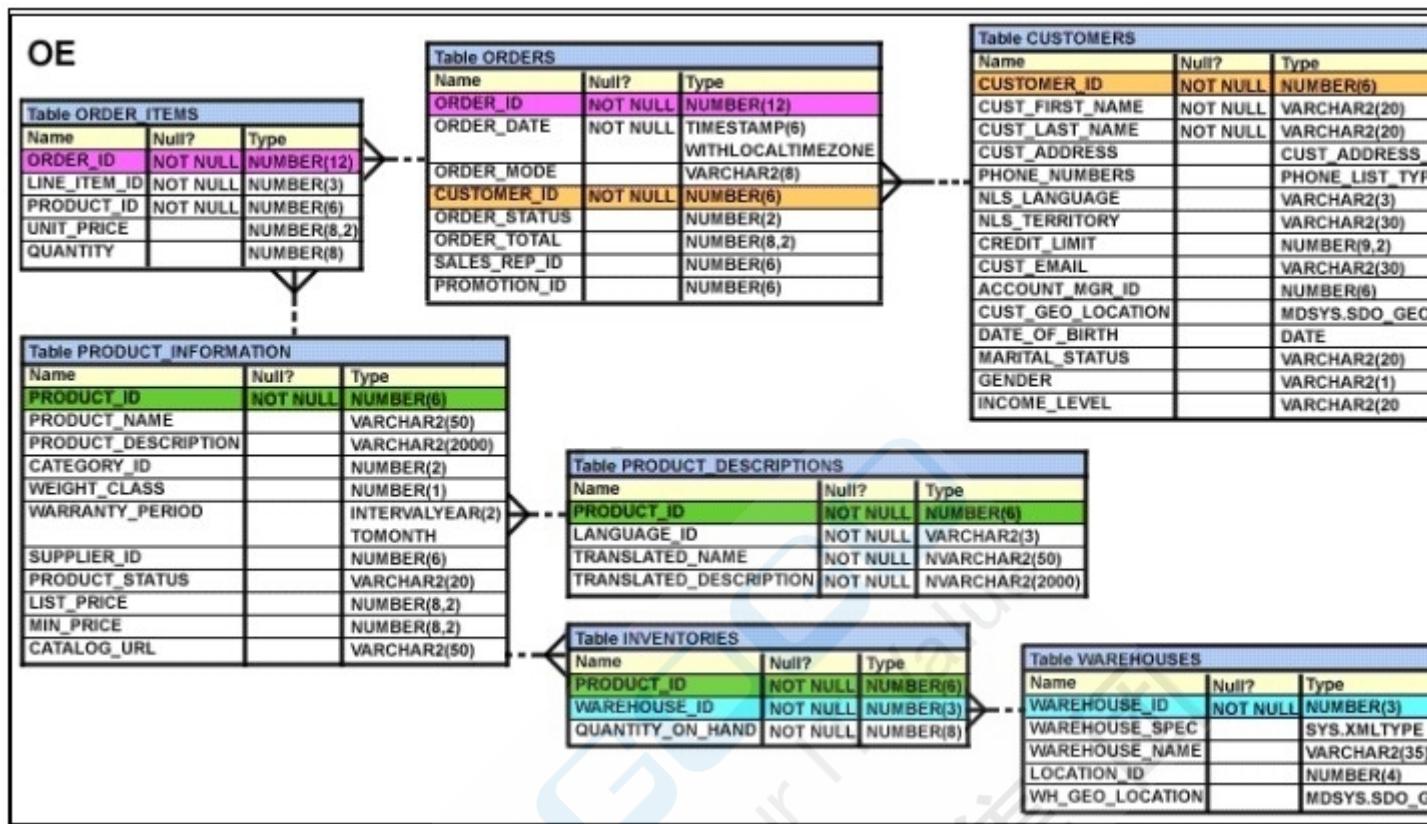

Examine the following SQL statement:

SELECT order_id, product_id, unit_price FROM order_items WHERE unit_price = (SELECT MAX(unit_price) FROM order_items GROUP BY order_id);

You want to display the PRODUCT_ID of the product that has the highest UNIT_PRICE per ORDER_ID. What correction should be made in the above SQL statement to achieve this?

- A. Replace = with the IN operator.
- B. Replace = with the >ANY operator.
- C. Replace = with the >ALL operator.
- D. Remove the GROUP BY clause from the subquery and place it in the main query.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 140

Evaluate the following expression using meta character for regular expression:

'[^Ale|ax.r\$]'

Which two matches would be returned by this expression? (Choose two.)

- A. Alex
- B. Alax
- C. Alxer
- D. Alaxendar
- E. Alexender

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:**QUESTION 141**

Which statement is true regarding the CUBE operator in the GROUP BY clause of a SQL statement?

- A. It produces only aggregates for the groups specified in the GROUP BY clause.
- B. It finds all the NULL values in the superaggregates for the groups specified in the GROUP BY clause.
- C. It produces 2^n possible superaggregate combinations, if the n columns and expressions are specified in the GROUP BY clause.
- D. It produces $n+1$ possible superaggregate combinations, if the n columns and expressions are specified in the GROUP BY clause.


Correct Answer: C**Section: (none)****Explanation****Explanation/Reference:****QUESTION 142**

Which statement is true regarding the SESSION_PRIVS dictionary view?

- A. It contains the current object privileges available in the user session.
- B. It contains the current system privileges available in the user session.
- C. It contains the object privileges granted to other users by the current user session.
- D. It contains the system privileges granted to other users by the current user session.

Correct Answer: B**Section: (none)****Explanation****Explanation/Reference:****QUESTION 143**

View the Exhibit and examine the descriptions of ORDER_ITEMS and ORDERS tables.

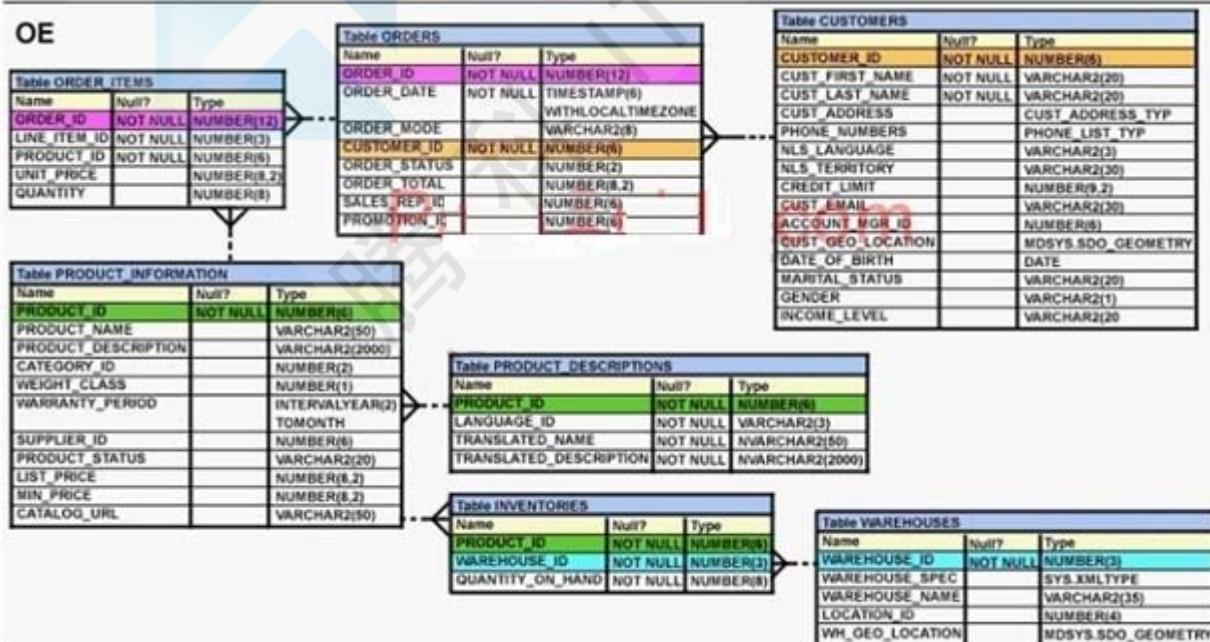

You want to display the CUSTOMER_ID, PRODUCT_ID, and total (UNIT_PRICE multiplied by QUANTITY) for the order placed. You also want to display the subtotals for a CUSTOMER_ID as well as

for a PRODUCT ID for the last six months.

- A. SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total"
FROM order_items oi JOIN orders o
ON oi.order_id=o.order_id
GROUP BY ROLLUP (o.customer_id,oi.product_id)
WHERE MONTHS_BETWEEN(order_date, SYSDATE) <= 6;
- B. SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total"
FROM orderitems oi JOIN orders o
ON oi.order_id=o.order_id

GROUP BY ROLLUP (o.customer_id,oi.product_id)
HAVING MONTHS_BETWEEN(order_date, SYSDATE) <= 6;
- C. SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total"
FROM order_items oi JOIN orders o
ON oi.order_id=o.order_id
GROUP BY ROLLUP (o.customer_id, oi.product_id)
WHERE MONTHS_BETWEEN(order_date, SYSDATE) >= 6;
- D. SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total"
FROM order_items oi JOIN orders o
ON oi.order_id=o.order_id
WHERE MONTHS_BETWEEN(order_date, SYSDATE) <= 6
GROUP BY ROLLUP (o.customer_id, oi.product_id);

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:


QUESTION 144

View the Exhibit and examine the description of the EMPLOYEES table.

Your company wants to give 5% bonus to all the employees on their annual salary. The SALARY column stores the monthly salary for an employee. To check the total for annual salary and bonus amount for each employee, you issued the following SQL statement:

```
SELECT first_name, salary, salary*12+salary*12*.05 "ANNUAL SALARY + BONUS"
FROM employees;
```

Which statement is true regarding the above query?

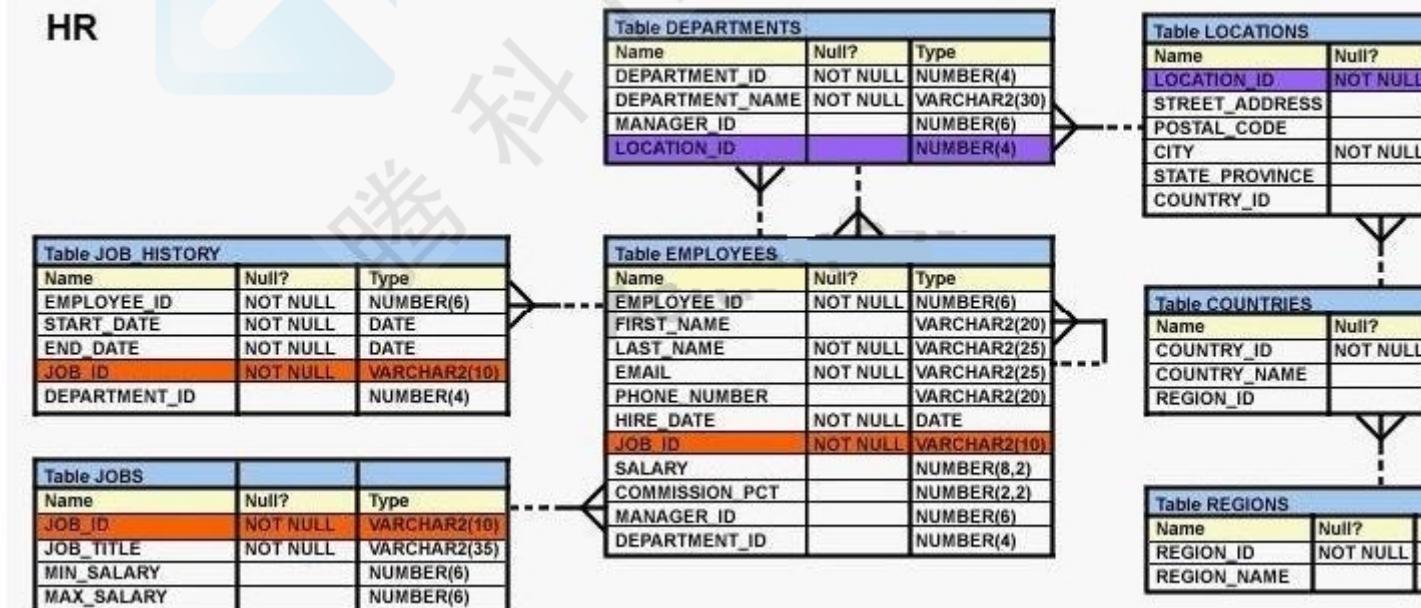

- A. It would execute and give you the desired output.

- B. It would not execute because the AS keyword is missing between the column name and the alias.
- C. It would not execute because double quotation marks are used instead of single quotation marks for assigning alias for the third column.
- D. It would execute but the result for the third column would be inaccurate because the parentheses for overriding the precedence of the operator are missing.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 145

View the Exhibit and examine the structure of the CUSTOMERS table.

CUSTOMER_VU is a view based on CUSTOMERS_BR1 table which has the same structure as CUSTOMERS table. CUSTOMERS needs to be updated to reflect the latest information about the customers.

What is the error in the following MERGE statement?

```
MERGE INTO customers c
USING customer_vu cv
ON (c.customer_id = cv.customer_id)
WHEN MATCHED THEN
UPDATE SET
c.customer_id = cv.customer_id,
c.cust_name = cv.cust_name,
c.cust_email = cv.cust_email,
c.income_level = cv.Income_Level
WHEN NOT MATCHED THEN
INSERT VALUESfcv.customer_id,fcv.cus_name,fcv.cus_email,fcv.income_level)
WHERE fcv.Income_Level >100000;
```

CUSTOMERS		
Name	Null?	Type
CUSTOMER_ID	NOT NULL	NUMBER (6)
CUST_NAME		VARCHAR2 (20)
CUST_EMAIL		VARCHAR2 (30)
INCOME_LEVEL		VARCHAR2 (20)

- A. The CUSTOMERJD column cannot be updated.
- B. The INTO clause is misplaced in the command.
- C. The WHERE clause cannot be used with INSERT.
- D. CUSTOMER VU cannot be used as a data source

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:


QUESTION 146

View the Exhibit and examine the descriptions for ORDERS and ORDER_ITEMS tables.

Evaluate the following SQL statement:

```
SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Order Amount"
FROM order_items oi JOIN orders o
ON oi.order_id = o.order_id
```

GROUP BY CUBE (o.customer_id, oi.product_id);

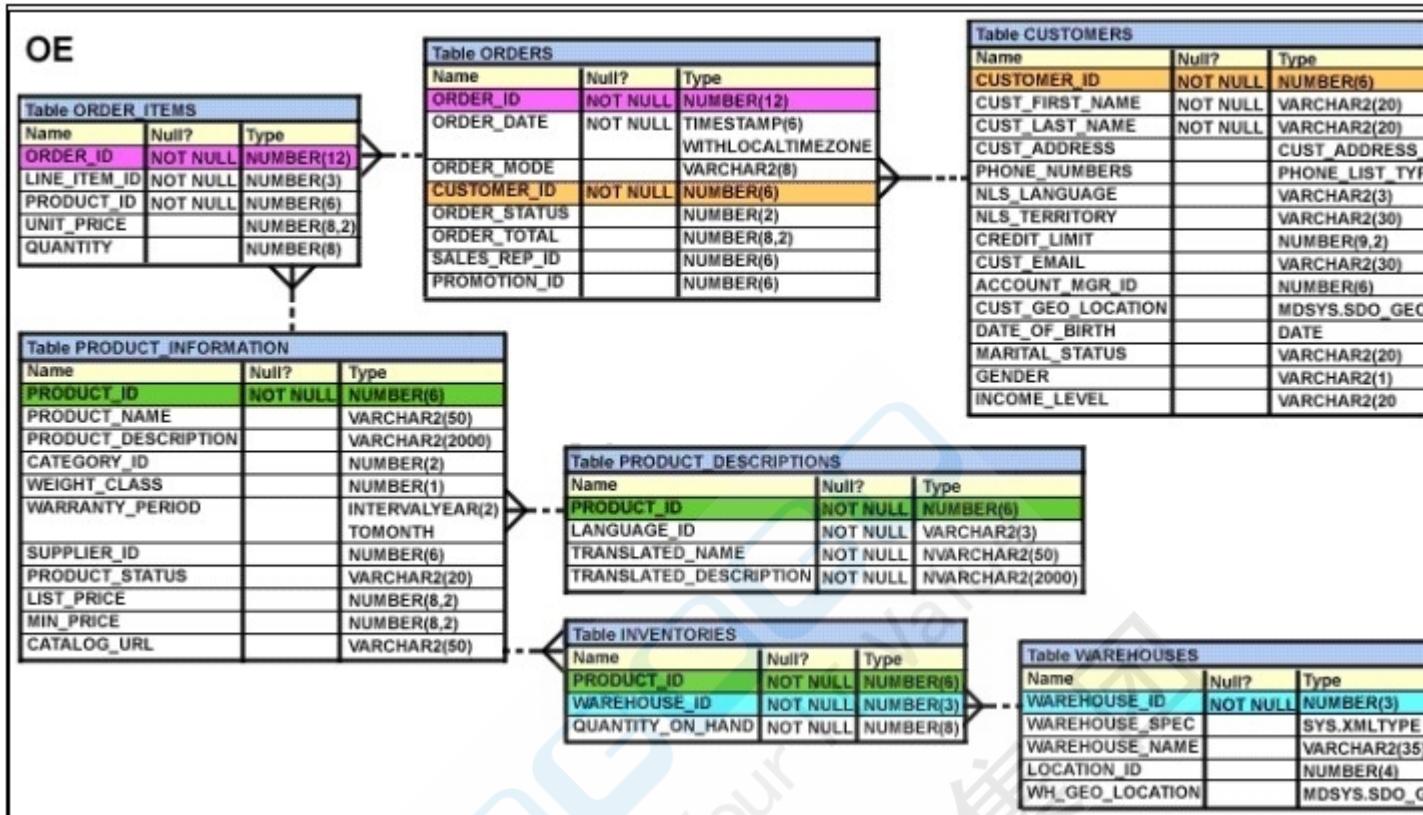

Which three statements are true regarding the output of this SQL statement? (Choose three.)

- A. t would return the subtotals for the Order Amount of every CUSTOMER_ID.
- B. t would return the subtotals for the Order Amount for every PRODUCT_ID.
- C. t would return the subtotals for the Order Amount of every PRODUCT_ID and CUSTOMER_ID as one group.
- D. t would return the subtotals for the Order Amount of every CUSTOMER_ID and PRODUCT_ID as one group.
- E. t would return only the grand total for the Order Amount of every CUSTOMER_ID and PRODUCT_ID as one group.

Correct Answer: ABD


Section: (none)

Explanation

Explanation/Reference:

QUESTION 147

View the Exhibit and examine the structure of EMPLOYEES and JOB_HISTORY tables.

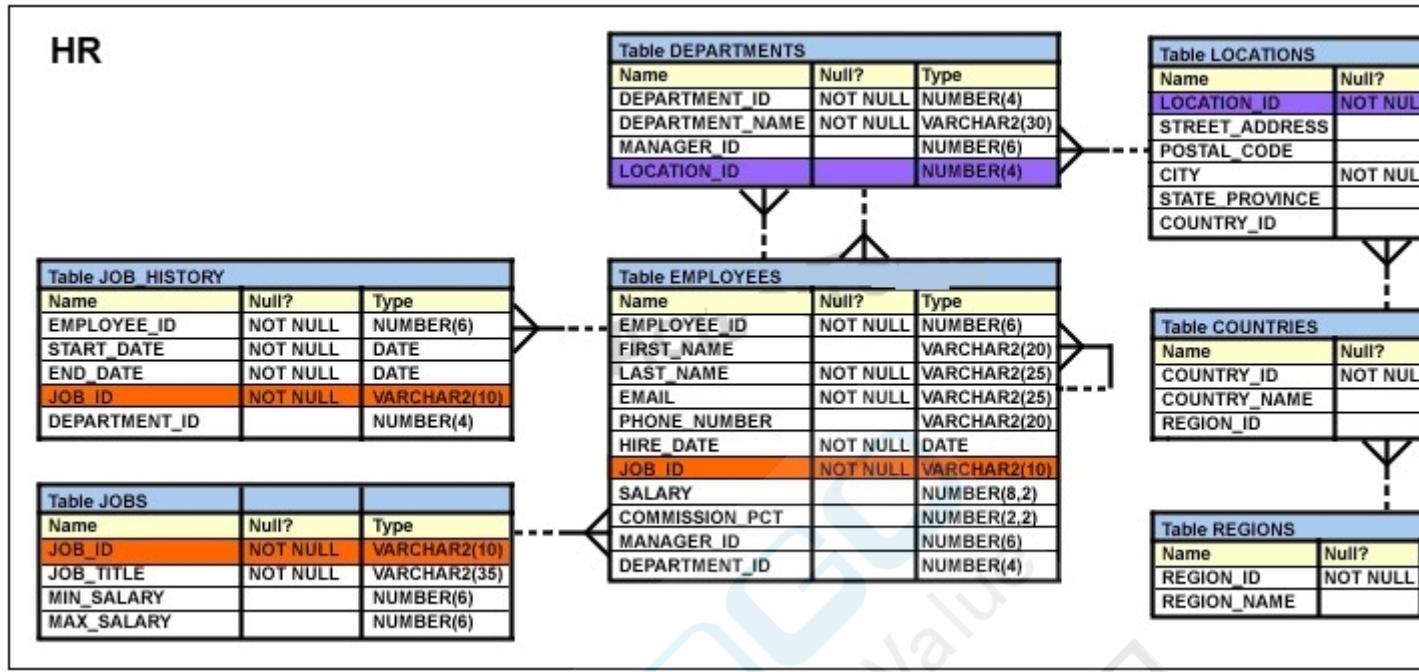

The EMPLOYEES table maintains the most recent information regarding salary, department, and job for all the employees. The JOB_HISTORY table maintains the record for all the job changes for the employees. You want to delete all the records from the JOB_HISTORY table that are repeated in the EMPLOYEES table.

Which two SQL statements can you execute to accomplish the task? (Choose two.)

- DELETE FROM job_history j WHERE employee_id = (SELECT employee_id FROM employees e WHERE j.employee_id = e.employee_id) AND job_id = (SELECT job_id FROM employees e WHERE j.job_id = e.job_id);
- DELETE FROM job_history j WHERE (employee_id, job_id) = ALL (SELECT employee_id, job_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)
- DELETE FROM job_history j WHERE employee_id = (SELECT employee_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)
- DELETE FROM job_history j WHERE (employee_id, job_id) = (SELECT employee_id, job_id FROM employees e WHERE j.employee_id = e.employee_id and j.job_id = e.job_id)

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 148

View the Exhibit and examine the descriptions of the DEPT and LOCATIONS tables.

DEPT		
Name	Null?	
DEPARTMENT_ID		NUMBER(4)
DEPARTMENT_NAME	NOT NULL	VARCHAR2(30)
MANAGER_ID		NUMBER(6)
LOCATION_ID		NUMBER(4)
CITY		VARCHAR2(30)

LOCATIONS		
Name	Null?	
LOCATION_ID	NOT NULL	NUMBER(4)
STREET_ADDRESS		VARCHAR2(40)
POSTAL_CODE		VARCHAR2(12)
CITY	NOT NULL	VARCHAR2(30)
STATE_PROVINCE		VARCHAR2(25)
COUNTRY_ID		CHAR(2)

You want to update the CITY column of the DEPT table for all the rows with the corresponding value in the CITY column of the LOCATIONS table for each department.

Which SOL statement would you execute to accomplish the task?

- A. UPDATE deptd
SET city = ANY (SELECT city
FROM locations l);
- B. UPDATE deptd
SET city = (SELECT city
FROM locations l)
WHERE d.location_id = l.location_id;
- C. UPDATE dept d
SET city = (SELECT city
FROM locations l
WHERE d.location_id = l.location_id);
- D. UPDATE dept d
SET city = ALL (SELECT city
FROM locations l
WHERE d.location_id = l.location_id);

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 149

View the Exhibit and examine the structure of the PRODUCT_INFORMATION table.

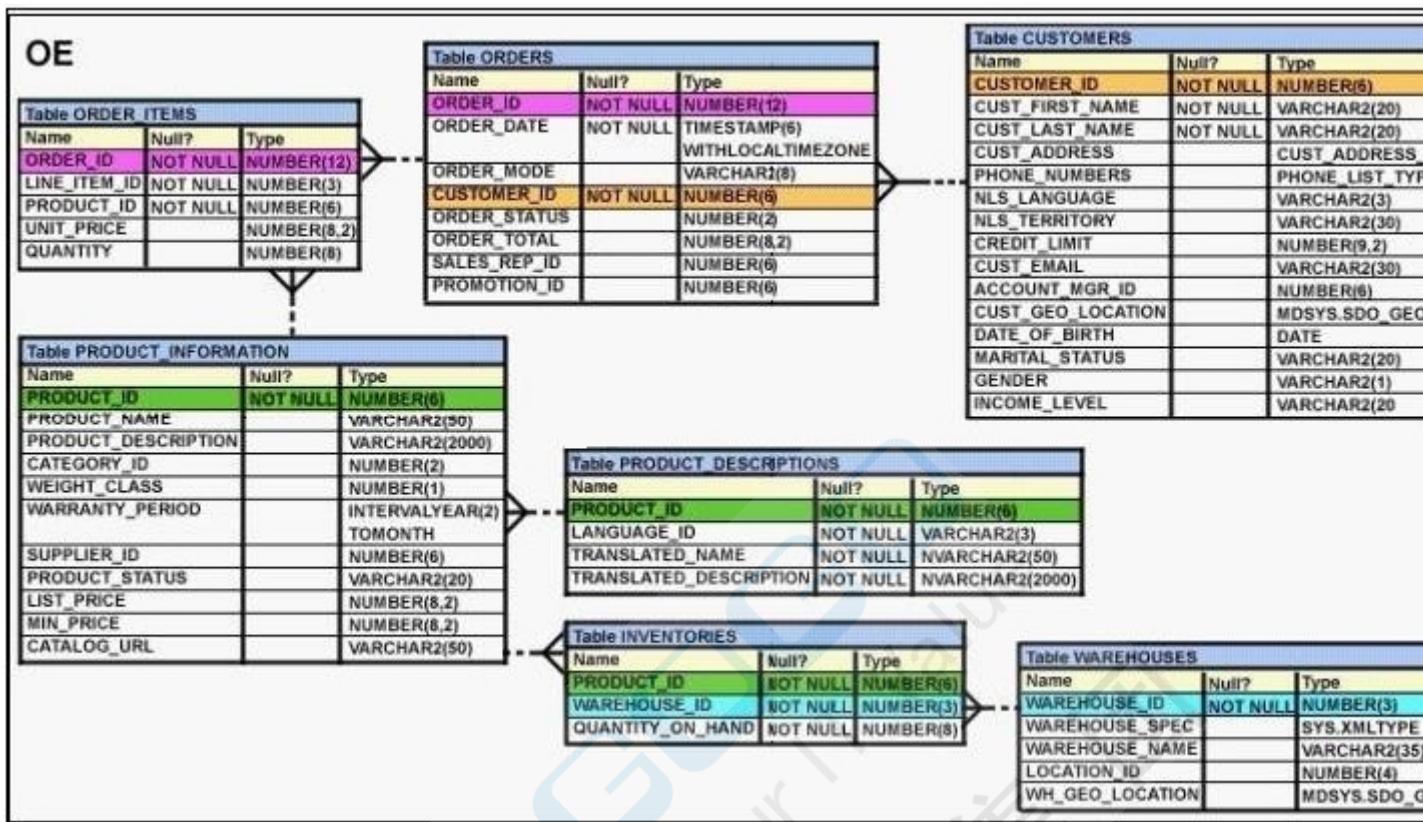

You want to see the product names and the date of expiration of warranty for all the products, if the product is purchased today. The products that have no warranty should be displayed at the top and the products with maximum warranty period should be displayed at the bottom.

Which SQL statement would you execute to fulfill this requirement?

- SELECT product_name, category_id, SYSDATE+warranty_period AS "Warranty expire date" FROM product_information ORDER BY SYSDATE-warranty_period;
- SELECT product_name, category_id, SYSDATE+warranty_period AS "Warranty expire date" FROM product_information ORDER BY SYSDATE+warranty_period;
- SELECT product_name, category_id, SYSDATE+warranty_period AS "Warranty expire date" FROM product_information ORDER BY SYSDATE;
- SELECT product_name, category_id, SYSDATE+warranty_period "Warranty expire date" FROM product_information WHERE warranty_period >SYSDATE;

Correct Answer: B


Section: (none)

Explanation

Explanation/Reference:

QUESTION 150

View the Exhibit and examine the description of the EMPLOYEES table.

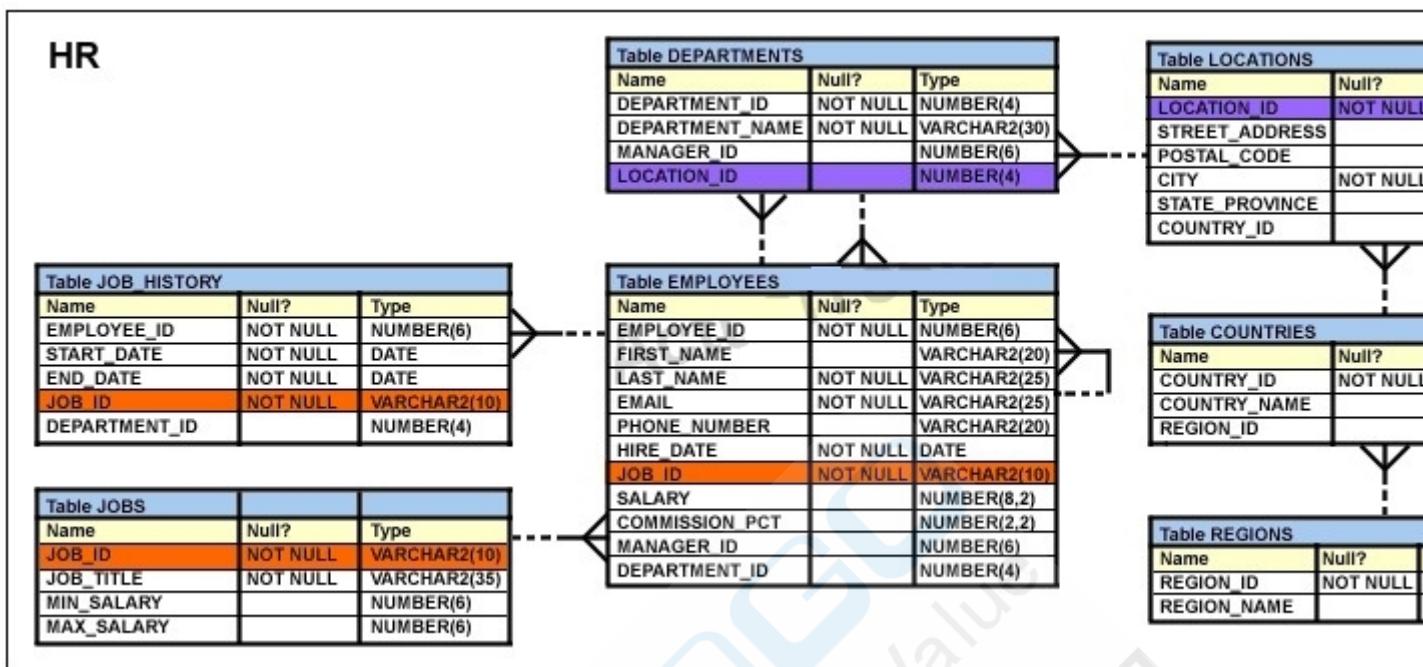

You want to calculate the total remuneration for each employee. Total remuneration is the sum of the annual salary and the percentage commission earned for a year. Only a few employees earn commission. Which SQL statement would you execute to get the desired output?

- A. SELECT first_name, salary, salary*12+salary*commission_pct "Total"
FROM EMPLOYEES;
- B. SELECT first_name, salary, salary*12+NVL((salary*commission_pct), 0) "Total"
FROM EMPLOYEES;
- C. SELECT first_name, salary, salary*12 + NVL(salary, 0)*commission_pct "Total"
FROM EMPLOYEES;
- D. SELECT first_name, salary, salary*12+ (salary*NVL2(commission_pct,
salary,salary+commission_pct))"Total"
FROM EMPLOYEES;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 151

Which two statements are true regarding operators used with subqueries? (Choose two.)

- A. The NOT IN operator is equivalent to IS NULL
- B. The <ANY operator means less than the maximum.
- C. =ANY and =ALL operators have the same functionality.
- D. The IN operator cannot be used in single-row subqueries.
- E. The NOT operator can be used with IN, ANY and ALL operators.

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 152

Which statements are true regarding the hierarchical query in Oracle Database 10g? (Choose all that apply.)

- A. It is possible to retrieve data only in top-down hierarchy.
- B. It is possible to retrieve data in top-down or bottom-up hierarchy.
- C. It is possible to remove an entire branch from the output of the hierarchical query.
- D. You cannot specify conditions when you retrieve data by using a hierarchical query.

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 153

Evaluate the following ALTER TABLE statement:

ALTER TABLE orders

SET UNUSED order_date;

Which statement is true?

- A. The DESCRIBE command would still display the ORDER_DATE column.
- B. ROLLBACK can be used to get back the ORDER_DATE column in the ORDERS table.
- C. The ORDER_DATE column should be empty for the ALTER TABLE command to execute successfully.
- D. After executing the ALTER TABLE command, you can add a new column called ORDER_DATE to the ORDERS table.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 154

Which statement is true regarding synonyms?

- A. Synonyms can be created for tables but not views.
- B. Synonyms are used to reference only those tables that are owned by another user.
- C. A public synonym and a private synonym can exist with the same name for the same table.
- D. The DROP SYNONYM statement removes the synonym, and the status of the table on which the synonym has been created becomes invalid.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 155

Evaluate the following statement:

CREATE TABLE bonuses(employee_id NUMBER, bonus NUMBER DEFAULT 100);

The details of all employees who have made sales need to be inserted into the BONUSES table. You can obtain the list of employees who have made sales based on the SALES REP ID column of the ORDERS table. The human resources manager now decides that employees with a salary of \$8,000 or less should receive a bonus. Those who have not made sales get a bonus of 1% of their salary. Those who have made sales get a bonus of 1 % of their salary and also a salary increase of 1 %. The salary of each employee can be obtained from the EMPLOYEES table.

Which option should be used to perform this task most efficiently?

- A. MERGE
- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 156

Evaluate the SQL statements:

```
CREATE TABLE new_order
```

```
(orderno NUMBER(4),  
booking_date TIMESTAMP WITH LOCAL TIME ZONE);
```

The database is located in San Francisco where the time zone is -8:00.

The user is located in New York where the time zone is -5:00.

A New York user inserts the following record:

```
INSERT INTO new_order
```

```
VALUES(1, TIMESTAMP 007-05-10 6:00:00 -5:00");
```

Which statement is true?

- A. When the New York user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000'
- B. When the New York user selects the row, booking_date is displayed as 2007-05-10 6.00.00.000000 - 5:00'.
- C. When the San Francisco user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000'
- D. When the San Francisco user selects the row, booking_date is displayed as 007-05-10 3.00.00.000000 -8:00'

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 157

Which three statements indicate the end of a transaction? (Choose three.)

- A. after a COMMIT is issued
- B. after a ROLLBACK is issued
- C. after a SAVEPOINT is issued
- D. after a SELECT statement is issued
- E. after a CREATE statement is issued

Correct Answer: ABE

Section: (none)


Explanation

Explanation/Reference:

QUESTION 158

View the Exhibit and examine the description of the EMPLOYEES and DEPARTMENTS tables. You want to display the LAST_NAME for the employees, LAST_NAME for the manager of the employees, and the DEPARTMENT_NAME for the employees having 100 as MANAGER_ID. The following SQL statement was written:

```
SELECT m.last_name "Manager", e.last_name "Employee", department_name "Department" FROM
employees m JOIN employees e
ON (m.employee_id = e.manager_id)
WHERE e.manager_id=100
JOIN departments d
ON (e.department_id = d.department_id);
```

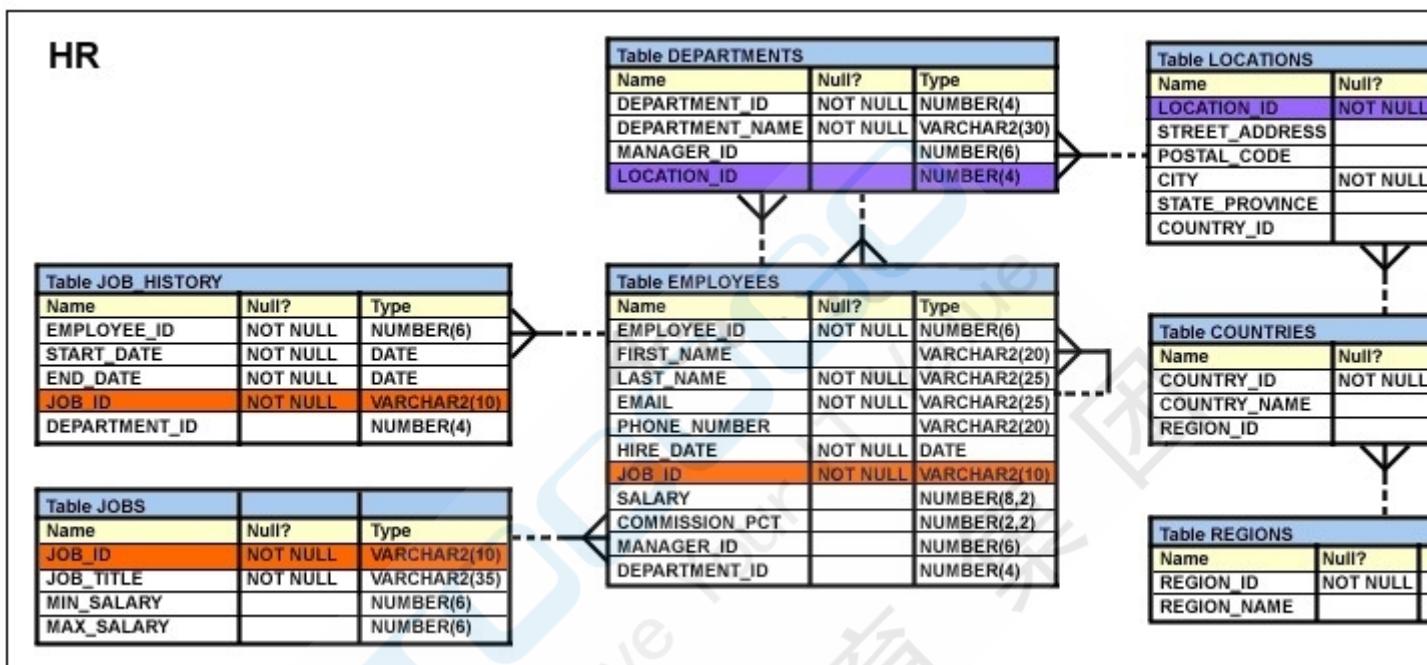

Which statement is true regarding the output of this SQL statement?

- A. The statement would provide the desired results.
- B. The statement would not execute because the ON clause is written twice.
- C. The statement would not execute because the WHERE clause is wrongly placed.
- D. The statement would not execute because the self join uses the ON clause instead of the USING clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 159

Given below is a list of datetime data types and examples of values stored in them in a random order:

Datatype Example

- 1) INTERVAL YEAR TO MONTH a) 2003-04-15 8:00:00 -8:00'
- 2) TIMESTAMP WITH LOCAL TIME ZONE b) '-K)6 03:30:16.000000'
- 3) TIMESTAMP WITH TIME ZONE c) '17-JUN-03 12.00.00.000000 AM'4) INTERVAL DAY TO SECOND d) '402-00' Identify the option that correctly matches the data types with the values.

- A. 1-d.2-c.3-a.4-b
- B. 1-b.2-a.3-c.4-d
- C. 1-b.2-a,3-d,4-c
- D. 1-d.2-c.3-b.4-a

Correct Answer: A

Section: (none)**Explanation****Explanation/Reference:****QUESTION 160**

Evaluate the following statement:

```
CREATE TABLE bonuses(employee_id NUMBER, bonus NUMBER DEFAULT 100);
```

The details of all employees who have made sales need to be inserted into the BONUSES table. You can obtain the list of employees who have made sales based on the SALES REP ID column of the ORDERS table.

The human resources manager now decides that employees with a salary of \$8,000 or less should receive a bonus. Those who have not made sales get a bonus of 1% of their salary. Those who have made sales get a bonus of 1 % of their salary and also a salary increase of 1 %. The salary of each employee can be obtained from the EMPLOYEES table.

Which option should be used to perform this task most efficiently?

- A. MERGE
- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: C**Section: (none)****Explanation****Explanation/Reference:****QUESTION 161**

Evaluate the following ALTER TABLE statement: ALTER TABLE orders

```
SET UNUSED order_date;
```

Which statement is true?

- A. The DESCRIBE command would still display the ORDER_DATE column.
- B. ROLLBACK can be used to get back the ORDER_DATE column in the ORDERS table.
- C. The ORDER_DATE column should be empty for the ALTER TABLE command to execute successfully.
- D. After executing the ALTER TABLE command, you can add a new column called ORDER_DATE to the ORDERS table.

Correct Answer: D**Section: (none)****Explanation****Explanation/Reference:****QUESTION 162**

View the Exhibit and examine the description of the ORDERS table.

You need to display CUSTOMER_ID for all customers who have placed orders more than three times in the last six months. You issued the following SQL statement:

```
SELECT customer_id,COUNT(order_id)  
FROM orders  
WHERE COUNT(order_id)>3 AND  
order_date BETWEEN ADD_MONTHS(SYSDATE,-6) AND SYSDATE  
GROUP BY customer_id;
```

Which statement is true regarding the execution of the above statement?

- A. It would execute successfully and provide the desired result.

- B. It would not execute because the WHERE clause cannot have an aggregate function.
- C. It would not execute because the ORDER_ID column is not included in the GROUP BY clause.
- D. It would not execute because the GROUP BY clause should be placed before the WHERE clause.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 163

View the Exhibit and examine the structure of the EMP table which is not partitioned and not an index-organized table.

Evaluate the following SQL statement:

ALTER TABLE emp DROP COLUMN first_name;

EMP		
Name	Null?	Type
EMPNO	NOT NULL	NUMBER (4)
FIRST_NAME		VARCHAR2 (20)
LAST_NAME		VARCHAR2 (20)
SALARY		NUMBER (10, 2)
DEPTNO		NUMBER (2)

Which two statements are true regarding the above command? (Choose two.)

- A. The FIRST_NAME column would be dropped provided it does not contain any data.
- B. The FIRST_NAME column would be dropped provided at least one or more columns remain in the table.
- C. The FIRST_NAME column can be rolled back provided the SET UNUSED option is added to the above SQL statement.
- D. The FIRST_NAME column can be dropped even if it is part of a composite PRIMARY KEY provided the CASCADE option is used.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 164

Which two statements are true regarding the GROUP BY clause in a SQL statement? (Choose two.)

- A. You can use column alias in the GROUP BY clause.
- B. Using the WHERE clause after the GROUP BY clause excludes the rows after creating groups.
- C. The GROUP BY clause is mandatory if you are using an aggregate function in the SELECT clause.
- D. Using the WHERE clause before the GROUP BY clause excludes the rows before creating groups.
- E. If the SELECT clause has an aggregate function, then those individual columns without an aggregate function in the SELECT clause should be included in the GROUP BY clause.

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 165

In which scenario would you use the ROLLUP operator for expression or columns within a GROUP BY clause?

- A. to find the groups forming the subtotal in a row
- B. to create group-wise grand totals for the groups specified within a GROUP BY clause
- C. to create a grouping for expressions or columns specified within a GROUP BY clause in one direction, from right to left for calculating the subtotals
- D. to create a grouping for expressions or columns specified within a GROUP BY clause in all possible directions, which is cross-tabular report for calculating the subtotals

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 166

View the Exhibit and examine the data in the PRODUCT_INFORMATION table.

PRODUCT_NAME	LIST_PRICE
Inkjet C/8/HQ	349
LaserPro 1200/8/BW	699
LaserPro 600/6/BW	498
HD 10GB /I	453
HD 10GB /R	489
HD 10GB /S	436
HD 10GB @5400 /SE	399
HD 12GB /I	543
HD 12GB /N	567
HD 12GB /R	612
HD 12GB /S	633
HD 12GB @7200 /SE	775
HD 18.2GB @10000 /E	800
HD 18.2GB@10000 /I	860
HD 8GB /SE	389
HD 8GB /SI	
HD 9.1GB @10000	456

There are some products listed in the PRODUCT_INFORMATION table that have no value in the LIST_PRICE column. You issued the following SQL statement to find out the PRODUCT_NAME for these products:

```
SELECT product_name, list_price
FROM product_information
```

WHERE list_price = NULL; The query returns no rows. What changes would you make in the statement to get the desired result?

- A. Change the WHERE clause to WHERE list_price = 0
- B. Change the WHERE clause to WHERE list_price = "".
- C. Change the WHERE clause to WHERE list_price IS NULL.
- D. In the WHERE clause, enclose NULL within single quotation marks.
- E. In the WHERE clause, enclose NULL within double quotation marks.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 167

View the Exhibit and examine the ORDERS table.

The ORDERS table contains data and all orders have been assigned a customer ID. Which statement would add a NOT NULL constraint to the CUSTOMER_ID column?

ORDERS		
Name	Null?	Type
ORDER_ID	NOT NULL	NUMBER(4)
ORDATE_DATE		DATE
CUSTOMER_ID		NUMBER(3)
ORDER_TOTAL		NUMBER(7,2)

- A. ALTER TABLE orders
ADD CONSTRAINT orders_cust_id_nn NOT NULL (customer_id);
- B. ALTER TABLE orders
MODIFY customer_id CONSTRAINT orders_cust_id_nn NOT NULL;
- C. ALTER TABLE orders
MODIFY CONSTRAINT orders_cust_id_nn NOT NULL (customer_id);
- D. ALTER TABLE orders
ADD customer_id NUMBER(6)CONSTRAINT orders_cust_id_nn NOT NULL;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:


QUESTION 168

View the Exhibit and examine the structure of ORDERS and CUSTOMERS tables.

Evaluate the following UPDATE statement:

```
UPDATE (SELECT order_date, order_total, customer_id FROM orders) SET order_date = 22-mar-2007'  
WHERE customer_id = (SELECT customer_id FROM customers WHERE cust_last_name = 'Roberts'AND  
Credit_limit = 600);
```

Which statement is true regarding the execution of the above UPDATE statement?

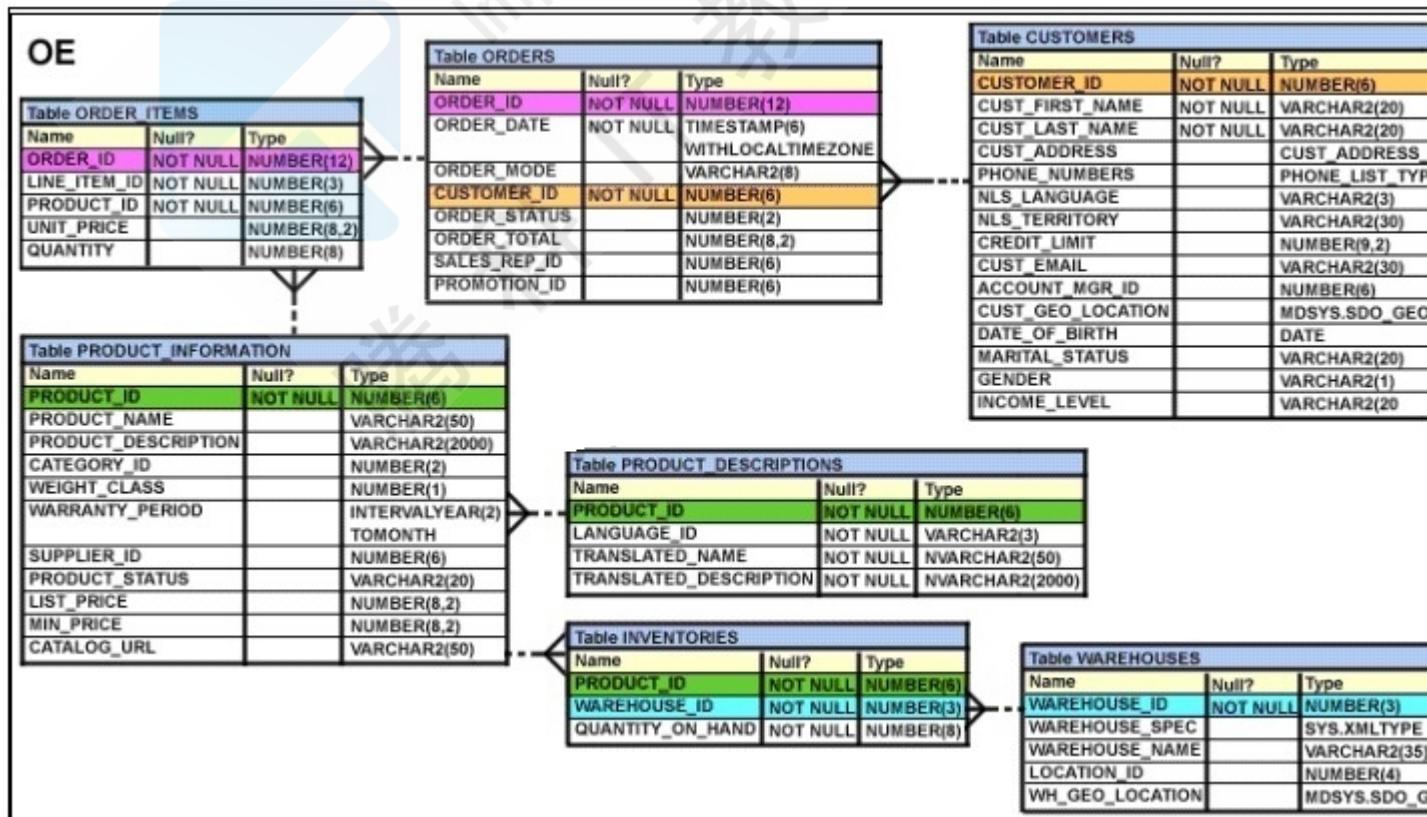

- A. It would not execute because two tables cannot be used in a single UPDATE statement.
- B. It would execute and restrict modifications to only the columns specified in the SELECT statement.
- C. It would not execute because a subquery cannot be used in the WHERE clause of an UPDATE statement.
- D. It would not execute because the SELECT statement cannot be used in place of the table name.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 169

Given below are the SQL statements executed in a user session:

```
CREATE TABLE product  
(PCODE NUMBER(2),  
PNAME VARCHAR2(10));  
INSERT INTO product VALUES(1, 'pen');  
INSERT INTO product VALUES (2,'pencil');  
SAVEPOINT a;  
UPDATE product SET PCODE = 10 WHERE PCODE = 1;  
SAVEPOINT b;  
  
DELETE FROM product WHERE PCODE = 2;  
COMMIT;  
DELETE FROM product WHERE PCODE=10;  
ROLLBACK TO SAVEPOINT a;
```

Which statement describes the consequences?

- A. No SQL statement would be rolled back.
- B. Both the DELETE statements would be rolled back.
- C. Only the second DELETE statement would be rolled back.
- D. Both the DELETE statements and the UPDATE statement would be rolled back.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 170

View the Exhibit and examine the structure of the ORDER_ITEMS table.

You need to display the ORDER_ID of the order that has the highest total value among all the orders in the ORDER_ITEMS table.

Which query would produce the desired output?

ORDER ITEMS

ORDER_ITEMS					
ORDER_ID	LINE_ITEM_ID	PRODUCT_ID	UNIT_PRICE	QUANTITY	
2355	4	2322	19	188	
2355	5	2323	17	190	
2355	9	2359	226.6	204	
2355	1	2289	46	200	
2356	5	2308	58	47	
2356	6	2311	95	51	
2356	1	2264	199.1	38	
2356	2	2274	148.5	34	
2356	3	2293	98	40	
2356	4	2299	72	44	
2357	2	2245	462	26	
2357	3	2252	788.7	26	
2357	4	2257	371.8	29	
2357	5	2262	95	29	

- A. SELECT order_id FROM order_items
WHERE(unit_price*quantity) = MAX(unit_price*quantity) GROUP BY order_id;
- B. SELECT order_id FROM order_items
WHERE(unit_price*quantity) = (SELECT MAX(unit_price*quantity) FROM order_items) GROUP BY order_id;
- C. SELECT order_id FROM order_items
WHERE (unit_price*quantity) = (SELECT MAX(unit_price*quantity) FROM order_items GROUP BY order_id);
- D. SELECT order_id FROM order_items GROUP BY order_id
HAVING SUM(unit_price*quantity) =(SELECT MAX(SUM(unit_price*quantity)) FROM order_items GROUP BY order_id);

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 171

The following are the steps for a correlated subquery, listed in random order:

- 1) The WHERE clause of the outer query is evaluated.
- 2) The candidate row is fetched from the table specified in the outer query.
- 3) The procedure is repeated for the subsequent rows of the table, till all the rows are processed.
- 4) Rows are returned by the inner query, after being evaluated with the value from the candidate row in the outer query. Identify the option that contains the steps in the correct sequence in which the Oracle server evaluates a correlated subquery.

- A. 4,2,1,3
B. 4,1,2,3
C. 2,4,1,3
D. 2,1,4,3

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 172

Evaluate the following command:

```
CREATE TABLE employees (employee_id NUMBER(2) PRIMARY KEY, last_name VARCHAR2(25) NOT NULL, department_id NUMBER(2), job_id VARCHAR2(8), salary NUMBER(10,2));
```

You issue the following command to create a view that displays the IDs and last names of the sales staff in the organization:

```
CREATE OR REPLACE VIEW sales_staff_vu AS SELECT employee_id, last_name job_id FROM employees WHERE job_id LIKE 'SA_%' WITH CHECK OPTION;
```

Which statements are true regarding the above view? (Choose all that apply.)

- A. It allows you to insert details of all new staff into the EMPLOYEES table.
- B. It allows you to delete the details of the existing sales staff from the EMPLOYEES table.
- C. It allows you to update the job ids of the existing sales staff to any other job id in the EMPLOYEES table.
- D. It allows you to insert the IDs, last names and job ids of the sales staff from the view if it is used in multitable INSERT statements.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:


QUESTION 173

View the Exhibit and examine DEPARTMENTS and the LOCATIONS tables.

Evaluate the following SQL statement:

```
SELECT location_id, city FROM locations l WHERE NOT EXISTS (SELECT location_id FROM departments WHERE location_id <> l.location_id);
```

This statement was written to display LOCATION_ID and CITY where there are no departments located. Which statement is true regarding the execution and output of the command?

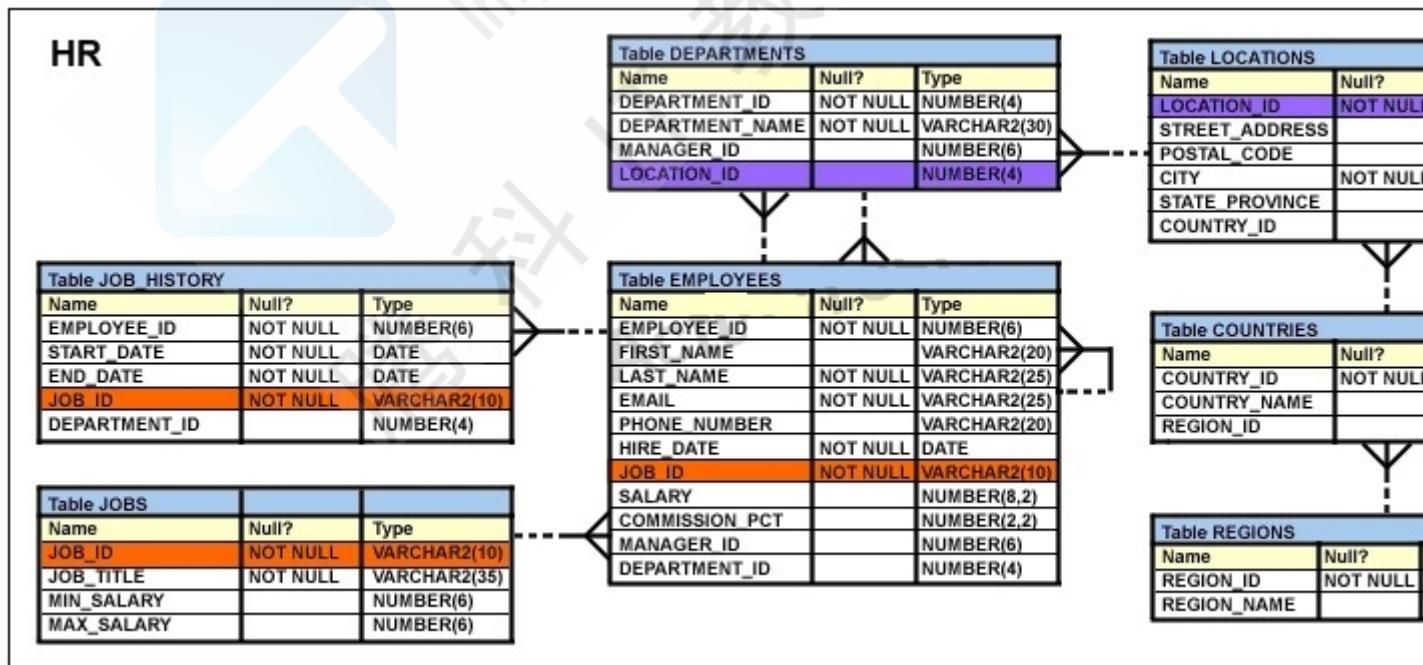

- A. The statement would execute and would return the desired results.
- B. The statement would not execute because the = comparison operator is missing in the WHERE clause of the outer query.

- C. The statement would execute but it will return zero rows because the WHERE clause in the inner query should have the = operator instead of <>.
- D. The statement would not execute because the WHERE clause in the outer query is missing the column name for comparison with the inner query result.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 174

Which three tasks can be performed using regular expression support in Oracle Database 10g? (Choose three.)

- A. it can be used to concatenate two strings.
- B. it can be used to find out the total length of the string.
- C. it can be used for string manipulation and searching operations.
- D. it can be used to format the output for a column or expression having string data.
- E. it can be used to find and replace operations for a column or expression having string data.

Correct Answer: CDE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 175

User OE, the owner of the ORDERS table, issues the following command:

GRANT SELECT .INSERT ON orders TO hr WITH GRANT OPTION;

The user HR issues the following command:

GRANT SELECT ON oe.orders TO scott;

Then, OE issues the following command:

REVOKE ALL ON orders FROM hr;

Which statement is correct?

- A. The user SCOTT loses the privilege to select rows from OE.ORDERS.
- B. The user SCOTT retains the privilege to select rows from OE.ORDERS.
- C. The REVOKE statement generates an error because OE has to first revoke the SELECT privilege from SCOTT.
- D. The REVOKE statement generates an error because the ALL keyword cannot be used for privileges that have been granted using WITH GRANT OPTION.

Correct Answer: A


Section: (none)

Explanation

Explanation/Reference:

QUESTION 176

View the Exhibit and examine the data in the DEPARTMENTS tables.

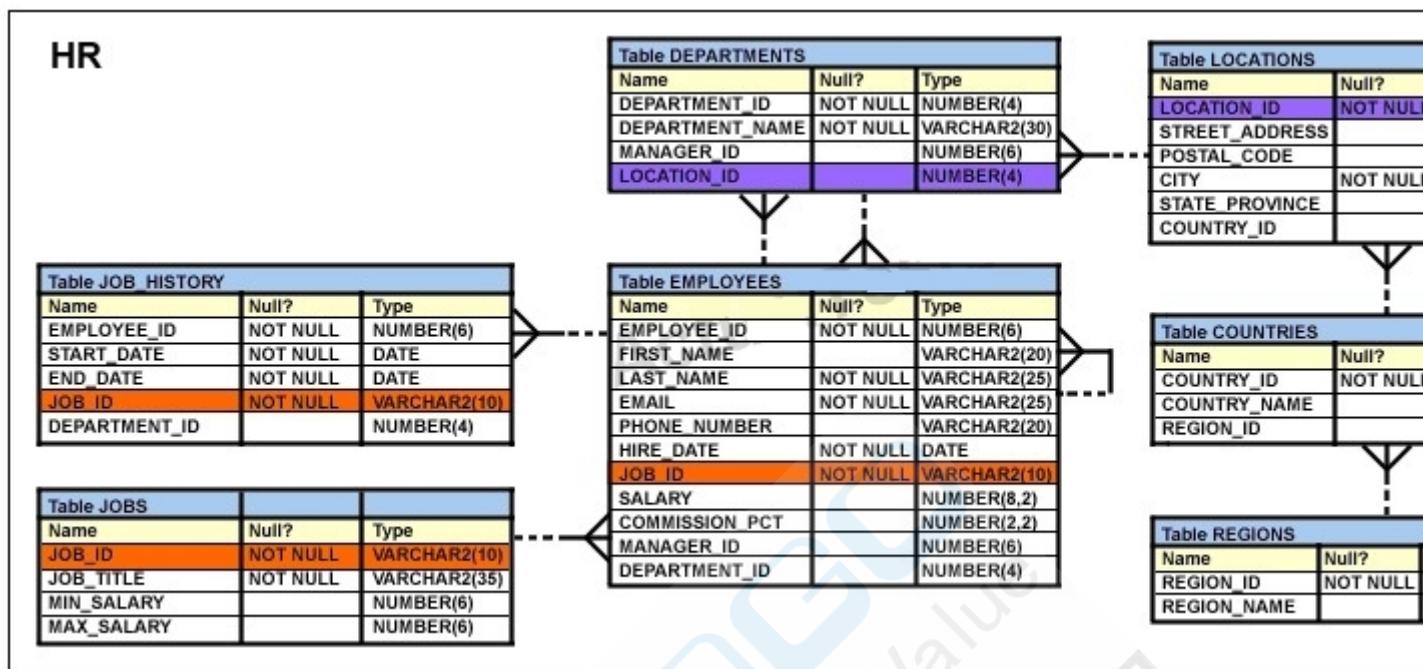

Evaluate the following SQL statement:

```
SELECT department_id "DEPT_ID", department_name , 'b' FROM departments WHERE
department_id=90 UNION SELECT department_id, department_name DEPT_NAME, 'a' FROM
departments WHERE department_id=10
```

Which two ORDER BY clauses can be used to sort the output of the above statement? (Choose two.)

- A. ORDER BY 3;
- B. ORDER BY 'b';
- C. ORDER BY DEPT_ID;
- D. ORDER BY DEPT NAME;

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 177

Evaluate the following SQL statements that are issued in the given order:

```
CREATE TABLE emp
(emp_no NUMBER(2) CONSTRAINT emp_emp_no_pk PRIMARY KEY,
enameVARCHAR2(15),
salary NUMBER(8,2),
mgr_no NUMBER(2) CONSTRAINT emp_mgr_fk REFERENCES emp);
```

```
ALTER TABLE emp
DISABLE CONSTRAINT emp_emp_no_pk CASCADE;
```

```
ALTER TABLE emp
```

```
ENABLE CONSTRAINT emp_emp_no_pk;
```

What would be the status of the foreign key EMP_MGR_FK?

- A. It would be automatically enabled and deferred.
- B. It would be automatically enabled and immediate.
- C. It would remain disabled and has to be enabled manually using the ALTER TABLE command.
- D. It would remain disabled and can be enabled only by dropping the foreign key constraint and re-

creating it.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 178

Evaluate the following statements:

```
CREATE TABLE digits  
(id NUMBER(2),  
description VARCHAR2(15));
```

```
INSERT INTO digits VALUES (1,'ONE');  
UPDATE digits SET description =TWO'WHERE id=1;  
INSERT INTO digits VALUES (2.'TWO');  
COMMIT;  
DELETE FROM digits;
```

```
SELECT description FROM digits  
VERSIONS BETWEEN TIMESTAMP MINVALUE AND MAXVALUE;
```

What would be the outcome of the above query?

- A. It would not display any values.
- B. It would display the value TWO once.
- C. It would display the value TWO twice.
- D. It would display the values ONE, TWO, and TWO.

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 179

View the Exhibit and examine the structure of the ORDERS table.

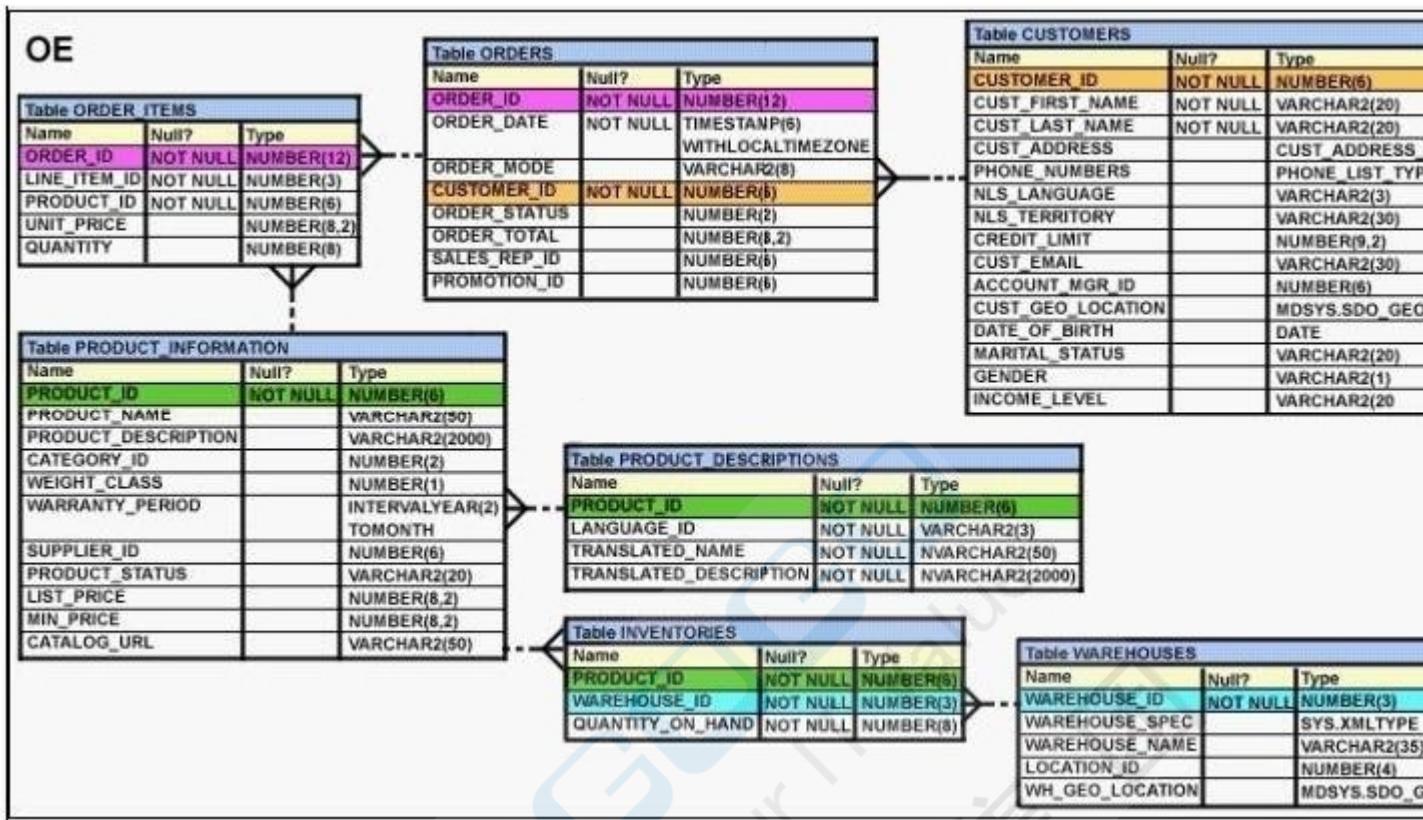

Which UPDATE statement is valid?

- A. UPDATE orders
SET order_date = '12-mar-2007' | order_total IS NULL WHERE order_id = 2455;
- B. UPDATE orders
SET order_date = '12-mar-2007', order_total = NULL WHERE order_id = 2455;
- C. UPDATE orders
SET order_date = '12-mar-2007'
AND order_total = TO_NUMBER(NULL)
WHERE order_id = 2455;
- D. UPDATE orders
SET order_date = TO_DATE('12-mar-2007,1,dd-mon-yyyy') | SET order_total =
TO_NUMBER(NULL) WHERE order id = 2455;

Correct Answer: B


Section: (none)

Explanation

Explanation/Reference:

QUESTION 180

View the Exhibit and examine the descriptions of ORDER_ITEMS and ORDERS tables.

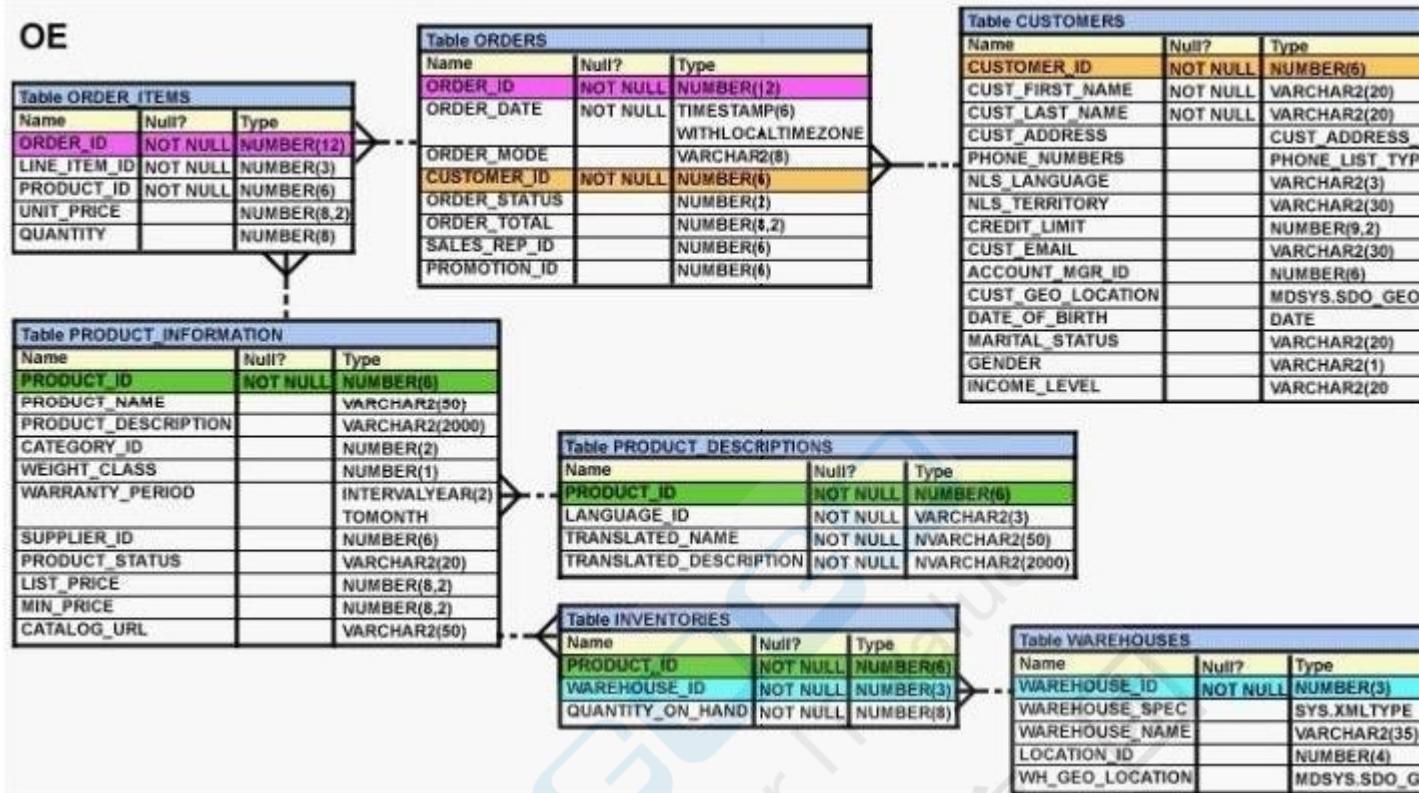

You want to display the CUSTOMER_ID, PRODUCT_ID, and total (UNIT_PRICE multiplied by QUANTITY) for the order placed. You also want to display the subtotals for a CUSTOMER_ID as well as for a PRODUCT ID for the last six months.

Which SQL statement would you execute to get the desired output?

- SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total FROM order_items oi JOIN orders o ON oi.order_id=o.order_id GROUP BY ROLLUP (o.customer_id, oi.product_id) WHERE MONTHS_BETWEEN(order_date,SYSDATE)<=6;
- SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total FROM order_items oi JOIN orders o ON oi.order_id=o.order_id GROUP BY ROLLUP (o.customer_id, oi.product_id) HAVING MONTHS_BETWEEN(order_date,SYSDATE)<=6;
- SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total FROM order_items oi JOIN orders o ON oi.order_id=o.order_id GROUP BY ROLLUP (o.customer_id, oi.product_id) WHERE MONTHS_BETWEEN(order_date,SYSDATE)>=6;
- SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Total FROM order_items oi JOIN orders o ON oi.order_id=o.order_id WHERE MONTHS_BETWEEN(order date,SYSDATE)<=6 GROUP BY ROLLUP (o.customer_id, oi.product_id);

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 181

Which statement correctly differentiates a system privilege from an object privilege?

- System privileges can be granted only by the DBA whereas object privileges can be granted by DBAs or the owner of the object.
- System privileges give the rights to only create user schemas whereas object privileges give rights to manipulate objects in a schema.
- Users require system privileges to gain access to the database whereas they require object privileges to create objects in the database.

- D. A system privilege is the right to perform specific activities in a database whereas an object privilege is a right to perform activities on a specific object in the database.

Correct Answer: D

Section: (none)


Explanation

Explanation/Reference:

QUESTION 182

View the Exhibit and examine the structure of the ORDERS table.

You have to display ORDER_ID, ORDER_DATE, and CUSTOMER_ID for all those orders that were placed after the last order placed by the customer whose CUSTOMER_ID is 101
Which query would give you the desired output?

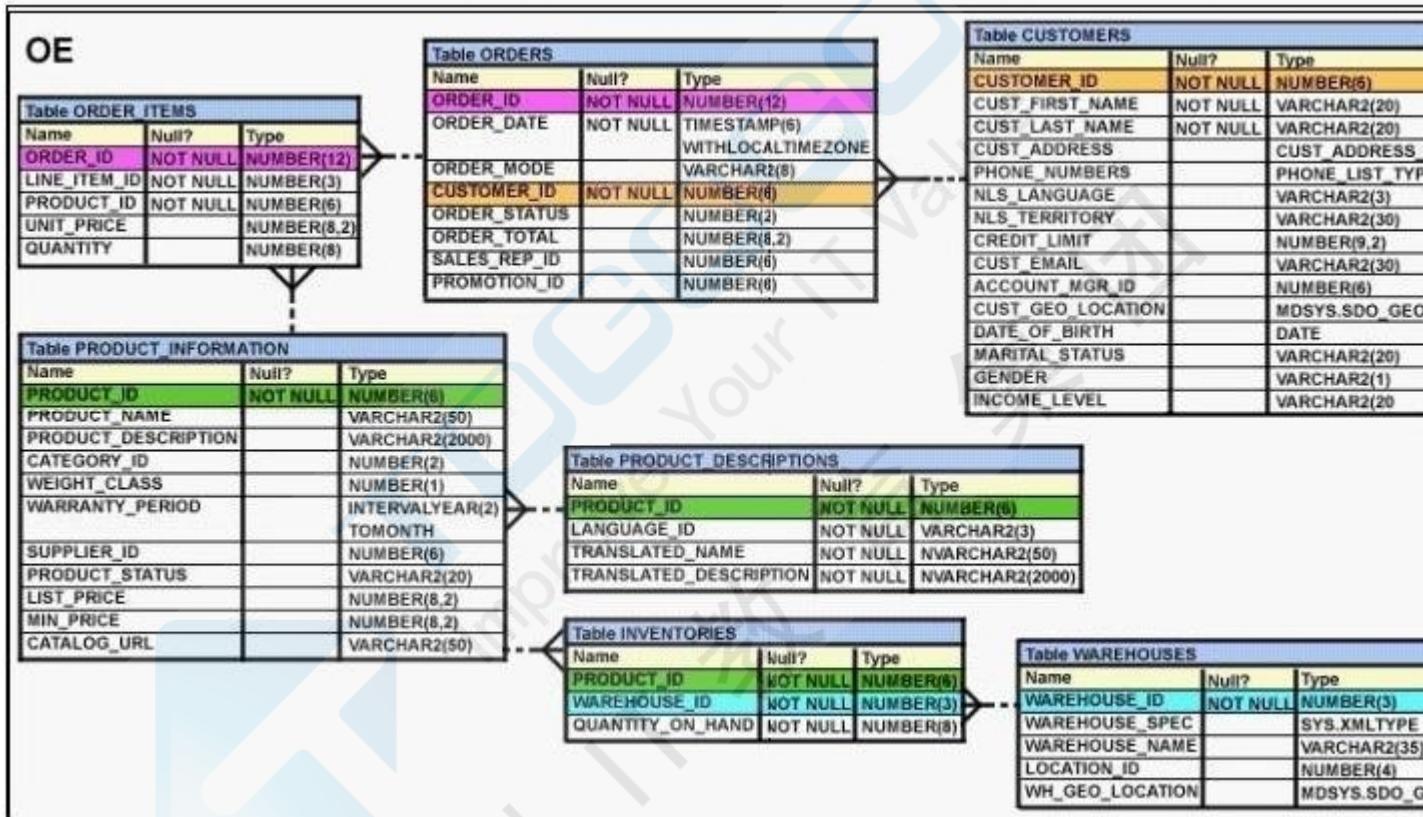

- SELECT order_id, order_date FROM orders WHERE order_date > ALL (SELECT MAX(order_date) FROM orders) AND Customer_id = 101;
- SELECT order_id, order_date FROM orders WHERE order_date > ANY (SELECT order_date FROM orders WHERE customer_id = 101);
- SELECT order_id, order_date FROM orders WHERE order_date > ALL (SELECT order_date FROM orders WHERE customer_id = 101);
- SELECT order_id, order_date FROM orders WHERE order_date IN (SELECT order_date FROM orders WHERE customer_id = 101);

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 183

View the Exhibit and examine the structure of the ORDERS table:

The ORDER_ID column has the PRIMARY KEY constraint and CUSTOMER_ID has the NOT NULL constraint.

Evaluate the following statement:

```
INSERT INTO (SELECT order_id.order_date.customer_id
FROM ORDERS
WHERE order_total = 1000
WITH CHECK OPTION)
VALUES (13, SYSDATE, 101);
```

What would be the outcome of the above INSERT statement?

ORDERS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE		DATE
CUSTOMER_ID	NOT NULL	NUMBER(6)
ORDER_TOTAL		NUMBER(8,2)
SALES REP ID		NUMBER(6)

- A. It would execute successfully and the new row would be inserted into a new temporary table created by the subquery.
- B. It would execute successfully and the ORDER_TOTAL column would have the value 1000 inserted automatically in the new row.
- C. It would not execute successfully because the ORDER_TOTAL column is not specified in the SELECT list and no value is provided for it.
- D. It would not execute successfully because all the columns from the ORDERS table should have been included in the SELECT list and values should have been provided for all the columns.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 184


View the Exhibit and examine the structure of the ORDERS table.

NEW_ORDERERS is a new table with the columns ORD_ID, ORD_DATE, CUST_ID, and ORD_TOTAL that have the same data types and size as the corresponding columns in the ORDERS table.

Evaluate the following INSERT statement:

```
INSERT INTO new_orders (ord_id, ord_date, cust_id, ord_total) VALUES(SELECT
order_id.order_date.customer_id.order_total FROM orders WHERE order_date > '31-dec-1999');
```

Why would the INSERT statement fail?

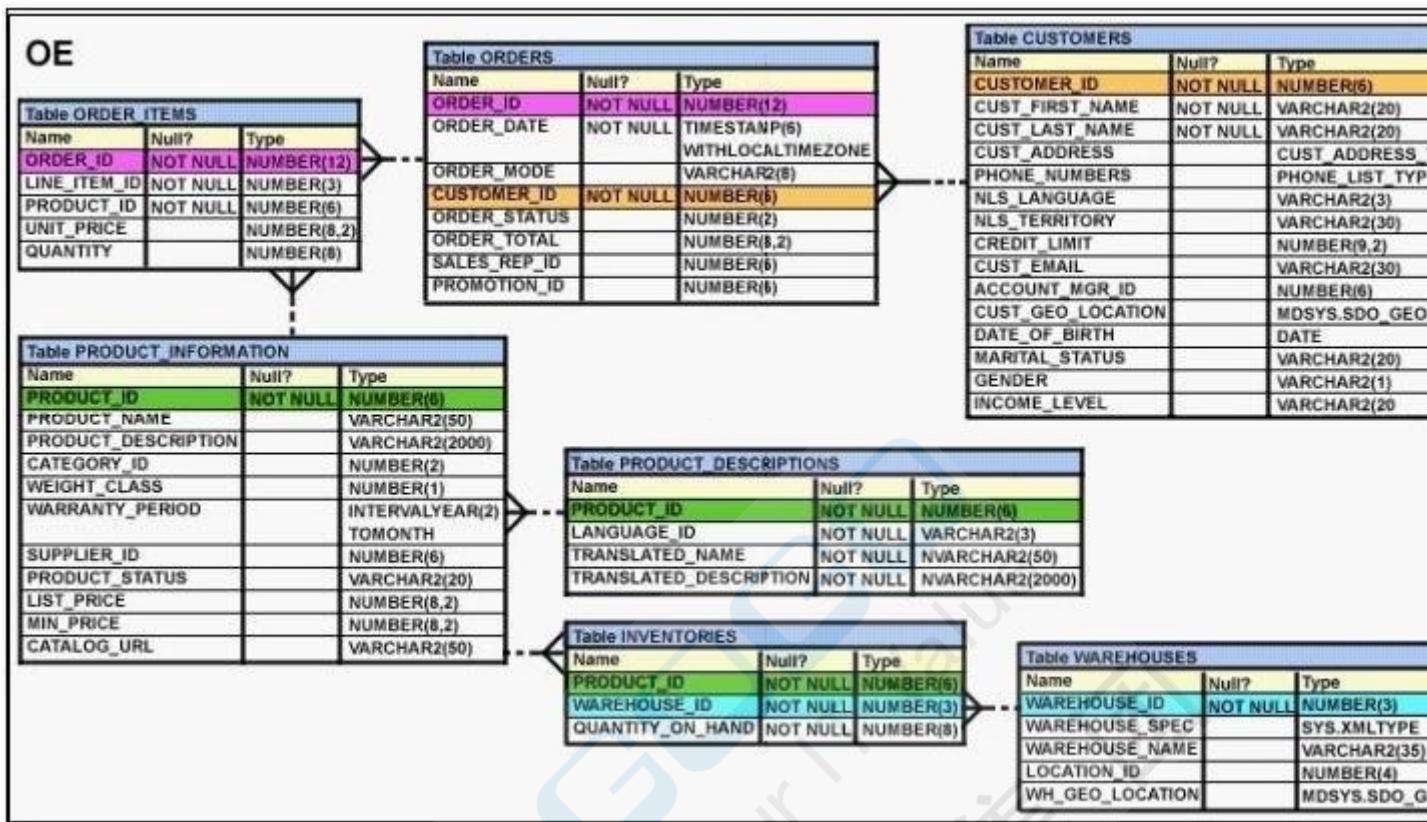

- A. because column names in NEWORDERS and ORDERS tables do not match
- B. because the VALUES clause cannot be used in an INSERT with a subquery
- C. because the WHERE clause cannot be used in a subquery embedded in an INSERT statement
- D. because the total number of columns in the NEW ORDERS table does not match the total number of columns in the ORDERS table

Correct Answer: B


Section: (none)

Explanation

Explanation/Reference:

QUESTION 185

View the Exhibit and examine the description of the ORDERS table.

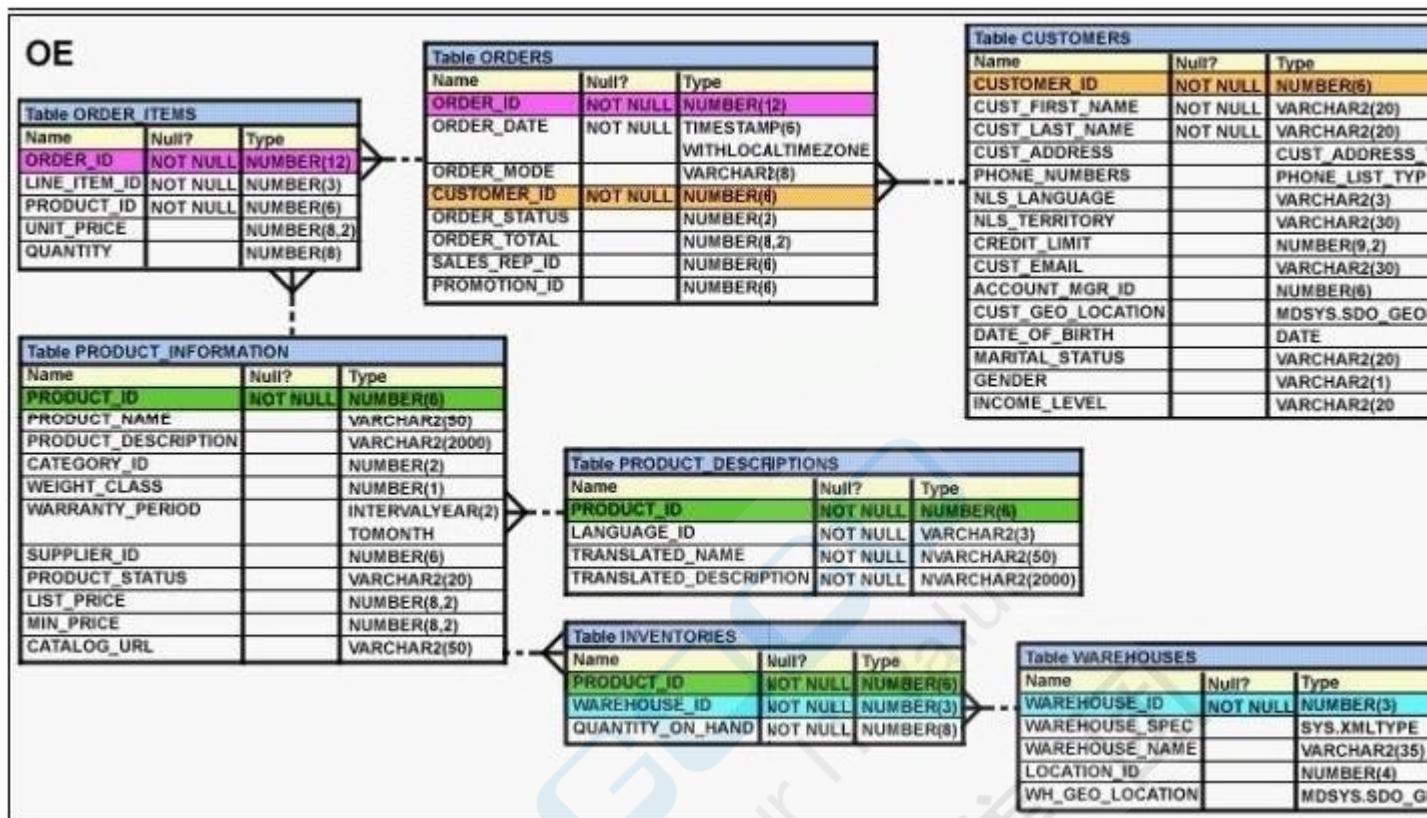

Which two WHERE clause conditions demonstrate the correct usage of conversion functions? (Choose two.)

- A. WHERE order_date > TO_DATE('JUL 10 2006','MON DD YYYY')
- B. WHERE TO_CHAR(order_date,'MON DD YYYY') = 'JAN 20 2003'
- C. WHERE order_date > TO_CHAR(ADD_MONTHS(SYSDATE,6),'MON DD YYYY')
- D. WHERE order_date IN (TO_DATE('Oct 21 2003','Mon DD YYYY'), TO_CHAR('NOV 21 2003','Mon DD YYYY'))

Correct Answer: AB

Section: (none)


Explanation

Explanation/Reference:

QUESTION 186

View the Exhibit and examine the structure of the EMPLOYEES table.

You want to know the FIRST_NAME and SALARY for all employees who have the same manager as that of the employee with the first name 'Neena' and have salary equal to or greater than that of 'Neena'. Which SQL statement would give you the desired result?

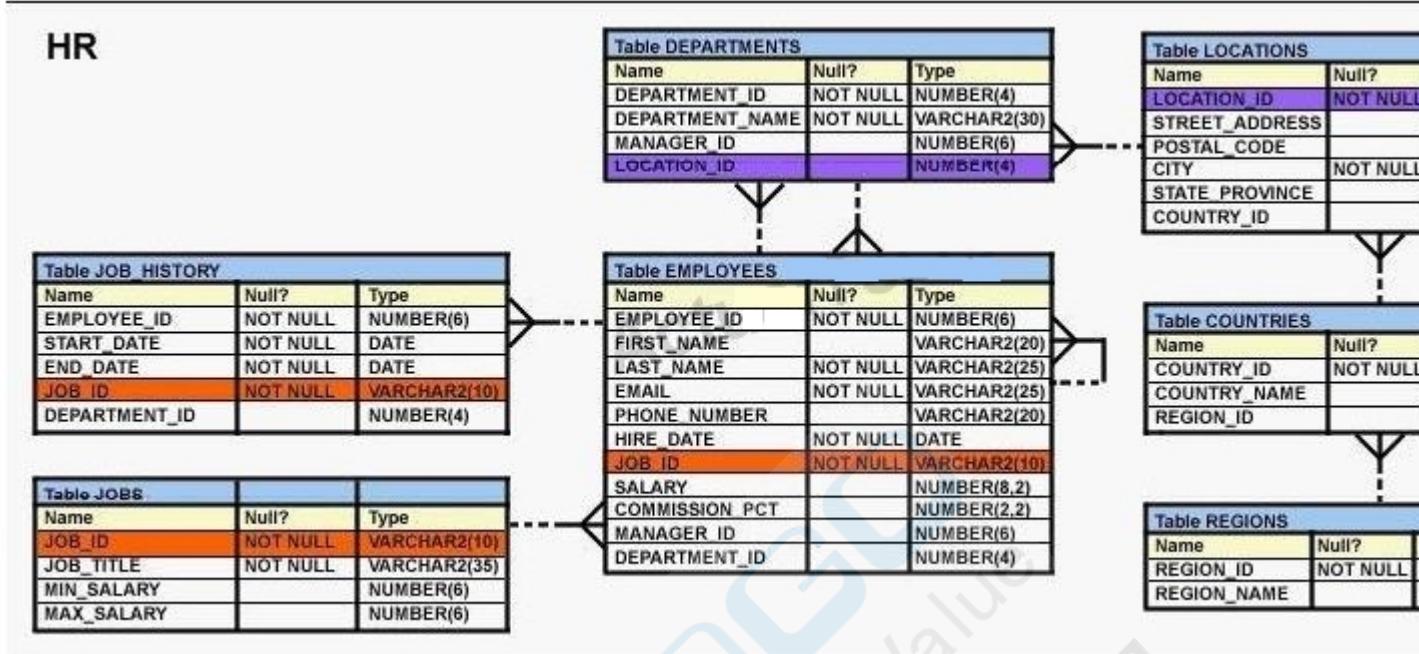

- A. SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= ALL (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena' AND first_name <> 'Neena');
- B. SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena') AND first_name <> 'Neena';
- C. SELECT first_name, salary FROM employees WHERE (manager_id, salary) >= ANY (SELECT manager_id, salary FROM employees WHERE first_name = 'Neena' AND first_name <> 'Neena');
- D. SELECT first_name, salary FROM employees WHERE (manager_id = (SELECT manager_id FROM employees WHERE first_name = 'Neena')) AND salary >= (SELECT salary FROM employees WHERE first_name = 'Neena')) AND first_name <> 'Neena';

Correct Answer: D

Section: (none)

Explanation


Explanation/Reference:

QUESTION 187

View the Exhibit and examine the structure of the ORDERS table. The ORDER_ID column is the PRIMARY KEY in the ORDERS table.

Evaluate the following CREATE TABLE command:

CREATE TABLE new_orders(ord_id, ord_date DEFAULT SYSDATE, cus_id)

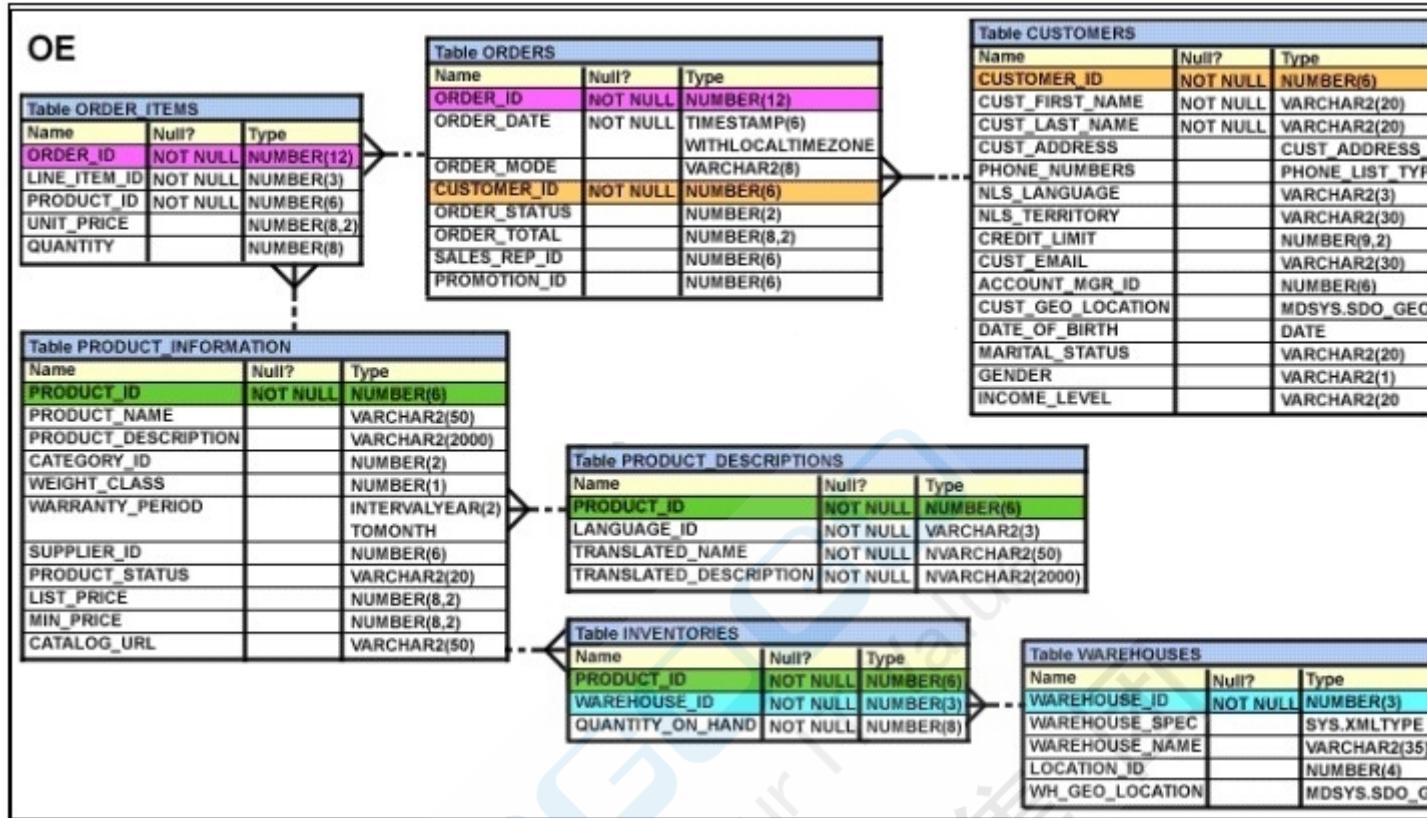

AS

SELECT order_id.order_date,customer_id
FROM orders;

Which statement is true regarding the above command?

- A. The NEW_IDRTERS table would not get created because the DEFAULT value cannot be specified in the column definition.
- B. The NEW_IDRTERS table would get created and only the NOT NULL constraint defined on the specified columns would be passed to the new table.
- C. The NEW_IDRTERS table would not get created because the column names in the CREATE TABLE command and the SELECT clause do not match.
- D. The NEW_IDRTERS table would get created and all the constraints defined on the specified columns in the ORDERS table would be passed to the new table.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:


QUESTION 188

View the Exhibit and examine the description for EMPLOYEES and DEPARTMENTS tables.

Evaluate the following SQL statement:

```
SELECT e.department_id, e.job_id, d.location_id, sum(e.salary) total
FROM employees e JOIN
departments d ON e.department_id = d.department_id
GROUP BY CUBE (e.department_id, e.job_id, d.location_id);
```

Which two statements are true regarding the output of this command? (Choose two.)

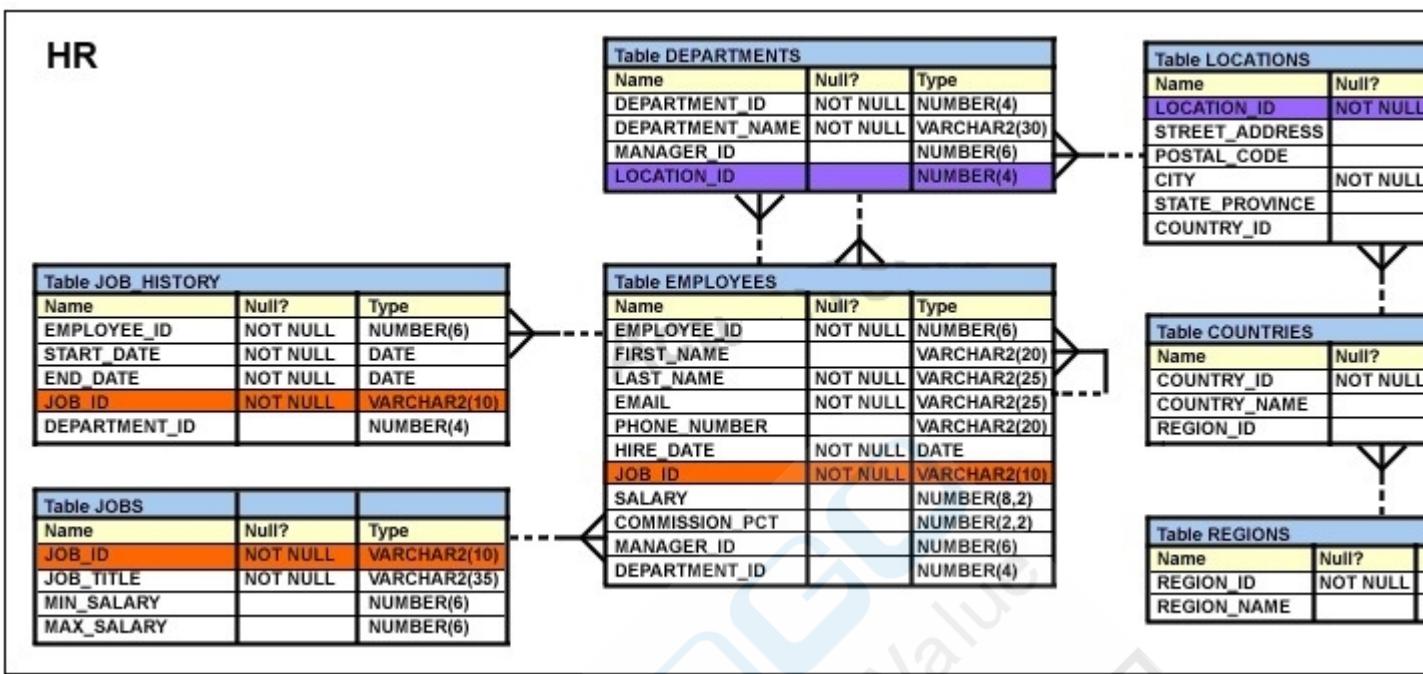

- A. The output would display the total salary for all the departments.
- B. The output would display the total salary for all the JOB_IDs in a department.
- C. The output would display only the grand total of the salary for all JOB_IDs in a LOCATION_ID.
- D. The output would display the grand total of the salary for only the groups specified in the GROUP BY clause.

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

QUESTION 189

Which two statements are true regarding constraints? (Choose two.)

- A. A foreign key cannot contain NULL values.
- B. A column with the UNIQUE constraint can contain NULL.
- C. A constraint is enforced only for the INSERT operation on a table.
- D. A constraint can be disabled even if the constraint column contains data.
- E. All the constraints can be defined at the column level as well as the table level

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 190

You need to load information about new customers from the NEW_CUST table into the tables CUST and CUST_SPECIAL. If a new customer has a credit limit greater than 10,000, then the details have to be inserted into CUST_SPECIAL. All new customer details have to be inserted into the CUST table. Which technique should be used to load the data most efficiently?

- A. external table
- B. the MERGE command

- C. the multitable INSERT command
- D. INSERT using WITH CHECK OPTION

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 191

User OE, the owner of the ORDERS table, issues the following command:

GRANT SELECT,INSERT

ON orders

TO hr

WITH GRANT OPTION;

The user HR issues the following command: GRANT SELECT ON oe.orders TO scott;

Then, OE issues the following command:

REVOKE ALL ON orders FROM hr;

Which statement is correct?

- A. The user SCOTT loses the privilege to select rows from OE.ORDERS.
- B. The user SCOTT retains the privilege to select rows from OE.ORDERS.
- C. The REVOKE statement generates an error because OE has to first revoke the SELECT privilege from SCOTT.
- D. The REVOKE statement generates an error because the ALL keyword cannot be used for privileges that have been granted using WITH GRANT OPTION.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 192

Evaluate the following CREATE TABLE commands:

CREATE TABLE orders
(ord_no NUMBER(2) CONSTRAINT ord_pk PRIMARY KEY,
ord_date DATE,
cust_id NUMBER(4));

CREATE TABLE ord_items
(ord_no NUMBER(2),
item_no NUMBER(3),

qty NUMBER(3) CHECK (qty BETWEEN 100 AND 200),
expiry_date date CHECK (expiry_date > SYSDATE),
CONSTRAINT it_pk PRIMARY KEY (ord_no,item_no),
CONSTRAINT ord_fk FOREIGN KEY(ord_no) REFERENCES orders(ord_no));

Why would the ORD_ITEMS table not get created?

- A. SYSDATE cannot be used with the CHECK constraint.
- B. The CHECK constraint cannot be used twice for the same table.
- C. The BETWEEN clause cannot be used for the CHECK constraint.
- D. ORD_NO and ITEM_NO cannot be used as a composite primary key because ORD_NO is also the FOREIGN KEY.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 193

View the Exhibit and examine the structure of the CUSTOMERS table.

CUSTOMER_VU is a view based on CUSTOMERS_BR1 table which has the same structure as CUSTOMERS table.

CUSTOMERS needs to be updated to reflect the latest information about the customers.

What is the error in the following MERGE statement?

```
MERGE INTO customers c USING customer_vu cv ON (c.customer_id = cv.customer_id) WHEN
MATCHED THEN UPDATE SET c.customer_id = cv.customer_id, c.cust_name = cv.cust_name,
c.cust_email = cv.cust_email,
c.
income_level = cv.income_level
WHEN NOT MATCHED THEN
INSERT VALUESfcv.customer_id,cv.cus_name,cv.cus_email, cv.income_level)
WHERE cv.income_level >100000;
```

CUSTOMERS		
Name	Null?	Type
CUSTOMER_ID	NOT NULL	NUMBER (6)
CUST_NAME		VARCHAR2 (20)
CUST_EMAIL		VARCHAR2 (30)
INCOME_LEVEL		VARCHAR2 (20)

- A. The CUSTOMER_ID column cannot be updated.
- B. The INTO clause is misplaced in the command.
- C. The WHERE clause cannot be used with INSERT.
- D. CUSTOMER VU cannot be used as a data source.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 194

Which statement correctly grants a system privilege?

- A. GRANT EXECUTE ON prod TO PUBLIC;
- B. GRANT CREATE VIEW ON table1 TO User1;
- C. GRANT CREATE TABLE TO user1,user2;
- D. GRANT CREATE SESSION TO ALL;

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

QUESTION 195

View the Exhibit and examine the structure of the EMPLOYEES table.

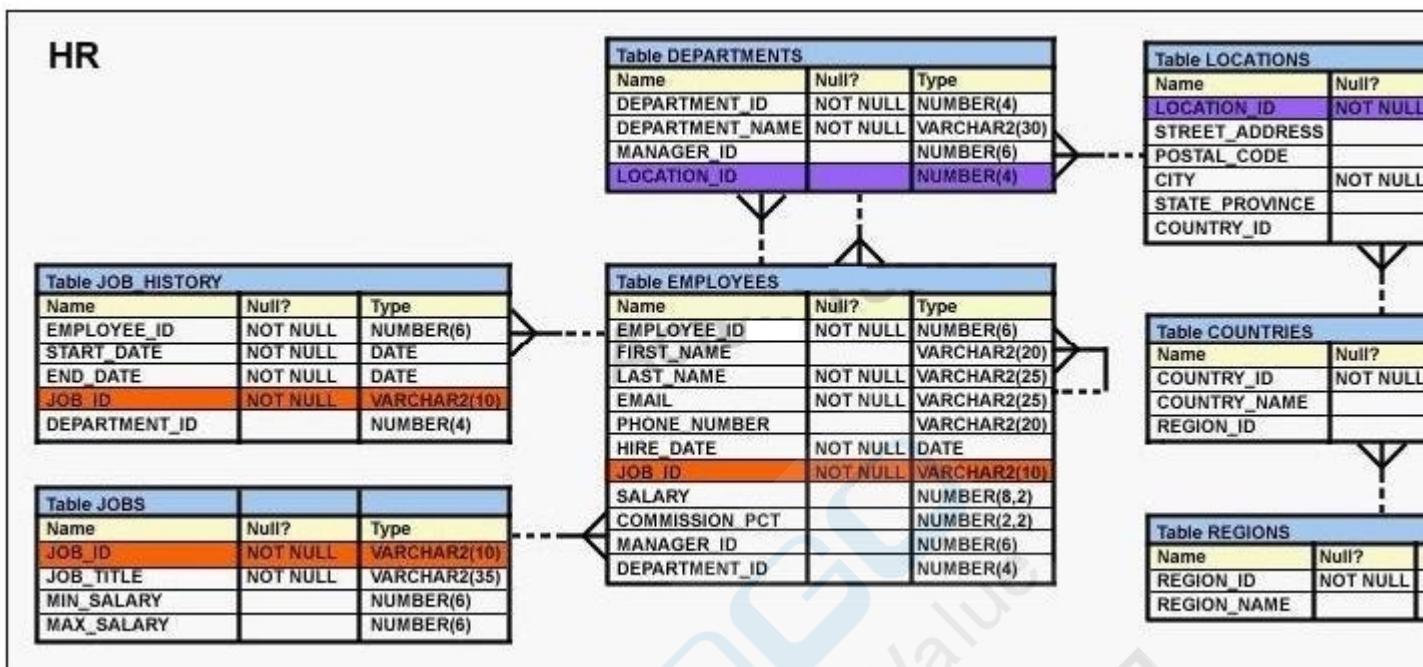

You want to retrieve hierarchical data of the employees using the top-down hierarchy. Which SQL clause would let you choose the direction to walk through the hierarchy tree?

- A. WHERE
- B. HAVING
- C. GROUP BY
- D. START WITH
- E. CONNECT BY PRIOR

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

QUESTION 196

View the Exhibit and examine the descriptions of the DEPT and LOCATIONS tables.

DEPT		
Name	Null?	
DEPARTMENT_ID		NUMBER(4)
DEPARTMENT_NAME	NOT NULL	VARCHAR2(30)
MANAGER_ID		NUMBER(6)
LOCATION_ID		NUMBER(4)
CITY		VARCHAR2(30)
LOCATIONS		
Name	Null?	
LOCATION_ID	NOT NULL	NUMBER(4)
STREET_ADDRESS		VARCHAR2(40)
POSTAL_CODE		VARCHAR2(12)
CITY	NOT NULL	VARCHAR2(30)
STATE_PROVINCE		VARCHAR2(25)
COUNTRY_ID		CHAR(2)

You want to update the CITY column of the DEPT table for all the rows with the corresponding value in the CITY column of the LOCATIONS table for each department.

Which SOL statement would you execute to accomplish the task?

- A. UPDATE deptd
SET city = ANY (SELECT city FROM locations l);
- B. UPDATE deptd
SET city = (SELECT city
FROM locations l)
WHERE d.location_id = l.location_id;
- C. UPDATE deptd
SET city = (SELECT city
FROM locations l
WHERE d.location_id = l.location_id);
- D. UPDATE deptd
SET city = ALL (SELECT city
FROM locations l
WHERE d.location_id = l.location_id);

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 197

View the Exhibit and examine the structure of the ORDERS table.

The ORDERS table belongs to the user OE. HR is another user in the database.

Evaluate the commands issued by users OE and HR in the following order:

Statement 1 by user OE: GRANT SELECT,

UPDATE(customer_id, order_total)

ON orders

TOhr;

Statement 1 by user HR: SELECT * FROM oe.orders;

Statement 2 by user HR: UPDATE oe.orders

SET order_total 10000;

ORDERS		
Name	Null?	Type
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE		DATE
CUSTOMER_ID		NUMBER(6)
ORDER_TOTAL		NUMBER(8,2)

Which statement is true regarding the above commands?

- A. Statement 1 by user OE would not work because the statement has to be issued by the DBA.
- B. Statement 2 by user HR would not work because the grant is only for SELECT in a subquery of update.
- C. There are no errors in the statements issued by OE and HR; all the statements would execute successfully.
- D. Statement 1 by user HR would not work because SELECT and UPDATE privileges have been granted only on CUSTOMER_ID and ORDER_TOTAL columns.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 198

EMPDET is an external table containing the columns EMPNO and ENAME. Which command would work in relation to the EMPDET table?

- A. UPDATE empdet SET ename = 'Amit' WHERE empno = 1234;
- B. DELETE FROM empdet WHERE ename LIKE 'J%'; C. CREATE VIEW empvu AS SELECT* FROM empdept;
- C. CREATE INDEX empdet_idx ON empdet(empno);

Correct Answer: C

Section: (none)


Explanation

Explanation/Reference:

QUESTION 199

View the Exhibit and examine the structure of the PRODUCT_INFORMATION and INVENTORIES tables. You have a requirement from the supplies department to give a list containing PRODUCT_ID, SUPPLIER_ID, and QUANTITY_ON_HAND for all the products wherein QUANTITY_ON_HAND is less than five.

Which two SQL statements can accomplish the task? (Choose two.)

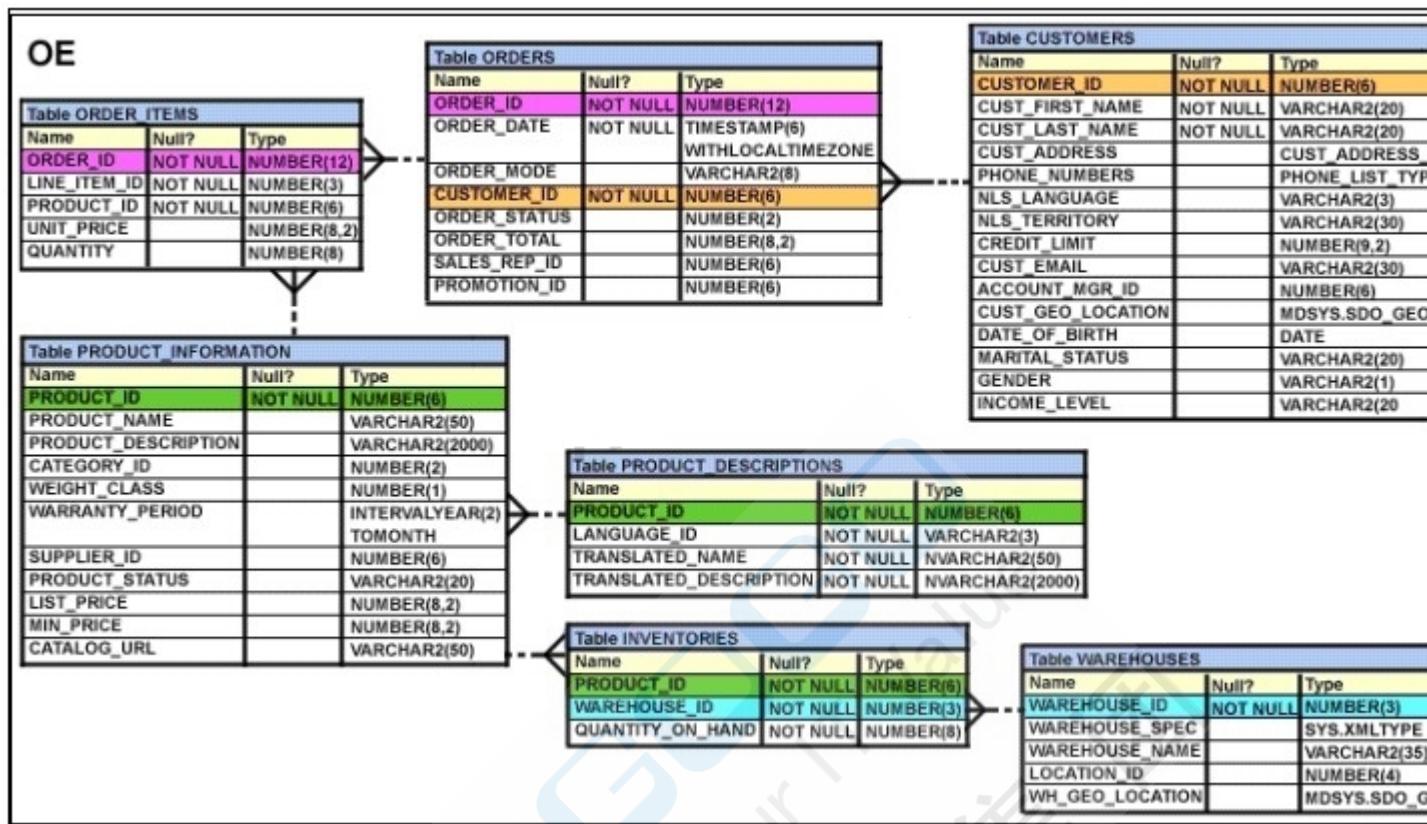

- A. SELECT product_id, quantity_on_hand , supplier_id FROM product_information NATURAL JOIN inventories AND quantity_on_hand < 5;
- B. SELECT i.product_id, i.quantity_on_hand , pi.supplier_id FROM product_information pi JOIN inventories i USING (product_id) AND quantity_on_hand < 5;
- C. SELECT i.product_id, i.quantity_on_hand , pi.supplier_id FROM product_information pi JOIN inventories i ON (pi.product_id=i.product_id) WHERE quantity_on_hand < 5;
- D. SELECT i.product_id, i.quantity_on_hand , pi.supplier_id FROM product_information pi JOIN inventories i ON (pi.product_id=i.product_id) AND quantity_on_hand < 5;

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 200

Which three statements are true regarding group functions? (Choose three.)

- A. They can be used on columns or expressions.
- B. They can be passed as an argument to another group function.
- C. They can be used only with a SQL statement that has the GROUP BY clause.
- D. They can be used on only one column in the SELECT clause of a SQL statement.
- E. They can be used along with the single-row function in the SELECT clause of a SQL statement.

Correct Answer: ABE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 201

The first DROP operation is performed on PRODUCTS table using the following command:

DROP TABLE products PURGE;

Then you performed the FLASHBACK operation by using the following command:

FLASHBACK TABLE products TO BEFORE DROP;

Which statement describes the outcome of the FLASHBACK command?

- A. It recovers only the table structure.
- B. It recovers the table structure, data, and the indexes.
- C. It recovers the table structure and data but not the related indexes.
- D. It is not possible to recover the table structure, data, or the related indexes.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 202

View the Exhibit and examine the description of the EMPLOYEES table.

You want to display the EMPLOYEE_ID, FIRST_NAME, and DEPARTMENT_ID for all the employees who work in the same department and have the same manager as that of the employee having EMPLOYEE_ID 104. To accomplish the task, you execute the following SQL statement:

```
SELECT employee_id, first_name, department_id  
FROM employees  
WHERE (manager_id, department_id) =(SELECT department_id, manager_id FROM employees WHERE  
employee_id = 104)  
AND employee_id <> 104;
```

When you execute the statement it does not produce the desired output. What is the reason for this?

- A. The WHERE clause condition in the main query is using the = comparison operator, instead of EXISTS.
- B. The WHERE clause condition in the main query is using the = comparison operator, instead of the IN operator.
- C. The WHERE clause condition in the main query is using the = comparison operator, instead of the = ANY operator.
- D. The columns in the WHERE clause condition of the main query and the columns selected in the subquery should be in the same order.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 203

Which statement is true regarding external tables?

- A. The default REJECT LIMIT for external tables is UNLIMITED.
- B. The data and metadata for an external table are stored outside the database.
- C. ORACLE_LOADER and ORACLE_DATAPUMP have exactly the same functionality when used with an external table.
- D. The CREATE TABLE AS SELECT statement can be used to unload data into regular table in the database from an external table.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:**QUESTION 204**

View the Exhibit and examine the data in EMP and DEPT tables.

In the DEPT table, DEPTNO is the PRIMARY KEY.

In the EMP table, EMPNO is the PRIMARY KEY and DEPTNO is the FOREIGN KEY referencing

the DEPTNO column in the DEPT table.

What would be the outcome of the following statements executed in the given sequence?

DROP TABLE emp;

FLASHBACK TABLE emp TO BEFORE DROP;

INSERT INTO emp VALUES (2,COTT 10);

DEPT	
DEPTNO	DEPTNAME
10	IT
20	HR

EMP		
EMPNO	ENAME	DEPTNO
1	KING	10
2	HARI	20

INSERT INTO emp VALUES (3,ING 55);

- A. Both the INSERT statements would fail because all constraints are automatically retrieved when the table is flashed back.
- B. Both the INSERT statements would succeed because none of the constraints on the table are automatically retrieved when the table is flashed back.
- C. Only the first INSERT statement would succeed because all the constraints except the primary key constraint are automatically retrieved after a table is flashed back.
- D. Only the second INSERT statement would succeed because all the constraints except referential integrity constraints that reference other tables are retrieved automatically after the table is flashed back.

Correct Answer: D

Section: (none)


Explanation

Explanation/Reference:**QUESTION 205**

View the Exhibit and examine the structure of the EMPLOYEES table.

You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.

Which SQL statement would you execute?

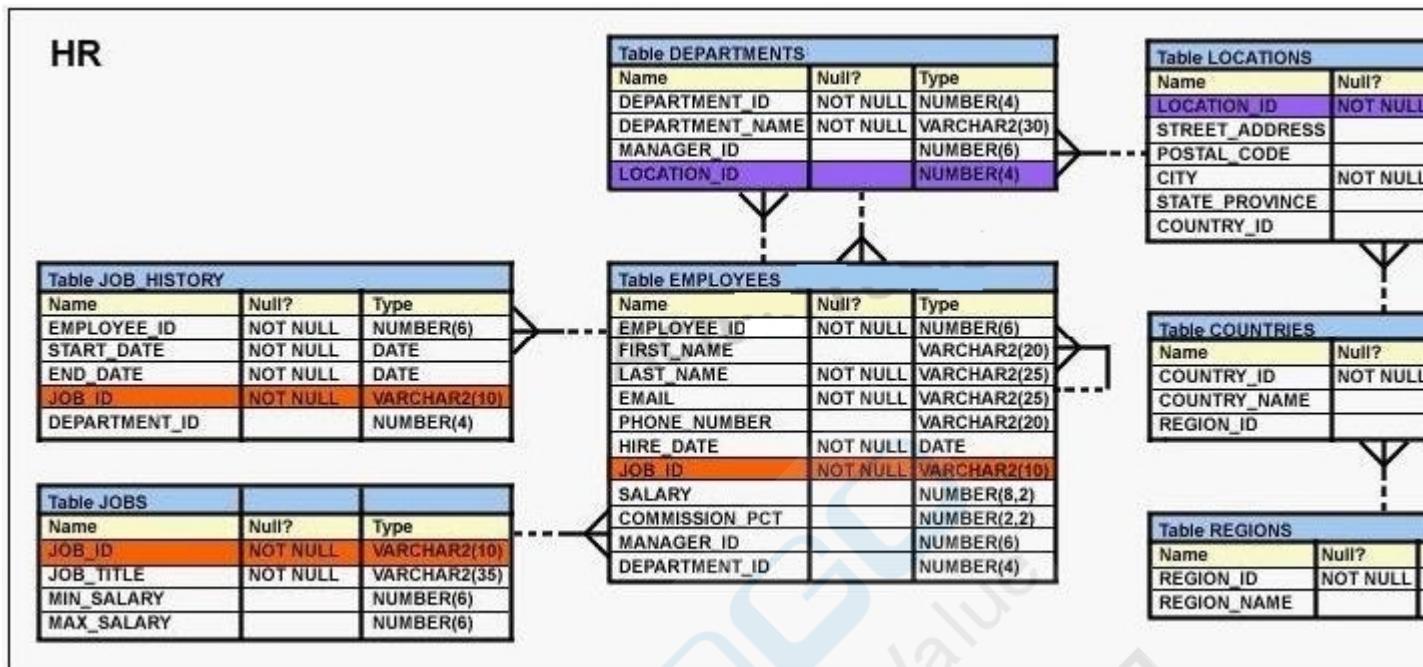

- A. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
ON m.employee_id = e.manager_id
WHERE m.manager_id=100;
- B. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
ON m.employee_id = e.manager_id
WHERE e.manager_id=100;
- C. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e

ON e.employee_id = m.manager_id WHERE m.manager_id=100;
- D. SELECT m.last_name "Manager", e.last_name "Employee"
FROM employees m JOIN employees e
WHERE m.employee_id = e.manager_id AND e.manager_id=100;

Correct Answer: B

Section: (none)

Explanation


Explanation/Reference:

QUESTION 206

View the Exhibit and examine the structure for the ORDERS and ORDER_ITEMS tables.

You want to display ORDER_ID, PRODUCT_ID, and TOTAL (UNIT_PRICE multiplied by QUANTITY) for all the orders placed in the last seven days.

Which query would you execute?

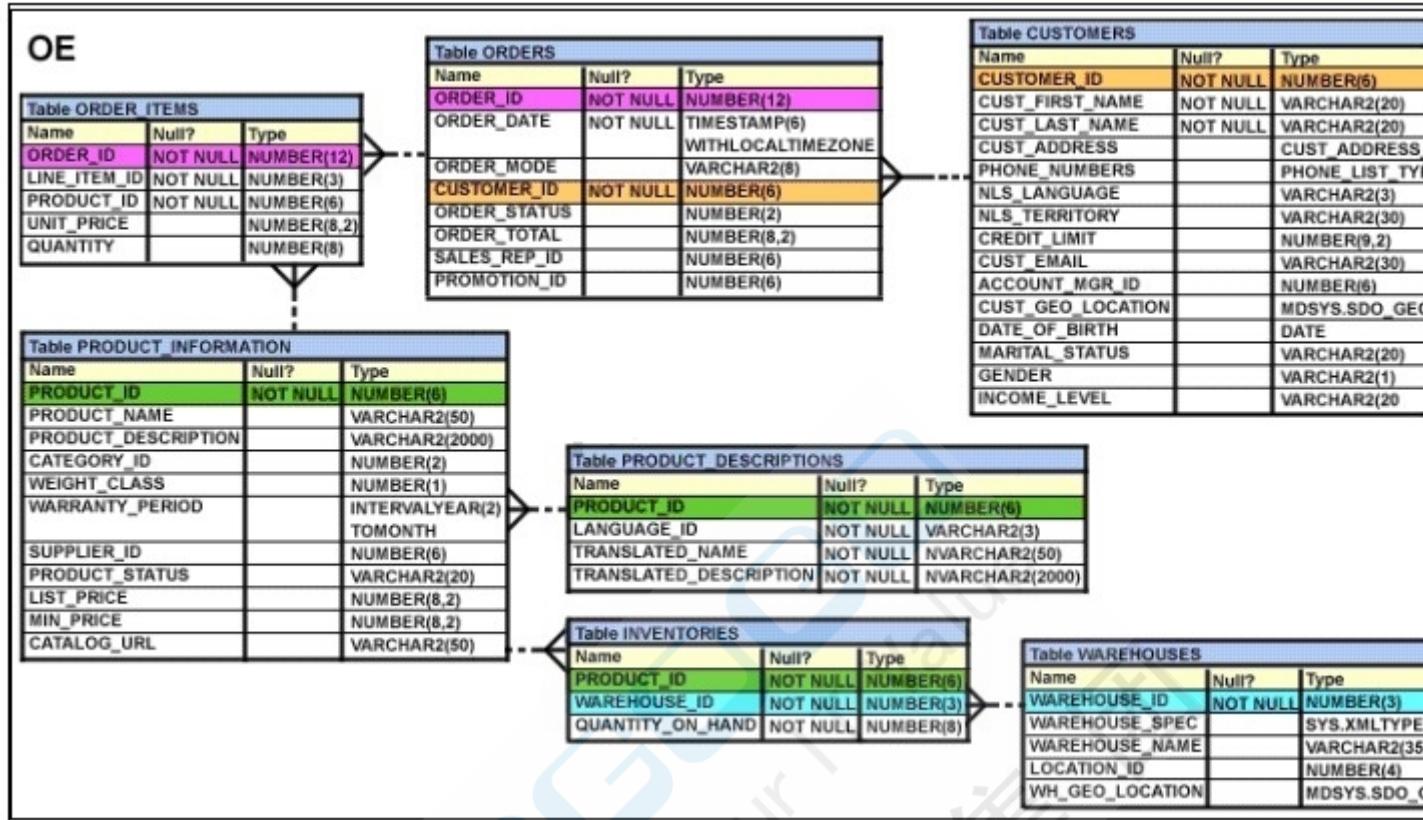

- A. SELECT order_id, product_id, unit_price*quantity "TOTAL"
FROM order_items oi JOIN orders o
ON (o.order_id=oi.order_id)
WHERE o.order_date>=SYSDATE-7;
- B. SELECT o.order_id,oi.product_id, oi.unit_price*oi.quantity "TOTAL"
FROM order_items oi JOIN orders o
USING (order_id)
WHERE o.order_date>=SYSDATE-7;
- C. SELECT o.order_id, oi.product_id, oi.unit_price*oi.quantity "TOTAL"
FROM order_items oi JOIN orders o

WHERE o.order_date>=SYSDATE-7 ON (o.order_id=oi.order_id);
- D. SELECT o.order_id, oi.product_id, oi.unit_price*oi.quantity "TOTAL"
FROM order_items oi JOIN orders o
ON (o.order_id=oi.order_id)
WHERE o.order_date>=SYSDATE-7;

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 207

Evaluate the following SELECT statement and view the Exhibit to examine its output:

SELECT constraint_name, constraint_type, search_condition, r_constraint_name, delete_rule, status
FROM user_constraints WHERE table_name = ORDERS

Which two statements are true about the output? (Choose two.)

CONSTRAINT_NAME	CON	SEARCH_CONDITION	R_CONSTRAINT_NAME	DELETE_RULE	STATUS
ORDER_DATE_NN	C	"ORDER_DATE" IS NOT NULL			ENABLED
ORDER_CUSTOMER_ID_NN	C	"CUSTOMER_ID" IS NOT NULL			ENABLED
ORDER_MODE_LOV	C	order_mode in ('direct', 'online')			ENABLED
ORDER_TOTAL_MIN	C	order_total >= 0			ENABLED
ORDER_PK	P				ENABLED
ORDERS_CUSTOMER_ID	R		CUSTOMERS_ID	SET NULL	ENABLED
ORDERS_SALES REP	R		EMP_EMP_ID	SET NULL	ENABLED

- A. In the second column, indicates a check constraint.
- B. The STATUS column indicates whether the table is currently in use.
- C. The R_CONSTRAINT_NAME column gives the alternative name for the constraint.
- D. The column DELETE_RULE decides the state of the related rows in the child table when the corresponding row is deleted from the parent table.

Correct Answer: AD

Section: (none)

Explanation


Explanation/Reference:

QUESTION 208

View the Exhibit and examine the structure of the ORDERS table.

The ORDER_ID column is the PRIMARY KEY in the ORDERS table. Evaluate the following CREATE TABLE command:

```
CREATE TABLE new_orders(ord_id, ord_date DEFAULT SYSDATE, cus_id)
AS
SELECT order_id.order_date.customer_id
FROM orders;
```

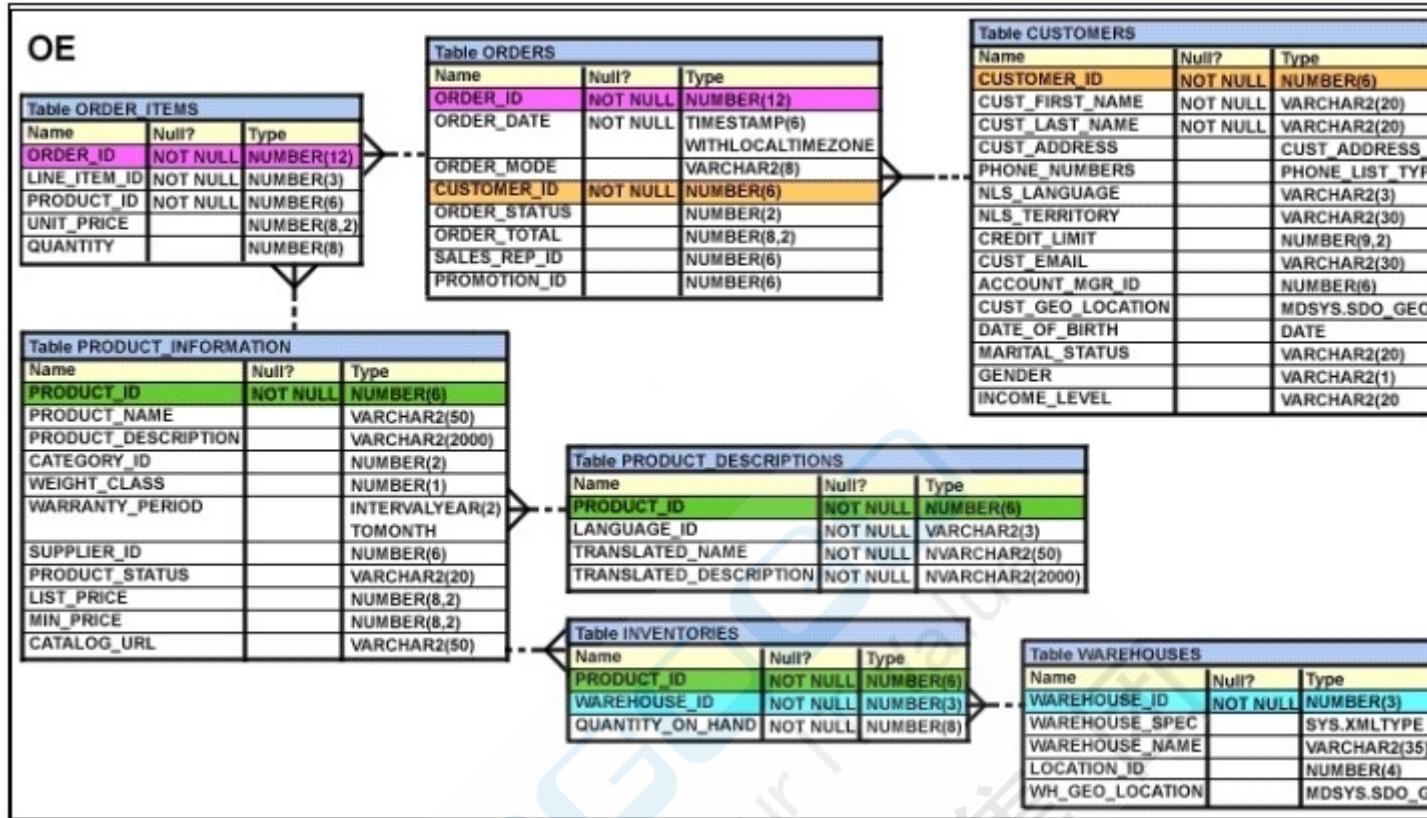

Which statement is true regarding the above command?

- A. The NEW_ORDERS table would not get created because the DEFAULT value cannot be specified in the column definition.
- B. The NEW_ORDERS table would get created and only the NOT NULL constraint defined on the specified columns would be passed to the new table.
- C. The NEW_ORDERS table would not get created because the column names in the CREATE TABLE command and the SELECT clause do not match.
- D. The NEW_ORDERS table would get created and all the constraints defined on the specified columns in the ORDERS table would be passed to the new table.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 209

Which statement is true regarding external tables?

- A. The default REJECT LIMIT for external tables is UNLIMITED.
- B. The data and metadata for an external table are stored outside the database.
- C. ORACLE_LOADER and ORACLE_DATAPUMP have exactly the same functionality when used with an external table.
- D. The CREATE TABLE AS SELECT statement can be used to unload data into regular table in the database from an external table.

Correct Answer: D

Section: (none)

Explanation


Explanation/Reference:

QUESTION 210

View the Exhibit and examine the description of the CUSTOMERS table.

You want to add a constraint on the CUST_FIRST_NAME column of the CUSTOMERS table so that the value inserted in the column does not have numbers.

Which SQL statement would you use to accomplish the task?

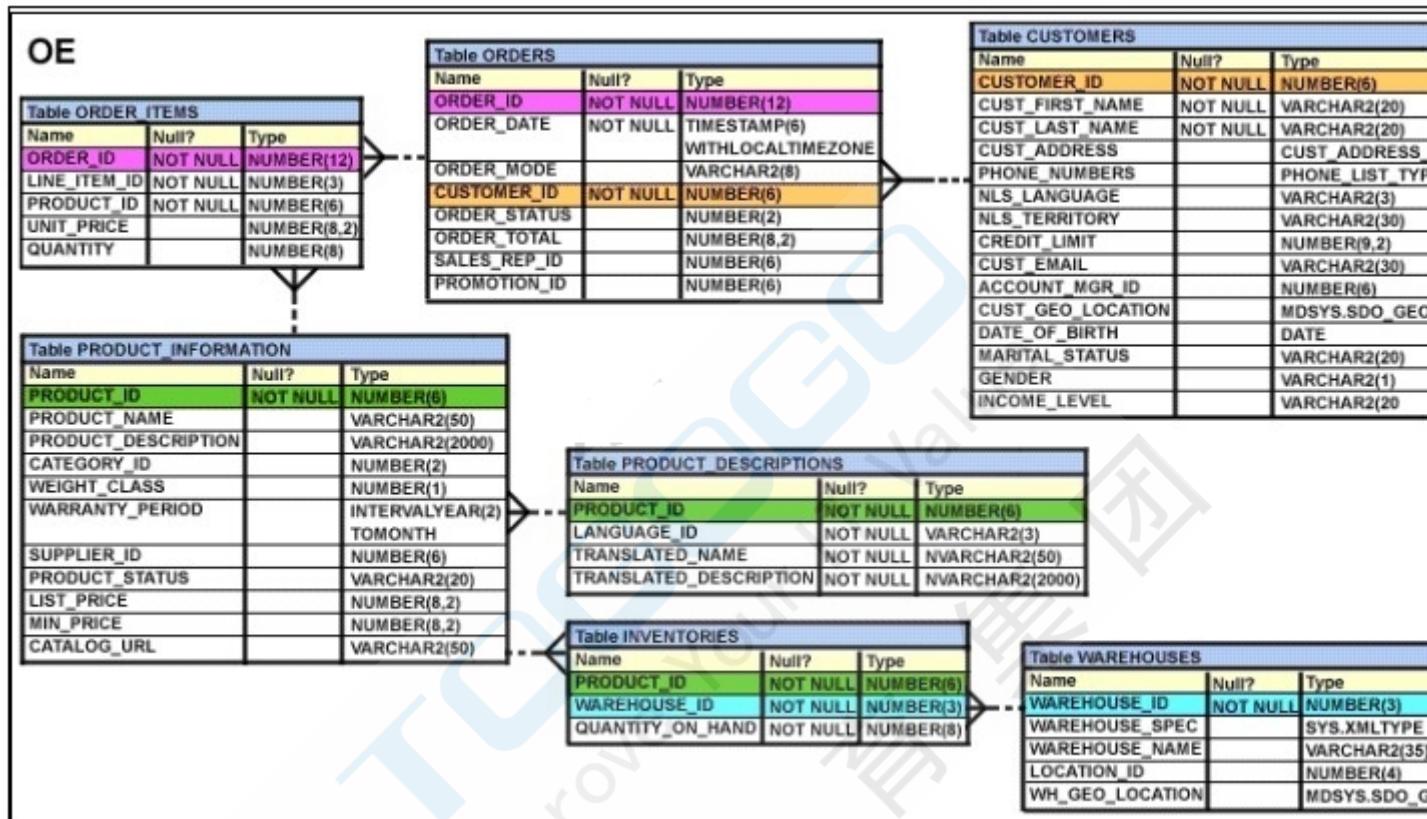

- A. ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CREGEXP_LIKE (cust_first_name,'^A-Z')NOVALIDATE;
- B. ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CREGEXP_LIKE (cust_first_name,'^[0-9]'))NOVALIDATE;
- C. ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CREGEXP_LIKE (cust_first_name,'[: alpha:]'))NOVALIDATE; D. ALTER TABLE CUSTOMERS ADD CONSTRAINT cust_f_name CHECK(CREGEXP_LIKE(cust_first_name,'[: digit:]'))NOVALIDATE;

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 211

In which scenario would you use the ROLLUP operator for expression or columns within a GROUP BY clause?

- A. to find the groups forming the subtotal in a row
- B. to create group-wise grand totals for the groups specified within a GROUP BY clause
- C. to create a grouping for expressions or columns specified within a GROUP BY clause in one direction, from right to left for calculating the subtotals
- D. to create a grouping for expressions or columns specified within a GROUP BY clause in all possible directions, which is cross-tabular report for calculating the subtotals

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 212

Which CREATE TABLE statement is valid?

- A. CREATE TABLE ord_details
(ord_no NUMBER(2) PRIMARY KEY,
item_no NUMBER(3) PRIMARY KEY,
ord_date date NOT NULL);
- B. CREATE TABLE ord_details
(ord_no NUMBER(2) UNIQUE, NOT NULL,
item_no NUMBER(3),
ord_date date DEFAULT SYSDATE NOT NULL);
- C. CREATE TABLE ord_details
(ord_no NUMBER(2),
item_no NUMBER(3),
ord_date date DEFAULT NOT NULL,
CONSTRAINT ord_uq UNIQUE (ord_no),
CONSTRAINT ord_pk PRIMARY KEY (ord_no));
- D. CREATE TABLE ord_details
(ord_no NUMBER(2),
item_no NUMBER(3),
ord_date date DEFAULT SYSDATE NOT NULL,
CONSTRAINT ord_pk PRIMARY KEY (ord_no, item_no));

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 213

Which two statements are true regarding the GROUP BY clause in a SQL statement? (Choose two.)

- A. You can use column alias in the GROUP BY clause.
- B. Using the WHERE clause after the GROUP BY clause excludes the rows after creating groups.
- C. The GROUP BY clause is mandatory if you are using an aggregate function in the SELECT clause.
- D. Using the WHERE clause before the GROUP BY clause excludes the rows before creating groups.
- E. If the SELECT clause has an aggregate function, then those individual columns without an aggregate function in the SELECT clause should be included in the GROUP BY clause.

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 214

Evaluate the following SQL statements in the given order:

DROP TABLE dept;

CREATE TABLE dept

(deptno NUMBER(3) PRIMARY KEY,
deptname VARCHAR2(10));

DROP TABLE dept;

FLASHBACK TABLE dept TO BEFORE DROP; Which statement is true regarding the above FLASHBACK operation?

- A. It recovers only the first DEPT table.
- B. It recovers only the second DEPT table.
- C. It does not recover any of the tables because FLASHBACK is not possible in this case.
- D. It recovers both the tables but the names would be changed to the ones assigned in the RECYCLEBIN.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 215

View the Exhibit and examine the data in the LOCATIONS table.

Evaluate the following SQL statement: SELECT street_address FROM locations WHERE

REGEXP_INSTR(street_address,'[^[:alpha:]]') = 1;

Which statement is true regarding the output of this SQL statement?

LOCATION_ID	STREET_ADDRESS	POSTAL_CODE	CITY	ST
1000	1297 Via Cola di Rie	00989	Roma	
1100	93091 Calle della Testa	10934	Venice	
1200	2017 Shinjuku-ku	1689	Tokyo	Toky
1300	9450 Kamiya-cho	6823	Hiroshima	
1400	2014 Jabberwocky Rd	26192	Southlake	Texas
1500	2011 Interiors Blvd	99236	South San Francisco	Calif
1600	2007 Zagora St	50090	South Brunswick	New
1700	2004 Charade Rd	98199	Seattle	Was
1800	147 Spadina Ave	M5V 2L7	Toronto	Onta
1900	6092 Boxwood St	Y5W 9T2	Whitehorse	Yukon
2000	40-5-12 Laogianggen	190518	Beijing	
2100	1298 Vileparle (E)	490231	Bombay	Mah
2200	12-98 Victoria Street	2901	Sydney	New
2300	198 Clementi North	540198	Singapore	
2400	8204 Arthur St		London	
2500	Magdalen Centre, The Oxford Science Park	OX9 9ZB	Oxford	Oxfo

- A. It would display all the street addresses that do not have a substring 'alpha1'.

- B. It would display all the street addresses where the first character is a special character.

- C. It would display all the street addresses where the first character is a letter of the alphabet.

- D. It would display all the street addresses where the first character is not a letter of the alphabet.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:


QUESTION 216

View the Exhibit and examine the structure of the ORDER_ITEMS and ORDERS tables.

You are asked to retrieve the ORDER_ID, PRODUCT_ID, and total price (UNIT_PRICE multiplied by QUANTITY), where the total price is greater than 50,000.

You executed the following SQL statement:

```
SELECT order_id, product_id, unit_price*quantity "Total Price" FROM order_items WHERE
```

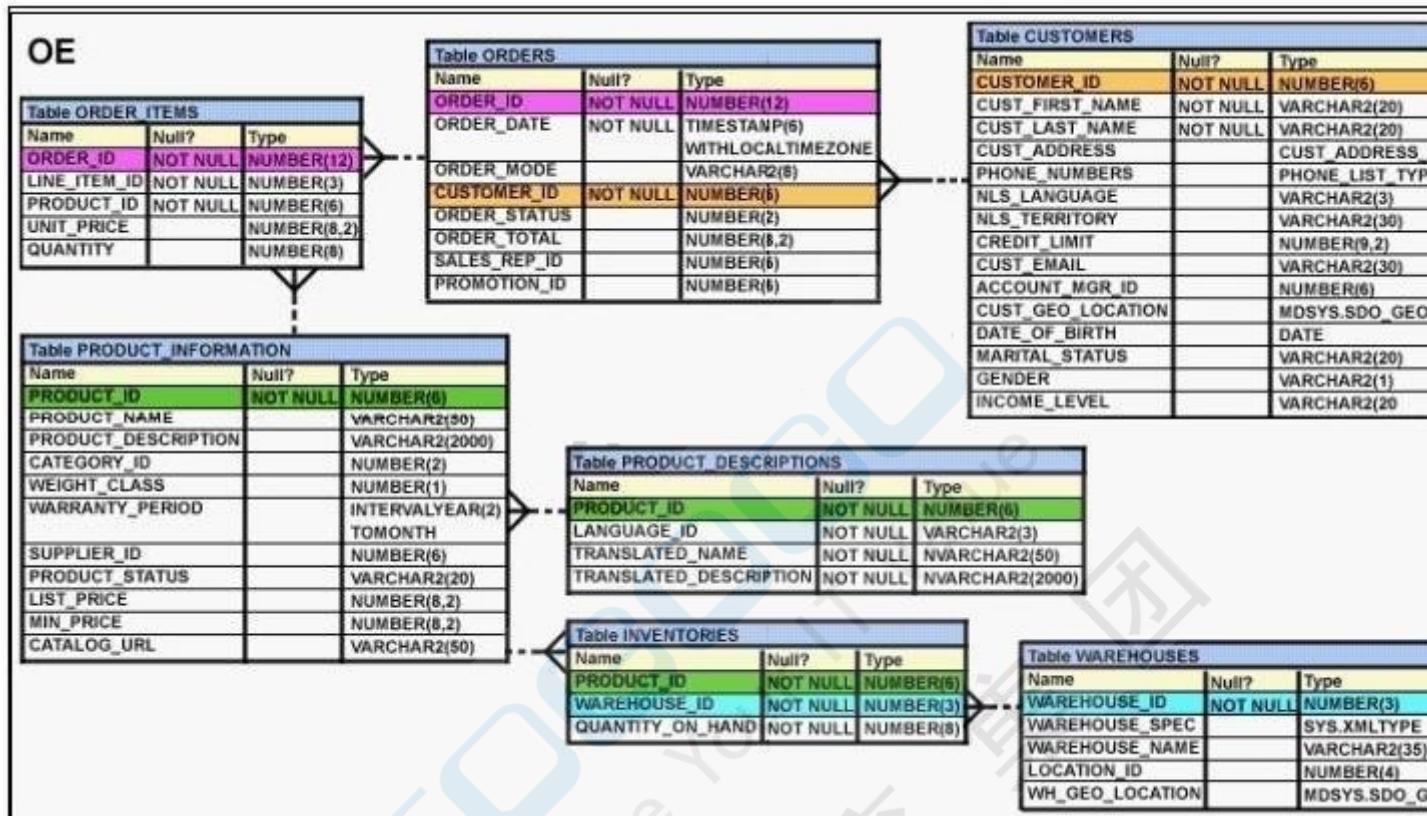

unit_price*quantity > 50000 NATURAL JOIN orders; Which statement is true regarding the execution of the statement?

- The statement would execute and provide the desired result.
- The statement would not execute because the ON keyword is missing in the NATURAL JOIN clause.
- The statement would not execute because the WHERE clause is before the NATURAL JOIN clause.
- The statement would not execute because the USING keyword is missing in the NATURAL JOIN clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 217

View the Exhibit and examine the description of the ORDER_ITEMS and PRODUCT_INFORMATION tables.

The ORDER_ITEM table has records pertaining to details for each product in an order. The PRODUCT_INFORMATION table has records for all the products available for ordering.


Evaluate the following SQL statement:

```
SELECT oi.order_id, pi.product_id
```

```
FROM orderitems oi RIGHT OUTER JOIN product_information pi
```

```
ON (oi.product_id=pi.Product_id);
```

Which statement is true regarding the output of this SQL statement?

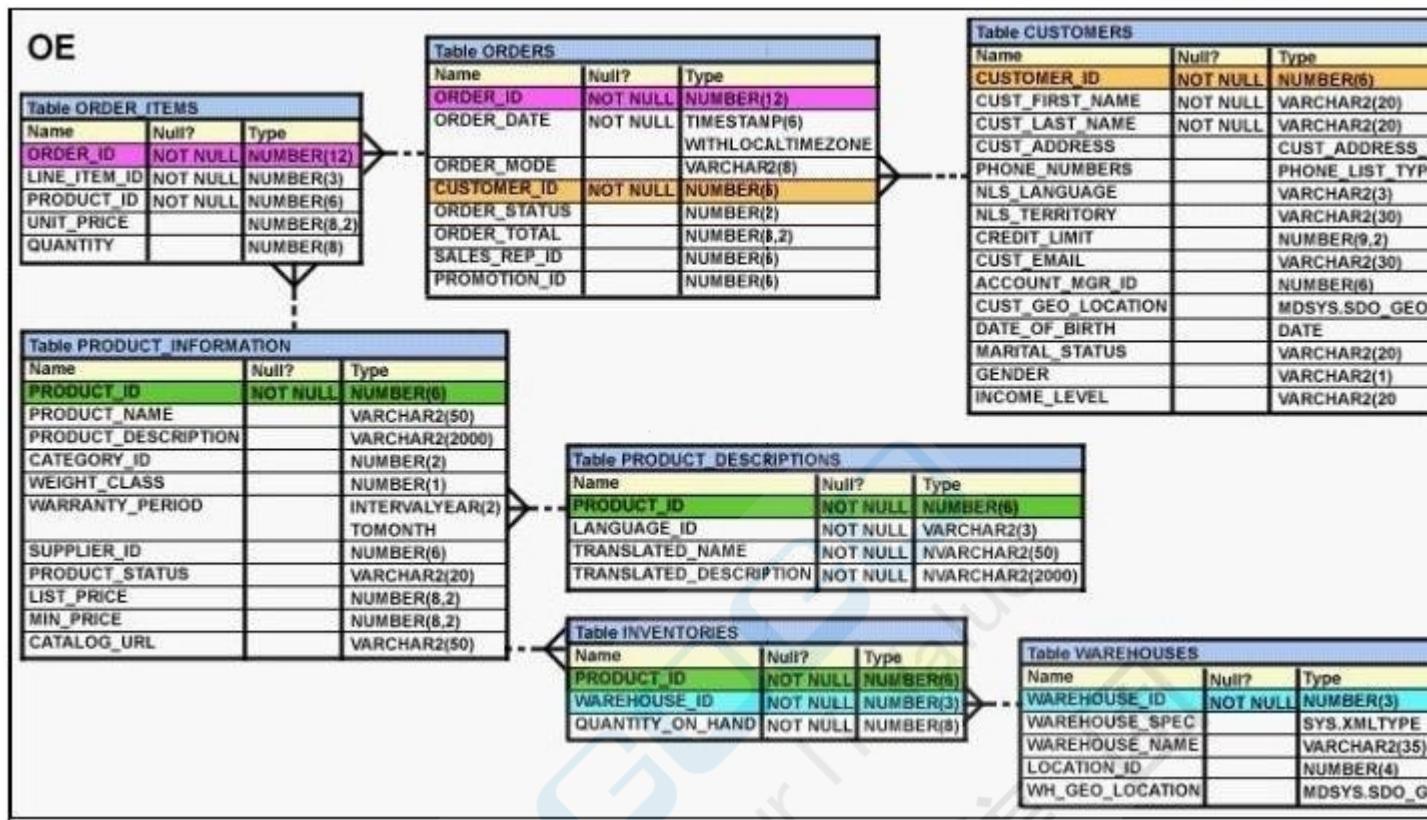

- A. The query would return the ORDER_ID and PRODUCT_ID for only those products that are ordered.
- B. The query would return the ORDER_ID and PRODUCT_ID for the products that are ordered as well as for the products that have never been ordered.
- C. The query would return the ORDER_ID and PRODUCT_ID for the products that are ordered but not listed in the PRODUCT_INFORMATION table.
- D. The query would return the ORDER_ID and PRODUCT_ID for those products that are ordered as well as for the products that have never been ordered, and for the products that are not listed in the PRODUCT INFORMATION table.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 218

Which three statements are true regarding the WHERE and HAVING clauses in a SQL statement?
(Choose three.)

- A. The HAVING clause conditions can have aggregate functions.
- B. The HAVING clause conditions can use aliases for the columns.
- C. WHERE and HAVING clauses cannot be used together in a SQL statement.
- D. The WHERE clause is used to exclude rows before the grouping of data.
- E. The HAVING clause is used to exclude one or more aggregated results after grouping data.

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 219

View the Exhibit button and examine the structures of ORDERS and ORDER_ITEMS tables.

In the ORDERS table, ORDER_ID is the PRIMARY KEY and in the ORDER_ITEMS table, ORDER_ID and LINE_ITEM_ID form the composite primary key.

Which view can have all the DML operations performed on it?

ORDERS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
ORDER_DATE		TIMESTAMP
CUSTOMER_ID	NOT NULL	NUMBER(6)

ORDER_ITEMS		
NAME	NULL?	TYPE
ORDER_ID	NOT NULL	NUMBER(12)
LINE_ITEM_ID	NOT NULL	NUMBER(3)
PRODUCT_ID	NOT NULL	NUMBER(6)
UNIT PRICE		NUMBER(8,2)
QUANTITY		NUMBER(8)

- A. CREATE VIEW V1
AS SELECT order_id, product_id
FROM order_items;
- B. CREATE VIEW V4(or_no, or_date, cust_id)
AS SELECT order_id, order_date, customer_id
FROM orders
WHERE order_date < 30-mar-2007
WITH CHECK OPTION;
- C. CREATE VIEW V3
AS SELECT o.order_id, o.customer_id, i.product_id
FROM orders o, order_items i
WHERE o.order_id=i.order_id;
- D. CREATE VIEW V2
AS SELECT order_id, line_item_id, unit_price*quantity total
FROM order items;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:


QUESTION 220

View the Exhibit and examine the structure of the EMPLOYEES table.

Evaluate the following SQL statement:

```
SELECT employee_id, last_name, job_id, manager_id FROM employees START WITH employee_id = 101 CONNECT BY PRIOR employee_id=manager_id;
```

Which statement is true regarding the output for this command?

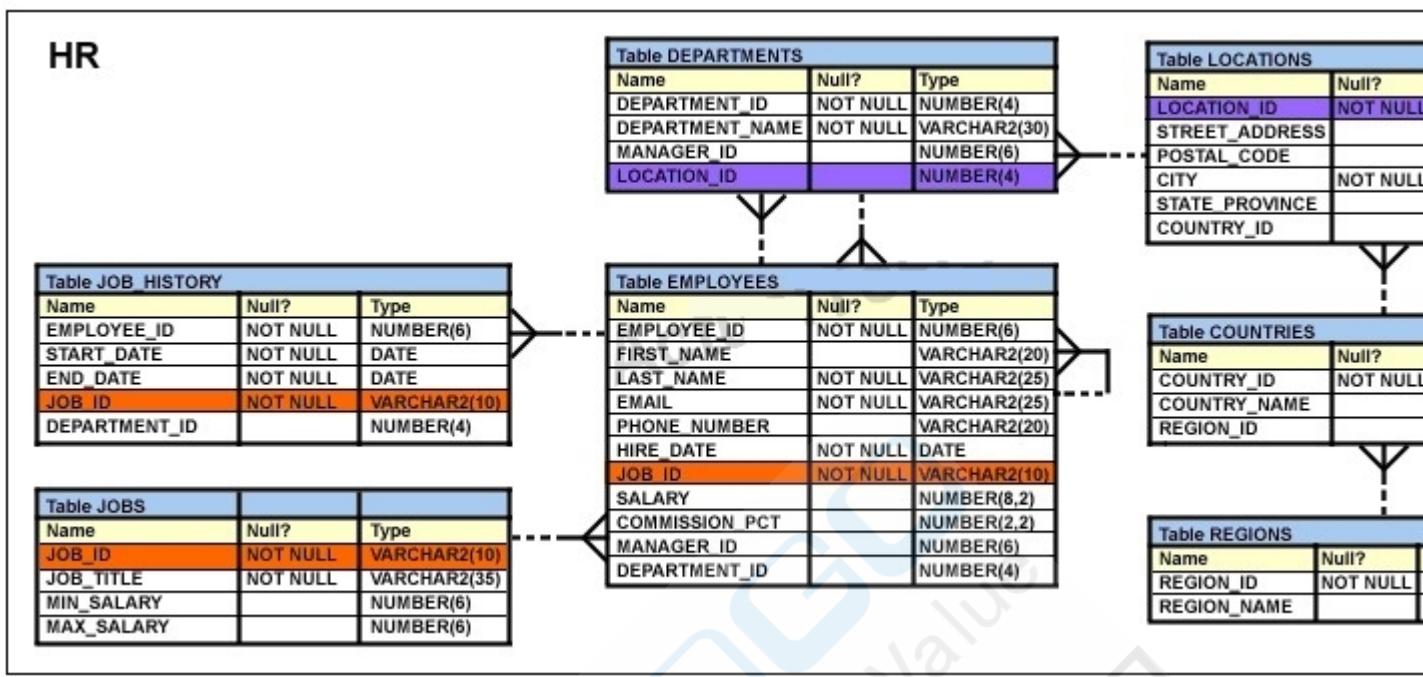

- A. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by his or her peers.
- B. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by the employee to whom he or she reports.
- C. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by employees below him or her in the hierarchy.
- D. It would return a hierarchical output starting with the employee whose EMPLOYEE_ID is 101, followed by employees up to one level below him or her in the hierarchy.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 221

Given below is the list of meta character syntaxes and their descriptions in random order: Meta character syntax Description 1) a) Matches character not in the list 2) [...] b) Matches character when it occurs at the beginning of a line 3) | c) Treats the subsequent meta character as a literal 4) \ d) Matches one of the characters such as the OR operator

Identify the option that correctly matches the meta character syntaxes with their descriptions.

- A. 1-b, 2-a, 3-d, 4-c
- B. 1-a, 2-b, 3-d, 4-c
- C. 1-d, 2-b, 3-a, 4-c
- D. 1-b, 2-c, 3-d, 2-a

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 222

Which two statements are true? (Choose two.)

- A. The USER_SYNONYMS view can provide information about private synonyms.
- B. The user SYSTEM owns all the base tables and user-accessible views of the data dictionary.
- C. All the dynamic performance views prefixed with V\$ are accessible to all the database users.
- D. The USER_OBJECTS view can provide information about the tables and views created by the user only.
- E. DICTIONARY is a view that contains the names of all the data dictionary views that the user can access.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 223

Which two statements are true about the GROUPING function? (Choose two.)

- A. It is used to find the groups forming the subtotal in a row.
- B. It is used to identify the NULL value in the aggregate functions.
- C. It is used to form the group sets involved in generating the totals and subtotals.
- D. It can only be used with ROLLUP and CUBE operators specified in the GROUP BY clause.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:


QUESTION 224

Evaluate the following DELETE statement:

DELETE FROM orders;

There are no other uncommitted transactions on the ORDERS table.

Which statement is true about the DELETE statement?



[Previous](#) [Next](#)

USER_OBJECTS

USER_OBJECTS describes all objects owned by the current user. Its columns are the same as those in "ALL_OBJECTS".



[Previous](#) [Next](#)

- A. It removes all the rows in the table and allows ROLLBACK

- B. It would not remove the rows if the table has a primary key.
- C. It removes all the rows as well as the structure of the table.
- D. It removes all the rows in the table and does not allow ROLLBACK

Correct Answer: A

Section: (none)


Explanation

Explanation/Reference:

QUESTION 225

View the Exhibit and examine the data in ORDERS and ORDER_ITEMS tables. You need to create a view that displays the ORDER_ID, ORDER_DATE, and the total number of items in each order.

Which CREATE VIEW statement would create the view successfully?

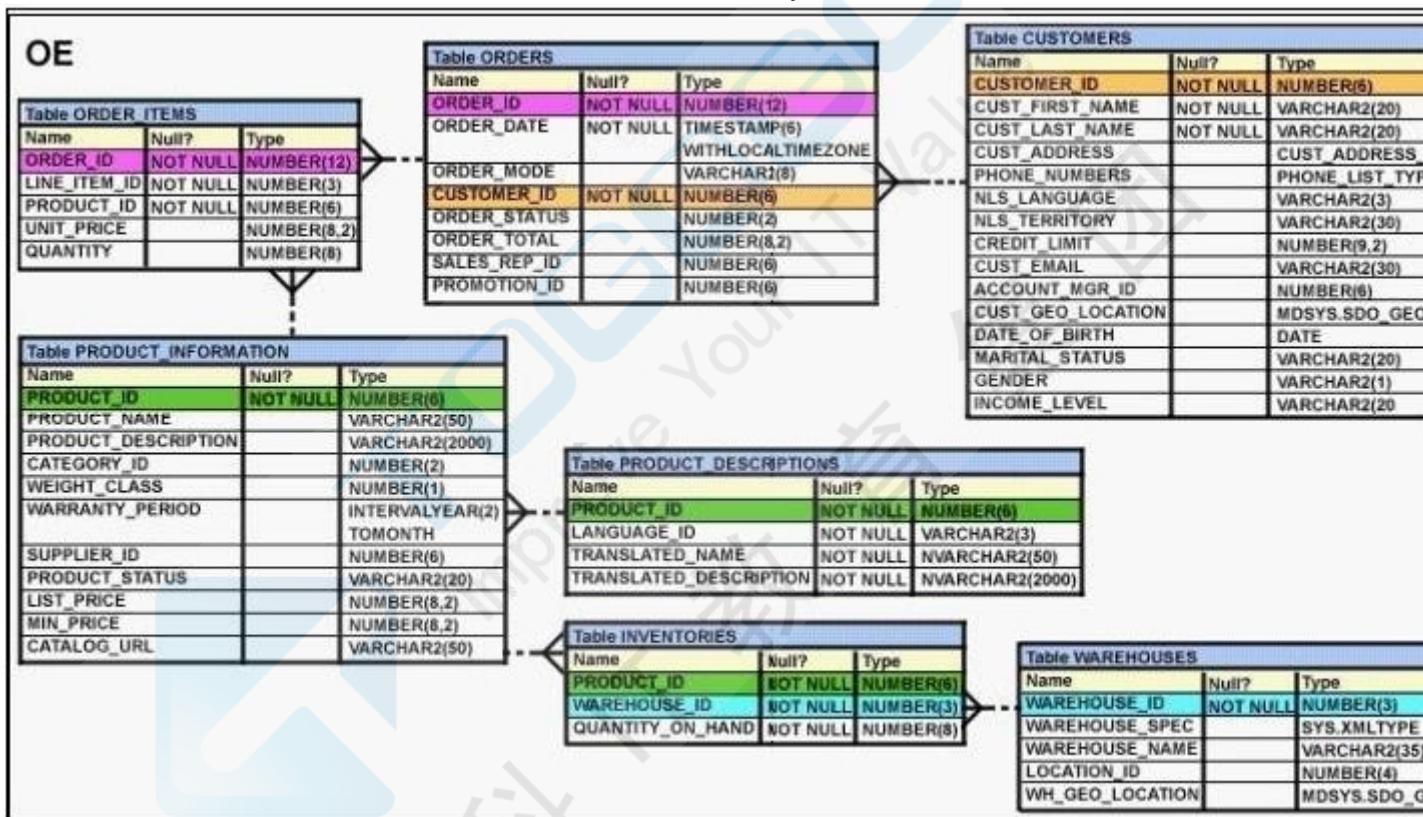

- A. CREATE OR REPLACE VIEW ord_vu (order_id,order_date)
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
"NO OF ITEMS"
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date;
- B. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
"NO OF ITEMS"
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date;
- C. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)

GROUP BY o.order_id,o.order_date;
D. CREATE OR REPLACE VIEW ord_vu
AS SELECT o.order_id, o.order_date, COUNT(i.line_item_id)| NO OF ITEMS'
FROM orders o JOIN order_items i
ON (o.order_id = i.order_id)
GROUP BY o.order_id,o.order_date
WITH CHECK OPTION;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 226

Which two statements are true regarding views? (Choose two.)

- A. A simple view in which column aliases have been used cannot be updated.
- B. A subquery used in a complex view definition cannot contain group functions or joins.
- C. Rows cannot be deleted through a view if the view definition contains the DISTINCT keyword.
- D. Rows added through a view are deleted from the table automatically when the view is dropped.
- E. The OR REPLACE option is used to change the definition of an existing view without dropping and re-creating it.
- F. The WITH CHECK OPTION constraint can be used in a view definition to restrict the columns displayed through the view.

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:


QUESTION 227

View the Exhibit and examine the descriptions for ORDERS and ORDER_ITEMS tables.

Evaluate the following SQL statement:

```
SELECT o.customer_id, oi.product_id, SUM(oi.unit_price*oi.quantity) "Order Amount"  
FROM order_items oi JOIN orders o  
ON oi.order_id = o.order_id  
GROUP BY CUBE (o.customer_id, oi.product_id);
```

Which three statements are true regarding the output of this SQL statement? (Choose three.)

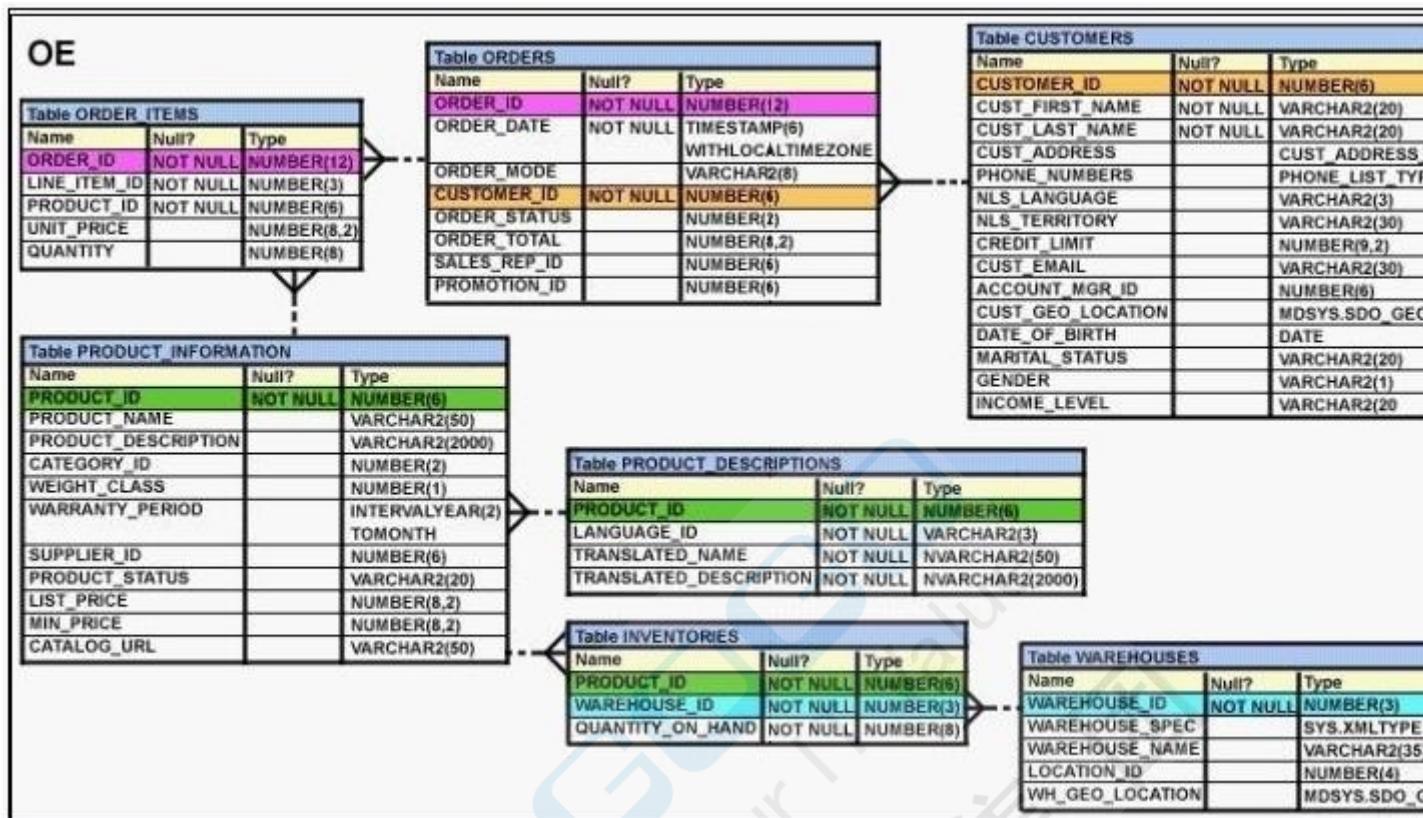

- A. It would return the subtotals for the Order Amount of every CUSTOMER_ID.
- B. It would return the subtotals for the Order Amount for every PRODUCT_ID.
- C. It would return the subtotals for the Order Amount of every PRODUCT_ID and CUSTOMER_ID as one group.
- D. It would return the subtotals for the Order Amount of every CUSTOMER_ID and PRODUCT_ID as one group.
- E. It would return only the grand total for the Order Amount of every CUSTOMER_ID and PRODUCT_ID as one group.

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 228

Given below is a list of datetime data types and examples of values stored in them in a random order:

Datatype Example

- 1) INTERVAL YEAR TO MONTH a) 2003-04-15 8:00:00 -8:00'
- 2) TIMESTAMP WITH LOCAL TIME ZONE b) '-K)6 03:30:16.000000'
- 3) TIMESTAMP WITH TIME ZONE c) '17-JUN-03 12.00.00.000000 AM'4)INTERVAL DAY TO SECOND d) '402-00'

Identify the option that correctly matches the data types with the values.

- A. 1-d.2-c.3-a.4-b
- B. 1-b.2-a.3-c.4-d
- C. 1-b.2-a, 3-d, 4-c
- D. 1-d.2-c.3-b.4-a

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 229

View the Exhibit and examine the structure of the MARKS_DETAILS and MARKStables. Which is the best method to load data from the MARKS_DETAILStable to the MARKStable?

MARKS DETAILS		
Name	Null?	Type
STUDENT_ID	NOT NULL	NUMBER (4)
ENG_SUB_ID		VARCHAR2 (3)
MARKS_ENGLISH		NUMBER (3)
MAT_SUB_ID		VARCHAR2 (3)
MARKS_MATH		NUMBER (3)
PHY_SUB_ID		VARCHAR2 (3)
MARKS_PHYSICS		NUMBER (3)
CHE_SUB_ID		VARCHAR2 (3)
MARKS_CHEMISTRY		NUMBER (3)
BIO_SUB_ID		VARCHAR2 (3)
MARKS_BIOLOGY		NUMBER (3)

MARKS		
Name	Null?	Type
STUDENT_ID	NOT NULL	NUMBER (4)
SUBJECT_ID		VARCHAR2 (3)
MARKS		NUMBER (3)

- A. Pivoting INSERT
- B. Unconditional INSERT
- C. Conditional ALL INSERT
- D. Conditional FIRST INSERT

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 230

Which three statements are true regarding the WHERE and HAVING clauses in a SQL statement?
(Choose three.)

- A. The HAVING clause conditions can have aggregate functions.
- B. The HAVING clause conditions can use aliases for the columns.
- C. WHERE and HAVING clauses cannot be used together in a SQL statement.
- D. The WHERE clause is used to exclude rows before the grouping of data.
- E. The HAVING clause is used to exclude one or more aggregated results after grouping data.

Correct Answer: ADE

Section: (none)**Explanation****Explanation/Reference:****QUESTION 231**

View the Exhibit and examine the description of the EMPLOYEES table.


You executed the following SQL statement:

SELECT first_name, department_id, salary

FROM employees

ORDER BY department_id, first_name, salary desc;

Which two statements are true regarding the output of the above query? (Choose two.)

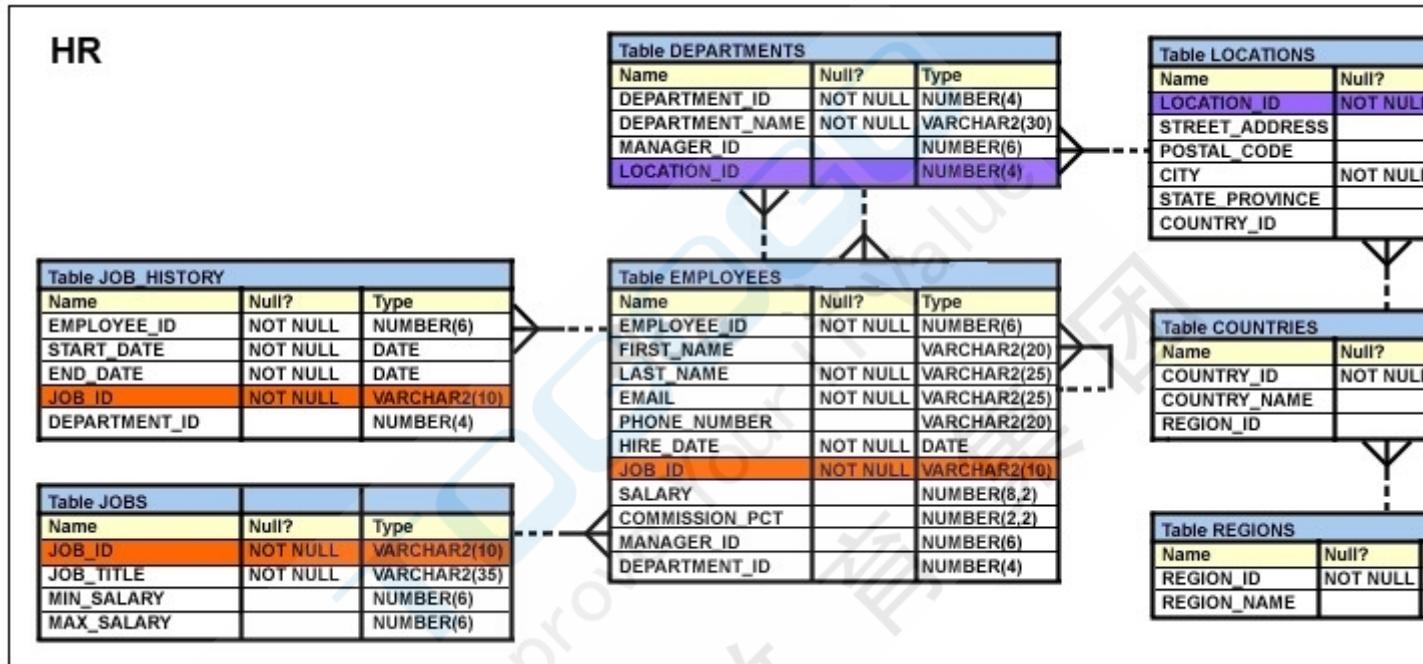

- The values in all the columns would be sorted in the descending order.
- The values in the SALARY column would be sorted in descending order for all the employees having the same value in the DEPARTMENT_ID column.
- The values in the FIRST_NAME column would be sorted in ascending order for all the employees having the same value in the DEPARTMENT_ID column.
- The values in the FIRST_NAME column would be sorted in the descending order for all the employees having the same value in the DEPARTMENT_ID column.
- The values in the SALARY column would be sorted in descending order for all the employees having the same value in the DEPARTMENT_ID and FIRST_NAME column.

Correct Answer: CE**Section: (none)****Explanation****Explanation/Reference:****QUESTION 232**

ORD is a private synonym for the OE.ORDERS table.

The user OE issues the following command:

DROP SYNONYM ord;

Which statement is true regarding the above SOL statement?

- Only the synonym would be dropped.

- The synonym would be dropped and the corresponding table would become invalid.

- C. The synonym would be dropped and the packages referring to the synonym would be dropped.
- D. The synonym would be dropped and any PUBLIC synonym with the same name becomes invalid.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 233

Which statement is true regarding the SESSION_PRIVS dictionary view?

- A. It contains the current object privileges available in the user session.
- B. It contains the current system privileges available in the user session.
- C. It contains the object privileges granted to other users by the current user session.
- D. It contains the system privileges granted to other users by the current user session.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 234

Which statements are true? (Choose all that apply.)

- A. The data dictionary is created and maintained by the database administrator.
- B. The data dictionary views can consist of joins of dictionary base tables and user-defined tables.
- C. The usernames of all the users including the database administrators are stored in the data dictionary.
- D. The USER_CONS_COLUMNS view should be queried to find the names of the columns to which a constraint applies.
- E. Both USER_OBJECTS and CAT views provide the same information about all the objects that are owned by the user.
- F. Views with the same name but different prefixes, such as DBA, ALL and USER, use the same base tables from the data dictionary

Correct Answer: CDF

Section: (none)

Explanation

Explanation/Reference:

QUESTION 235

View the Exhibit and examine the structure of the EMP table which is not partitioned and not an index-organized table.

Evaluate the following SQL statement:

ALTER TABLE emp DROP COLUMN first_name;

Which two statements are true regarding the above command? (Choose two.)

EMP		
Name	Null?	Type
EMPNO	NOT NULL	NUMBER (4)
FIRST_NAME		VARCHAR2 (20)
LAST_NAME		VARCHAR2 (20)
SALARY		NUMBER (10, 2)
DEPTNO		NUMBER (2)

- A. The FIRST_NAME column would be dropped provided it does not contain any data.
- B. The FIRST_NAME column would be dropped provided at least one or more columns remain in the table.
- C. The FIRST_NAME column can be rolled back provided the SET UNUSED option is added to the above SQL statement.
- D. The FIRST_NAME column can be dropped even if it is part of a composite PRIMARY KEY provided the CASCADE option is used.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 236

The user SCOTT who is the owner of ORDERS and ORDER_ITEMS tables issues the following GRANT command:

```
GRANT ALL
ON orders, order_items
TO PUBLIC;
```

What correction needs to be done to the above statement?

- A. PUBLIC should be replaced with specific usernames.
- B. ALL should be replaced with a list of specific privileges.
- C. WITH GRANT OPTION should be added to the statement.
- D. Separate GRANT statements are required for ORDERS and ORDER_ITEMS tables.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 237


View the Exhibit and examine the description of EMPLOYEES and DEPARTMENTS tables.

You want to display the EMPLOYEE_ID, LAST_NAME, and SALARY for the employees who get the maximum salary in their respective departments. The following SQL statement was written:

```
WITH
SELECT employee_id, last_name, salary
FROM employees
WHERE (department_id, salary) = ANY (SELECT*
FROM dept_max)

dept_max as (SELECT d.department_id, max(salary)
FROM departments d JOIN employees j
ON (d.department_id = j.department_id)
GROUP BY d.department_id);
```

Which statement is true regarding the execution and the output of this statement?

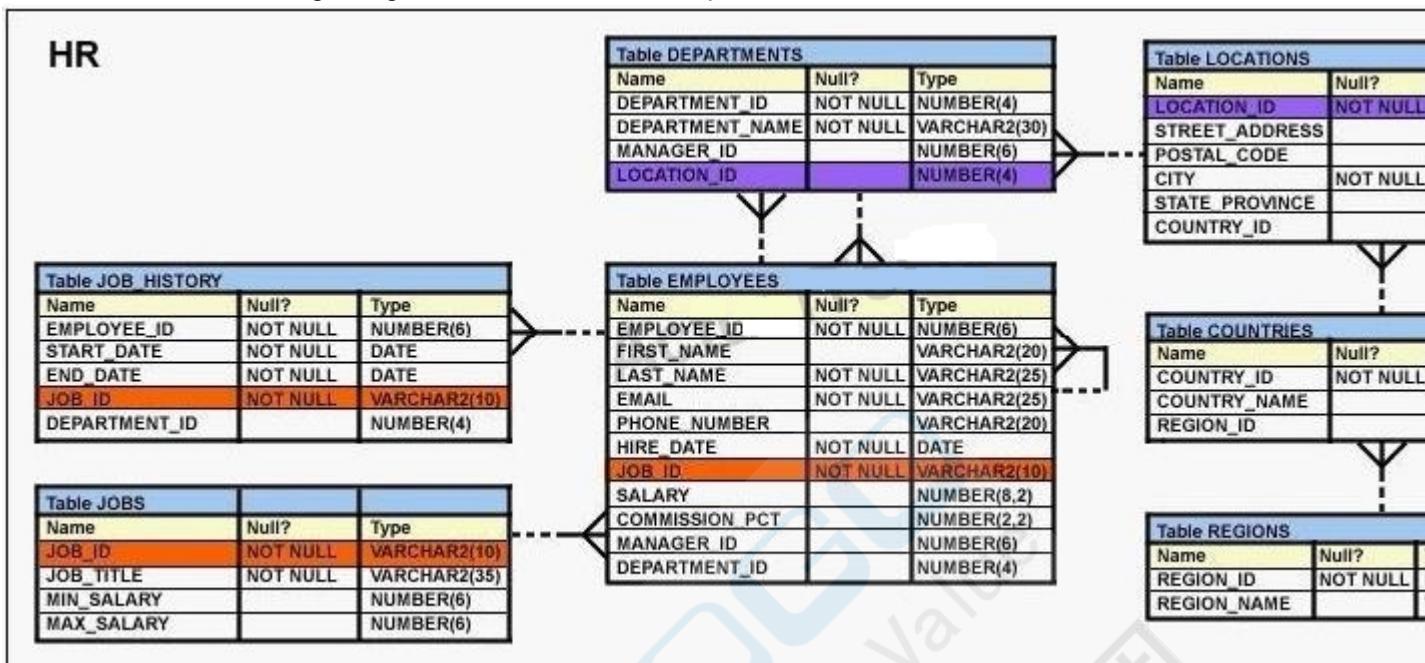

- A. The statement would execute and give the desired results.
- B. The statement would not execute because the = ANY comparison operator is used instead of =.
- C. The statement would not execute because the main query block uses the query name before it is even created.
- D. The statement would not execute because the comma is missing between the main query block and the query name.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 238

Which statement is true regarding the ROLLUP operator specified in the GROUP BY clause of a SQL statement?

- A. It produces only the subtotals for the groups specified in the GROUP BY clause.
- B. It produces only the grand totals for the groups specified in the GROUP BY clause.
- C. It produces higher-level subtotals, moving from right to left through the list of grouping columns specified in the GROUP BY clause.
- D. It produces higher-level subtotals, moving in all the directions through the list of grouping columns specified in the GROUP BY clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 239

Which view would you use to display the column names and DEFAULT values for a table?

- A. DBA_TABLES

- B. DBA_COLUMNS
- C. USER_COLUMNS
- D. USER_TAB_COLUMNS

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 240

View the Exhibit and examine the description of the EMPLOYEES table.

Evaluate the following SQL statement:


```
SELECT first_name, employee_id, NEXT_DAY(ADD_MONTHS(hire_date, 6), 1) "Review" FROM employees;
```

The query was written to retrieve the FIRST_NAME, EMPLOYEE_ID, and review date for

employees.

The review date is the first Monday after the completion of six months of the hiring. The NLS_TERRITORY parameter is set to AMERICA in the session.

Which statement is true regarding this query?

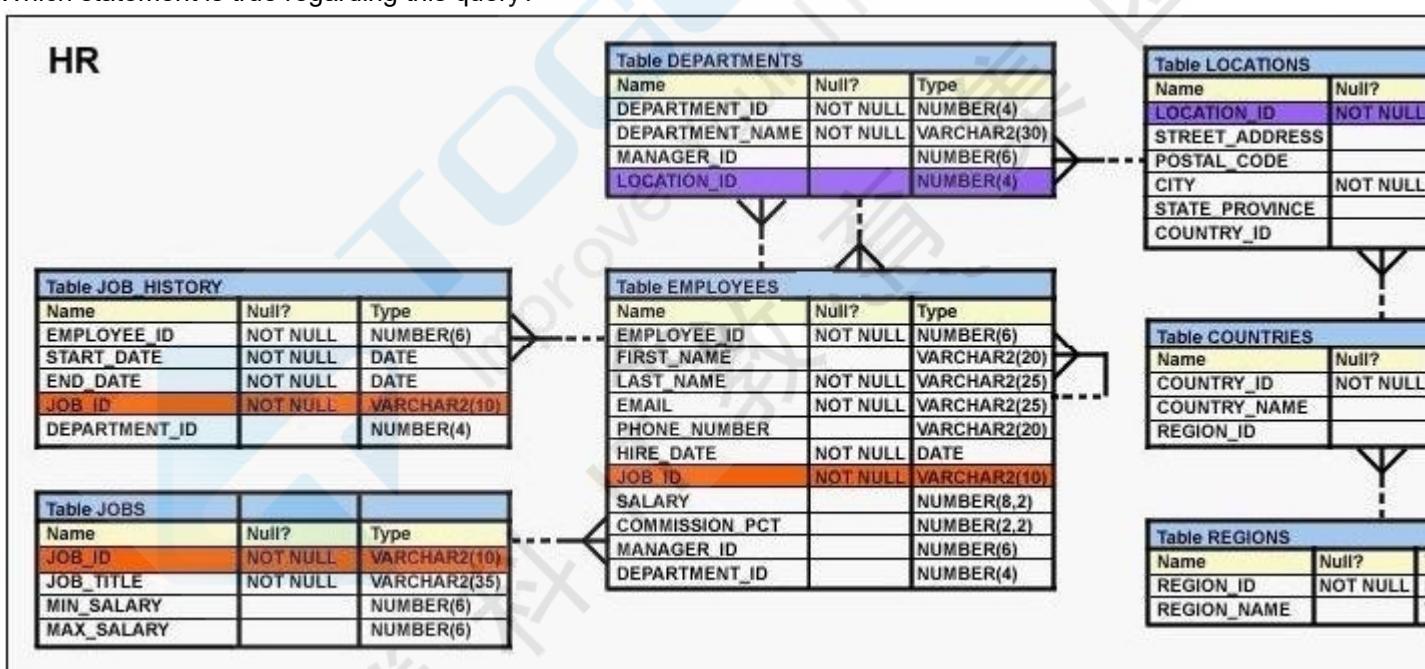

- A. The query would execute to give the desired output.
- B. The query would not execute because date functions cannot be nested.
- C. The query would execute but the output would give review dates that are Sundays.
- D. The query would not execute because the NEXT_DAY function accepts a string as argument.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 241

Which statement is true regarding Flashback Version Query?

- A. It returns versions of rows only within a transaction.
- B. It can be used in subqueries contained only in a SELECT statement.
- C. It will return an error if the undo retention time is less than the lower bound time or SCN specified.
- D. It retrieves all versions including the deleted as well as subsequently reinserted versions of the rows.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 242

Which mandatory clause has to be added to the following statement to successfully create an external table called EMPDET?

```
CREATE TABLE empdet  
(empno CHAR(2), ename CHAR(5), deptno NUMBER(4))  
ORGANIZATION EXTERNAL  
(LOCATION ('emp.daf));
```

- A. TYPE
- B. REJECT LIMIT
- C. DEFAULT DIRECTORY
- D. ACCESS PARAMETERS

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 243

Which two statements are true? (Choose two.)

- A. The USER_SYNONYMS view can provide information about private synonyms.
- B. The user SYSTEM owns all the base tables and user-accessible views of the data dictionary.
- C. All the dynamic performance views prefixed with V\$ are accessible to all the database users.
- D. The USER_OBJECTS view can provide information about the tables and views created by the user only.
- E. DICTIONARY is a view that contains the names of all the data dictionary views that the user can access.

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 244

View the Exhibit and examine the structure of the ORDER_ITEMS table.

You need to display the ORDER_ID of the order that has the highest total value among all the orders in the ORDER_ITEMS table.

Which query would produce the desired output?

ORDER_ITEMS					
ORDER_ID	LINE_ITEM_ID	PRODUCT_ID	UNIT_PRICE	QUANTITY	
2355	4	2322	19	188	
2355	5	2323	17	190	
2355	9	2359	226.6	204	
2355	1	2289	46	200	
2356	5	2308	58	47	
2356	6	2311	95	51	
2356	1	2264	199.1	38	
2356	2	2274	148.5	34	
2356	3	2293	98	40	
2356	4	2299	72	44	
2357	2	2245	462	26	
2357	3	2252	788.7	26	
2357	4	2257	371.8	29	
2357	5	2262	95	29	

- A. SELECT order_id
 FROM order_items
 WHERE(unit_price*quantity) = MAX(unit_price*quantity)
 GROUP BY order_id;
- B. SELECT order_id
 FROM order_items
 WHERE(unit_price*quantity) = (SELECT MAX(unit_price*quantity) FROM order_items)
 GROUP BY order_id;
- C. SELECT order_id
 FROM order_items
 WHERE (unit_price*quantity) = (SELECT MAX(unit_price*quantity) FROM order_items
 GROUP BY order_id);
- D. SELECT order_id
 FROM order_items
 GROUP BY order_id
 HAVING SUM(unit_price*quantity) =(SELECT MAX(SUM(unit_price*quantity))
 FROM order_items GROUP BY order_id);

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 245

View the Exhibit and examine the details of the ORDER_ITEMS table.

Evaluate the following SQL statements:

Statement 1:

SELECT MAX(unit_price*quantity) "Maximum Order"

FROM order_items;

Statement 2:

SELECT MAX(unit_price*quantity) "Maximum Order"

FROM order_items GROUP BY order_id;

Which statements are true regarding the output of these SQL statements? (Choose all that apply.)

ORDER_ID	LINE_ITEM_ID	PRODUCT_ID	UNIT_PRICE
2356	2	2274	1
2356	7	2316	
2356	8	2323	
2356	5	2308	
2356	6	2311	
2356	1	2264	1
2357	7	2276	2
2357	8	2289	
2357	1	2211	
2357	4	2257	3
2357	6	2268	
2357	2	2245	
2357	3	2252	7
2357	5	2262	
2358	4	1803	
2358	3	1797	
2358	5	1808	

- A. Statement 1 would return only one row of output.
- B. Both the statements would give the same output.
- C. Statement 2 would return multiple rows of output.
- D. Statement 1 would not return any row because the GROUP BY clause is missing.
- E. Both statements would ignore NULL values for the UNIT_PRICE and QUANTITY columns.

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

QUESTION 246

The following are the steps for a correlated subquery, listed in random order:

- 1) The WHERE clause of the outer query is evaluated.
- 2) The candidate row is fetched from the table specified in the outer query.
- 3) The procedure is repeated for the subsequent rows of the table, till all the rows are processed.
- 4) Rows are returned by the inner query, after being evaluated with the value from the candidate row in the outer query. Identify the option that contains the steps in the correct sequence in which the Oracle server evaluates a correlated subquery.

- A. 4,2,1,3
- B. 4,1,2,3
- C. 2,4,1,3
- D. 2,1,4,3

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 247

Evaluate the following SQL statement:

ALTER TABLE hr.emp SET UNUSED (mgr_id);

Which statement is true regarding the effect of the above SQL statement?

- A. Any synonym existing on the EMP table would have to be re-created.
- B. Any constraints defined on the MGR_ID column would be removed by the above command.
- C. Any views created on the EMP table that include the MGR_ID column would have to be dropped and re-created.
- D. Any index created on the MGR_ID column would continue to exist until the DROP UNUSED COLUMNS command is executed.

Correct Answer: B

Section: (none)

Explanation


Explanation/Reference:

QUESTION 248

View the Exhibit and examine the structure of ORDERS and ORDER_ITEMS tables.

ORDER_ID is the primary key in the ORDERS table. It is also the foreign key in the ORDER_ITEMS table wherein it is created with the ON DELETE CASCADE option.

Which DELETE statement would execute successfully?

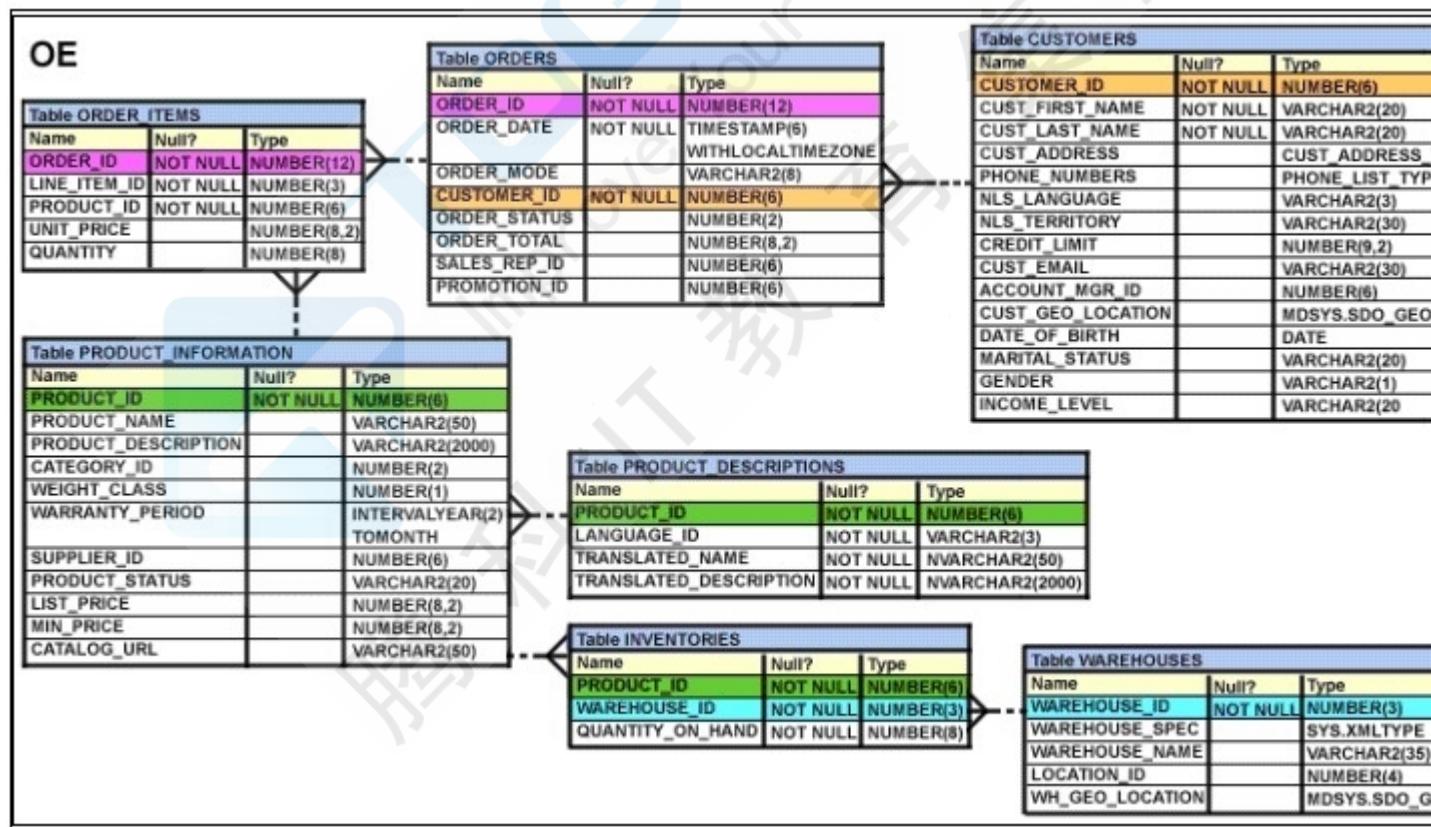

- A. DELETE order_id FROM orders WHERE order_total < 1000;
- B. DELETE orders WHERE order_total < 1000;
- C. DELETE FROM orders WHERE (SELECT order_id FROM order_items);
- D. DELETE orders o, order_items i WHERE o.order_id = i.order_id;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 249

View the Exhibit and examine the structure of ORD and ORD_ITEMS tables.

In the ORD table, the PRIMARY KEY is ORD_NO and in the ORD_ITEMS tables the composite PRIMARY KEY is (ORD_NO, ITEM_NO).

Which two CREATE INDEX statements are valid? (Choose two.)

ORD		
Name	Null?	Type
ORD_NO	NOT NULL	NUMBER(2)
ORD_DATE		DATE
CUST_ID		NUMBER(4)

ORD_ITEMS		
Name	Null?	Type
ORD_NO	NOT NULL	NUMBER(2)
ITEM_NO	NOT NULL	NUMBER(3)
QTY		NUMBER(8,2)

- A. CREATE INDEX ord_idx
ON ord(ord_no);
- B. CREATE INDEX ord_idx
ON ord_items(ord_no);
- C. CREATE INDEX ord_idx
ON ord_items(item_no);
- D. CREATE INDEX ord_idx
ON ord,ord_items(ord_no, ord_date,qty);

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 250

The ORDERS table belongs to the user OE. OE has granted the SELECT privilege on the ORDERS table to the user HR. Which statement would create a synonym ORD so that HR can execute the following query successfully? SELECT'FROM ord;

- A. CREATE SYNONYM ord FOR orders; This command is issued by OE.
- B. CREATE PUBLIC SYNONYM ord FOR orders; This command is issued by OE.
- C. CREATE SYNONYM ord FOR oe.orders; This command is issued by the database administrator.
- D. CREATE PUBLIC SYNONYM ord FOR oe.orders; This command is issued by the database administrator.

Correct Answer: D

Section: (none)

Explanation


Explanation/Reference:

QUESTION 251

View the Exhibit and examine the description of the EMPLOYEES table.

You want to know the EMPLOYEE_ID and FIRST_NAME of all the records in the EMPLOYEES table wherein the JOB_ID column has ST_CLERK or ST_MAN values, the DEPARTMENT_ID column has value 30, and the SALARY column has a value greater than 3,000.

Which SQL statement would get you the desired result?

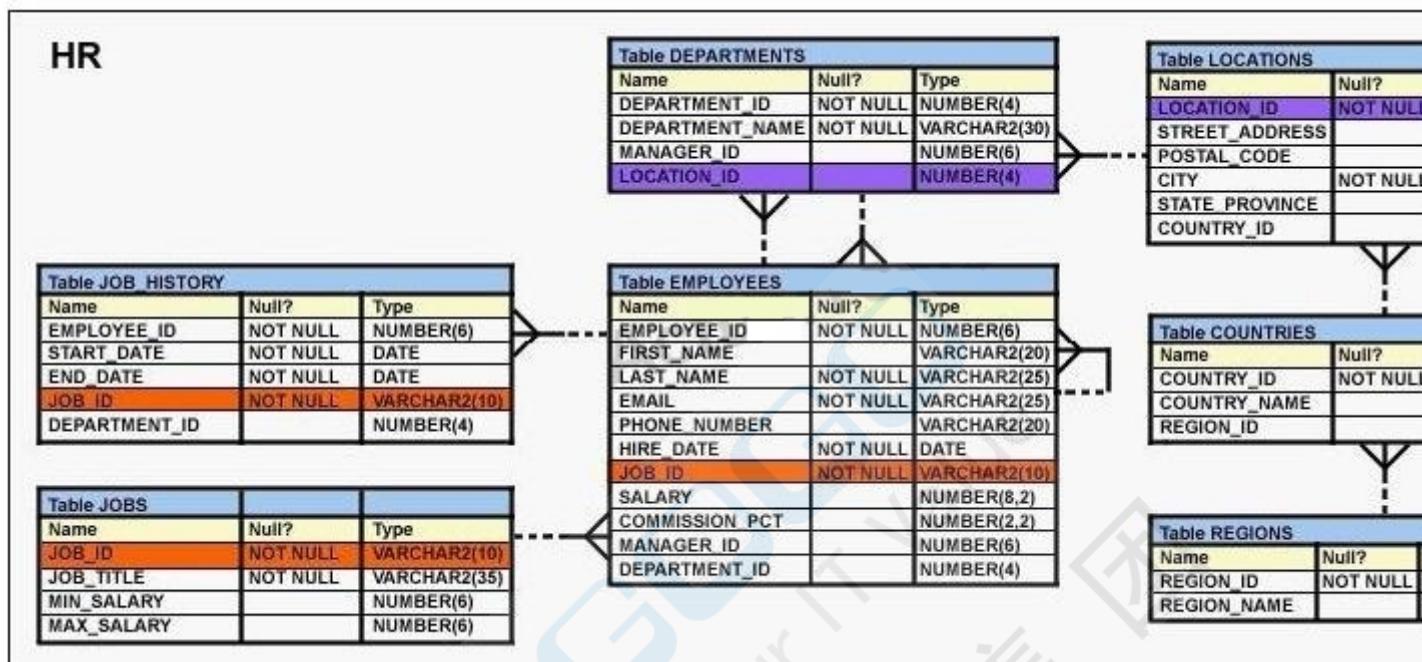

- A. SELECT employee_id, first_name
FROM employees
WHERE job_id like 'MAN%' OR job_id like 'CLERK%'
AND department_id = 30 AND salary > 3000;
- B. SELECT employee_id, first_name
FROM employees
WHERE job_id like '%MAN' OR job_id like '%CLERK'
AND (department_id = 30 OR salary > 3000);
- C. SELECT employee_id, first_name
FROM employees
WHERE (job_id like '%MAN' AND job_id like '%CLERK')
AND department_id = 30 OR salary > 3000;
- D. SELECT employee_id, first_name
FROM employees
WHERE (job_id like '%MAN' OR job_id like '%CLERK')
AND department_id = 30 AND salary > 3000;

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 252

Evaluate the following CREATE SEQUENCE statement:

```

CREATE SEQUENCE seq1
START WITH 100
INCREMENT BY 10
MAXVALUE 200
CYCLE
NOCACHE;
    
```

The sequence SEQ1 has generated numbers up to the maximum limit of 200. You issue the following SQL

statement:

SELECT seq1.nextval FROM dual;

What is displayed by the SELECT statement?

- A. 1
- B. 10
- C. 100
- D. an error

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 253

Which two statements are true regarding subqueries? (Choose two.)

- A. Only two subqueries can be placed at one level.
- B. A subquery can be used to access data from one or more tables or views.
- C. If the subquery returns 0 rows, then the value returned by the subquery expression is NULL.
- D. The columns in a subquery must always be qualified with the name or alias of the table used.
- E. A subquery in the WHERE clause of a SELECT statement can be nested up to three levels only.

Correct Answer: BC

Section: (none)


Explanation

Explanation/Reference:

QUESTION 254

View the Exhibit and examine the description of the EMPLOYEES table.

Evaluate the following SQL statement: SELECT employee_id, last_name, job_id, manager_id, level
FROM employees START WITH employee_id = 101 CONNECT BY PRIOR employee_id=manager_id;
Which two statements are true regarding the output of this command? (Choose two.)

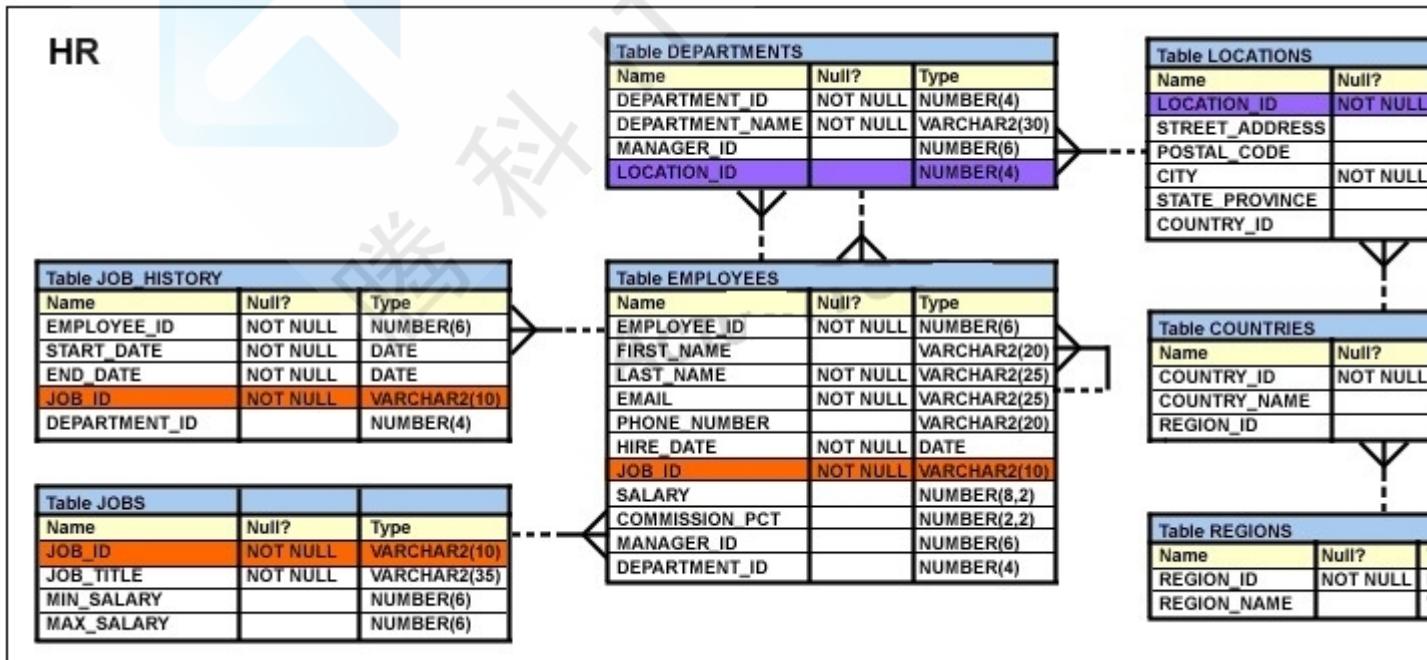

- A. The output would be in top-down hierarchy starting with EMPLOYEE_ID having value 101.
- B. The output would be in bottom-up hierarchy starting with EMPLOYEE_ID having value 101.
- C. The LEVEL column displays the number of employees in the hierarchy under the employee having the EMPLOYEE_ID 101.
- D. The LEVEL column displays the level in the hierarchy at which the employee is placed under the employee having the EMPLOYEE_ID 101

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 255

Which mandatory clause has to be added to the following statement to successfully create an external table called EMPDET?

```
CREATE TABLE empdet
(emphno CHAR(2), ename CHAR(5), deptno NUMBER(4))
ORGANIZATION EXTERNAL
(LOCATION ('emp.daf'));
```

- A. TYPE
- B. REJECT LIMIT
- C. DEFAULT DIRECTORY
- D. ACCESS PARAMETERS

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:


QUESTION 256

View the Exhibit and examine the description of the EMPLOYEES and DEPARTMENTS tables.

You want to display the LAST_NAME for the employees, LAST_NAME for the manager of the employees, and the DEPARTMENT_NAME for the employees having 100 as MANAGER_ID. The following SQL statement was written:

```
SELECT m.last_name "Manager", e.last_name "Employee", department_name "Department"
FROM employees m JOIN employees e
ON (m.employee_id = e.manager_id)
WHERE e.manager_id=100 JOIN departments d ON (e.department_id = d.department_id);
```

Which statement is true regarding the output of this SQL statement?

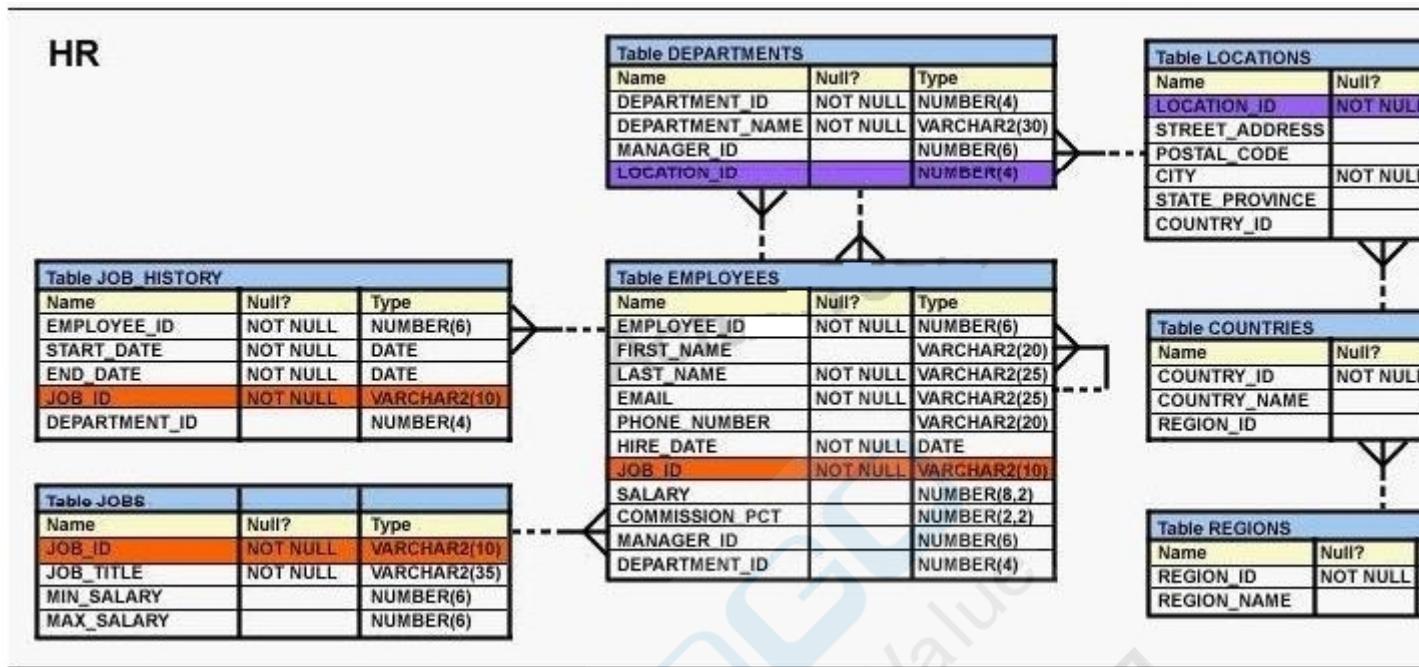

- A. The statement would provide the desired results.
- B. The statement would not execute because the ON clause is written twice.
- C. The statement would not execute because the WHERE clause is wrongly placed.
- D. The statement would not execute because the self join uses the ON clause instead of the USING clause.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 257

Evaluate the following SQL statement:

ALTER TABLE hr.emp SET UNUSED (mgr_id);

Which statement is true regarding the effect of the above SQL statement?

- A. Any synonym existing on the EMP table would have to be re-created.
- B. Any constraints defined on the MGR_ID column would be removed by the above command.
- C. Any views created on the EMP table that include the MGR_ID column would have to be dropped and re-created.
- D. Any index created on the MGR_ID column would continue to exist until the DROP UNUSED COLUMNS command is executed.

Correct Answer: B

Section: (none)


Explanation

Explanation/Reference:

QUESTION 258

View the Exhibit and examine the description of the PRODUCT_INFORMATION table.

You want to display the expiration date of the warranty for a product. Which SQL statement would you execute?

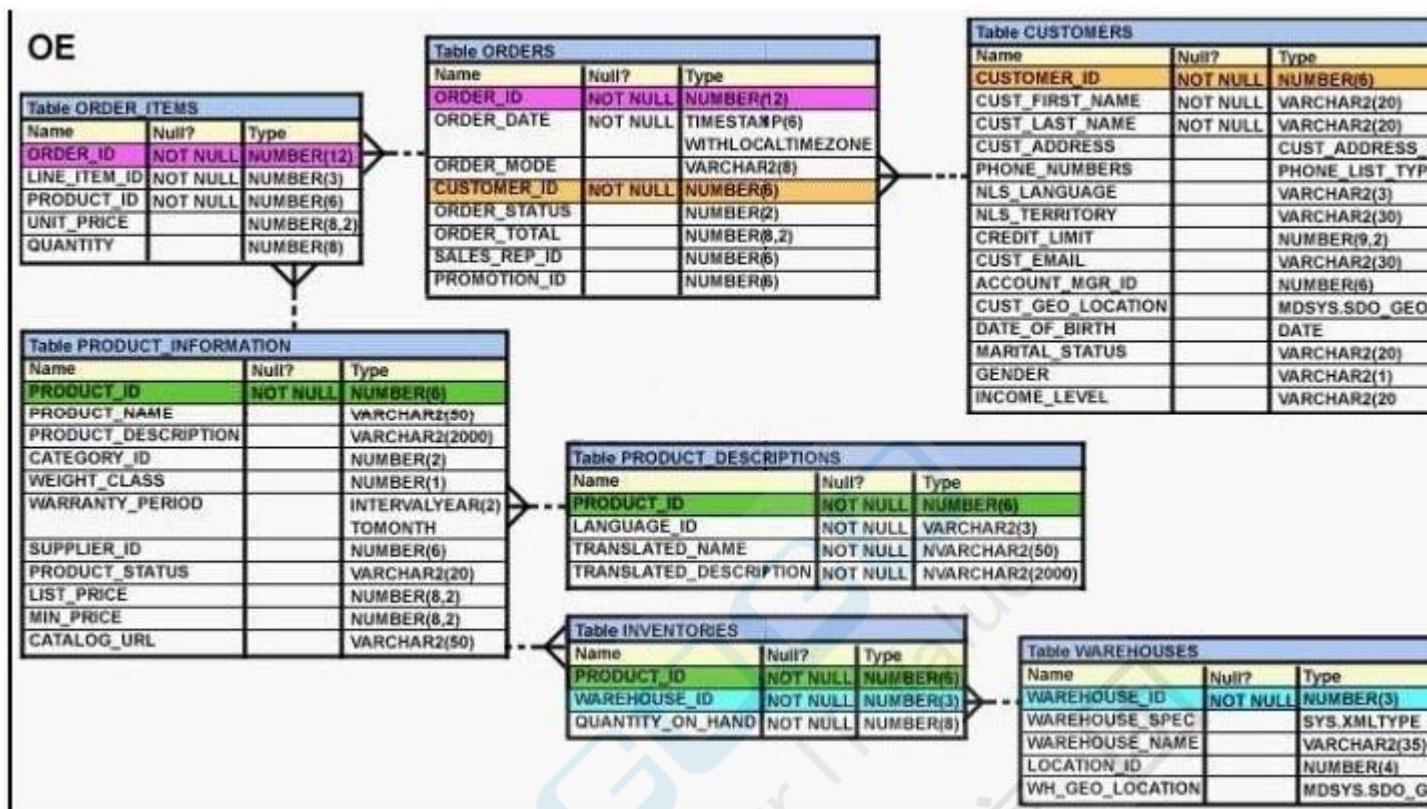

- A. SELECT product_id, SYSDATE + warranty_period FROM product_information;
- B. SELECT product_id, TO_YMINTERVAL(warranty_period) FROM product_information;
- C. SELECT product_id, TO_YMINTERVAL(SYSDATE) + warranty_period FROM product_information;
- D. SELECT product_id, TO_YMINTERVAL(SYSDATE + warranty_period) FROM product_information;

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

QUESTION 259

View the Exhibit and examine the details of the EMPLOYEES table.

Evaluate the following SQL statements:

Statement 1:

```
SELECT employee_id, last_name, job_id, manager_id
FROM employees
```

START WITH employee_id = 101

CONNECT BY PRIOR employee_id = manager_id AND manager_id != 108 ;

Statement 2:

```
SELECT employee_id, last_name, job_id, manager_id
FROM employees
WHERE manager_id != 108
START WITH employee_id = 101
CONNECT BY PRIOR employee_id = manager_id;
```

Which two statements are true regarding the above SQL statements? (Choose two.)

- A. Statement 2 would not execute because the WHERE clause condition is not allowed in a statement that has the START WITH clause.

- B. The output for statement 1 would display the employee with MANAGER_ID 108 and all the employees below him or her in the hierarchy.
- C. The output of statement 1 would neither display the employee with MANAGER_ID 108 nor any employee below him or her in the hierarchy.
- D. The output for statement 2 would not display the employee with MANAGER_ID 108 but it would display all the employees below him or her in the hierarchy.

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

QUESTION 260

Which three statements are true regarding group functions? (Choose three.)

- A. They can be used on columns or expressions.
- B. They can be passed as an argument to another group function.
- C. They can be used only with a SQL statement that has the GROUP BY clause.
- D. They can be used on only one column in the SELECT clause of a SQL statement.
- E. They can be used along with the single-row function in the SELECT clause of a SQL statement.

Correct Answer: ABE

Section: (none)

Explanation

Explanation/Reference: