

Team Presentation

Team 5

Qingdao University of Technology

October 4, 2022

1 Problem 1

2 Problem 2

3 Problem 3

4 Problem 4

5 Problem 5

Problem 1

Design two nonlinear algebraic equations (degree at least 5 , with no less than 3 zeros) and find all their zeros (error less than 0.001), show your result and Matlab or Python code.

Problem 1 Solution

First, draw the graph of the higher degree equation of one variable then find the approximate interval between zero, Finally, the binary method is used to determine the value of zero.

Following are our target functions:

$$y = x^6 + x^4 - 3x^5 - 2x^3 + 4x^2 \quad (1)$$

$$y = x^7 - 2x^6 - 4x^5 + 3x^3 + 3x^2 \quad (2)$$

Problem 1 Matlab Code

```
1 function r=bisect(a,b,accurate)
2 p=(a+b)/2;
3 error=b-a;n=0;
4 while (error>accurate)
5     n=n+1;
6     if fun(p)==0
7         break;
8     else if fun(a)*fun(p)<0
9         b=p;
10    else
11        a=p;
12    end
13    p=(a+b)/2;
14    error=(b-a)/2^2;
15 end
16 r=p;
17 end end
```

Problem 1 Solution

By using bisection algorithm, we got the approximation of the function's root:

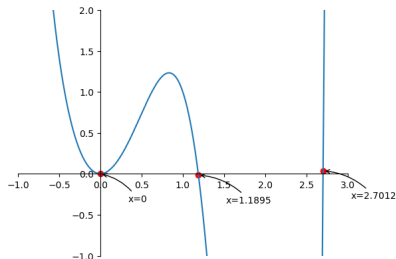


Figure: $y = x^6 + x^4 - 3x^5 - 2x^3 + 4x^2$




Figure: $y = x^7 - 2x^6 - 4x^5 + 3x^3 + 3x^2$

Problem 2(1)

Find the numerical solution of the following nonlinear equations using iteration method and Newton method respectively and show your analysis of error by using norms of vector and matrix and demonstrate your computer code

$$\begin{cases} x_1^2 - 10x_1 + x_2^2 + 8 = 0 \\ x_1x_2^2 + x_1 - 12x_2 + 7 = 0 \end{cases} \quad (3)$$

Problem 2(1) Fixed-Point Python Code

```
1 x = np.zeros([max_iteration, 2], dtype='float64')
2 err = np.zeros(max_iteration - 1, dtype='float64')
3 distance = 1; idx = 1; x[0, 0] = 1; x[0, 1] = 1
4 while(distance > acc):
5     if(idx < max_iteration):
6         x[idx, 0] = ((x[idx - 1, 0])**2 + (x[idx - 1, 1])**2 + 8) / 10
7         x[idx, 1] = (x[idx - 1, 0] + (x[idx - 1, 0] * x[idx - 1, 1])**2 + 7) / 12
8         distance = (x[idx - 1, 0] - x[idx, 0])**2 + (x[idx - 1, 1] - x[idx, 1])**2
9         err[idx - 1] = distance
10        idx = idx + 1
11    else:
12        break
```


Problem 2(1)

In a very extreme condition like in a tolerance of 1×10^{-20} , the fixed-point iteration took about 20 times to reach the target.

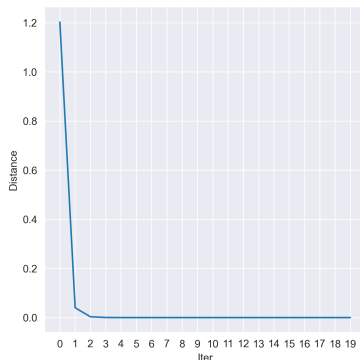


Figure: Fixed-Point Iteration Result

Problem 2(1) Newton-Raphson Matlab Code

```
1 syms x1 x2;
2 f1(x1,x2) = x1^2 - 10*x1 + x2^2 + 8;
3 f2(x1,x2) = x1*x2^2 + x1 - 12*x2 + 7;
4 F(x1,x2) = [f1;f2]; x_solve(:,1) = [1;1];
5 J(x1,x2) = jacobian(F,[x1 x2]);
6 dx_Nr=[0;0];
7 for i = 1:N
8     dx_Nr(:,i) = J(x_solve(1,i),x_solve(2,i))\(-F(x_solve(1,i),x_solve(2,i)));
9     if(sqrt(sum(dx_Nr(:,i).^2)) < epsilon)
10         x_solve(:,i+1) = x_solve(:,i) + dx_Nr(:,i);
11         break;
12     else
13         x_solve(:,i+1) = x_solve(:,i) + dx_Nr(:,i);
14     end end
```

Problem 1 Solution

Using programming tools, we got the root of this given nonlinear system. In the tolerance of 1×10^{-10} , the two methods showed a very different performance. Newton-Raphson iteration converges in incredible speed which only took 4 times to get a trustable root.

$$\begin{cases} x_1 = 0.936680033263737 \\ x_2 = 0.699593344681334 \end{cases} \quad (4)$$




Figure: Fixed-Point Iteration




Figure: Newton-Raphson Iteration

Problem 1 Solution

Using programming tools, we got the root of this given nonlinear system. In the tolerance of 1×10^{-10} , the two methods showed a very different performance. Newton-Raphson iteration converge in incredible speed which only took 4 times to get a trustable root.




Figure: Fixed-Point Iteration

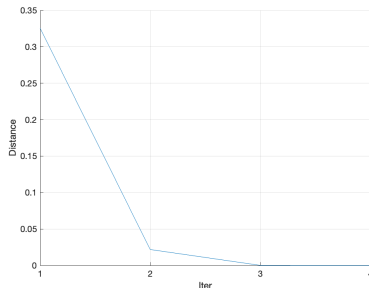


Figure: Newton-Raphson Iteration

Problem 2(2)

Find the numerical solution of the following nonlinear equations using iteration method and Newton method respectively and show your analysis of error by using norms of vector and matrix and demonstrate your computer code

$$\begin{cases} 5x_1 - x_2^2 + x_1x_3 = 2 \\ x_1x_3 + 4x_2 - x_3 = 0 \\ x_1^2 + x_2 - 3x_3 = 1 \end{cases} \quad (5)$$

Problem 3(1)

Generate matrix A 50×50 and vector b 50×1) by using random number and solve the linear system $AX=b$ by using Gaussian partial pivoting elimination algorithm.

Problem 3(2)

Randomly generate 3 diagonal matrices ($30 * 30$), and use Jacobi iteration and Gauss Seidel iteration to solve them respectively. The error of the solution in terms of norm is required to be less than $1/1000$.

Problem 4

Use appropriate polynomial interpolation to approximate the following ellipse.

$$\frac{x^2}{5^2} + \frac{y^2}{5^2} = 1 \quad (6)$$

$$x^2 + y^2 = 5^2 \quad (7)$$

Problem 5

我国古代数学著作《九章算术》记载的线性方程组如下：

今有上禾三秉，中禾二秉，下禾一秉，实三十九斗；上禾二秉，中禾三秉，下禾一秉，实三十四斗；

上禾一秉，中禾二秉，下禾三秉，实二十六斗；问上、中、下禾实一秉各几何？

查阅九章算术记载的此问题的解法是什么？指出相当于今天的什么方法。

Problem 5

我国古代数学著作《九章算术》记载的线性方程组如下：

今有上禾三秉，中禾二秉，下禾一秉，实三十九斗；上禾二秉，中禾三秉，下禾一秉，实三十四斗；

上禾一秉，中禾二秉，下禾三秉，实二十六斗；问上、中、下禾实一秉各几何？

查阅九章算术记载的此问题的解法是什么？指出相当于今天的什么方法。