}

public có dấu +

Bài tập ứng dụng BT1

```
class Person
private string name;
private date birthday;
public void setName (string name) {
    this.name = name;
}

public void setBirthday (date birthday) {
    this.birthday = birthday;
}

public string getDetails () {
    return "Name :" + name + ", Birthday : " + birthday
}

}

public class Employee extends Person {
    private double salary;
    public void setSalary (double salary) {
        this.salary = salary;
}
```

HAI TIEN

Được quét bằng CamScanner

```
@Override
public String getDetails() {
    return super.getDetails()+ ", Assistant; " + assistant
    .getDetails();
    }
}

public class Main {
public static void main(String [] args) {
    //
    person person1 = new Employee()
    person1.setName("Nguyen Van A");
    person1.setBirthday(new Date());
    person person2 = new Manager();
    person2.setName("Tran Van B");
    person2.setBirthday(new Date());
    System.out.println("---Upcasting Employee---");
    System.out.println(person1.getDetails());
    System.out.println("--- Upcasting Manager---");
    System.out.println(person2.getDetails());
    }
}
```

BT 2

UML

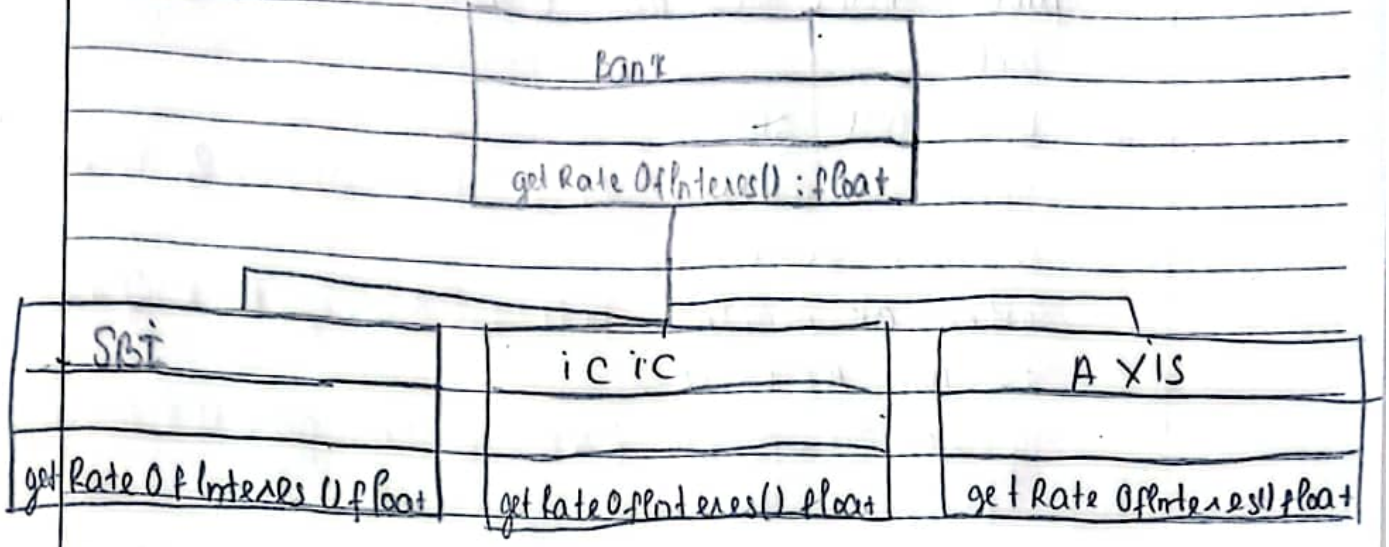


```
public class Bank; {
public float getRateOfInteres ();
}

Class SBI extends Bank {
    float getRateOfInteres () {
        return 8.0f ;
    }
}

Class ICIC extends Bank {
    float getRateOfInteres () {
    return 7.0f;
    }
}

Class AXIS extends Bank {
    float getRateOfInteres() {
    return 9.0 f
    }
}
```


Được quét bằng CamScanner

```
public class Main {
public static void main (String[] args) {
 Bank b;
 b = new SBI ();
 System.out.println ("SBI : " + b.getRateOfInterest () + "%
 b= new ICIC ();
 system.out.println " ICIC : " + b.getRateOfInterest()+%
 b= new AXIS ();
 system.out.println ("AXIS : " + b.getRateOfInterest()+
 }
}
```

Được quét bằng CamScanner

BTS

```
public class NhanVien {
    protected string ten;
    protected long luong;
    public NhanVien () {
    public nhanvien (String ten) {
        this.ten = ten;
    }
}

    protected string loaiNhanVien () {
        return " ";
}

    public void tinh luong () {}
    public void xuatThongtin () {
    System.out.println("=== nhan vien : " + ten + "===");
    system.out.println("- loai nhan vien " + loaiNhanVien());
    System.out.println("- luong : " + luong + " VNĐ");
}

    public class NhanVienFullTime extends NhanVien {
        private int ngaylamthem;
        private int loaiChucVu;
    public NhanVienFullTime ( String ten, int ngaylamthem,
    int loaiChucVu ) {
        super (ten);
        this.ngaylamthem = ngaylamthem;
        this.loaiChucVu = loaiChucVu;
}

    (a) Override
    protected string loaiNhanVien () {
    return (loaiChucVu == 1 ) "full-time (sếp) : full-time (NV)
}
```

HAI TIEN

Được quét bằng CamScanner

```
@Override
public void tinhLuong() {
    luong luongCung = (loaiChucVu == 1) ? 2000
    luong = luongCung + (long) ngayLamThem * 20000
}
}

public class NhanVienPartTime extends NhanV
    private int gioLamViec,
    public NhanVienPartTime(String ten, int gioLam
        super(ten);
        this.gioLamViec = gioLamViec,
}

@Override
protected String loaiNhanVien() {
    return "Nhan vien thoi vu (Part tim)";
}
@Override
    public void tinhLuong() {
        luong = (long) gioLamViec * 10000;
    }
}

public class Main {
    public static void main(String[] args) {
        NhanVienFullTime sep = new NhanVienFullTime("Nguy
Van Anh", 9, 1);
        Sep.tinhLuong();
        Sep.xuatThongTin();
        NhanVienPartTime nvThoiVu = new NhanVienPartTim
Nguyễn Minh Anh, 20);
        nvThoiVu.tinhLuong();
        nvThoiVu.xuatThongTin();
    }
}
```

HAI TIEN

Được quét bằng CamScanner