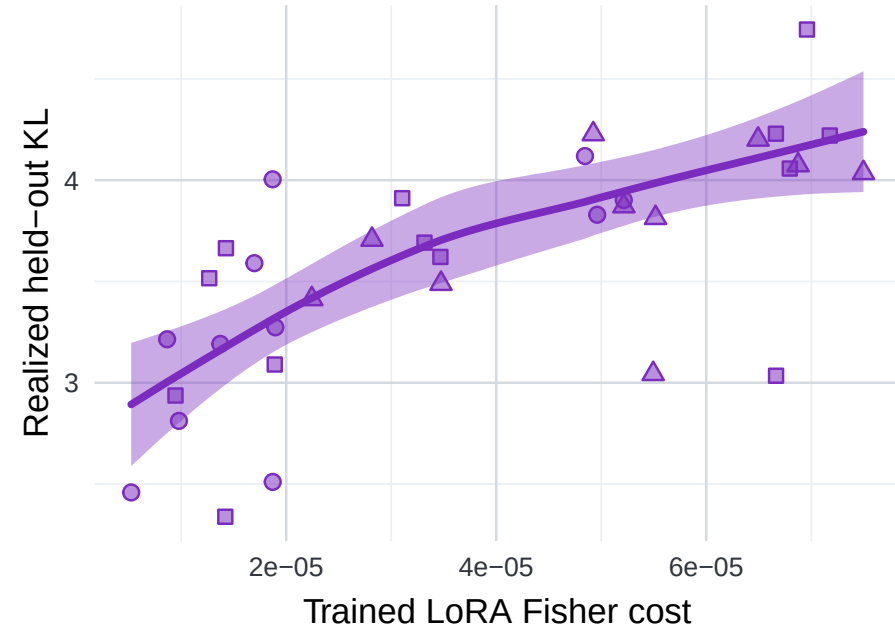
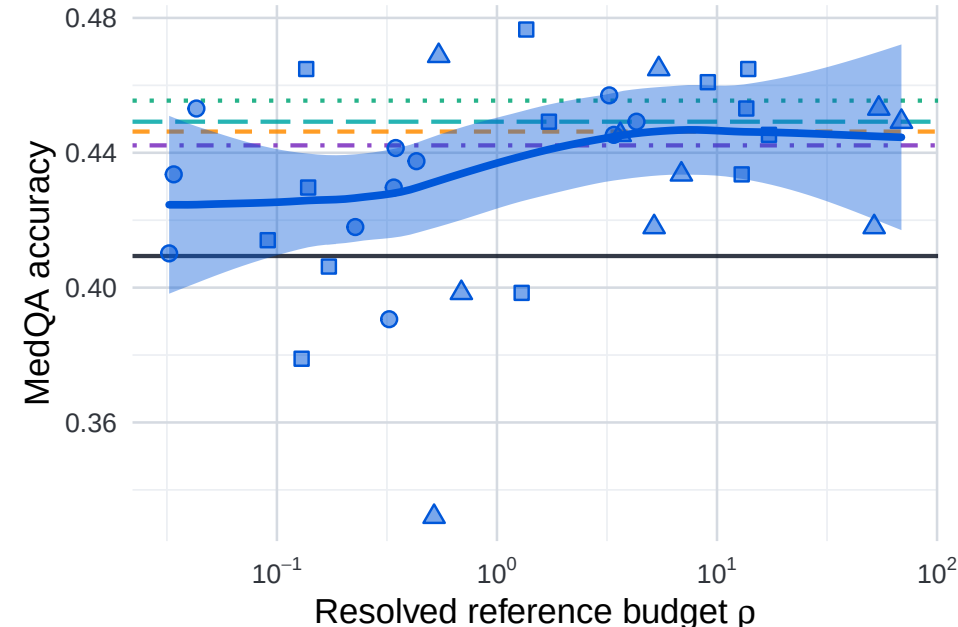
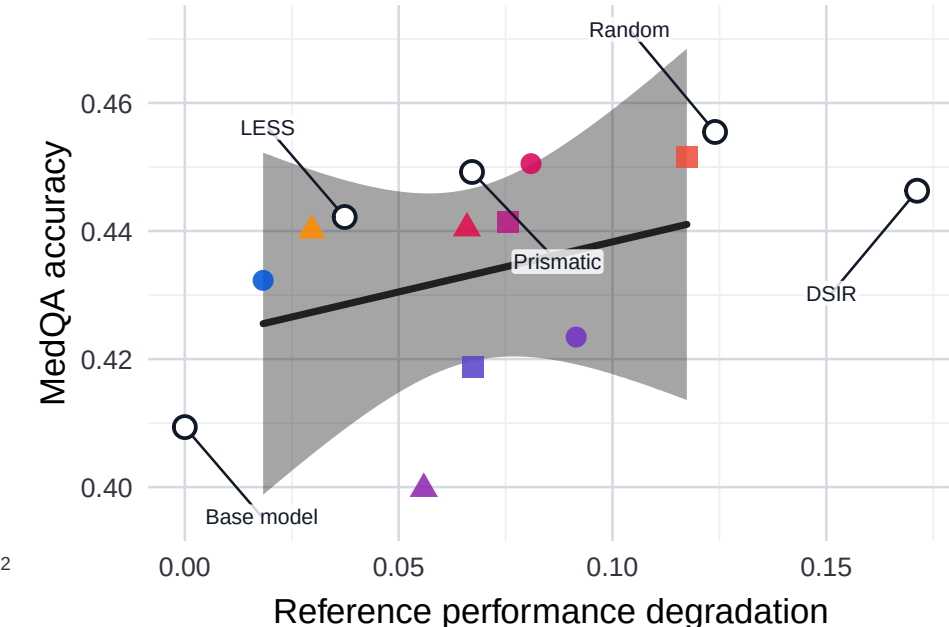


Held-out KL vs trained FisherSpearman $r_s = 0.70$; $p = <0.001$; $n = 34$ **MedQA accuracy vs resolved ρ** Spearman $r_s = 0.39$; $p = 0.021$; $n = 34$ **Reference drift vs resolved ρ** Spearman $r_s = 0.23$; $p = 0.19$; $n = 34$ **MedQA accuracy vs reference drift**Spearman $r_s = 0.48$; $p = 0.19$; $n = 9$ **Accuracy reference**— Base model ($n=5$) ··· Random ($n=5$) - - - DSIR ($n=4$) - - - LESS ($n=5$) - - - Prismatic ($n=3$)**Resolved ρ** 