

Humana Associate Support Center

Copado | Rollback Feature based on Snapshot Differences

KB0124455 • 30 Views • Published: December 11, 2023



REFERENCE: KB0124455

This article explains the rollback feature in Copado, which allows users to revert their changes. The process involves Git backup repository, Git Snapshot record, release label, and pre-deployment and post-deployment snapshot automation steps. The article provides step-by-step instructions for rolling back changes in both sandbox and branch, which involve creating snapshot differences from pre and post snapshots, selecting the metadata to be rolled back, and creating a deployment record. Additionally, the article includes reference links for URL callouts and syntax for generating the URL callout for taking Git snapshot. It is important to note that the rollback setup is taken care of by E3 for all Orgs, and no action is needed from users.

Overview:

Live Chat and Virtual Agent

Live Chat and Virtual Agent


1. Pre-Requisites

1. Git backup repository for the relevant working repo.
2. Git Snapshot record based on the backup repository.
3. Release label for creating pre-deployment backup
4. Post backup snapshot automation step is at pipeline connection behavior

Note: Configuring Rollback setup is taken care by E3 for all Orgs, no action needed from users, for queries reach E3 team

2. Pre-Deployment Snapshot

- As per Release certification process, after successful creation of Change Order gets created in Step 5, Step 6 (Pre-Deployment Snapshot) gets initiated automatically.
- Click on status button to check the status of the pre-snapshot creation

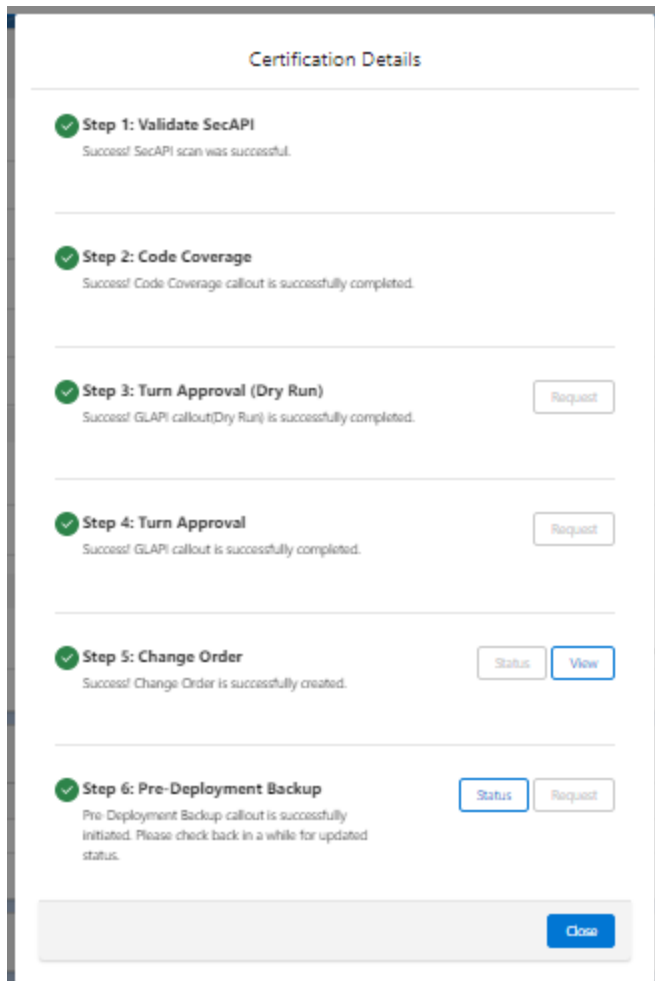

Note: In case the snapshot creation fails, the request button will be enabled for step 6 and user can trigger pre-deployment backup manually.

Live Chat and Virtual Agent

3. Post-Snapshot

- Post deployment snapshot is triggered after the successful deployment to production.
- The url callout configurations are added in pipeline connection behavior.

 Connection Behavior

CopadoProd Behavior

Details

Automations

Applied To

 Automations (1)

Automation Name	Type
post snapshot	URL Callout

Steps

Add Step

ACTION	STEP NAME	TYPE
   	Git Promotion P105580 m	Git Promotion
   	URL Callout	URL Callout

Live Chat and Virtual Agent

3. Rollback the changes in Sandbox

1. To rollback the changes in sandbox - create the snapshot difference from the pre and post snapshot based on the commit id
2. Enter the commit id for source and destination snapshots and save it
3. select the metadata to be rolled back and click on create deployment
4. The deployment record gets created, add the source and destination org credentials and start the deployment, the change gets rolled back in sandbox

The screenshot shows the 'SNAPSHOT DIFFERENCE' interface for a project named 'rollback test pco'. At the top, there are fields for 'Source Credential', 'Destination Credential', 'Source Git Commit' (Cmt-37977), and 'Destination Git Commit' (Cmt-37978). Below these are buttons for 'Edit', 'Delete', 'Calculate Differences', 'Commit Changes', and 'Create Deployment' (highlighted with a red box). The 'Snapshot Difference Name' is 'rollback test pco' and the 'Last Run' is '1/25/2023 3:13 PM'. The 'Source Git Commit' is 'Cmt-37977' and the 'Destination Git Commit' is 'Cmt-37978'. There is a 'Partial Selection' checkbox and a 'Format' dropdown set to 'XML'. Below the main form is a 'File Differences' section with 'Save' and 'Download CSV' buttons. At the bottom is a table with columns 'Selected', 'Status', and 'Name'.

Selected	Status	Name
☐	Select Filter	
☐	update	cleanDataServices/DataCloudGeoLocation.cleanDataService Show Diff
☒	update	classes/testHelloTest.cls Show Diff

4. Rollback the changes in Branch

- Navigate to the Snapshot record of the main branch, click Commit Changes and select the Metadata components that were rolled back in the sandbox and commit them.
- This will ensure that the changes in the org's branch are in sync with the org itself.

Live Chat and Virtual Agent

 GIT SNAPSHOT

PCO CopadoProd

A Git Snapshot record in Copado controls which Salesforce Credential will be backed up to and to which Git repository. It also sets the frequency of the execution. Bear in mind that only metadata is backed up, no data is backed up unless advanced metadata filters are used. Metadata types will be displayed only after a Credential is selected.

Git Repository
PCO Training

Credential
CopadoProd

Branch
main

Git Snapshot Permissions
Allow Snapshots & Commits

Edit

Delete

Retrieve Commits

Take Snapshot Now

Commit Changes

Show Hook URL

Run Compliance Scan

Basic information

Git Snapshot Name
PCO CopadoProd

Git Repository
PCO Training

Branch
main

Git Snapshot Permissions
Allow Snapshots & Commits

Frequency
None

Credential
CopadoProd

Last Snapshot
3/29/2023 5:38 AM

Snapshot Commit

CopadoProd > PCO Training / main

Git Operation
Commit Files

Commit Message
rollback commit

Git Snapshot Name
PCO CopadoProd

Cancel

Commit Changes

Select Metadata

Refresh All Metadata

Refresh Recent Changes

Auto-Select Changes

All Metadata

Selected Metadata

Select...	Retrieve ...	Name	Type	Last Modified By ID	Last Modified D...	Created By	Created Date
☐	☐		Select Filter				
☐	☐	testHello	ApexClass	Copado Integration User	2023-03-29	Copado Integration User	2023-03-28
☒	☐	testHelloTest	ApexClass	Copado Integration User	2023-03-29	Copado Integration User	2023-03-28

Live Chat and Virtual Agent

5. Reference Links:

- <https://copado.docs.apiary.io/#reference/run-all-org's-apex-test/jsonv1/webhooktestorgorgidapikeyuserapikey/post> - URL callouts
- Generating the URL callout for taking Git snapshot,-

Syntax for URL callout-

`https://app-api.copado.com/json/v1/webhook/gitSnapshot/{snapshot_id}?api_key={user_api_key}&apply_env_vars={true/false}&apply_find_replace={true/false}`

Snapshot_id is from the backup snapshot URL created in Step 2, and api_key should be generated for the user

https://humanashared--copadotrn.sandbox.lightning.force.com/lightning/r/copado__Git_Backup__c/a2r56000004gF0hAAE/view

The actual URL looks like - [https://app-](https://app-api.copado.com/json/v1/webhook/gitSnapshot/a2r56000004gF0hAAE?api_key=a2fb73a429045f28d5546636cba9bc3b&apply_env_vars=false&apply_find_replace=false)

[api.copado.com/json/v1/webhook/gitSnapshot/a2r56000004gF0hAAE?](https://app-api.copado.com/json/v1/webhook/gitSnapshot/a2r56000004gF0hAAE?api_key=a2fb73a429045f28d5546636cba9bc3b&apply_env_vars=false&apply_find_replace=false)

[api_key=a2fb73a429045f28d5546636cba9bc3b&apply_env_vars=false&apply_find_replace=false](https://app-api.copado.com/json/v1/webhook/gitSnapshot/a2r56000004gF0hAAE?api_key=a2fb73a429045f28d5546636cba9bc3b&apply_env_vars=false&apply_find_replace=false)

Live Chat and Virtual Agent